
MIL-C-20/41B
5 NOV 1976
SUPERSEDING
MIL-C-0020/41A(USAF)
19 December 1973, and
MIL-C-20/41
25 May 1973

MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR17 AND CC17

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

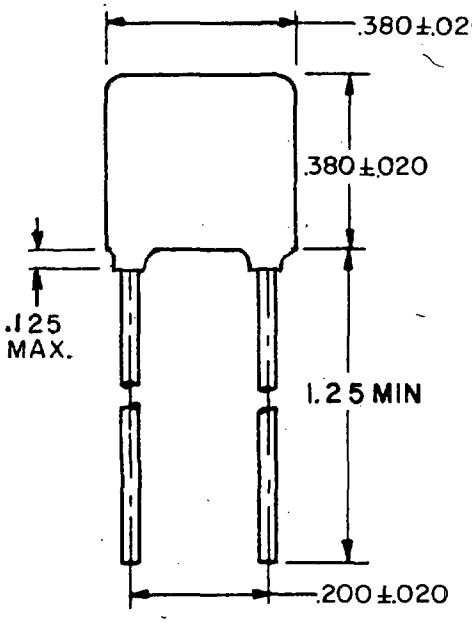

INCHES	MM
.020	.51
.030	.76
.130	3.30
.200	5.08
.380	9.65
1.25	31.75

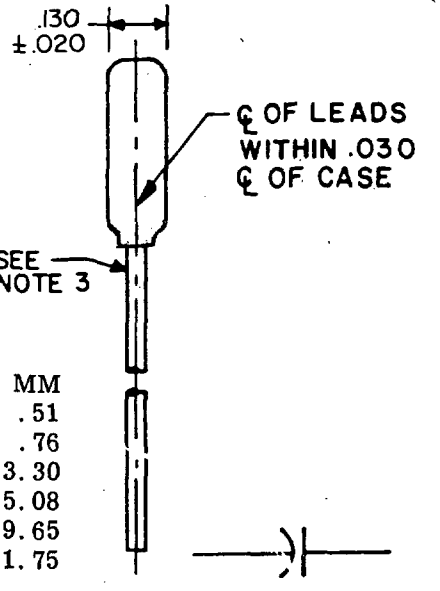

CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be .020 (.51 mm) to .027 (.69 mm).

FIGURE 1. Styles CCR17 and CC17 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

- Design and construction:
  Dimensions and configuration: See figure 1.
  Lead type: Radial.
  Case type: Dipped.
  DC rated voltage: See table I.
  Operating temperature range: -55° to +125°C.
  Characteristic: See table I.
  Failure rate level (CCR17 only): M (1.0%), P (0.1%), R (0.01%) or S (0.001%).

Thermal shock and voltage conditioning (CCR17 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

TABLE I. Capacitor characteristics.

Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.	Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.
	Volts, dc	pF			Volts, dc	pF	
CC-17SH101--	200	100	FGJ	CC-17CG272--	200	2,700	FGJK
CC-17SH111--	200	110		CC-17CG332--	200	3,300	FGJK
CC-17SH121--	200	120		CC-17CG562--	100	5,600	FGJK
CC-17SH131--	200	130		CC-17CG682--	100	6,800	FGJK
CC-17SH151--	200	150		CC-17CG822--	100	8,200	FGJK
CC-17SH161--	200	160		CC-17CG103--	100	10,000	FGJK
CC-17SH181--	100	180		CC-17CG123--	100	12,000	FGJK
CC-17SH201--	100	200		CC-17CG153--	50	15,000	FGJK
CC-17SH221--	100	220		CC-17CG183--	50	18,000	FGJK
CC-17SH241--	100	240		CC-17CG223--	50	22,000	FGJK
CC-17SH271--	100	270		CC-17CG273--	50	27,000	FGJK
CC-17SH301--	100	300		CC-17CG333--	50	33,000	FGJK
CC-17SH331--	100	330	FGJ	CC-17CG393--	50	39,000	FGJK
CC-17CG222--	200	2,200	FGJK	CC-17CG473--	50	47,000	FGJK

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR17) or dash will be deleted (for style CC17).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR17 only) or dash will be deleted (for style CC17).

2/ Capacitors deleted since the previous issue shall be replaced by selecting a capacitor with the nearest parameter.

Dissipation factor: In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test II.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

Marking: Method I of MIL-STD-1285, as shown in following example:

JCG - "J" brand (J); and characteristic (CG).
222 - Capacitance value.
GM6 - Cap. tolerance (G); FR level, CCR17 only (M); and year code (6 for 1976).
ATM - Lot code (A); and trademark (TM).

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1189-11)

U.S. GOVERNMENT PRINTING OFFICE: 1976—703-020:121

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.