MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC
(TEMPERATURE COMPENSATING),
ESTABLISHED AND NON-ESTABLISHED RELIABILITY,
STYLES CCR18 AND CC18

This amendment forms a part of Military Specification Sheet MIL-C-20/42 dated 25 May 1973, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

* Figure 1, delete and substitute:




| INCHES | MM |
|---|---|
| .002 | .05 |
| .020 | .51 |
| .025 | .64 |
| .030 | .76 |
| .062 | 1.57 |
| .200 | 5.08 |
| .400 | 10.16 |
| .500 | 12.70 |
| 1.25 | 31.8 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Lead diameter shall be .025 ±.002.

FIGURE 1. Styles CCR18 and CC18 capacitors.

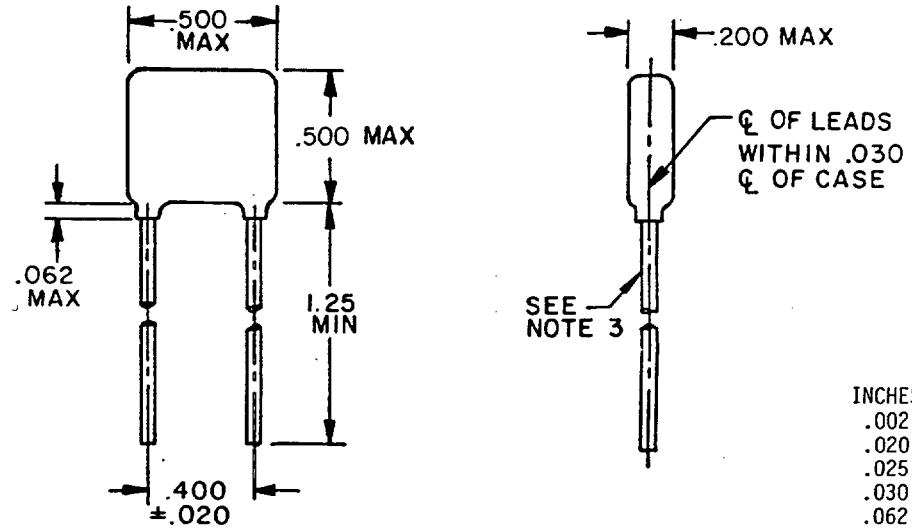

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DLA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5910-1323-4)



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.