
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR18 AND CC18

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

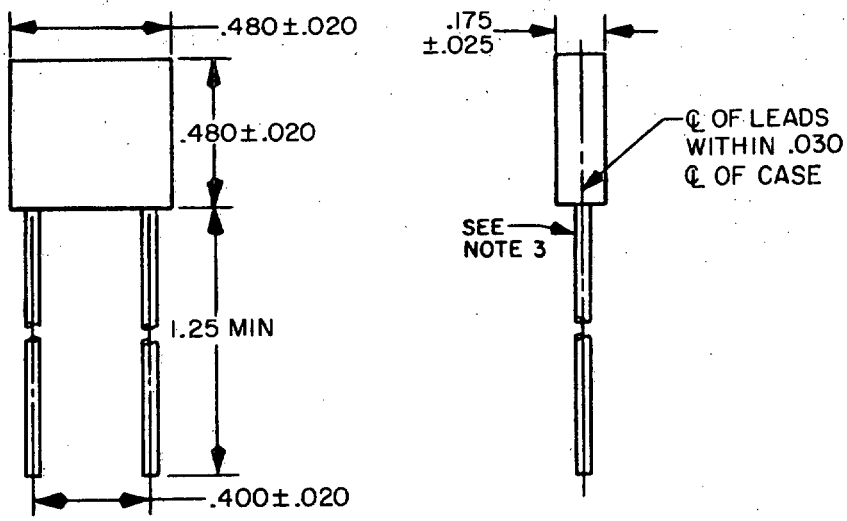

INCHES	MM
.020	.51
.025	.64
.027	.69
.030	.76
.175	4.45
.400	10.16
.480	12.19
1.25	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be .020 - .027.

FIGURE 1. Styles CCR18 and CC18 capacitors.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Radial.
Case type: Dipped.
DC rated voltage: See table I.
Operating temperature range: -55° to +125° C.
Characteristic: CG.
Failure rate level (CCR18 only): M (1.0%) or P (0.1%).

Temperature cycling and voltage conditioning (CCR18 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/	Rated voltage	Nom. cap.	Cap. tol.	Type designation 1/	Rated voltage	Nom. cap.	Cap. tol.
	(volts, dc)	(pF)			(volts, dc)	(pF)	
CC-18CG392--	200	3,900	GJK	CC-18CG183--	100	18,000	GJK
CC-18CG472--	200	4,700	GJK	CC-18CG563--	50	56,000	GJK
CC-18CG153--	100	15,000	GJK	CC-18CG683--	50	68,000	GJK

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR18) or dash will be deleted (for style CC18).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR18 only) or dash will be deleted (for style CC18).

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test II.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: In accordance with MIL-C-20, method I.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 80
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1064-35)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.