
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR55 AND CC55

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

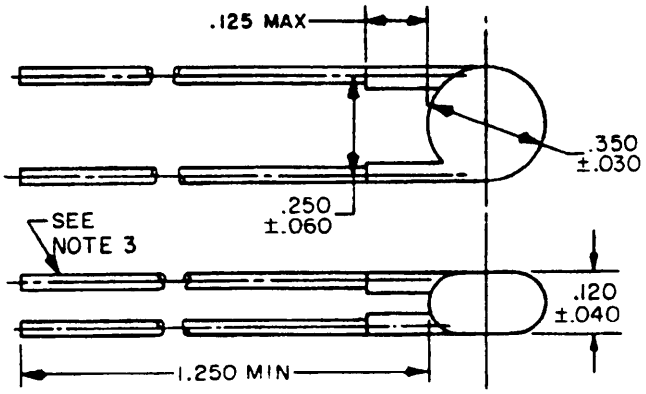

INCHES	MM
.002	.05
.025	.64
.030	.76
.040	1.02
.060	1.52
.120	3.05
.125	3.18
.250	6.35
.350	8.89
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Leads shall be .025 ± .002 diameter.

FIGURE 1. Styles CCR55 and CC55 capacitors.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Radial.
Case type: Disk.
DC rated voltage: 500 volts.
Operating temperature range: -55° to +125° C.
Characteristic: CG.
Failure rate level (CCR55 only): M (1.0%) or P (0.1%).

Temperature cycling and voltage conditioning (CCR55 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test II.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/	Rated voltage	Nom. cap.	Cap. tol.	Type designation 1/	Rated voltage	Nom. cap.	Cap. tol.
	(volts, dc)	(pF)			(volts, dc)	(pF)	
CC-55CG120--	500	12	GJK	CC-55CG330--	500	33	GJK
CC-55CG150--	500	15	GJK	CC-55CG390--	500	39	GJK
CC-55CG180--	500	18	GJK	CC-55CG470--	500	47	GJK
CC-55CG220--	500	22	GJK	CC-55CG560--	500	56	GJK
CC-55CG240--	500	24	FGJK	CC-55CG680--	500	68	GJK
CC-55CG270--	500	27	FGJK	CC-55CG820--	500	82	GJK

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR55) or dash will be deleted (for style CC55).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR55 only) or dash will be deleted (for style CC55).

Temperature coefficient and capacitance drift: In accordance with MIL-C-20. For capacitors with values of 18 pF or less, the temperature-coefficient tolerance shall be determined in accordance with the curve shown on figure 2. For points below the curve, characteristics are not considered practicably measurable.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: Method I of MIL-STD-1285, as shown in following example:

JCG - "J" brand (J); and characteristic (CG).
240 - Capacitance value.
FM3 - Cap. tolerance (F); FR level, CCR55 only (M); and year code (3 for 1973).
ATM - Lot code (A); and trademark (TM).

Source: https://assist.dla.mil -- Downloaded: 202610-15T17:09Z
Check the source to verify that this is the currentversion before use.

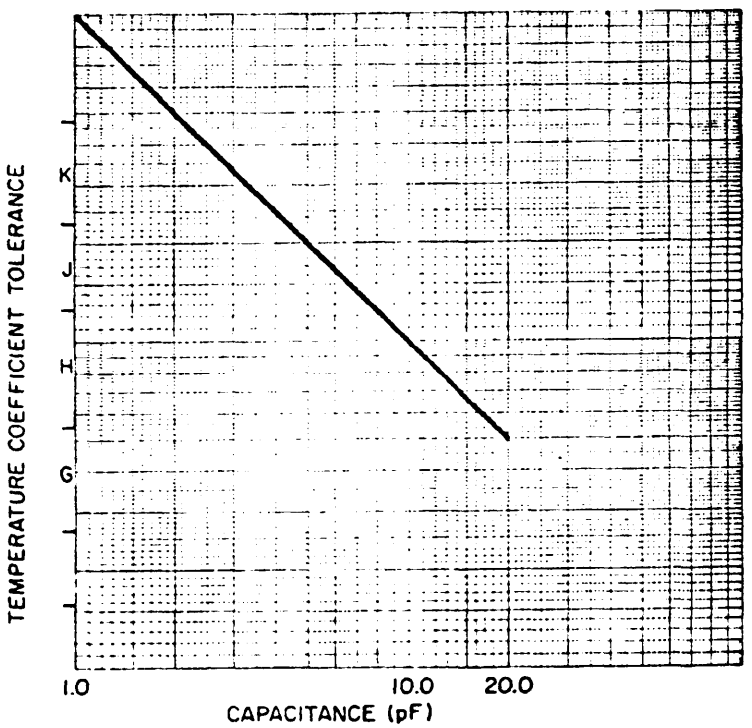


FIGURE 2. Limits for characteristic measurement.

NOTE: Recommended replacement capacitors for those covered in MIL-C-0020/17B(USAF) are as follows:

Recommended type designation 1/ (MIL-C-20/44)	Canceled type designation (MIL-C-0020/17B(USAF))
CC-55CG240F	CC51HH240F
CC-55CG240F	CC51LH240F
CC-55CG270F	CC51PH270F

1/ "CCR" (ER part) or "CC" (non-ER part).

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 80
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1064-37)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C16061

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

FOLD

4950/TZC
Wright-Patterson AFB, O 45433
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE AIR FORCE
DoD-318

U.S. MAIL

4950/TZS
Wright-Patterson AFB, Ohio 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.