
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR56 AND CC56

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

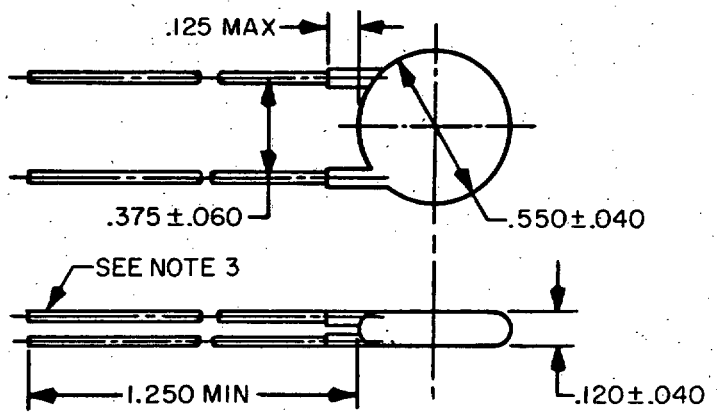

INCHES	MM
.002	.05
.025	.64
.040	1.02
.060	1.52
.120	3.05
.125	3.18
.375	9.53
.550	13.97
1.250	31.75

NOTES:
1. Dimensions are in inches
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Leads shall be .025 ± .002 diameter.

FIGURE 1. Styles CCR56 and CC56 capacitors.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Radial.
Case type: Disk.
DC rated voltage: 500 volts.
Operating temperature range: -55° to +125° C.
Characteristic: CG.
Failure rate level (CCR56 only): M (1.0%) or P (0.1%).

Temperature cycling and voltage conditioning (CCR56 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/	Rated voltage	Nominal capacitance	Cap. tol.
	(Volts, dc)	(pF)	
CC-56CG330--	500	33	GJK
CC-56CG390--	500	39	GJK
2/ CC-56CG470--	500	47	FGJK
CC-56CG560--	500	56	GJK

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR56) or dash will be deleted (for style CC56).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR56 only) or dash will be deleted (for style CC56).

2/ Recommended replacement capacitor for CC52CG470F of MIL-C-0020/18B(USAF).

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: In accordance with MIL-C-20, method I.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 80
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1064-38)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:09Z
Check the source to verify that this is the current version before use.