
MIL-C-20/48E
5 NOV 1976
SUPERSEDING
MIL-C-0020/48D(USAF)
19 December 1973, and
MIL-C-20/48
25 May 1973

MILITARY SPECIFICATION SHEET


CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR14 AND CC14

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

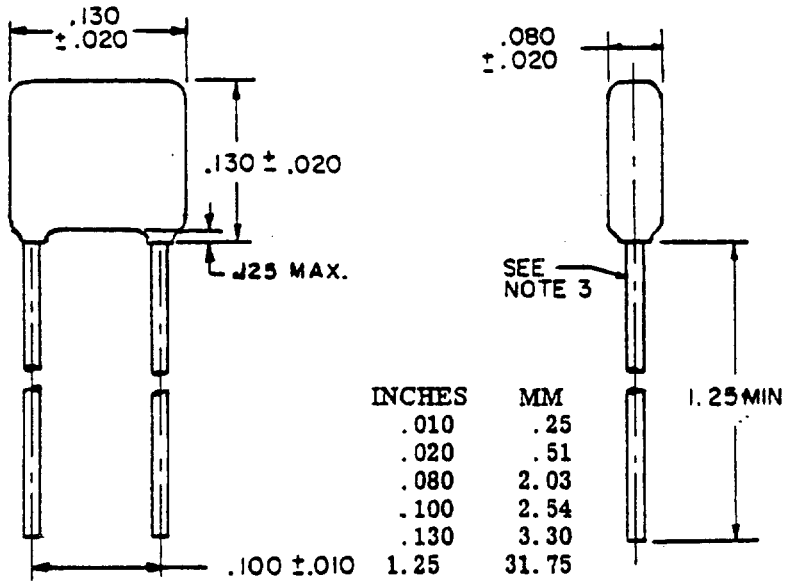

INCHES	MM
.010	.25
.020	.51
.080	2.03
.100	2.54
.130	3.30
1.25	31.75



CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be .016 (.41 mm) +.004 (.10 mm) -.001 (.03 mm).

FIGURE 1. Styles CCR14 and CC14 capacitors.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Radial.
Case type: Dipped.
DC rated voltage: See table I.
Operating temperature range: -55° to +125°C.
Characteristic: See table I.
Failure rate level (CCR14 only): M (1.0%), P (0.1%), R (0.01%) or S (0.001%).

Thermal shock and voltage conditioning (CCR14 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

TABLE I. Capacitor characteristics.

Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.	Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.
	Volts, dc	pF			Volts, dc	pF	
CC-14SH240--	200	24	FGJ	CC-14SH820--	100	82	FGJ
CC-14SH270--		27		CC-14UJ270--		27	
CC-14SH300		30		CC-14CG820--		82	
CC-14SH330--		33		CC-14CG101--		100	
CC-14SH360--		36		CC-14CG121--		120	
CC-14SH390--		39		CC-14CG151--		150	
CC-14SH430--		43		CC-14CG181--		180	
CC-14SH470--		47		CC-14CG221--	100	220	
CC-14SH510--		51		CC-14CG271--	50	270	
CC-14SH560--		56		CC-14CG331--		330	
CC-14SH620--		62		CC-14CG391--		390	
CC-14SH680--	200	68	FGJ	CC-14CG471--		470	
CC-14SH750--	100	75	FGJ	CC-14CG561--	50	560	FGJ

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR14) or dash will be deleted (for style CC14).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR14 only) or dash will be deleted (for style CC14).

2/ Capacitors deleted since the previous issue shall be replaced by selecting a capacitor with the nearest parameter.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test II.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.


Life: In accordance with MIL-C-20, operating condition 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:10Z
Check the source to verify that this is the current version before use.

Marking: Method I of MIL-STD-128S, as shown in following example:

JCG - "J" brand (J); and characteristic (CG).
1S1 - Capacitance value.
FM6 - Cap. tolerance (F); FR level, CCR14 only (M); and year code (6 for 1976).
ATM - Lot code (A); and trademark (TM).

The marking may be all on one side (sample one) or divided on two sides (sample two).

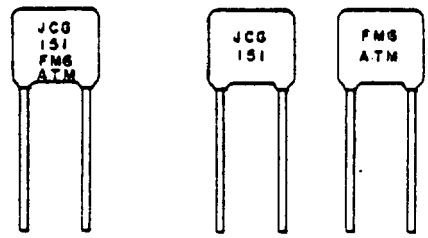

SAMPLE ONE SAMPLE TWO

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1189-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:10Z
Check the source to verify that this is the current version before use.