
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC
(TEMPERATURE COMPENSATING),
ESTABLISHED AND NON-ESTABLISHED RELIABILITY,
STYLES CCR14 AND CC14

This amendment forms a part of Military Specification Sheet MIL-C-20/48E, dated 5 November 1976, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

Figure 1, delete and substitute:

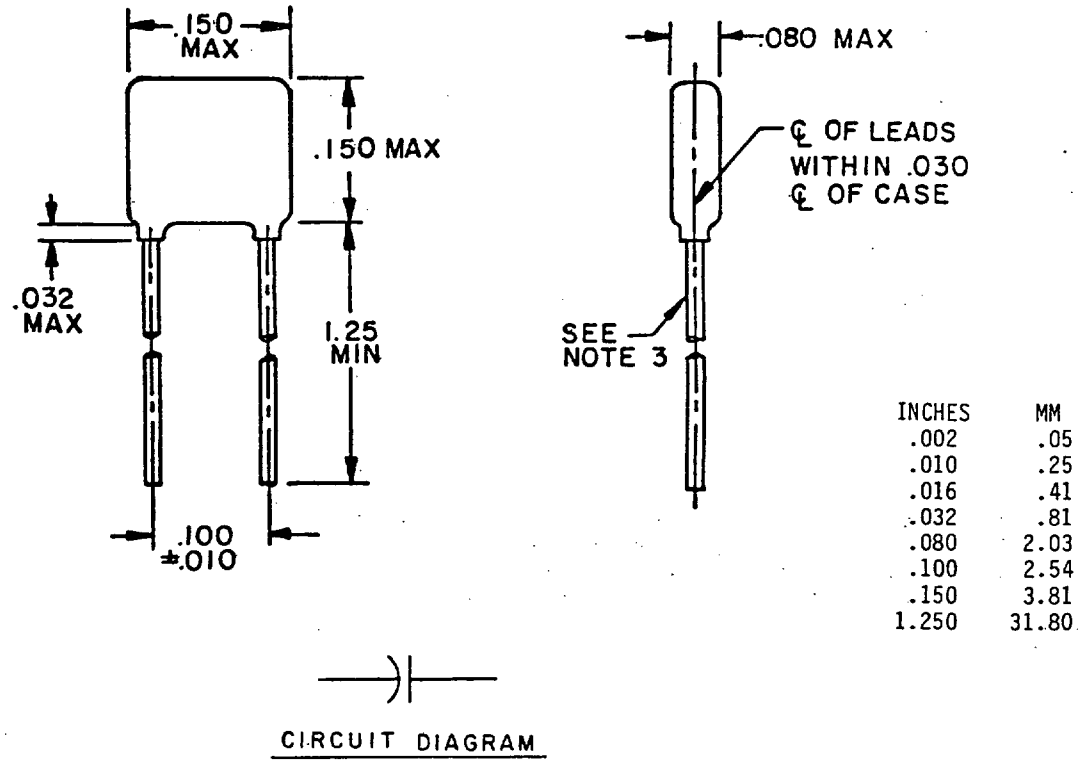

INCHES	MM
.002	.05
.010	.25
.016	.41
.032	.81
.080	2.03
.100	2.54
.150	3.81
1.250	31.80

CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Lead diameter shall be .016 ±.002.


FIGURE 1. Styles CCR14 and CC14 capacitors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:10Z
Check this source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

* After marking, delete and substitute:

In accordance with MIL-C-20 and method I of MIL-STD-1285, except the minimum marking as shown in the following example will be permitted. Full marking shall be included on the package.

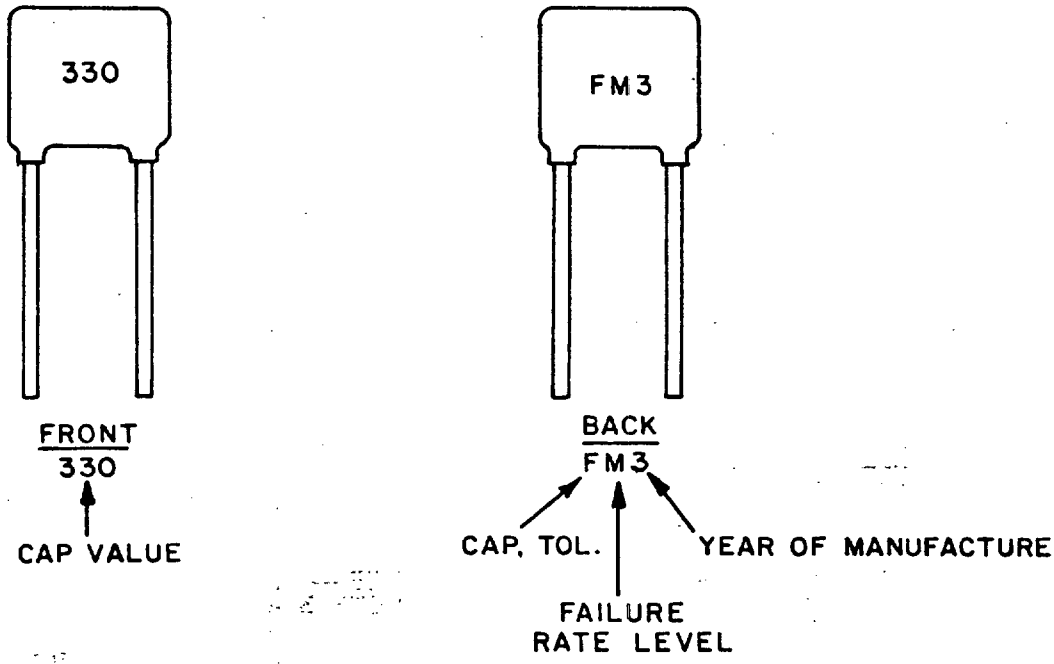

The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 85
DLA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Agent:
DLA - ES

Preparing activity:
Air Force - 11

(Project 5910-1543)

Source: https://assist.dla.mil Downloaded: 2026-10-15T17:10Z
Check the source to verify that this is the current version before use.