INCH-POUND

MIL-C-20/48F
31 Dec 1991
SUPERSEDING
MIL-C-20/48E
5 November 1976


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR14 AND CC14

STYLE CC14 INACTIVE FOR DESIGN
AFTER DATE OF SPECIFICATION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-20.

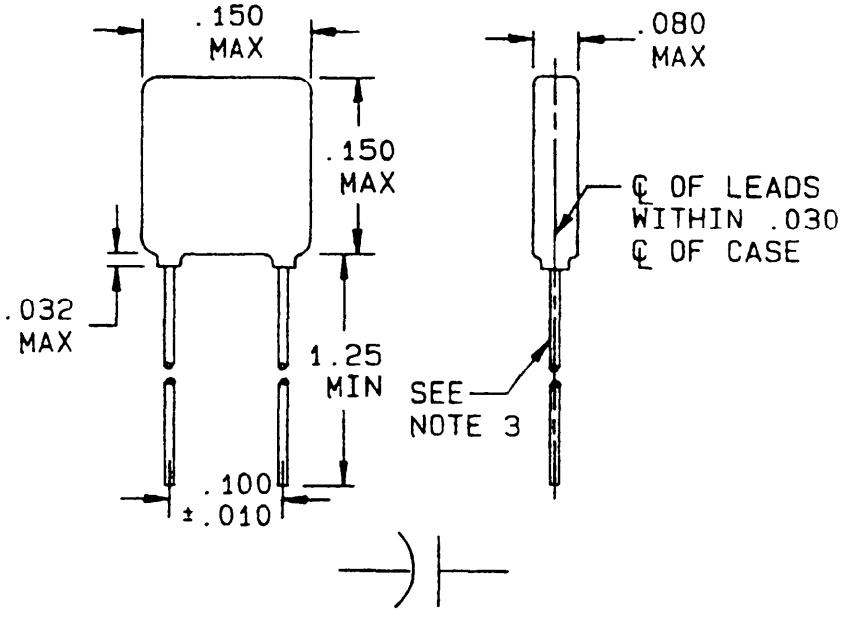

CIRCUIT DIAGRAM

Inches	mm
.002	.05
.010	.25
.016	.41
.032	.81
.080	2.03
.100	2.54
.150	3.81
1.250	31.80

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Lead diameter shall be .016 ±.002.

FIGURE 1. Styles CCR14 and CC14 capacitors.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Lead type: Radial.

Case type: Dipped.

DC rated voltage: See table I.

Operating temperature range: -55°C to +125°C.

Characteristic: See table I.

Failure rate level (CCR14 only): M (1.0%), P (0.1%), R (0.01%), or S (0.001%).

Thermal shock and voltage conditioning (CCR14 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

TABLE I. Capacitor characteristics.

Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.	Type designation 1/ 2/	Rated voltage	Nom. cap.	Cap. tol.
	Volts, dc	pF			Volts, dc	pF	
CC-14SH240--	200	24	FGJ	CC-14SH820--	100	82	FGJ
CC-14SH270--	"	27	"	CC-14UJ270--	"	27	"
CC-14SH300--	"	30	"	CC-14CG820--	"	82	"
CC-14SH330--	"	33	"	CC-14CG101--	"	100	"
CC-14SH360--	"	36	"	CC-14CG121--	"	120	"
CC-14SH390--	"	39	"	CC-14CG151--	"	150	"
CC-14SH430--	"	43	"	CC-14CG181--	"	180	"
CC-14SH470--	"	47	"	CC-14CG221--	"	220	"
CC-14SH510--	"	51	"	CC-14CG271--	50	270	"
CC-14SH560--	"	56	"	CC-14CG331--	"	330	"
CC-14SH620--	"	62	"	CC-14CG391--	"	390	"
CC-14SH680--	"	68	"	CC-14CG471--	"	470	"
CC-14SH750--	100	75	"	CC-14CG561--	"	560	"

1/ Complete type designation will include the following:
1st dash - Symbol "R" (for style CCR14) or dash will be deleted (for style CC14).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR14 only) or dash will be deleted (for style CC14).

2/ Capacitors deleted since the previous issue shall be replaced by selecting a capacitor with the nearest parameter.

Dielectric withstanding voltage: In accordance with MIL-C-20.

Body insulation: Test II.

Source: https://assist.dla.mil -- Downloaded: 202610-15T17:10Z
Check the source to verify that this is the current version before use.

Solderability: In accordance with MIL-C-20.

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: In accordance with MIL-C-20 and method 1 of MIL-STD-1285, except the minimum marking as shown in the following example will be permitted. Full marking shall be included in the package (see figure 2).

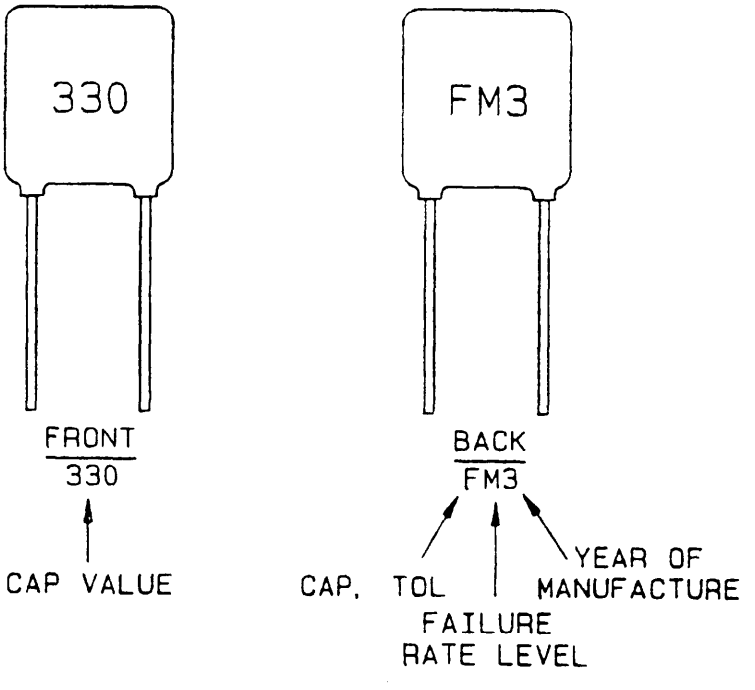


FIGURE 2. Markings.

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - OS
DLA - ES

User activities:
Navy - AS, MC, SH

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5910-1781)

Source: https://assist.dla.mil -- Downloaded: 202610-15T17:10Z
Check the source to verify that this is the current version before use.