INCH-POUND

MIL-M-43994C
2 January 1991
SUPERSEDING
MIL-M-43994B
25 September 1985

MILITARY SPECIFICATION

MARKER, IDENTIFICATION, FIRE, CHEMICAL HAZARD, AND RESTRICTED AREA, REFLECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense

1. SCOPE

1.1 Scope. This specification covers markers processed on pressure-sensitive adhesive backed retroreflective sheeting.

1.2 Classification. The markers shall be of the following types, marker numbers, sizes, and classes as specified (see 6.2).

Type I	- Fire Hazard
Marker 1	- Hazard class 1.1
Marker 2	- Hazard class 1.2
Marker 3	- Hazard class 1.3
Marker 4	- Hazard class 1.4
Size	- 24 inch
Size	- 12 inch
Type II	- Chemical Hazard
Marker 5	- Wear full protective clothing Class 1 - Red Class 2 - Yellow Class 3 - White

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5019 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 7690

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

Marker 6 - Wear breathing apparatus
Marker 7 - Apply no water
Marker 8 - G Nerve agent
Marker 9 - VX Nerve agent
Marker 10 - BZ Incapacitating agent
Marker 11 - H Mustard
Marker 12 - L Lewisite
Size - 24 inch
Size - 12 inch

* Type III - Restricted Area
Marker 13 - No Photography
Marker 14 - No Recording
Marker 15 - No Notes
Marker 16 - Warning Controlled Area, see figure 4 for sizes
Marker 17 - Warning Restricted Area, see figure 4 for sizes

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

L-S-300 - Sheeting and Tape, Reflective: Nonexposed Lens
* PPP-B-26 - Bag, Plastic (General Purpose)
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-L-10547 - Liners, Case, and Sheet, Overwrap: Water-Vaporproof or Waterproof, Flexible

STANDARDS

FEDERAL

FED-STD-595 - Colors Used in Government Procurement

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

MIL-STD-129 - Marking for Shipment and Storage

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIAL (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

(Non-Government standards and other publications are normally available from organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Reflective sheeting for type I and II markers. The reflective sheeting shall have a pressure-sensitive adhesive backing covered by a protective liner and shall conform to type I, class 4 of L-S-300.

3.2.2 Reflective sheeting for type III markers. The reflective sheeting shall have a pressure-sensitive adhesive backing covered by a protective liner and shall conform to type I, class 1 of L-S-300.

3.3 Design and color. All colors specified herein, except black, shall conform to L-S-300.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

3.3.1 Type I, markers 1,2,3, and 4. The markers shall be made from the material specified in 3.2.1. The designs and dimensions shall conform to figure 1. A tolerance of ± 1/4 inch shall apply for the size 24-inch marker dimensions. A tolerance of ± 1/8 inch shall apply for the size 12-inch marker dimensions. The colpr of the background shall be orange. The color of the numbers shall be black No. 17038 of FED-STD-595.

3.3.2 Type II markers. The markers shall be made from the material specified in 3.2.1. The designs and dimensions shall conform to figure 2. A tolerance of ± 1/4 inch shall apply for the size 24-inch marker dimensions. A tolerance of ± 1/8 inch shall apply for the size 12-inch marker dimensions.

3.3.2.1 Marker 5 colors. The background shall be blue. The figure and rim shall be red for class 1, yellow for class 2, and white for class 3.

3.3.2.2 Marker 6 colors. The background shall be blue. The figure and rim shall be white.

3.3.2.3 Marker 7 colors. The background shall be white. The circle and diagonal shall be red. The figure shall be black No. 17038 of FED-STD-595.

3.3.2.4 Marker 8 through 12 colors. The background shall be yellow. The letters shall be black No. 17038 of FED-STD-595.

3.3.3 Type III, markers 13, 14, and 15. The markers shall be made from the material specified in 3.2.2. The designs and dimensions shall conform to figure 3. A tolerance of ± 1/8 inch shall apply for the marker dimensions. The color of the background shall be white. The circle and diagonal shall be red. The inserts shall be black No. 17038 of FED-STD-595.

* 3.3.3.1 Markers 16 and 17. The markers shall be made from material specified in 3.2.2. The design and dimensions shall conform to figure 4. A tolerance of ± 1/8 inch shall apply for the marker dimensions. The color or the background shall be white. The word "WARNING" shall be red and all other lettering shall be Black 17038 of FED-STD-595.

* 3.4 Workmanship. The markers shall conform to the quality of product established by this specification and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

* 4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table I. The lot size shall be expressed in units of markers of the type, marker number, size or class specified. The sample unit shall be one marker. The inspection level shall be I and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

TABLE I. End item visual defects

Examine	Defect
Adhesive backing	Backing not completely and evenly covered with adhesive
Liner	Missing Does not completely cover back of marker
Color	Not as specified
Design and form	Not type specified Marker not one piece
Appearance	Surface of exterior film not smooth Any tear, cut, hole, crack, blister, dirt, crease, scale or pit Any edge ragged, nicked, crushed, or uneven Sticky edges Any solid lump 1/ Any spot, stain, or streak more than 1 inch in its longest dimension 1/

1/ Clearly visible at normal inspection distance (approximately 3 feet).

4.4.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified on the applicable figure. Any dimension more or less than that specified shall be classified as a defect. The lot size shall be expressed in units of markers of the type, marker number, size or class specified. The sample unit shall be one marker. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

* 4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2, and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling Bulged or distorted container
Content	Weight of contents per container exceeds specified limits

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

* 5.1.1 Level A preservation. Each marker shall be unit packed in a close-fitting, clear polyethylene film bag conforming to type I or II, style 1 of PPP-B-26. Prior to or during the heat sealing closure operation, excess air within the bag shall be expelled.

5.1.2 Commercial preservation. Markers shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2).

5.2.1 Level A packing. A quantity of markers of one type and marker number only, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC-L, grade V2s of PPP-B-636; or overseas type, style A or J, type 3 load of PPP-B-601. The inside of each fiberboard shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each fiberboard shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Each wood container shall be closed and reinforced in accordance with the appendix of PPP-B-601; and waterproofed with a sealed case liner conforming to type I or II, grade C of MIL-L-10547. The weight of the contents of each fiberboard container shall not exceed 65 pounds and for each wood container shall not exceed 150 pounds.

5.2.2 Level B packing. A quantity of markers of one type and marker number only, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic of PPP-B-636; or domestic type, style A or J, type 3 load of PPP-B-601. The inside of each fiberboard shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Each fiberboard shipping container shall be closed in accordance with method II as

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. The weight of contents of each fiberboard container shall not exceed 65 pounds and for each wood container shall not exceed 150 pounds.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box, fabricated in accordance with PPP-B-636 and closed in accordance with method III, as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Markers, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

5.3.1 Special marking.

5.3.1.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black, directly on the bag across the center face, or on a white paper label inserted within the bag so as to permit ready identification.

5.3.1.2 Shelf-life marking (see 6.5). Each unit pack and shipping container shall include type II shelf-life item data of MIL-STD-129, except that Date of delivery shall be given in lieu of Date of manufacture. The Inspection/Test Date shall be 12 months after the Date of delivery of the marking material of marker, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Type I markers are intended to convey fire fighting personnel the kind of hazard presented by fires involving various types of ammunition and explosives in storage. Type II markers identify the type of chemical agent in storage and the type of precautions to be taken in fighting fires involving specific chemical agents (see 6.4). Type III markers (decals) are intended for use as a means of warning individuals as to the restrictions of the area they are entering.

* 6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, marker number, class, and size (see 1.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 User information. When markers 8, 10, 11 or 12 are used, marker 5, class 1 (red) must also be used. When marker 9 is used, marker 5, class 2 (yellow) must also be used. When marker 7 is used, marker 6 must also be used.

6.5 Shelf-life. Shelf-life marking specified in 5.3.1.2 is for use in surveillance during Government storage. The date to be marked is selected by the Government, as given in 5.3.1.2, and is not necessarily identical with the manufacturer's warranted shelf-life expiration date.

* 6.6 Subject term (key word) listing.

Pressure-sensitive
Retroreflective
Warning

6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 99

* Review activity:


Army - MD
Air Force - 84

Preparing activity:


Army - GL

(Project 7690-0085)


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

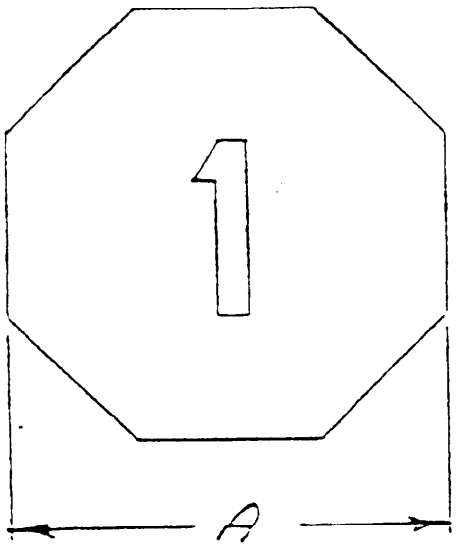


MARKER -1
(FIRE HAZARD CLASS 1.1)

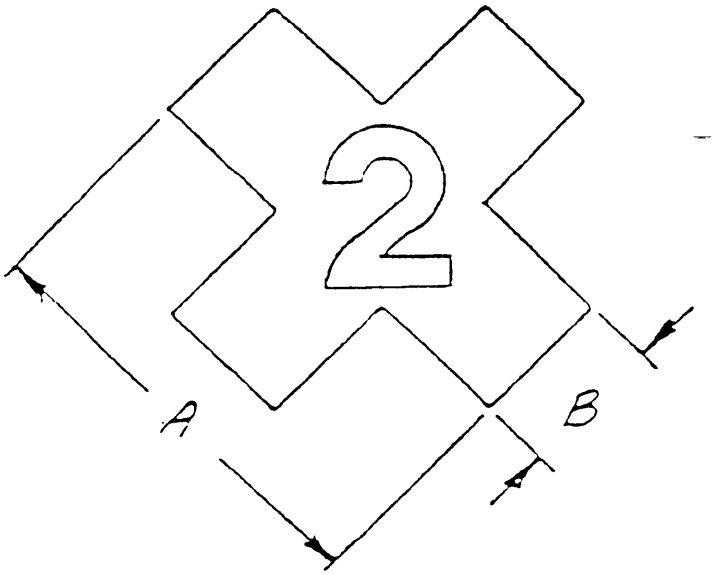

MARKER-2
(FIRE HAZARD CLASS 1.2)

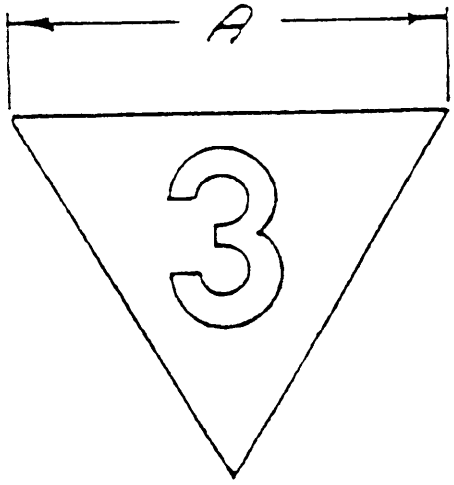

MARKER-3
(FIRE HAZARD CLASS 1.3)

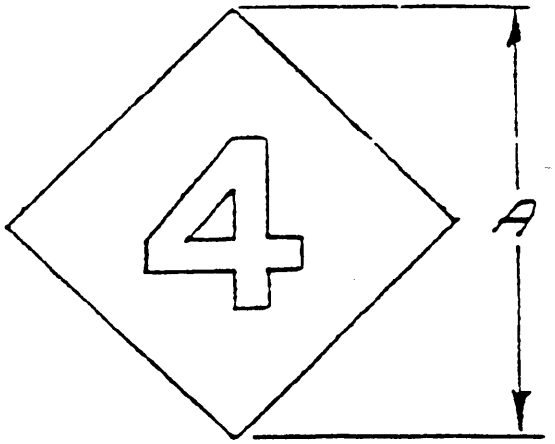


MARKER-4
(FIRE HAZARD CLASS 1.4)


MARKER	A	B	NUMERAL SIZE	A	B	NUMERAL SIZE
1	24"	—	10"H × 2"W	12"	—	5"H × 1"W
2	24"	8"	10"H × 2"W	12"	4"	5"H × 1"W
3	24"	—	10"H × 2"W	12"	—	5"H × 1"W
4	24"	—	10"H × 2"W	12"	—	5"H × 1"W

FIGURE 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

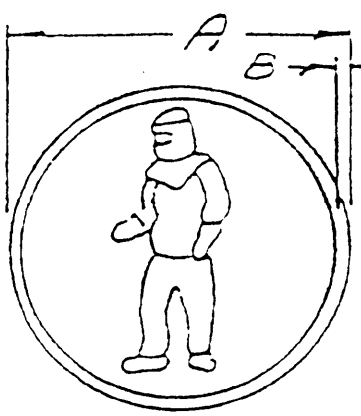

MARKER 5
WEAR FULL PROTECTIVE CLOTHING

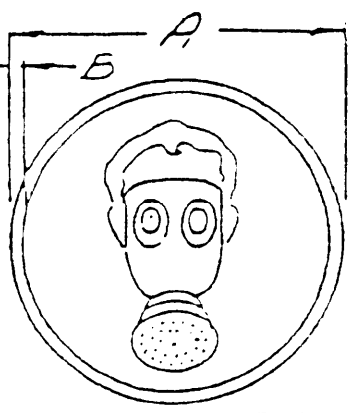


MARKER 6
WEAR BREATHING APPARATUS

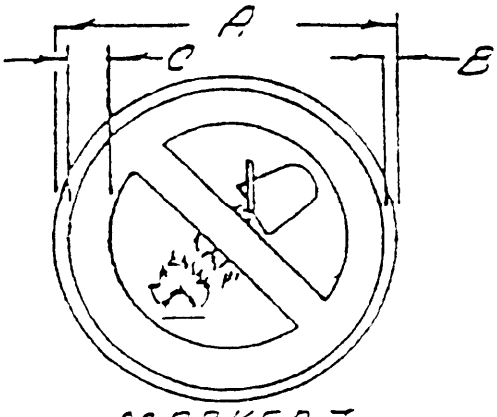

MARKER 7
APPLY NO WATER


MARKER	A	B	C	A	B	C
5	24"	1/2"	—	12"	1/4"	—
6	24"	1/2"	—	12	1/4"	—
7	24	1/2"	8"	12"	1/4"	4"

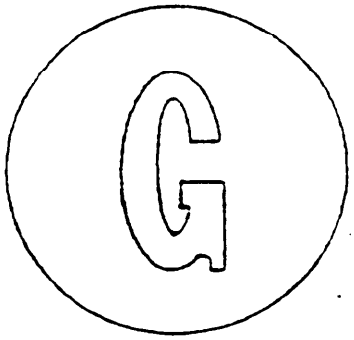


MARKER 8
SEE NOTE




MARKEE 9
SEE NOTE

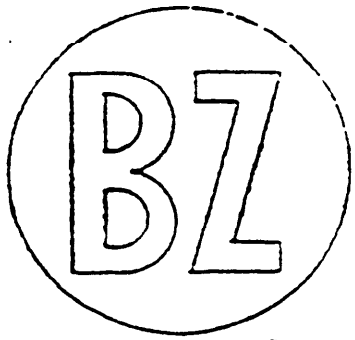

MARKER 10
SEE NOTE

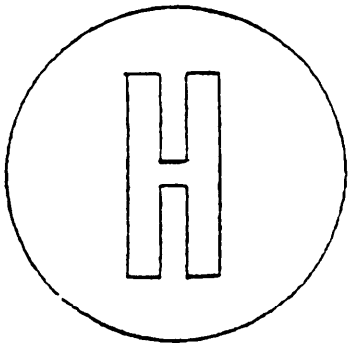

MARKER 11
SEE NOTE

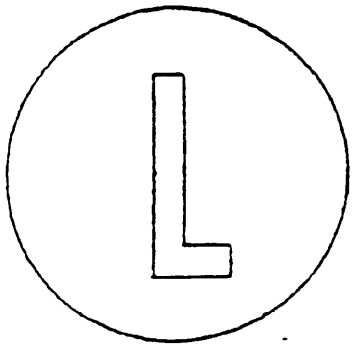

MARKEE 12
SEE NOTE


NOTE:

24 INCH SIZE = 24 INCH OD WITH 12 INCH HIGH x 2 INCH WIDE LETTERS


12 INCH SIZE = 12 INCH OD WITH 6 INCH HIGH x 1 INCH WIDE LETTERS

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

MARKER	A	B
13	3 3/8"	5/16"
14	3 3/8"	5/16"
15	3 3/8"	5/16"

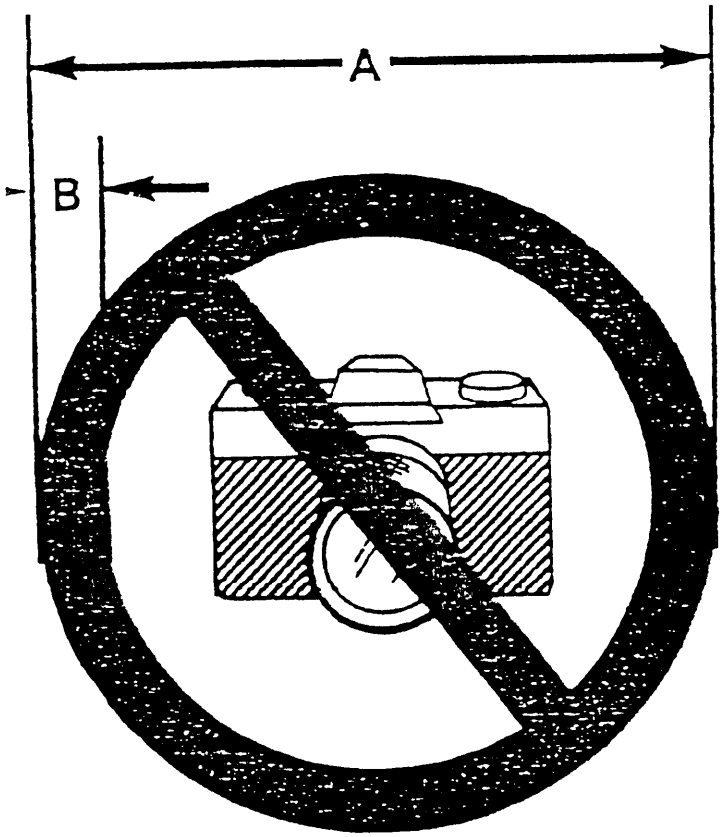

MARKER 13
NO PHOTOGRAPHY

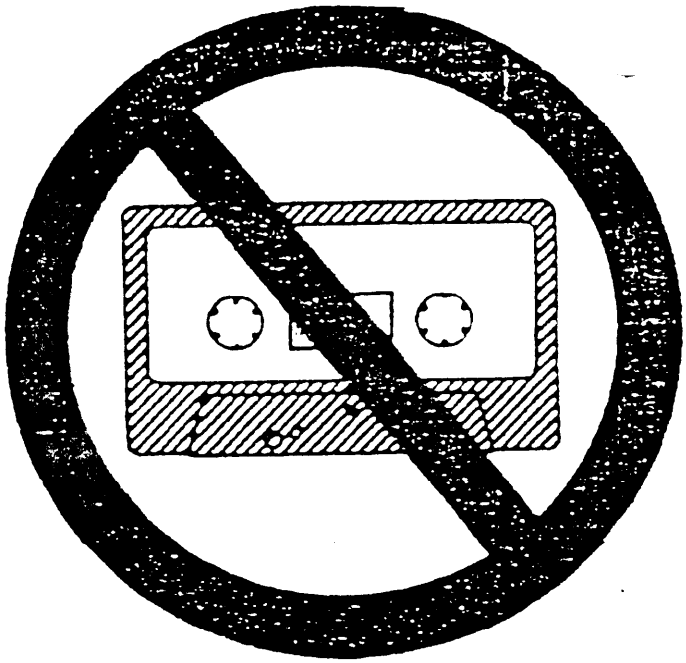

MARKER 14
NO RECORDING



MARKER 15
NO NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.


WARNING

Controlled Area

It is unlawful to enter this area without permission of the Installation Commander.
Sec. 21, Internal Security Act of 1950; 50 U.S.C.797

While on this Installation all personnel and the property under their control are subject to search.

MARKER 16

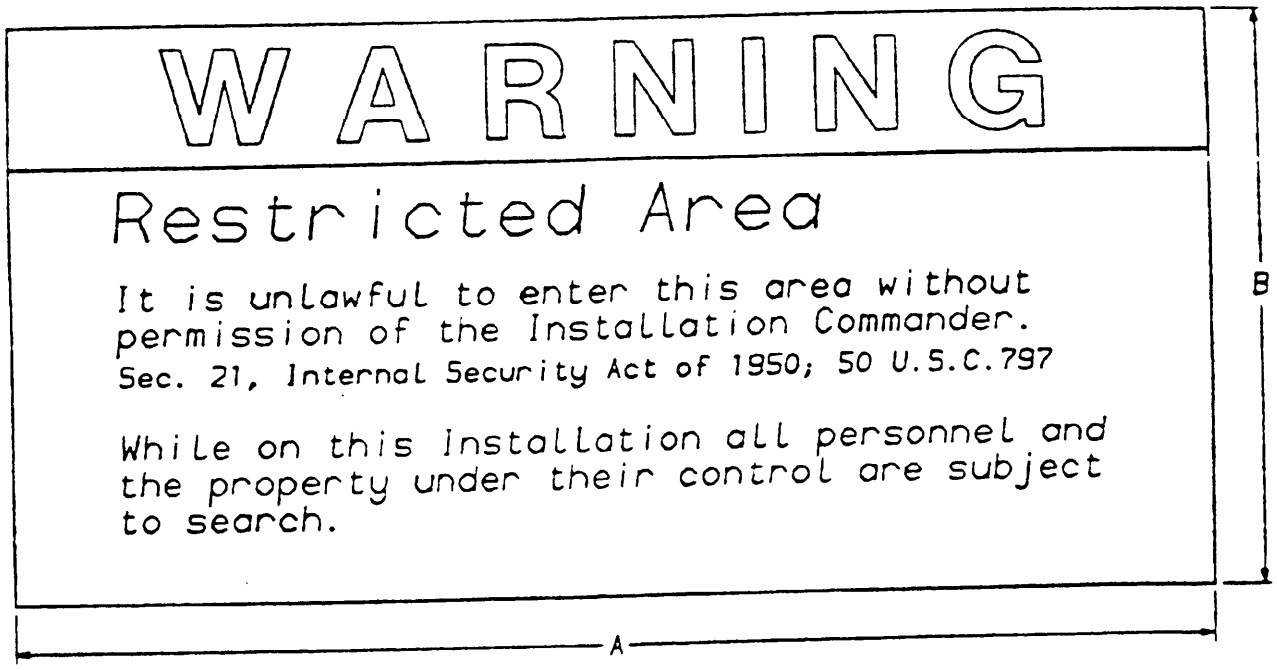

MARKER 17

MARKER	A-(INCHES)	B-(INCHES)
16	24	12
16	36	30
16	48	24
17	24	12
17	36	30
17	48	24

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-M-43994C	1991 January 2

3. DOCUMENT TITLE
MARKER, IDENTIFICATION, FIRE, CHEMICAL HAZARD, AND RESTRICTED AREA, REFLECTIVE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
U.S. Army Natick RD&E Center	508-651-4532	256-4532
c. ADDRESS (Include Zip Code)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.