INCH-POUND

MIL-DTL-43994D
w/AMENDMENT 1
10 December 2024
SUPERSEDING
MIL-DTL-43994D
15 April 2008

DETAIL SPECIFICATION

MARKER, IDENTIFICATION, FIRE, CHEMICAL HAZARD, AND RESTRICTED AREA, REFLECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. Scope

1.1 Scope. This specification covers markers processed on pressure-sensitive adhesive backed retroreflective sheeting.

1.2 Classification. The markers will be of the following types, marker numbers, sizes, and classes as specified (see 6.2):

Type I	- Fire Hazard
Marker 1	- Hazard class 1.1
Marker 2	- Hazard class 1.2
Marker 3	- Hazard class 1.3
Marker 4	- Hazard class 1.4
Size	- 24 inch
Size	- 12 inch
Type II	- Chemical Hazard
Marker 5	- Wear full protective clothing
	Class 1 - Red
	Class 2 - Yellow
	Class 3 – White

Comments, suggestions, or questions on this document should be addressed to DLA Troop Support-Construction and Equipment (C&E) (ATTN: Code FCSB), 700 Robbins Avenue Philadelphia, PA 19111-5096 or email to CE_Standardization@dla.mil. Since contact information can change, you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 7690

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Marker 6	- Wear Breathing apparatus
Marker 7	- Apply no water
Marker 8	- G Nerve agent
Marker 9	- VX Nerve agent
Marker 10	- BZ Incapacitating agent
Marker 11	- H Mustard
Marker 12	- L Lewisite
Size	- 24 inch
Size	- 12 inch

Type III	- Restricted Area
Marker 13	- No Photography
Marker 14	- No Recording
Marker 15	- No Notes
Marker 16	- Warning Controlled Area, See figure 4 for sizes
Marker 17	- Warning Restricted Area, see figure 4 for sizes

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in section 3, 4, or 5 of this standard. This section does not include documents cited in other sections of this standard or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements of documents cited in section 3, 4, or 5 of this standard, whether or not they are listed.

2.2 Government documents.

2.2.1 Specifications, standards, and handbooks. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE STANDARD

MIL-STD-129 Marking for Shipment and Storage

(Copies of these documents are available online at https://assist.dla.mil)

2.3 Non-Government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

ASTM INTERNATIONAL

ASTM D4956 Standard Specification for Retroreflective Sheeting for Traffic Control

(Copies of this document are available from www.astm.org or ASTM International, 100 Barr Harbor Drive, PO Box C700, West Conshohocken, PA 19428-2959.)

AMERICAN SOCIETY FOR QUALITY (ASQ)

ASQ Z1.4 Sampling Procedures and Tables for Inspection by Attributes

(Copies of this document are available from www.asq.org or the American Society for Quality, 611 East Wisconsin Avenue, Milwaukee, WI 53202.)

SAE INTERNATIONAL (SAE)

SAE-AMS-STD-595 Color used in Government Procurement.

(Copies of these documents are available from www.sae.org or SAE International Customer Service, 400 Commonwealth Drive, Warrendale, PA 15096)

Order of precedence. In the event of a conflict between the text of this document and the reference cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.2.

3.2 Material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Reflective sheeting for type I and II markers. The reflective sheeting shall have a pressure-sensitive adhesive backing covered by a protective liner and shall conform to class 4 of ASTM D4956.

3.2.2 Reflective sheeting for type III markers. The reflective sheeting shall have a pressure-sensitive adhesive backing covered by a protective liner and shall conform to class 1 of ASTM D4956.

3.3 Design and color. All colors specified herein, except black, shall conform to ASTM D4956.

3.3.1 Type I, markers 1, 2, 3 and 4. The markers shall be made from the material specified in 3.2.1. The designs and dimensions shall conform to figure 1. A tolerance of ± 1/4 inch shall apply for the size 24-inch marker dimensions. A tolerance of ± 1/8 inch shall apply for the size 12-inch marker dimensions. The color of the background shall be orange. The color of the numbers shall be black No. 17038 of SAE-AMS-STD-595.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

3.3.2 Type II markers. The markers shall be made from the material specified in 3.2.1. The designs and dimensions shall conform to figure 2. A tolerance of 1/4 inch shall apply for the size 24-inch marker dimensions. A tolerance of ± 1/8 inch shall apply for the size 12-inch marker dimensions.

3.3.2.1 Marker 5 colors. The background shall be blue. The figure and rim shall be red for class 1, yellow for class 2, and white for class 3.

3.3.2.2 Marker 6 colors. The background shall be blue. The figure and rim shall be white.

3.3.2.3 Marker 7 colors. The background shall be white. The circle and diagonal shall be red. The figure shall be black No. 17038 of SAE-AMS-STD-595.

3.3.2.4 Marker 8 through 12 colors. The background shall be yellow. The letters shall be black No. 17038 of SAE-AMS-STD-595.

3.3.3 Type III, markers 13. 14, and 15. The markers shall be made from the material specified in 3.2.2. The designs and dimensions shall conform to figure 3. A tolerance of ± 1/8 inch shall apply for the marker dimensions. The color of the background shall be white. The circle and diagonal shall be red. The inserts shall be black No. 17038 of SAE-AMS-STD-595.

3.3.3.1 Markers 16 and 17. The markers shall be made from material specified in 3.2.2. The design and dimensions shall conform to figure 4. A tolerance of ±1/8 inch shall apply for the marker dimensions. The color or the background shall be white. The word “WARNING” shall be red and all other lettering shall be Black 17038 of SAE-AMS-STD-595.

3.4 Shelf-life marking (see 6.5). Each unit pack and shipping container shall include type II shelf-life item data of MIL-STD-129, except that date of delivery shall be given in lieu of date of manufacture. The inspection/test date shall be 12 months after the date of delivery of the marking material of marker, as applicable.

3.5 Workmanship. The markers shall conform to the quality of product established by this specification.

4. VERIFICATION

4.1 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2).
b. Conformance inspection (see 4.3).

4.2 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.3.2 and 4.3.3.

4.3 Conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with ASQ Z1.4. Unless otherwise specified, the Acceptable Quality Limits (AQLs) listed in this section shall be used to establish the sample size, however, the acceptance number shall be zero.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

4.3.1 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.3.2 End item visual examination. The end items shall be examined for the defects listed in table I. The lot size shall be expressed in units of markers of the type, marker number, size or class specified. The sample unit shall be one marker. The inspection level shall be I and the acceptable quality limits (AQL), expressed in terms of defects per hundred units, shall be 1.5.

TABLE 1. End item visual defects.

Examine	Defect
Adhesive backing	Backing not completely and evenly covered with adhesive
Liner	Missing Does not completely cover back of marker
Color	Not as specified
Design and form	Not type specified Marker not one piece
Appearance	Surface of exterior film not smooth Any tear, cut, hole, crack, blister, dirt, crease, scale or pit Any edge ragged, nicked, crushed, or uneven Sticky edges Any solid lump 1/ Any spot, stain, or streak more than 1 inch in its longest dimension 1/

1/ Clearly visible at normal inspection distance (approximately 3 feet).

4.3.3 End item dimensional examination. The end items shall be examined for conformance to the dimensions specified on the applicable figure. Any dimension more or less than that specified shall be classified as a defect. The lot size shall be expressed in units of markers of the type, marker number, size or class specified. The sample unit shall be one marker. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.3.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2, and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap. improper taping, loose strapping or inadequate stapling Bulged or distorted container
Content	Weight of contents per container exceeds specified limits

5. PACKAGING

5.1 Packaging. For acquisition purposes, the packaging requirements shall be as specified in the contract or order (see 6.2). When packaging of material is to be performed by DoD or inhouse contractor personnel, these personnel need to contact the responsible packaging activity to ascertain packaging requirements. Packaging requirements are maintained by the Inventory Control Point's packaging activities within the Military Services or Defense Agency, or within the military service's system commands. Packaging data retrieval is available from the managing Military Department's or Defense Agency's automated packaging files, CD-ROM products, or by contacting the responsible packaging activity.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Type I markers are intended to convey fire fighting personnel the kind of hazard presented by fires involving various types of ammunition and explosives in storage. Type II markers identify the type of chemical agent in storage and the type of precautions to be taken in fighting fires involving specific chemical agents (see 6.4). Type III markers (decals) are intended for use as a means of warning individuals as to the restrictions of the area they are entering.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Type, marker number, class, and size (see 1.2).
c. When a first article is required (see 3.1, 4.2 and 6.3).
d. Packaging requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

6.3 First article. When a first article is required, it may be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 User information. When markers 8, 10, 11 or 12 are used, marker 5, class 1 (red) must also be used. When marker 9 is used, marker 5, class 2 (yellow) must also be used. When marker 7 is used, marker 6 must also be used.


6.5 Shelf-life. This specification covers items where the assignment of a Federal shelf-life code is a consideration. Specific shelf-life requirements should be specified in the contract or purchase order, and should include, as a minimum, shelf-life code, shelf-life package markings in accordance with MIL-STD-129 or FED-STD-123, preparation of a material quality storage standard for type II (extendible) shelf-life items, and a minimum of 85 percent shelf-life remaining at time of receipt by the Government. These and other requirements, if necessary, are in DoD 4140.27-M, Shelf-life Management Manual. The shelf-life codes are in the Federal Logistics Information System Total Item Record. Additive information for shelf-life management may be obtained from DoD 4140.27-M, or the designated shelf-life Points of Contact (POC). The POC should be contacted in the following order: (1) the Inventory Control Points that manage the item and (2) the DoD Services and Agency administrators for the DoD Shelf-Life Program. Appropriate POCs for the DoD Shelf-Life Program can be contacted through the DoD Shelf-Life Management website: https://www.shelflife.hq.dla.mil/.

6.6 Subject term (key word) listing.


Pressure-sensitive
Retroreflective
Warning

6.7 Amendment notations. The margins of this specification are marked with vertical lines to identify modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notifications. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

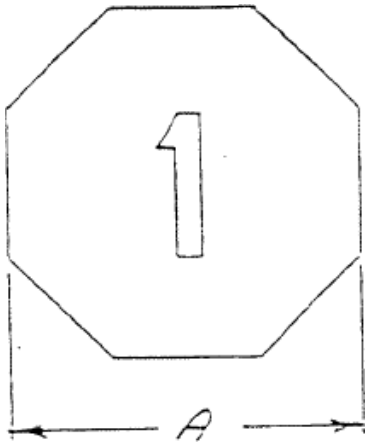


MARKER – 1
(FIRE HAZARD CLASS 1.1)

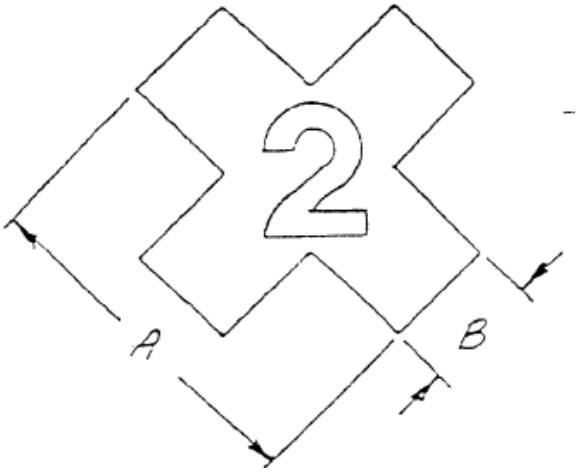

MARKER – 2
(FIRE HAZARD CLASS 1.2)

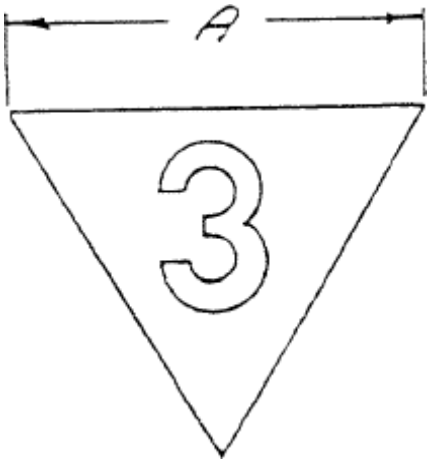

MARKER – 3
(FIRE HAZARS CLASS 1.3)

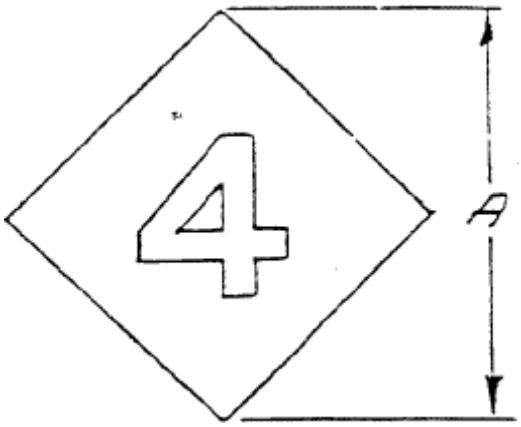


MARKER – 4
(FIRE HAZARS CLASS 1.4)


MARKER	A	B	NUMERAL SIZE		A	B	NUMERAL SIZE
1	24”	-	10”H x 2”W		12”	-	5”H x 1”W
2	24”	8”	10”H x 2”W		12”	4”	5”H x 1”W
3	24”	-	10”H x 2”W		12”	-	5”H x 1”W
4	24”	-	10”H x 2”W		12”	-	5”H x 1”W

FIGURE 1. Markers 1 thru 4.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

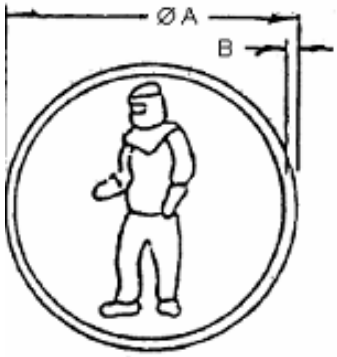

MARKER 5
WEARFULL PROTECTIVE CLOTHING



MARKER 6
WEARFULL BREATHING APPARATUS

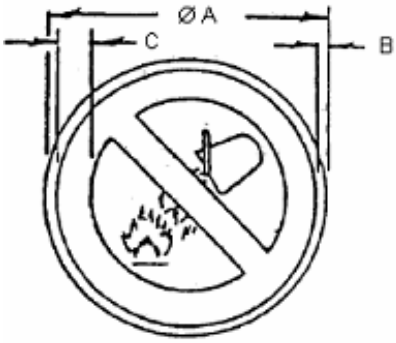

MARKER 7
APPLY NO WATER

MARKER	∅A	B	C		∅A	B	C
5	24”	½ “	-		12”	¼ “	-
6	24”	½ “	-		12”	¼ “	-
7	24”	½ “	8”		12”	¼ “	4”




MARKER 8
SEE NOTE




MARKER 9
SEE NOTE



MARKER 10
SEE NOTE



MARKER 11
SEE NOTE




MARKER 12
SEE NOTE

NOTE:
24 INCH SIZE = 24 INCH O.D. WITH 12 INCH HIGH x 2 INCH WIDE LETTERS
12 INCH SIZE = 12 INCH O.D. WITH 6 INCH HIGH x 1 INCH WIDE LETTERS

FIGURE 2. Markers 5 thru 12.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

MARKER	∅A	B
13	3 3/8”	5/16”
14	3 3/8”	5/16”
15	3 3/8”	5/16”

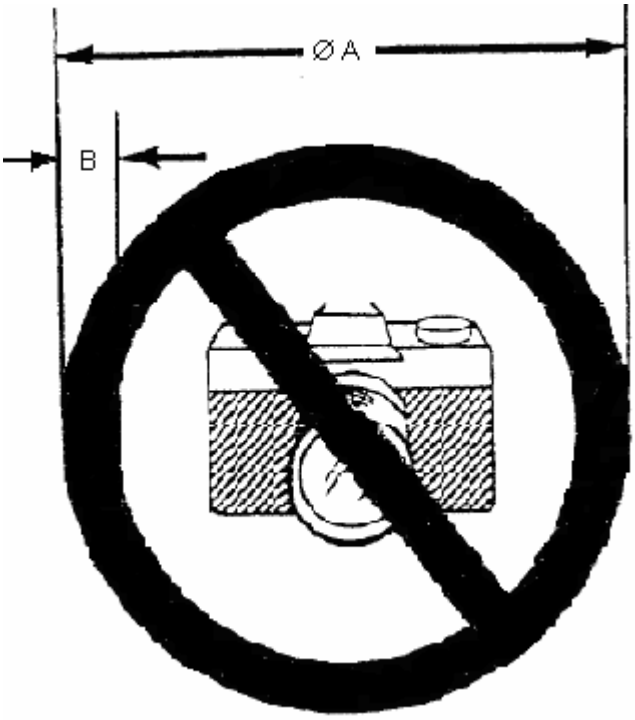

MARKER 13
NO PHOTOGRAPHY




MARKER 14
NO RECORDING




MARKER 15
NO NOTES

FIGURE 3. Markers 13 thru 15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

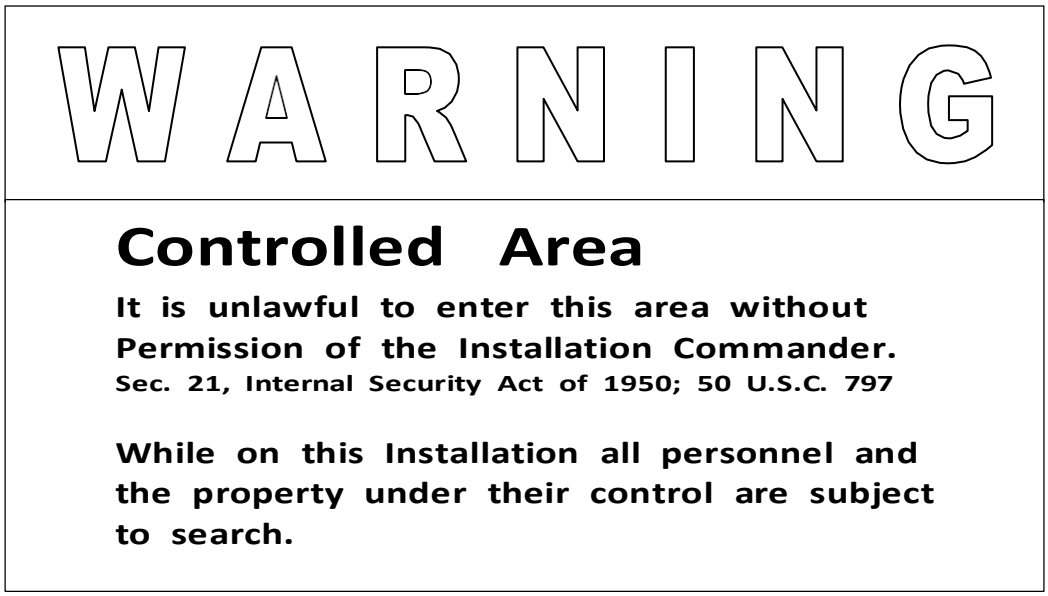

MARKER 16

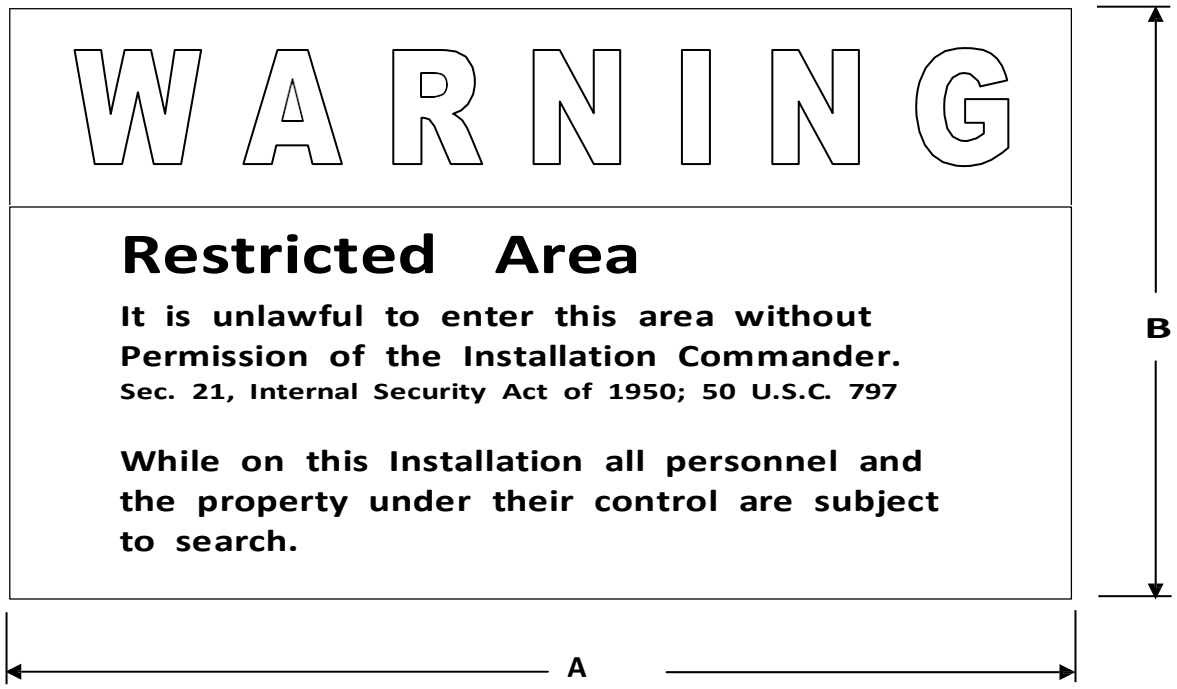

MARKER 17

MARKER	A – (INCHES)	B – (INCHES)
16	24	12
16	36	30
16	48	24
17	24	12
17	36	30
17	48	24

FIGURE 4. Markers 16 and 17.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Custodians:
Army – GL
Air Force – 99
DLA-CQ

Preparing activity:
DLA-CQ

(Project 7690-2024-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.