MIL-F-43986A(GL)
14 March 1980
SUPERSEDING
MIL-F-43986(GL)
15 November 1978

MILITARY SPECIFICATION

FOLDER FILE: EQUIPMENT RECORD

This specification is approved for use by the Natick Research and Development Command, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one size folder which consists of a cover and four attached envelopes (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-375	-	Plastic Film, Flexible, Vinyl Chloride
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-676	-	Boxes, Setup

STANDARDS

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

* FSC 7510

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:17Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by contractors in connection with specific procurement functions, should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Standard sample. The folder shall match the standard sample for the design, configuration, color, printing, and marking and shall be equal to or better than the standard sample for other characteristics specified herein (see 6.3).

3.2 Materials and components. Materials and components used shall be as specified herein. Materials and components not definitely specified shall be of the quality normally used by the manufacturer provided the completed item complies with all the provisions of this specification (see 6.4).

* 3.3 Design and construction. The folder shall be of the side opening type, and the dimensions of the cover and four envelopes shall be as specified in table I. All seams shall be heat-sealed in accordance with L-P-375.

TABLE I. Dimensions, inches (mm): Tolerance +1/4 -1/8 inches (+6.4 -3.2 mm)

Cover (covering with fillerboards), outside dimensions	10-1/4 (260) long by 8-1/4 (210) wide
Envelopes, inside dimensions	9-7/8 (251) long by 7 (178) wide

* 3.3.1 Covering. The covering material shall be 0.0160 inch (.406 mm) thick plastic conforming to type II, class 1 or 2 of L-P-375. The plastic covering shall cover the back and front commercial fillerboard components of the cover. The edges shall be heat-sealed. The fillerboards shall be not less than 10 inch long by 8 inch wide by 0.050 inch thick (254 by 203 by 0.38 mm) and with 1/8 inch (3.2 mm) rounded corners. Two plastic pockets shall be formed along the two 10 inch (254 mm) edges of the cover. The pockets shall be located on the inside front and inside back portion of the folder. The pockets shall be 3-1/2 $\pm$ 1/4 inch (89 $\pm$ 6.4 mm) wide. The edges shall be heat-sealed. The corners at the openings of the pockets shall be reinforced by a 1/4 inch (6.4 mm) round heat weld. The outside of the covering shall be printed as specified in 3.3.3. A transparent plastic card holder shall be centered on the front of the covering and with the lower edge 2 inches (51 mm) from the bottom of the covering. The card holder shall have inside dimensions capable of receiving a 3 inch by 5 inch (76 by 127 mm) card insert. The card holder shall have a half-moon thumb cut at the top edge (see figure 1) for the removal of cards.

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:17Z
Check the source to verify that this is the currentversion before use.

* 3.3.2 Envelopes. The envelope material shall be 0.0080 inch (.203 mm) thick plastic conforming to type II, class 1 of L-P-375. The envelope dimensions shall be as specified in table I. There shall be one opening per envelope located 1 ± 1/8 inch (25.4 ± 3.2 mm) from the center line of the folder and along the 9-7/8 inch (251 mm) length. The inside dimensions of the envelopes shall not be less than 9-3/4 inch long and 6-7/8 inch wide (248 by 175 mm). The outside edges of the envelopes shall be heat-sealed. The envelopes shall be heat-sealed to the inside center of each folder along the 10 inch (254 mm) dimension. An opening or plastic loop capable of holding a pen or pencil shall be provided along the center line of the envelopes, about 4 inch (102 mm) from the top edge of the folder.

* 3.3.3 Marking, printing and color. The marking on the front and back covering (see figure 1) shall be blind embossed (see 4.2.2). The areas of the pattern shall be printed with Army camouflage color shades yellow green 354, dark green 355, brown 356 and black 357. The pattern may be obtained by overprinting three colors onto a ground shade matching the fourth color or by four color printing on the covering. The design, colors, registration and solid coverage of the respective pattern areas of the covering shall reproduce the standard sample (see 4.3). The printing medium shall be compatible with the vinyl covering material and the printed covering material shall comply with the physical requirements of the unprinted covering material.

* 3.4 Identification. Identification shall be printed or stamped on the inside of the folder cover in accordance with the manufacturer's commercial practice and shall indicate the manufacturer's name or trade mark and date of manufacture.

3.5 Workmanship. The folder shall be well finished, clean and all edges shall be smooth. The plastic materials shall be uniform in surface finish and shall be free from gels, scratches, cracks, blisters, pits, tears, cuts, holes, fish eyes, creases and unmelted material. Sealed seams shall be straight, of good appearance, and free from skips and gaps. The protective pages shall be flat and free from waviness, dirt, oil, foreign matter or other defects which may affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:17Z
Check the source to verify that this is the current version before use.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all of the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.2.2 Process examination. Examination shall be made during the printing process. Embossing shall be as specified in 3.3.3.

4.2.3 End item inspection. The inspection lot shall be all complete folders offered for inspection at one time. The sample unit shall be one complete folder.

4.2.3.1 Visual examination. The folders shall be examined for the defects in table II. The inspection level shall be II with an acceptable quality level (AQL) of 6.5 for total defects expressed in terms of defects per hundred units.

TABLE II. Visual examination

Examine	Defect
Finish	Not clean, smooth, and uniform Not free from gels, scratches, cracks, blisters, pits, tears, cuts, holes, fish eyes, creases, and unmelted material
Design, construction and workmanship, general (applicable to all components and assemblies)	Any component or part missing or not specified type Any edge not smooth
Covering	Does not cover the fillerboards Edges not heat-sealed Inside pockets not heat-sealed at the edges Corners at the opening of the pockets not reinforced by a round heat weld Closure seams of the window not heat-sealed Window not transparent Half-moon thumb cut opening in window missing Printing not in accordance with figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:17Z
Check the source to verify that this is the current version before use.

TABLE II. Visual examination (cont'd)

Examine	Defect
Design, construction and workmanship, general (applicable to all components and assemblies) (cont'd)	
Envelopes	Not heat-sealed to the inside center of the folder along the 10 inch (254 mm) dimension Not flat, free from waviness, dirt, oil or foreign matter
Marking for identification	Missing, or illegible

4.2.3.2 Dimensional examination. Examination shall be made of the folder for compliance with dimensions specified. Any dimension that is not within the specified tolerance shall be classified as a defect. The inspection level shall be S-2 with an AQL of 6.5 expressed in terms of defects per hundred units.

4.2.3.3 End item testing. Each end item shall be tested as specified in 4.3. Failure to pass the test shall be cause for rejection of the item.

4.2.4 Packaging inspection. Packaging inspection shall be made to determine that preservation, packing and marking comply with section 5. Defects shall be scored as set forth in table II. The sample unit shall be one shipping container fully packed, except that it need not be closed. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-1 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II. Packaging inspection

Examine	Defect
Markings	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Components missing, damaged.
Contents	Not as specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:17Z
Check the source to verify that this is the current version before use.

4.3 Matching test. The end item shall be observed against the standard sample under artificial daylight with a color temperature of 7500 kelvin, and also under an incandescent lamp at 2800 kelvin. Failure of the end item to approximately match the standard sample as specified in 3.3.3 shall be cause for failure of the test.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Ten folders shall be unit packed in a snug-fitting paperboard folding or setup box conforming to variety 1, style III or VIII, type G, class 1 of PPP-B-566; or type I, variety 1, class A, style 3 or 4 of PPP-B-676. Each box shall be securely closed with tape as specified in the appendix of the applicable box specification.

5.1.2 Commercial. The folders shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. Eighty folders, preserved as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to style RSC, grade V2s of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636.

* 5.2.2 Level B packing. Eighty folders, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

5.2.2.1 Weather-resistant shipping containers. When specified (see 6.2), the fiberboard shipping container shall be grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636.

5.2.3 Commercial packing. Folders, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 and MIL-STD-1188, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:17Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The folders covered by this specification are intended for use in military vehicles for filing maintenance records and reports.

6.2 Ordering data. Procurement data should specify the following:

(a) Title, number and date of this specification.
(b) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(c) When weather-resistant containers are required for level B packing (see 5.2.2.1).

6.3 Standard sample. For access to the standard sample, see the office issuing the invitation to bid (see 3.1).

6.4 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification (see 3.1).

6.5 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in US customary units shall be controlling.

* 6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:

Army - MD

Preparing activity:

Army - GL

Project No. 7510-A312

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:17Z
Check the source to verify that this is the current version before use.

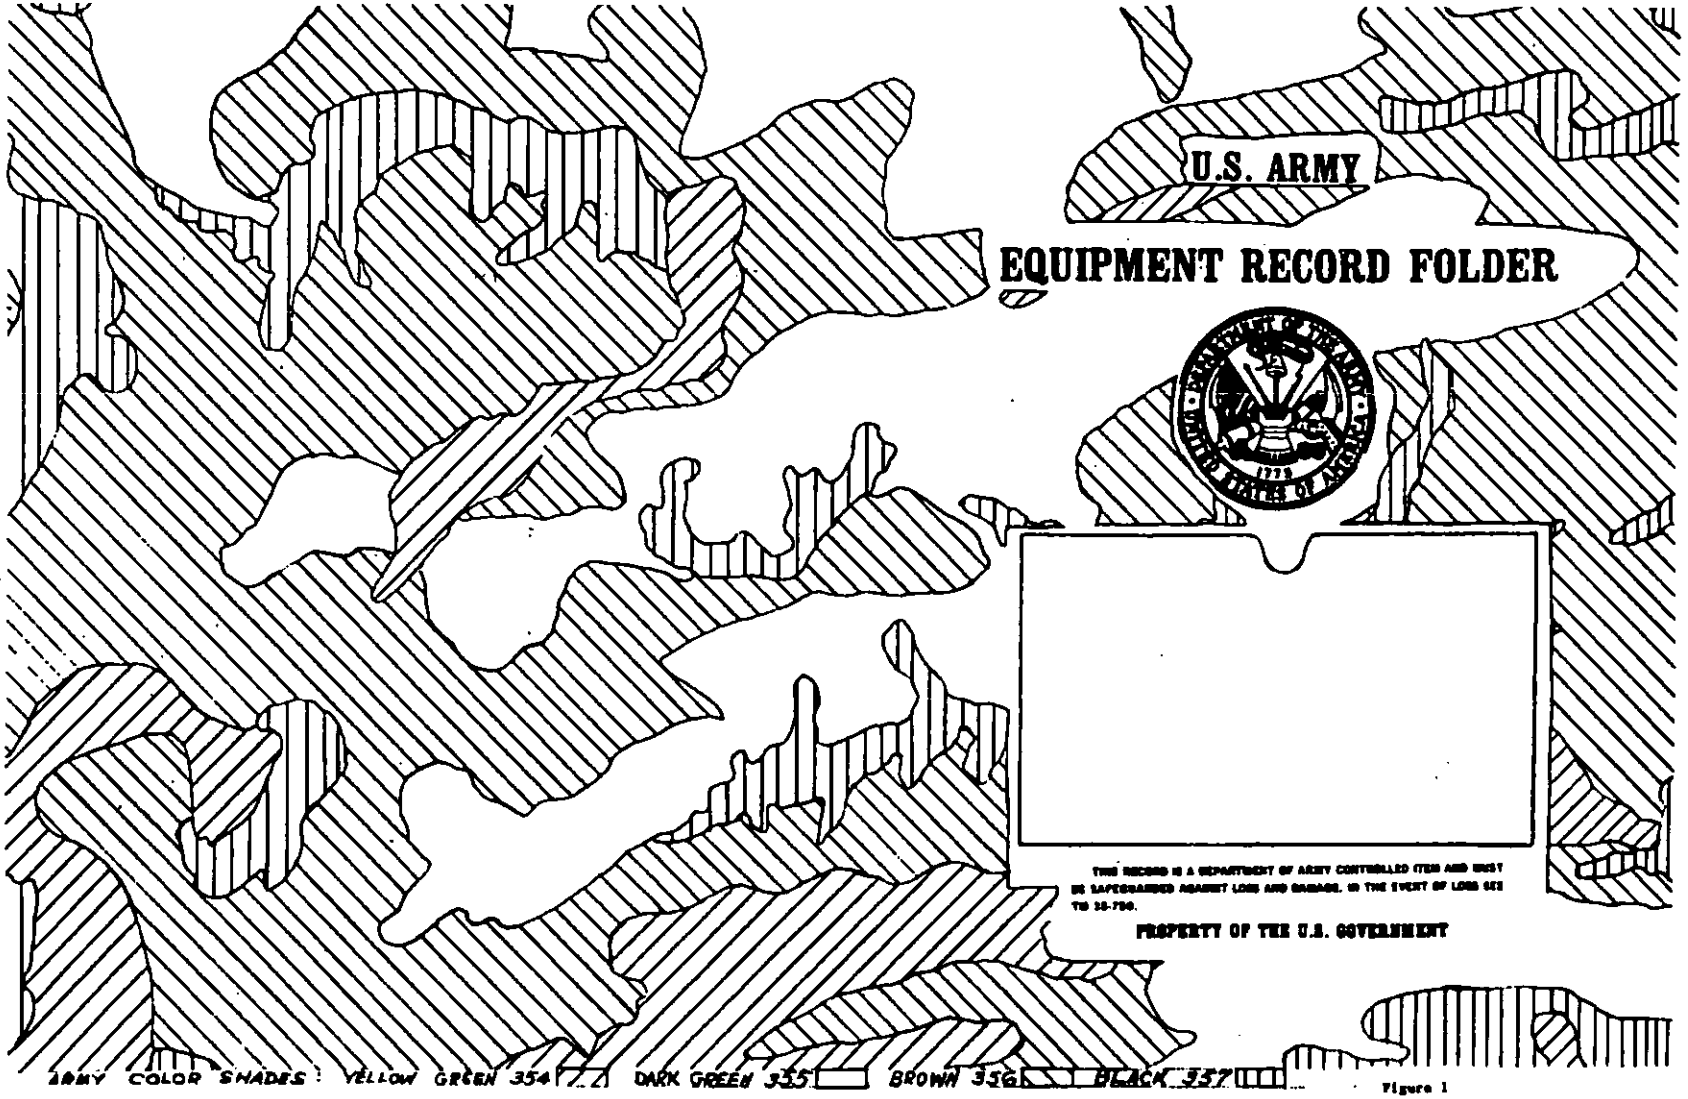


Figure 1

☆U.S. GOVERNMENT PRINTING OFFICE: 1980 — 603-121/1411

Source: https://assist.dla.mil -- Downloaded: 2026/0-21T23:17Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

NATICK OP 1 AUG 78
FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:17Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-43986A(GL) - Folder File: Equipment Record

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:17Z
Check the source to verify that this is the current version before use.