INCH-POUND

MIL-H-43981D
30 March 1990
SUPERSEDING
MIL-H-43981C
25 June 1986

MILITARY SPECIFICATION

HANDBAG, WOMEN'S, SYNTHETIC, BLACK

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for women's polyurethane handbags.

1.2 Classification. The handbags shall be of one type in the following classes as specified (see 6.2):

Class 1 - Handbag with brass hardware
Class 2 - Handbag with chrome hardware

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8445

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

A-A-883	-	Tape, Pressure Sensitive Adhesive, Masking
V-F-106	-	Fastener, Slide, Interlocking
V-T-276	-	Thread, Cotton
V-T-295	-	Thread, Nylon
QQ-C-320	-	Chromium Plating (Electrodeposited)
QQ-N-290	-	Nickel Plating (Electrodeposited)
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-676	-	Boxes Setup

MILITARY

MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-C-43718	-	Cloth, Polyester; Polyester and Cotton; Polyester and Rayon, for Pockets

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

2-1-1329 - Handbag, Women's, Synthetic, Black; Hardware Details

(Copies of drawings required by contractors are available from the U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-EMSS, Natick, MA 01760-5014.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

THE COLOR ASSOCIATION OF THE UNITED STATES

Standard Color Card of America

Department of Defense Standard Color Card for Sewing Threads

(Color cards may be available from the Color Association of the United States, 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY PUBLICATIONS

T403 - Bursting Strength of Paper
T410 - Grammage of Paper and Paperboard (Weight per Unit Area)
T411 - Thickness (Caliper) of Paper, Paperboard, and Combined Board
T414 - Internal Tearing Resistance of Paper (Elmendorf-Type Method)
T489 - Stiffness of Paper and Paperboard

(Application for copies should be addressed to the Technical Association of the Pulp and Paper Industry, Technology Park/Atlanta, P.O. Box 105113, Atlanta, GA 30348-5113.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 1424 - Tear Resistance of Woven Fabrics by Falling-Pendulum (Elmendorf) Apparatus
D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample in which case this specification shall govern.

* 3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Basic material.

* 3.3.1.1 Base fabric. The base fabric prior to coating shall be black, 5 harness cotton sateen woven cloth, napped on one side, conforming to the following requirements when tested as specified in 4.4.1.1:

	MIN	MAX
Weight (ounces per square yard)	7.0	7.8
Yarns per inch		
Warp	60	
Filling	56	

* 3.3.1.2 Coated fabric. The base fabric specified in 3.3.1.1 shall be coated on the napped side only with a polyurethane suitable compound and pigmented black in color. The coated fabric shall be embossed with a simulated leather grain and shall match the standard sample for color, grain, and finish. The coated fabric shall conform to the following requirements when tested as specified in 4.4.1.1:

	MIN	MAX
Weight (ounces per square yard)	10.0	12.0
Breaking strength (pounds)		
Warp	60	
Filling	70	
Tearing strength (pounds)		
Warp	5.5	
Filling	2.6	

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

Adhesion of coating (pounds per 2-inch width)	17	
Blocking scale rating		No. 3
Resistance to low temperature	1/	
Resistance to oven aging	2/	

1/ There shall be no evidence of the coating cracking when examined along the fold line.

2/ The coated cloth shall show no evidence of becoming stiff, brittle, soft or tacky. In addition, there shall be no appreciable change in the color or appearance of the exposed test specimen when compared to the unexposed test specimen (appreciable means a change that is noticeable at first glance).

* 3.3.2 Cloth, rayon warp/cotton filling, bengaline. The cloth for the inside lining and center zipper pocket shall be a black rayon warp/cotton filling bengaline. The warp yarn shall be a continuous multifilament viscose, and the filling yarn shall be a combed cotton of such count as to meet the physical requirements of the finished cloth. The cloth shall conform to the following requirements when tested as specified in 4.4.1.1.

	MIN
Weight (ounces per square yard)	5.0
Breaking strength, pounds	
Warp	100
Filling	65
Yarns per inch	
Warp	140
Filling	32

As an alternative, the cloth for the inside lining and center zipper pocket shall be black, 100 percent textured, multifilament polyester, plain weave cloth in accordance with class 1 of MIL-C-43718.

3.3.2.1 Colorfastness. The dyed cloth shall match the standard sample and shall show fastness to crocking and water-resistance equal to or better than the standard sample when tested as specified in 4.4.1.1. When no standard sample is available, the dyed cloth shall show "fair" fastness to crocking and water-resistance when tested as specified in 4.4.1.1. The use of sulfur dyes or the presence of labile sulfur is prohibited. Tests for labile sulfur shall be conducted as specified in 4.4.1.1.

3.3.3 Felt. The felt (acetate, cotton or polyester) interlining shall weigh 3.0 to 5.0 ounces per square yard and shall have a thickness at 0.6 psi of 0.051 $\pm$ .015 inch (see 4.4.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.3.4 Paperboard neoprene impregnated. The paperboard used for stiffening shall be made from high-alpha cellulose wood pulp fiber impregnated with 25 ± 5 percent blended neoprene. The neoprene impregnated paperboard shall conform to the following requirements when tested as specified in 4.4.1.1.

Thickness (inch)	0.035 ± 0.003
Weight (pounds per 1000 square feet)	90 ± 5
Tearing resistance (gram), minimum	
- machine direction	550
- cross direction	625
Bursting strength (pounds per inch), minimum	139
Stiffness (gram-cm)	
- machine direction	280 ± 70
- cross direction	120 ± 30
Neoprene content (percent)	25 ± 5

3.3.5 Bogus paper. The bogus paper used for lining component parts shall be made from wood pulp fibers and shall be 0.018 ± 0.002 inch thick, having a basic weight of 70 ± 4 pounds per 1000 square feet (see 4.4.1.1). The shade of the bogus paper shall be black or grey approximating the shade of the coated fabric.

3.3.6 Thread, cotton. The thread for all inside and lining stitching except for polyurethane components shall be cotton, ticket No. 50, 3 ply, conforming to type IA3 of V-T-276. The thread shall be dyed Black Shade AA, C.A. 66043 and shall show fastness to light equal to or better than the standard sample.

3.3.7 Thread, nylon. The thread for stitching all polyurethane components shall be nylon, size E, class 1 of types I and II or type III, conforming to V-T-295. The thread shall be dyed Black Shade AA, C.A. 66043 and shall show fastness to light equal to or better than the standard sample.

3.3.8 Welting. The welting for outside of handbag shall be made from extruded vinyl and shall be 5/16 inch in width when tested as specified in 4.4.1.1 (see 6.5).

3.3.9 Masking tape. The tape applied to the back of the turn-buckle lock-washer and to the back of 3-inch staples shall be 1-1/2 inches wide conforming to type I of A-A-883.

3.3.10 Adhesive. The material for bonding coated fabric, fabric, and paper shall be a natural rubber or neoprene rubber solvent cement (see 4.4.1.1).

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:16Z
Check the source to verify that this is the currentversion before use.

3.3.11 Hardware.

3.3.11.1 Finish.

3.3.11.1.1 Class 1 handbag. All hardware except snap fasteners, washers, staples, studs, and slide fasteners shall be underplated with 0.0001 to 0.0003 inch nickel plate, followed by flash brass plating, and then coated with a baked lacquer finish. The lacquered surfaces shall show no change in color and shall show no appearance of dark spots when tested as specified in 4.5.1.

3.3.11.1.2 Class 2 handbag. All hardware except snap fasteners, washers, staples, studs, and slide fasteners shall be given a bright chrome-plated finish conforming to type I, class 1 of QQ-C-320 and the nickel undercoat shall conform to class 1, grade G of QQ-N-290.

3.3.11.2 Loop rings. The loop rings shall be formed from 0.160 to 0.165 inch steel wire and shall finish 1-3/8 inches in length by 7/16 inch in width, inside dimensions. The loop rings shall be evenly closed, with no gap to exceed 3/64 inch when tested as specified in 4.4.1.1 (see 3.3.11.1 and 6.5).

3.3.11.3 Twist lock, spring keeper, washer, tab and bottom eyelet. The twist lock, spring keeper, washer, tab, and bottom eyelet shall conform to Drawing 2-1-1329. Testing shall be as specified in 4.4.1.1 (see 3.3.11.1 and 6.5).

3.3.11.4 Base stop and stud. The base stops shall be brass half-ball with steel stud conforming to Fulford Mfg. Co., part number 9526 and P-296 or equal. Testing shall be as specified in 4.4.1.1 (see 3.3.11.1 and 6.5). The dimensions of the base stop and stud shall be as shown on figure 2.

* 3.3.11.5 Snap fasteners. The snap fasteners shall conform to style 2A, finish 2 of MIL-F-10884. The male components shall consist of a stud and size 1 eyelet for a single thickness strap. The female components shall consist of a socket and size 1 button for a single thickness of strap and a socket and size 2 button for a double thickness of strap.

* 3.3.11.6 Slide fastener. The slide fastener for the pocket shall be brass or continuous element, monofilament polyester coil, type I, style 6, size L, 7 inches in length with a short tab pull conforming to V-F-106. The tape shall be dyed Black Shade G, Cable No. 66507 and shall conform in all respects to V-F-106, except that only "good" fastness to light shall be required.

3.3.11.7 Staple and steel washer. The staple to secure the various compartments of the handbag shall be 3 inches in length and shall be equipped with a washer. Testing shall be as specified in 4.4.1.1 (see 6.5).

3.3.11.8 Holding paper. The holding paper for the 3 inch staple shall be 3/4 ± 1/8 inch wide and 4-1/4 inches ± 1/4 inch long. Testing shall be as specified in 4.4.1.1 (6.5).

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the currentversion before use.

3.3.12 Label. Each handbag shall have an identification label measuring not less than 3 by 1-1/2 inches conforming to type VI, class 5 of DDD-L-20.

3.4 Design. The handbag is rectangular in shape with three separate inside compartments and adjustable shoulder strap. The bag is lined with bengaline, and the center compartment lining has a pocket with a slide fastener closure. The bag has an outside back pocket lined with bengaline, and the handbag is closed by means of a twist lock and flap plate (see figure 1).

3.5 Patterns. Standard patterns will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns or making dies. The working patterns or dies shall be identical to the standard patterns.

3.5.1 Pattern parts. The component parts of the handbag shall be cut from the material specified below in accordance with pattern parts indicated in table I.

TABLE I. List of pattern parts

Material	Pattern nomenclature	Cut parts
Coated fabric	Flap	1
	Front pocket (outside layer)	1
	Front and back pocket (inside layer)	2
	Strap 1/	1
	Center pocket	2
	Center pocket sides	2
	Outside back pocket	1
	Strip for back of handbag	1
Bogus paper	Flap	1
	Center and back pocket	2
	Center pocket with slide fastener opening	1
	Center pocket	1
	Strap 1/	1
	Reinforcement strip for back pocket opening	1
Paperboard	Flap	1
	Front and back pocket	2
	Clasp reinforcement	1
	Center pocket sides	2
	Reinforcement strip for back pocket opening	1
	Reinforcement strip for back of handbag	1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE I. List of pattern parts (cont'd)

Material	Pattern nomenclature	Cut parts
Bengaline (lining)	Flap	1
	Front pocket	2
	Back pocket (inside)	2
	Center pocket	2
	Outside back pocket	1
	Back wall of handbag	1
	Zipper pocket	1
Felt	Center pocket sides	2
	Flap	1
	Front pocket	1
	Outside back pocket	1

1/ The strap parts may be roll cut. When this option is used, the shoulder strap shall conform to the requirements of operation 7 and finished length of the pattern.

3.6 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the written document appear in figure 1, the written document shall govern.

3.6.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table II. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers, or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used.

3.6.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1/2 inch, except where ends are turned under or caught in other seams or stitching. Ends of a continuous line of stitching shall overlap not less than 1/2 inch. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.6.1.1.1 Repairs of type 301 stitching.

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

b. Except for prestitching, thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.6.2 Application of adhesive. The adhesive shall be applied 1/4 to 1/2 inch from edge except as otherwise indicated in table II.

3.6.3 Raw edges of synthetic leather and bogus paper. All raw edges of synthetic leather and bogus paper shall be stained to match the color of the coated fabric surface (see 3.3.1.2).

* 3.7 Manufacturing operations requirements. The handbag shall be made in accordance with operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any additional basting or holding stitches used to facilitate manufacture are permissible provided the thread does not show on the finished handbag.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut all component parts of the handbag in strict accordance with patterns, which show notches for proper assembly, marks for clasp location, staple positions on inner pockets, and location of slide fastener opening. b. Cut fabric components in accordance with directional lines on patterns. c. Cut the bogus paper and paperboard in strict accordance with patterns, which show directional lines (machine direction is the stiffer direction and cross direction is the more flexible direction), holes, slots, and notches for proper assembly.						
2.	Replacement of defective components. During the spreading, cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.2 shall be removed from production and replaced with nondefective and properly matched components.						
3.	Make and join center pocket sides; attach base stops and studs. a. Position paperboard for center pocket sides on the fabric side of the coated fabric. Apply adhesive to the felt and position on the top of the paperboard so that the edges of felt and coated fabric are even.						

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Make and join center pocket sides; attach base stops and studs. (cont'd)						
	b. With bottom edges of sides even and notches matching, stitch across the width 1/2 inch from edges.	301	SSz-3(a)	8-12	E	E	
	c. Spread seams open and stitch 1/4 to 3/16 inch from edge.	301	SSz-3(b)	8-12	E	E	
	d. Apply adhesive to the felt side edges at loop end of the center pocket sides. Turn sides of coated fabric down approximately 1/2 inch as indicated by slits on patterns and stitch folded edges 1/8 to 3/16 inch from edge.						
	e. Punch holes to attach the four base stops with locking studs as indicated on patterns. Attach the four base stops with locking studs.						
4.	Make front pocket and front pocket lining.						
	a. Apply adhesive to outside panel of front pocket on fabric side of coated fabric. Position felt to panel as indicated by marks on pattern. The top edges of felt shall be approximately 1/2 inch from top edge of coated fabric. Position straight edge of paperboard abutting top edge of felt and adhere.						
	b. Position twist lock to front of handbag through coated fabric, felt, paperboard, and steel washer as indicated by marks on pattern. Clinch staple securely and apply a strip of masking tape covering the clinched washer.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make front pocket and front pocket lining. (cont'd)						
	c. Apply adhesive to top edge of inside panel of front pocket. Turn top edge down approximately 1/2 inch (notches on pattern).						
	d. Position flat edge of 5/16 inch welting to edge of coated side of inside panel and stitch welting to panel along side and bottom edges, with stitching 1/16 to 1/8 inch from edge.	301	SSaa-1	6-12	E	E	
	e. Superimpose panels of front pocket, coated side to coated side, and stitch 1/8 to 3/16 inch from side and bottom edges.	301	SSa-1	8-12	E	E	
	f. Position 3-inch staple to inside panel of front pocket through holding paper and coated fabric as indicated by marks on pattern.						
	g. Turn pocket to finished position.						
	h. Apply adhesive to top edge of bogus paper and paperboard. Position bogus paper and paperboard to lining material as indicated by marks on pattern and turn top edges of lining material over edges of bogus paper and paperboard.						
	i. With lining material face to face and raw edges even, stitch around sides and bottom 1/4 to 3/8 inch from edges.	301	SSa-1	8-12	50	50	
	j. Insert front pocket lining into front pocket and, with top edge of lining and coated fabric even, stitch 1/8 to 3/16 inch around entire top edge.	301	SSa-1	8-12	E	E	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Make center pocket.						
	a. Apply adhesive to top edges of front and rear panel of center pocket. Turn top edges down as indicated by notches on pattern.						
	b. Position flat edge of 5/16 inch welting to edge of coated side of both front and rear panels of center pocket and stitch welting to panels along side and bottom edges, with stitching 1/16 to 1/8 inch from edge.	301	SSaa-1	6-12	E	E	
	c. Place loop rings at tops of center pocket sides and turn tops down forming loop.						
	d. With edge of center pocket side and front panel of center pocket even, stitch 1/8 to 3/16 inch from edges around side and bottom edges. The looped portion of the center side shall be caught in the stitching. Repeat procedure for rear panel of center pocket.	301	SSa-1	8-12	E	E	
6.	Make center pocket lining and slide fastener pocket.						
	a. Apply adhesive to bogus paper from top edge to approximately 1/2 inch below zipper pocket opening. Position bogus paper to lining material as indicated by marks on pattern. Slash lining for slide fastener opening as indicated by marks on pattern and turn edges of lining material over the bogus paper at top and at slide fastener opening and at top only on opposite lining part.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make center pocket lining and slide fastener pocket. (cont'd)						
	b. Center identification label from side edges with top of label 1/2 to 1 inch from finished top edge of handbag on front lining panel of center pocket and stitch around four sides through lining material and bogus paper. The label shall read from top opening of handbag to bottom end. Stitching shall not be through the printing.	301	LSbj-1	8-12	50	50	
	c. Position edge of zipper pocket fabric to bottom edge of slide fastener opening on bogus paper side. Position slide fastener to opening so that back edge of teeth are 1/8 to 3/16 inch from edge of opening and stitch tape 1/8 to 3/16 inch from back edge of tape through zipper pocket and lining.	301	SSa-1	8-12	50	50	
	d. Fold zipper pocket fabric up as indicated by marks on pattern and position on slide fastener tape. Stitch zipper pocket to tape and lining. Stitching shall be 1/8 to 3/16 inch from back edge of tape.	301	SSa-1	8-12	50	50	
	e. With side edges of zipper pocket material even, stitch sides 1/4 to 3/8 inch from edges.	301	SSa-1	8-12	50	50	
	f. With lining material face to face and raw edges even, stitch around sides and bottom 1/4 to 3/8 inch from edges.	301	SSa-1	8-12	50	50	
	g. Insert center pocket lining into center pocket and with top edges of lining and coated fabric even stitch 1/8 to 3/16 inch around entire top edge.	301	SSa-1	8-12	E	E	

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Make shoulder strap.						
	a. Fold shoulder strap in half lengthwise and insert bogus paper with edge of bogus paper against folded edge.						
	b. Turn edges of coated fabric to inside and stitch with four rows of stitching. The gage of stitching between the outermost rows shall be 3/4 inch and the gage between the inner rows shall be 5/16 inch.	301	EFp-4	8-12	E	E	
	c. Punch out two holes for snap fastener closures 1/2 ± 1/16 inch and 2-1/2 inches ± 1/8 inch from each end of the strap.						
8.	Make outside back pocket and lining.						
	a. Apply adhesive to sides and bottom edges of felt and position on outside back pocket part on fabric side as indicated by marks on pattern.						
	b. Apply adhesive to top of felt and top of coated fabric (fabric side). Position paperboard strip with top edge of paper and top edge of felt even. Turn top edge of coated fabric down over paperboard.						
	c. Apply adhesive to top of lining fabric. Position bogus paper strip to lining fabric as indicated by marks on pattern. Turn top of lining down over bogus paper.						
	d. Superimpose lining on coated fabric (bogus paper to paperboard) and, with top edges even, stitch 1/8 to 3/16 inch across top edge.	301	SSa-1	6-12	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	DOBBIN/ LOOPER	COVER
8.	Make outside back pocket and lining. (cont'd)						
	e. Apply adhesive to edges of coated fabric strip for back of handbag and paperboard reinforcement to coated fabric strip as indicated by marks on pattern. Turn top edge of coated fabric over paperboard.						
	f. Position top edge of lining (back wall of handbag) to bottom edge of coated fabric strip and stitch 3/16 to 1/4 inch from edge. Turn lining and raise stitch 1/16 to 1/8 inch from turned edge.	301 301	LSq-2(a) and LSq-2(b)	8-12 8-12	E E	E E	
	g. Position top of back outside pocket to bottom of coated fabric strip and with all edges of lining and coated fabric even, stitch down sides and across bottom 1/16 to 1/8 inch from edges. or Apply adhesive to the sides and bottom 1/8 inch from edges.	301	SSa-1	6-12	E	E	
9.	Make flap.						
	a. Position paperboard and felt to fabric side of coated fabric as indicated by marks on pattern and stitch through all plies 5/16 to 3/8 inch from edge of paperboard. The stitching shall be along the bottom and side edges of the flap.	301	SSa-1	6-12	E	E	
	b. Apply adhesive to edges of paperboard and turn down side and bottom edges of coated fabric.						

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Make flap. (cont'd)						
	c. Apply adhesive to edge of flap bogus paper. Position bogus paper to flap lining as indicated by marks on pattern and turn edges of lining over bogus paper.						
10.	Make inside back pocket and lining.						
	a. Apply adhesive to top edge of inside back pocket (fabric side of coated fabric). Turn top edge down as indicated by notches on pattern.						
	b. Position flat edge of welting to edge of coated side and stitch welting along side and bottom edges with stitching 1/16 to 1/8 inch from edge.	301	SSa-1	8-12	E	E	
	c. Apply adhesive to top of back lining and position paperboard as indicated by marks on pattern. Turn top edge of lining as indicated by pattern.						
	d. Apply adhesive to top part of front lining and position bogus paper as indicated by marks on lining.						
	e. Turn in top edge of front pocket lining as indicated by pattern.						
	f. Superimpose linings and stitch along side and bottom edges 1/8 to 1/4 inch from edges. Do not catch coated fabric or paperboard in the stitching.	301	SSa-1	8-12	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach flap.						
	a. Position top edge of paperboard attached to flap to bottom edge of paperboard attached to coated fabric strip and stitch coated fabric strip to flap 1/8 to 3/16 inch from top edge of coated fabric strip.	301	LSbj-1	8-12	E	E	
	b. Position top edge of bogus paper attached to flap lining to top edge of back lining of inside back pocket with paperboard attached, as indicated by marks on pattern and stitch back lining of inside back pocket to flap lining. The stitching shall be 1/8 to 3/16 inch from top of back lining. Apply masking tape or adhesive to top edge of paperboard and adhere to bogus paper.	301	LSbj-1	8-12	50	50	
	c. Superimpose back of handbag coated fabric to coated fabric portion of inside back pocket and stitch around side and bottom edges 1/8 to 3/16 inch from edge. Do not catch inside back pocket lining in stitching.	301	SSa-1	8-12	E	E	
	d. Position 3-inch staple to inside panel of back pocket through holding paper and coated fabric as indicated by marks on pattern.						
	e. Turn pocket to finished position. Insert back pocket lining with paperboard into inside back pocket. Cement bogus/lining to paperboard lining flaps. With front lining of the inside back pocket even with the top of coated cloth front of inside back pocket, stitch 1/8 to 3/16 inch from top edges.	301	SSa-1	8-12	E	E	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach flap. (cont'd)						
	f. Superimpose flap lining on flap and stitch 1/8 to 3/16 inch from edges around side and bottom.	301	SSa-1	8-12	E	E	
	g. Assemble the tab and eyelet to flap by centering tab on hole of coated fabric, and eyelet on the flap lining. Clinch staples evenly and securely to the indentations of the eyelet.						
12.	Assemble handbag.						
	a. Assemble the 3-inch staples on back panel of front pocket through front panel of center pocket, holding paper and steel washer as indicated by marks on patterns. Clinch staple securely and apply a strip of masking tape covering clinched staples.						
	b. With the top edges of the coated fabric even, stitch top edge of back panel of front pocket to top edge of front panel of center pocket. The stitching shall be 1/8 to 3/16 inch from top edges and shall terminate 1 to 1-1/2 inches from side edges of pockets.	301	SSa-1	8-12	E	E	
	c. With the top edges of the coated fabric even, stitch top edge of back panel of center pocket to top edge of front panel of back pocket. The stitching shall be 1/8 to 3/16 inch from top edges and shall terminate 1 to 1-1/2 inches from side edges of pocket.	301	SSa-1	8-12	E	E	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 20261[illegible]-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
12.	Assemble handbag. (cont'd)						
	d. Insert shoulder strap through loop rings and attach snap fastener sockets and studs. With one end of strap inserted through the left loop ring (when viewed from front of bag as shown in figure 1) from the outside to the inside, place one button through both holes and clinch to the socket, thereby securing the strap permanently to the handbag. The button shall be visible on the outside portion of the strap. Insert the other end of the strap through the right loop ring outside to inside. Insert one button in the hole 2-1/2 inches from the end, then clinch securely to the socket. At 1/2 inch from end of strap, insert the eyelet through the hole and clinch securely to the stud. These two assemblies shall be positioned with the buttons visible on the underside of the strap.						
	e. Prior to packaging the handbag, adjust the strap to its shortest length and snap ends together.						
13.	Clean handbags and prepare for packing.						
	a. Trim all thread ends.						
	b. Clean and polish synthetic fabric.						
	c. Stuff with tissue paper.						

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.8 Finished measurements. The handbag shall conform to the following finished measurements:

a. Length shall be 10-1/4 inches ± 1/8 inch measured across the front of the handbag 1-1/4 inches up from the bottom from outside to outside of the welt.

b. Height shall be 7-1/4 inches + 1/4 inch - 1/8 inch, measured on the front of the handbag one inch in from either end at the bottom, from the bottom to the top of the bag with the flap closed.

c. Width of the shoulder strap shall be 1 inch ± 1/8 inch.

d. Width of the flap shall be 6-3/8 inches ± 1/8 inch measured near the center of the flap from the bottom folded edge to the edge of the joining seam at the top, with the flap open and flat.

3.9 Workmanship. The finished handbag shall conform to the quality of product established by this specification, and the occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:16Z
Check the source to verify that this is the current version before use.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.2 and 4.4.3. The presence of any defect or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.4.1.1 Component testing. In addition to any testing required by 4.4.1, components shall be tested as shown in table III. The methods of testing specified in FED-STD-191, wherever applicable and as listed in table III, shall be followed. All test reports shall contain the individual values used in expressing the final results. The sample size shall be as specified in table IV. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified. The lot size units and the sample units shall be as follows:

Component	Lot size unit	Sample unit
Base fabric (uncoated)	yard	1 yard full width
Coated fabric	yard	3 continuous yards full width
Cloth, rayon warp/cotton filling (bengaline lining)	yard	1 yard full width

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

Component	Lot size unit	Sample unit
Felt	yard	1/4 yard full width
Paperboard	roll	800 square inches
Bogus paper	roll	800 square inches
Welting	yard	1 yard cut width
Adhesive	gallon	1/2 pint
Loop rings	gross	2 each
Twist lock	gross	2 each
Twist lock washer	gross	2 each
Tab and bottom eyelet	gross	2 each
Staple	each	2 each
Holding paper	each	2 each
Base stops and studs	gross	2 each

TABLE III. Component tests

Component	Characteristic	Requirement paragraph	Test method or procedure
Base fabric (uncoated)	Weave	3.3.1.1	Visual
	Weight	3.3.1.1	5041
	Yarns per inch	3.3.1.1	5050
Coated fabric	Weight	3.3.1.2	5041
	Breaking strength	3.3.1.2	5100
	Tearing strength	3.3.1.2	ASTM D 1424
	Adhesion of coating	3.3.1.2	5970
	Blocking, scale rating	3.3.1.2	5872
	Resistance to low temperature	3.3.1.2	1/
	Resistance to oven aging	3.3.1.2	2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE III. Component tests (cont'd)

Component	Characteristic	Requirement paragraph	Test method or procedure
Cloth, rayon warp/ cotton filling (bengaline lining)	Warp identification 3/	3.3.2	1500
	Filling identification 3/	3.3.2	1200
	Weight	3.3.2	5041
	Yarns per inch	3.3.2	5050
	Breaking strength	3.3.2	5100
	Crocking	3.3.2.1	5651
	Fastness to water	3.3.2.1	5630
	Labile sulfur 3/	3.3.2.1	2020
Felt	Material identification 3/	3.3.3	1510
	Weight	3.3.3	5041
	Thickness	3.3.3	5030
Paperboard	Thickness	3.3.4	T-411 TAPPI
	Weight	3.3.4	T-410 TAPPI
	Internal tearing resistance	3.3.4	T-414 TAPPI
	Bursting strength	3.3.4	T-403 TAPPI
	Stiffness	3.3.4	T-489 TAPPI
	Neoprene content	3.3.4	3/
Bogus paper	Fibers 3/	3.3.5	-
	Basic weight	3.3.5	T-410 TAPPI
	Thickness	3.3.5	T-411 TAPPI
Welting	Width	3.3.8	Scale
Adhesive	Material identification 3/	3.3.10	-
Loop rings	Material identification 3/	3.3.11.2	-
	Finish 3/	3.3.11.1	-
	Gap	3.3.11.2	Scale
	Dimensions (inside)	3.3.11.2	Scale

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE III. Component tests (cont'd)

Component	Characteristic	Requirement paragraph	Test method or procedure
Twist lock and washer	Material identification 3/	3.3.11.3	-
	Finish (twist lock) 3/	3.3.11.1	-
	Construction 3/	3.3.11.3	-
Tab and bottom eyelet	Material identification 3/	3.3.11.3	-
	Finish 3/	3.3.11.1	-
	Construction 3/	3.3.11.3	-
Spring keeper	Material identification 3/	3.3.11.3	-
	Finish	3.3.11.1	-
	Construction 3/	3.3.11.3	-
Base stop and stud	Material identification 3/	3.3.11.4	-
	Finish 3/	3.3.11.1	-
	Construction 3/	3.3.11.4	-
Staple	Length	3.3.11.7	Scale
Holding paper	Length and width	3.3.11.8	Scale

1/ After exposure for 4 hours at a temperature of -10° ± 2°F and while still at that temperature, the coated cloth shall be subjected to the test described in Method 5874 of FED-STD-191 except that the determination for hydrostatic resistance is not required under this test.

2/ One 8-inch by 8-inch test specimen shall be exposed in a circulating air oven at 180° ± 2 °F for 10 days and then brought back to equilibrium under standard conditions and examined.

3/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE IV. Sample size

Lot size	Sample size (sample units)
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

4.4.2 End item visual examination. The end items shall be examined for the defects listed in table V. The lot size shall be expressed in units of handbags. The sample unit shall be one handbag. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

TABLE V. End item visual defects

Examine	Defect	Classification Major	Minor
Color and finish (applicable to all components and assemblies unless otherwise indicated)	Not as specified	101	
	Area of synthetic leather with no finish or not proper embossed print	102	
	Variation in color, shade, or texture of grain on exterior of handbag when flap is closed	103	
	Raw edges of synthetic leather or bogus paper not stained as required	104	
	Color variation in bag interior		201
Material defects and workmanship damages	Any hole, cut, tear, or scratch	105	
	Uncoated area	106	
	Coated cloth wrinkled, creased, blistered, cracked, or lumpy	107	
	Any thinly coated area evidenced by light area or window	108	
Cleanness	Any permanent spot or stain on exterior of handbag	109	
	Any permanent spot or stain on interior of handbag		202
	Thread not trimmed		203

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Component and assembly	Any component part or required operation omitted (unless otherwise classified herein)	110	
	Any operation not performed as specified (unless otherwise classified herein)		204
	Strap reversed		205
	Edge of bengaline lining exposed beyond coated fabric flap edge:		
	- More than 1/16 inch	111	
	- Up to 1/16 inch inclusive		206
	Bottom edge of flap not centered on front pocket when closed:		
	- Up to 1/8 inch inclusive		207
	- More than 1/8 inch		208
Cutting	Any part not cut in accordance with directional lines indicated on pattern or not cut in accordance with specification requirements	112	
Seams and stitchings	Accuracy of seaming:		
	- any part of handbag caught in an unrelated operation or stitching	113	
	- stitching overlapping ends of thread break less than 1/2 inch		209
	- ends of a continuous line of stitching overlapped less than three stitches on label, or less than 1/2 inch on all other stitching		210
	- various shades of thread used on outside of same handbag	114	
	- puckering or pleating on exterior of handbag	115	
	- puckering or pleating on interior of handbag		211
	- needle chews	116	
	- two or more stitches per inch less than specified	117	
	- one stitch less than specified		212
	- more than the specified number of stitches per inch	118	

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Seams and stitchings (cont'd)	- any row of stitching omitted	119	
	- stitching margin not as specified or irregular	120	
	- any open seam	121	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or runoffs occur. On double-stitched seams, a seam shall be considered open when either one or both sides of the seam are open.		
	Gage of stitching and seam allowances:		
	- irregular, i.e., unevenly gaged or corresponding stitching not uniformly gaged	122	
	- width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified		213
	- seam or stitch type not as specified	123	
	Stitch tension:		
	- loose tension, resulting in a loose seam	124	
	Loose tension (exposed loops of top or bottom thread):		
	- for a distance of more than 1 inch	125	
	- for a distance of not more than 1 inch, with a total of less than 3 inches distributed throughout the handbag		214
	Tight tension resulting in cutting of material or thread breaks when strain is applied in the direction of the seam or stitching	126	
Hardware	Broken or malformed; corroded areas, burrs, or sharp edges	127	
	Finish omitted or not as specified	128	

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE V. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Hardware (cont'd)	Improperly set, reversed, not attached securely, or failing to serve intended purpose	129	
	Finish not smooth	130	
	Contains scratches, streaks, or other visible defects	131	
	Clinched tightly cutting the fabric	132	
Label	Missing, incorrect, or illegible	133	
	Not positioned as specified		215
	Not specified type or size	134	

4.4.3 End item dimensional examination. The end items shall be examined for compliance with all dimensions specified in 3.8. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of handbags. The sample unit shall be one handbag. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.4 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQLs, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling
	Bulged or distorted container
Content	Number of handbags per container is more or less than required

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

4.4.5 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQLs, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

4.5 Methods of inspection.

4.5.1 Test of lacquered surfaces (class 1 handbag, see 3.3.11.1.1). The sample to be tested shall be immersed in a solution made up with 2 grams of potassium sulfide and 98 grams of water at a temperature of 100° ± 10°F for a period of 3 minutes. The pieces shall then be removed and rinsed in warm, then cold, then hot water after which they shall be wiped gently with an absorbent cellulose material or whirled to remove residual moisture, allowed to air dry at room temperature for a period of 1 hour, and then examined. Any evidence of change in color or surface shall be cause for rejection.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A preservation. The inside compartments of each handbag shall be stuffed with folded or wadded tissue paper and the bag closed. Each handbag shall be placed in a gusset style clear polyethylene film bag of 0.00125-inch thickness (± 25 percent tolerance). The bag dimensions shall be approximately 22 inches by 10 inches. The polyethylene bag shall be formed with heat-sealed seams that are straight, continuous, and parallel to each other and to the formed edges of the bag. The bag may be fabricated from polyethylene film tubing or sheeting. Bag closure shall be effected by a mechanical tie (paper or plastic covered soft steel wire, aluminum band, etc.). A 1/4 inch diameter hole shall be made at one corner of each bag to allow the excess air to escape. One handbag shall then be placed in a setup paperboard box conforming to type II, variety 1, class A, style 3 or 4 of PPP-B-676 or paperboard box conforming to variety 1, style VIII, type G, class i or j of PPP-B-566, except that the

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

thickness of the paperboard shall be not less than 0.038 inch. The inside dimensions of each box shall be 12 inches in length, 8-1/2 inches in width, and 4 inches in depth. The depth of the box lid shall be not less than 1-1/2 inches.

5.1.2 Commercial preservation. Handbags shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Twelve handbags of one class only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A unit packs shall be packed on side (lids shall be alternated on layers) six in length, one in width, and two in depth within the shipping container. Inside dimensions of the shipping container shall be approximately 25 inches in length, 12-1/2 inches in width, and 17-1/2 inches in length. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Twelve handbags of one class only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A unit packs shall be packed on side (lids shall be alternated on layers) six in length, one in width, and two in depth within the shipping container. Inside dimensions of the shipping container shall be approximately 25 inches in length, 12-1/2 inches in width, and 17-1/2 inches in length. Approximate dimensions are furnished as a guide only. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.4.

5.2.3 Commercial packing. Handbags, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

5.3 Palletization. When specified (see 6.2), handbags, packed as specified in 5.2.2 or 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C and D or film bonding means F or G. Pallet pattern shall be number 35 in accordance with appendix of MIL-STD-147.

5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The handbag is intended for use by female personnel of the U.S. Army (class 1) and Air Force (class 2).

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Class required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is required (see 3.1, 4.3, and 6.3).
e. Levels of preservation and packing (see 5.1 and 5.2).
f. Type and class of unit load required (see 5.2.1).
g. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
h. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21 23:16Z
Check the source to verify that this is the current version before use.

6.5 Component sources. For informational purposes only, sources for components indicated in section 3 of this specification are as follows:

(a) Loop ring - 8-0-202

Rome Fastener Corp./Rings Wire Inc.
ATTN: Howard J. Reiter
P.O. Box 213
Milford, CT 06460

(b) Twist lock (small) and top and bottom eyelet with washer - 8989/9086/7781/8902

Fulford Mfg. Co.
ATTN: Kevin Vanier
65 Tripps Lane
East Providence, RI 02915

(c) 3-inch staple and washer - 610 and 653

Rome Fastener Corp,
ATTN: Howard J. Reiter
P.O. Box 213
Milford, CT 06460

(d) Holding paper for 3-inch staple

Lindi Die Cut Products, Inc.
ATTN: John Konent
P.O. Box 661
Newburg, NY 12550

(e) Welting - 516 - 5/16 inch extruded vinyl

Gem Plastics Extruders Co., Inc.
117 Sanford St.
Brooklyn, NY 11205

(f) Stud - 9526 steel stud, wide flanges
Stop - P-296, brass half ball

Fulford Mfg. Co.
65 Tripps Lane
East Providence, RI 02915

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

* 6.6 Subject term (key word) listing.

Accessories
Apparel
Military dress
Uniform accessories

6.7 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 11

Review activities:

Army - MD
Air Force - 82, 99
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

(Project 8445-0109)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

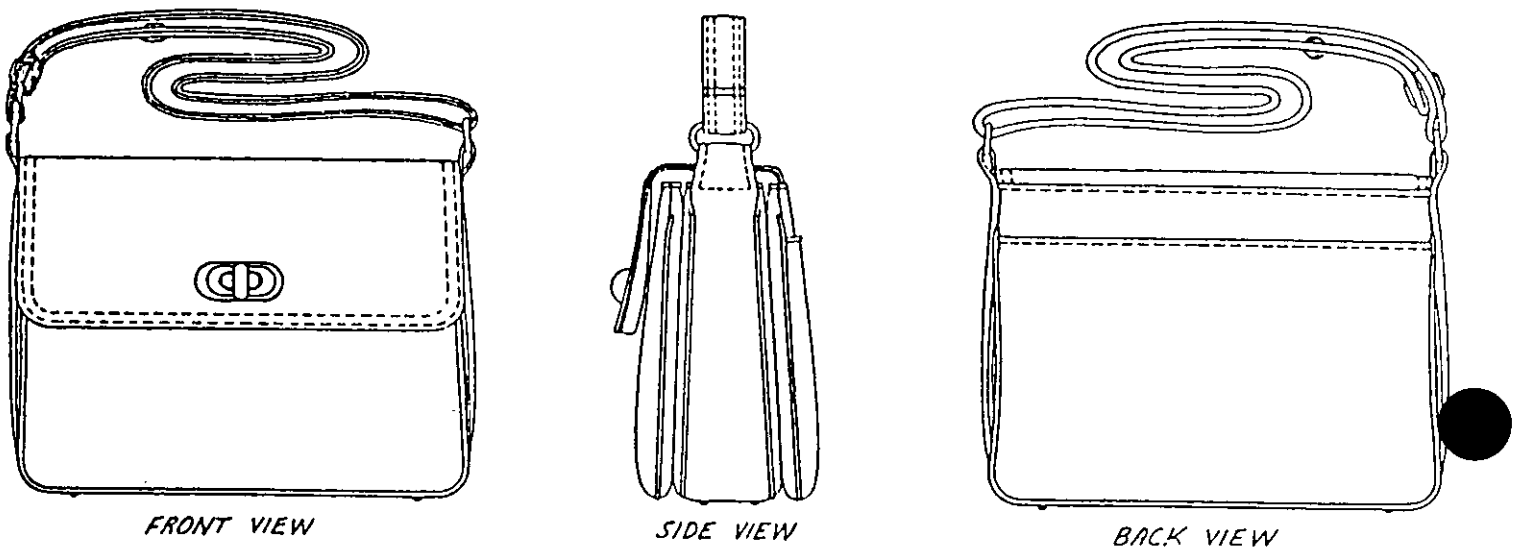


FIGURE 1. Handbag, women's, synthetic, black (assembly).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

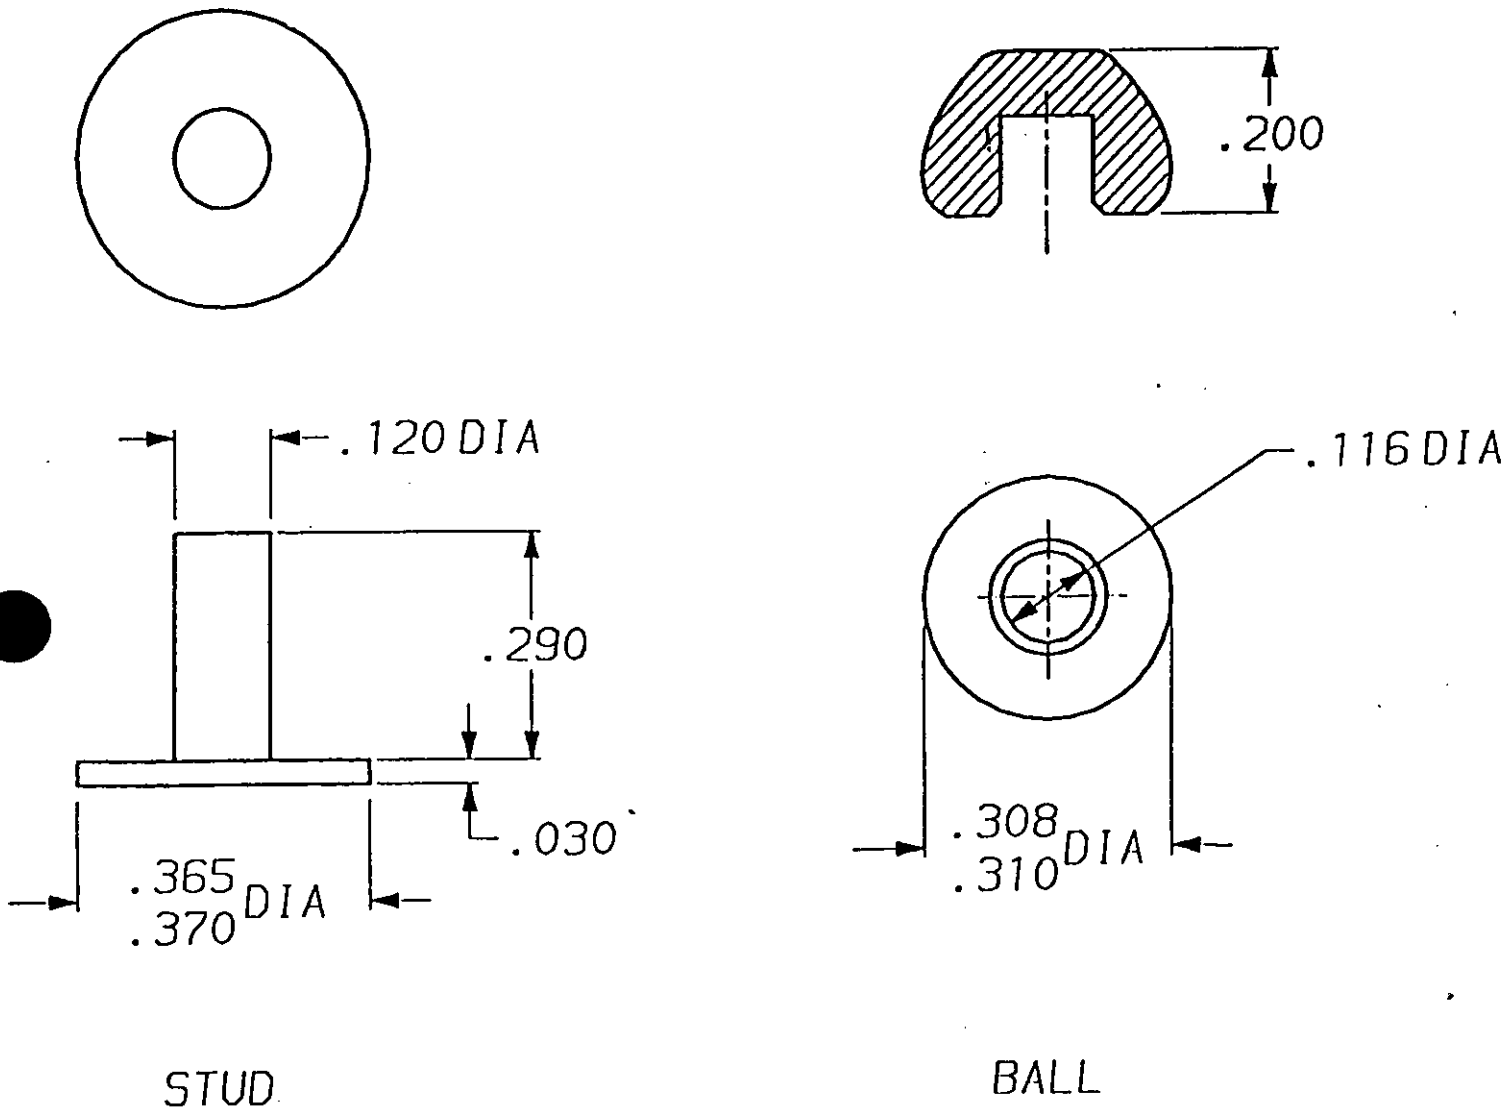


FIGURE 2. Handbag, women's, synthetic, black.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-H-43981D	1990 March 30

3. DOCUMENT TITLE
Handbag, Women's, Synthetic, Black

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
U.S. Army Natick RD&E Center	(1) Commercial 508-651-5221	(2) AUTOVON 256-5221
c. ADDRESS (Include Zip Code) Commander, U.S. Army Natick RD&E Center ATTN: STRNC-ES Natick, MA 01760-5014	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD Form 1426, OCT 89 NATICK OP, APR 90 *Previous editions are obsolete.* 198/290

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.