MIL-J-43990(GL)
29 December 1978
SUPERSEDING
(See 6.6)

MILITARY SPECIFICATION

JACKET, WOMAN'S, SUMMER, WARP KNIT (SHORT SLEEVE)

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a jacket made of linen look, polyester knitted material.

1.2 Classification. The jacket shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

Short	Regular	Long
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18
20	20	20
22	22	22

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-3461	-	Button, Insignia, Metal, Uniform and Cap
MIL-T-43548	-	Thread, Polyester, Cotton-Covered
MIL-C-43938	-	Cloth, Knitted, Warp, Linen Look, Polyester

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Guide sample. A sample, when furnished, is solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

3.2 Materials.

3.2.1 Basic material. The basic material for the jacket shall be a Medium Green 388, polyester, linen look, warp knit cloth conforming to MIL-C-43938.

3.2.2 Fusible interlining. The interlining shall be a white, preshrunk, 100 percent cotton, plain weave cloth. It shall be fused to the basic material with an evenly distributed dot system of polyvinyl chloride adhesive applied to one side of the cloth. The fusible interlining cloth shall meet the following requirements when tested as specified in 4.2.1:

Weight, oz. per sq. yard	3.6 to 4.6
Yarns per inch, minimum:	
Warp	62
Filling	52

3.2.2.1 Fusing conditions. The fabric shall be fused with either of the fusing presses specified, set within the following limits. There shall be no "strike-through" of the adhesive after fusing.

	Fusing presses			
	Electrically heated		Continuous fusing	
	Min.	Max.	Min.	Max.
Temperature between pressing surfaces	300°F	325°F	275°F	300°F
Pressure between pressing surfaces, psi	3	4	Medium	
Pressing time, seconds	10	12	8	10

NOTE: The above were established to include requirements of several fusing materials. For optimum results with the particular fusible style and press used, specific machine settings should be obtained from the supplier of the fusible material.

The bond strength of the fused materials after five launderings shall be not less than 32 ounces per inch (average of the warp and filling). The fused plies shall show no bubbling or delamination after five laundering cycles. Testing shall be as specified in 4.2.1.

3.2.3 Thread. The thread for all seaming and stitching shall be cotton-covered polyester thread, ticket numbers 50's, and 70's conforming to MIL-T-43548. The thread shall be dyed to match the basic material.

3.2.4 Buttons. The buttons shall be size 20-line, gold plated metal, hopper back, conforming to type I, style 2, class A of MIL-B-3461.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

3.2.5 Labels. Each jacket shall have a size and a combination identification-instruction label conforming to type I of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.2.5.1 Size. The size label shall conform to class 2.

3.2.5.2 Combination label. The combination identification-instruction label shall conform to classes 1 and 3, with the item description, contract number and contractor's name preceeding the body of instructions. The combination label shall conform to the coating requirements of the class 3 label. The body of instructions shall be as follows:

JACKET, WOMAN'S, SUMMER, WARP KNIT (SHORT SLEEVE)

MACHINE WASH
-Use wash and wear cycle.
- Wash with warm water 120°F using soap or mild detergent.
-DO NOT STARCH OR BLEACH.
-Dry in tumble dryer at warm setting. Remove immediately at end of drying cycle.
NOTE: It is preferred that the garment be slightly damp rather than overly dried.
-Shape and hang on wooden hanger.

HAND WASH
-Hand wash in warm water with soap or mild detergent.
-DO NOT WRING OR TWIST
-DO NOT STARCH
-Place wet jacket on wooden hanger and hang to dry.

3.3 Design. The jacket has a four button front closure, notched collar, short cuffed sleeves, shoulder loops, and semi-cutaway effect at the bottom edge of the front closure.

3.4 Figure. Figure 1 and 2 are furnished for information only. To the extent of any inconsistencies between the specification and the figure, the specification shall control.

3.5 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a seam allowance of 1/4 inch for collar construction, collar setting, and front facings; 3/8 inch for setting sleeves and shoulder loop construction; 1/2 inch for shoulder seam and front darts; and 3/4 inch for side, center back, and sleeve seams.

3.5.1 Pattern parts. The component parts of the jacket shall be cut from materials specified in accordance with the pattern parts listed in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

TABLE I. Pattern parts

Material	Pattern nomenclature	Cut parts
Polyester, linen look warp knit cloth (see 3.2.1)	Front	2
	Back	2
	Sleeves	2
	Topcollar	1
	Undercollar	1
	Front facing	2
	Shoulder loop	4
Fusible interlining	Front facing interlining	2
	Shoulder loop interlining	2
	Collar interlining	1

3.6 Construction.

3.6.1 Stitches, seams, and stitching. Stitch, seam, and stitching types, specified in table II, shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same operation, any one of them may be used. When stitch type 401 is used, the looper (under thread) shall be on the inside of the jacket. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Seams required to be worked out that have a depth between the fold of 1/16 inch or more shall be considered a defect.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings (except darts), when not caught in other seams, shall be backtacked not less than 1/4 inch. The thread ends of darts shall be trimmed to a length of 1/2 to 3/4 inch. The ends of a continuous line of stitching, except on labels, shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than three stitches. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type.

3.6.4 Buttonholes. The buttonholes shall be cut-after, straight-cut, tacked on both ends, and the finished cut length shall be not less than 1/2 inch and not more than 5/8 inch. The stitching shall be caught in the fabric and the ends securely tacked. When a purl type buttonhole is used, the purling shall be on the outside of the jacket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

3.7 Pressing. Pressing, as required in table II, shall be performed with a heated pressing iron or machine, set at a suitable temperature for synthetics.

3.8 Manufacturing operations requirements. The jacket shall be manufactured in accordance with all operation requirements as specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any basting or holding stitching used to facilitate manufacturing is permissible provided that the thread is removed or does not show on the finished jacket.

3.8.1 Shade and size marking. The component parts of the jacket shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on type tickets.
(c) Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets.
(d) Pin tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Spread the material on the cutting table without tension so that the knit loops of each layer of fabric all face in one lengthwise direction. Place the patterns on the fabric so that the directional lines are in the warp direction, and the arrows are pointing in the direction of the loop as indicated by Figure 2. Note: The direction of the loops can be observed on the backside of the fabric. b. Cut jacket in strict accordance with patterns furnished which show directional lines, sizes, darts, and notches for proper assembly of all parts. c. Cut all parts of the garment out of one piece of material except the undercollar and the under part of shoulder loops which may be cut from ends. Undercollar may be cut with direction of loop in opposite direction as indicated by Figure 2. d. Cut the fusible interlining in accordance with directional lines on patterns.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in 4.2.2.1 are excluded and replaced with non-defective and properly matched material.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking.						
	Mark or ticket all component parts to insure a correct size and shade throughout the jacket.						
4.	Make collar.						
	a. Position fusible interlining on top collar 1/16 to 1/8 inch from top, sides, and bottom edges on suitable fusing equipment.						
	b. Place top collar and undercollar face to face, stitch top and side edges.	301 or	SSe-2(a)	8-12	50	50	
		401	SSe-2(a)	8-12	50	70	
	c. Trim corners, turn, and force out points, or press collar points on a collar pointing machine.						
	d. Edge stitch collar 5/16 ± 1/16 inch from edge.	301	SSe-2(b)	8-12	50	50	
5.	Make shoulder loops.						
	a. Position fusible interlining on top ply of shoulder loop on suitable fusing equipment.						
	b. Place underply and top ply of shoulder loop face to face and stitch.	301 or	SSe-2(a)	8-12	50	50	
		401	SSe-2(a)	8-12	50	70	
	c. Trim corner, force out points and edge stitch 5/16 ± 1/16 inch from edge.	301	SSe-2(b)	8-12	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make facings.						
	a. Position fusible interlining to the wrong side of facing 1/16 to 1/8 inch from raw edge on suitable fusing equipment.						
	b. Overedge stitch the back side and shoulder end of facing	502 or 503	SSa-1 SSa-1	6-8 6-8	70 70	70 70	
7.	Make sleeves.						
	a. Join sleeve underseam as marked on pattern. Press seam open.	401	SSa-1	8-12	50	70	
	b. Fold up bottom of sleeve as marked on pattern 2 inches and blind stitch hem partially penetrating the body fabric.	103 or 106	EF-1	3-4	70		
8.	Make sleeve cuff.						
	a. Fold bottom of sleeve up forming a cuff 1-3/4 + 1/8 inch. Edge stitch cuff all around, through sleeve 5/16 + 1/16 inch from the folded edge of cuff, starting and ending at the underarm seam.	301	LSd-1	8-12	50	50	
9.	Make back.						
	a. Join back center seam according to marks on patterns.	401	SSa-1	8-12	50	70	
	b. Press seam open.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Hem bottom.						
	a. Fold up the bottom of the jacket back the same width as the front facing.						
	b. Blind-stitch the bottom hem from one front dart across back to the other front dart, partially penetrating the body fabric.	103 or 106	EF1-1	3-4	70		
14.	Join collar to jacket and attach size label.						
	Finished appearance. The collar shall be carefully joined to the jacket with notches matching without distorting. The collar ends shall not be uneven in length by more than 1/8 inch.						
	a. Position size label at center back and stitch 1/8 to 3/16 inch from raw edge of neck area. (Label may be inserted and stitched during operation 14e).	301	SSa-1	8-10	50	50	
	b. Fold facing back at notch.						
	c. Insert collar between fronts and facings. Stitch from notch to shoulder seam, backtack ends of stitching, and notch facing and collar.	301 or 401	LScf-2(a) LScf-2(a)	8-12 8-12	50 50	50 70	
	d. Continue stitching the undercollar to the neck area.	301	SSa-1	8-12	50	50	
	e. Turn neck and top collar seam allowance up and stitch 1/16 to 1/8 inch from top collar folded edge and from shoulder seam to shoulder seam, catching the undercollar and the top of the size label in the stitching.	301	LScf-2(b)	8-12	50	50	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

TABLE II

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
15.	Place shoulder loops.						
	a. Position shoulder loop over shoulder seam of jacket with front edge of the finished loop lined up with the notch on front armhole. The pointed end of the loop shall be 1/4 to 3/8 inch from neck seam and 1/8 to 1/4 inch forward of shoulder seam. Stitch the loop to the armhole and trim shoulder loop even with raw armhole.	301	SSa-1	8-12	50	50	
	b. Tack the pointed end of shoulder loop through shoulder seams and facings. The tack shall be superimposed upon the edge stitching of the shoulder loop and extend 1/2 inch from each side of point and shall be securely backtacked. The tack shall be superimposed upon the edge stitching of the shoulder loop and shall extend 1/2 inch from each side of point and shall be securely backtacked.	301	LSbj-1	8-12	50	50	
16.	Set in sleeves.						
	a. Position sleeves in armholes, matching notches, and stitch. The fullness shall be distributed evenly between notches.	401	SSa-1	8-12	50	70	
	b. Press out entire armhole and sleeve seam allowance flat.						
17.	Make buttonholes.						
	Finished appearance. The buttonholes shall be clean cut and the stitching shall be securely caught through the front and facing.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Make buttonholes. (cont'd) Make four horizontal buttonholes with the top and bottom buttonholes positioned as indicated by marks on pattern. The remaining two buttonholes shall be evenly spaced between the top and bottom buttonholes. The inside edge of the buttonholes shall be 3/4 to 7/8 inch in from the front edge.	Buttonhole		50-56	50	50	
18.	Clean jacket. a. Trim all ends of stitching and remove loose threads. b. Remove all spots, stains, and shade tickets.						
19.	Press jacket. Finished appearance. Press bottom of jacket, sleeve cuffs, shoulder loops, collar, gorge, and fronts and back of jacket. The sleeves, collar, and lapels shall not be creased. Press out creases and wrinkles, and remove gloss marks.						
20.	Sew buttons. Finished appearance. Buttons shall be securely sewn and properly aligned so the center of the buttons are positioned in line with corresponding buttonholes to effect a smooth closure.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

NO.	TABLE II MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
20.	Sew buttons. (cont'd)						
	Sew four 20-line buttons with the eagles facing upward through left front and facing, with the center of the button 3/4 to 7/8 inch in from front edge.	301 or		10-14 per button	50	50	
		101 or		10-14 per button	50		
		Hand		4 per button double threads	50		

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The finished measurements of the jacket shall be as specified in table III.

3.10 Workmanship. The finished jacket shall conform to the quality of product established by this specification. As a final step in the contractor's production control plan, before formation of the lot, each jacket shall be examined, buttoned, pressed, and laid out flat on a table prior to folding for packaging. Any jacket containing a selected defect shall not be included in the end item lot. The selected major defects are those major defects listed in 4.2.2.1 and 4.2.2.2 indicated by an asterisk (*). The occurrence of defects other than selected major defects shall not exceed the limits established by the applicable acceptable quality levels.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

TABLE III. Finished measurements (in inches)

Size	6	8	10	12	14	16	18	20	22	Tol.
1/2 bust 1/	17	17-1/2	18	18-3/4	19-1/2	20-1/4	21-1/4	22-1/4	23-1/4	± 1/4
Cross back 2/	13-1/4	13-1/2	13-3/4	14-1/8	14-1/2	14-7/8	15-3/8	15-7/8	16-3/8	± 1/4
1/2 sweep 3/	18	18-1/2	19	19-3/4	20-1/2	21-1/4	22-1/4	23-1/4	24-1/4	± 1/2
Back 4/ length:										
Short	19-1/2	19-3/4	20	20-1/4	20-1/2	20-3/4	21	21-1/4	21-1/2	± 1/4
Regular	20-5/8	20-7/8	21-1/8	21-3/8	21-5/8	21-7/8	22-1/8	22-3/8	22-5/8	± 1/4
Long	21-3/4	22	22-1/4	22-1/2	22-3/4	23	23-1/4	23-1/2	23-3/4	± 1/4

The jacket shall be buttoned, placed flat upon a table, and measured from folded size to folded edge, unless otherwise indicated.

1/ Measure across front 1 inch below armhole seam.

2/ Four and one-half inches below undercollar seam, measure from sleeve setting seam to sleeve setting seam.

3/ Measure along bottom edge from folded edge to folded edge of jacket.

4/ Back length measurements taken along center seam from undercollar seam to bottom of jacket.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except when otherwise indicated herein.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on the components listed in table IV for the characteristics shown therein. Unless otherwise indicated, testing shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values utilized in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size shall be in yards and sample size shall be as specified below, and the sample unit for testing shall be 1 yard full width.

Lot size (yards)	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

TABLE IV. Component testing

Component	Characteristic	Requirement paragraph	Test method
Cloth, white, cotton, plain weave (fusible interlining)	Material identification	3.2.2	1200 1/
	Weight	3.2.2	5041
	Yarns per inch	3.2.2	5050
Interlining fused to basic cloth	Bond strength after 5 launderings	3.2.2.1	5552 and 5951

1/ Unless otherwise specified, a certificate of compliance is required and will be acceptable for the stated requirement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

4.2.2 Examination of the end item. The completely fabricated jacket shall be examined for the defects listed in 4.2.2.1 and 4.2.2.3. The sample unit shall be one completed fabricated jacket. The inspection level and AQL shall be in accordance with 4.2.2.4, except that if one or more asterisk (*) defect is found in the sample, it shall be cause for rejection of the lot.

4.2.2.1 General defects.

Defect	Classification Major	Minor A	Minor B
Pressing.			
a. Omitted		X	
b. Burned or scorched.	X		
c. Gloss, wrinkles, or creases.			X
d. Edge bulky (not pressed solidly).			X
e. Sleeve center, collar, or lapel creased.			X
f. One or more darts or seams not pressed open.			X
g. Front dart not completely pressed out to end.			X
h. Cuff not pressed evenly.			X
Material defects and damages.			
a. Hole, cut, tear, needle chew, burn, mend, darn, patch, multiple float, snagged yarn, loose or unsightly slub, or shade bar:			
- on outside.	(*)		
- on inside.		X	
b. Permanent crease in cloth (when caught in stitching).	X		
Shaded parts.			
Variation in shade within an outside part or between outside parts, except undercollar and underply of shoulder loop.	(*)		
Undercollar or underply of should loops badly shaded or unevenly shaded.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Cleanness.			
a. Spot or stain, clearly noticeable:			
- on outside.	X		
- on inside.			X
b. One or more marking tickets not removed.			X
c. Any marking clearly visible on outside.	X		
d. Thread ends not trimmed, or loose threads not removed.			X
e. Visible basting thread not removed.			X
Component and assembly.			
a. Any component part or required operation omitted or added (unless otherwise classified herein).	X		
b. Any operation not performed as specified (unless otherwise classified herein).		X	
Cutting.			
Any component part not cut in conformance with directional lines indicated on patterns or not cut in accordance with specification requirements.	X		
Seams and stitching.			
a. Accuracy of seaming and stitching:			
1. Seams or part of seam twisted, puckered, or pleated.	X		
2. Any part of jacket caught in unrelated operation or stitching:			
- caught in, up to and including, 1/4 inch of stitching.		X	
- caught in more than 1/4 inch of of stitching.	X		
3. End of stitching, when not caught in other seams or stitching, backtacked less than 1/4 inch.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching. (cont'd)			
a. Accuracy of seaming and stitching: (cont'd)			
4. Stitching overlapping end of thread break less than 1/2 inch.			X
5. Ends of a continuous line of stitching overlapped less than three stitches on labels or less than 1/2 inch on all other continuous stitching.			X
6. Raw edge more than 1/4 inch long.		X	
b. Gage of stitching and seam allowances:			
1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged.		X	
2. Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified.		X	
c. Stitches broken or missing (except blindstitching and buttonholes):			
1. All stitching except overedging:			
- up to 1/4 inch inclusive.			X
- more than 1/4 inch to 1/2 inch inclusive.		X	
2. On overedging:			
- 1 inch or more.			X
3. Blind stitching:			
- 1/2 to 1 inch inclusive.		X	
- more than 1 inch.	X		
d. Skipped stitches or runoff stitches:			
- 1/4 inch up to 1/2 inch long.			X
- more than 1/2 inch long.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching. (cont'd)			
e. Seam and stitch type:			
- seam type or stitch type not as specified.		X	
f. Stitches per inch (to be scored only when condition exists on major portion of seam):			
- less than minimum or more than maximum specified.		X	
g. Stitch tension (except buttonholes):			
1. Loose tension resulting in a loose seam.	X		
2. Loose tension (exposed loops of top or bottom threads) more than 1/2 inch in length.			X
3. Tight tension (stitches break when strain is applied in the direction of the seam or stitching).		X	
Buttonholes.			
a. One or more omitted or added.	X		
b. Opening in any one of the four buttonholes less than 1/2 inch or more than 5/8 inch.		X	
c. One or more slanted.		X	
d. The four buttonholes unequally spaced by more than 1/4 inch.			X
e. Stitches not securely caught in fabric (stitches pull away from fabric).	X		
f. One or more broken or more than two continuous skipped stitches in one or more buttonholes.		X	
g. Loose stitch tension.			X
h. Ragged edge in one or more.			X
i. Not specified type or uncut.			X
j. Tacking omitted on end.		X	
k. Any one of the four buttonholes less than 3/4 inch or more than 7/8 inch from front.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Buttons.			
a. One or more buttons missing, broken, or malformed.	X		
b. Hand sewn button tacked with less than two stitches.			X
c. Buttons not sewn through facing, insecurely sewn, or eagle not upright.		X	
d. Stitching not locked at end of cycle (tug at loose end of thread to determine if it will ravel).		X	
Labels.			
a. Size label omitted, incorrect, or illegible.		X	
b. Combination identification and instruction label:			
- omitted, incorrect, or illegible.		X	
- not positioned on lower end of left facing.		X	
- left side of label less than 3/4 inch from the finished front edge of facing.			X
Darts.			
a. Front darts not uniform in length by more than 1/2 inch.		X	
b. Any dart tapered less than 1/2 inch more than 3/4 inch beyond cut end.			X
c. Thread ends less than 1/2 inch or more than 3/4 inch long.			X
_____.			
Uneven by 1/4 inch or more at bottom, when buttoned.		X	

4.2.2.2 Detailed defects applicable to specific parts.

Defect	Classification Major	Minor A	Minor B
a. Edges not worked out (having folds 1/16 inch or more deep) or undercollar exposed beyond edge of top collar for a distance of more than 1/2 inch.			X
b. Button not aligned with buttonhole causing twists or puckers when jacket is buttoned.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Collar, lapels, and front closure. (cont'd)			
c. Excessive fullness in collar and lapels.	X		
d. Collar ends twisted or curled.	X		
e. Facing exposed beyond front or bottom edge by more than 1/16 inch for a distance of 1 inch or more.		X	
f. Lapel steps - uneven by more than 1/8 inch.		X	
Shoulder loops.			
a. Construction and position:			
1. Misplaced or out of alignment causing twist, bulge, or distortion.		X	
2. Misplaced, i.e., one loop further forward or backward from position of other loop:			
- more than 1 inch.	X		
- more than 1/2 inch but not more than 1 inch.		X	
- 1/4 inch up to 1/2 inch inclusive.			X
b. Poorly shaped or both loops not shaped uniformly.		X	
Sleeves.			
a. Sleevehead fullness misplaced or omitted.	X		
b. Sleeve setting seam at underarm staggered more than 1/4 inch (measured from center of seam to center of seam.			X
c. Sleeve-setting stitching irregular.		X	
d. Width of cuff less than 1-5/8 inches or more than 1-7/8 inches wide.			X
e. Cuff twisted.		X	
f. Cuff not uniform in width.		X	
Seams.			
Sides, shoulders, sleeves, and back seams not pressed open.			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Fusible.			
a. Omitted	(*)		
b. Twisted causing puckers, pleats or twists on the outside of jacket.	X		
c. Any evidence of bleeding through, bubbling, delamination, or color change.	X		
d. Exposed.		X	

4.2.2.3 Size measurements.

Half bust Cross back Back length 1/2 sweep	Any measurement deviating from the nominal dimension and tolerance specified in table III shall be scored as a defect.
Equal length of sleeves	Sleeves unequal in length by more than 1/4 inch shall be scored as a defect. (Measure down center of sleeve from sleeve setting seam at shoulder to bottom of sleeve).

4.2.2.4 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

	AQL	Inspection level
For defects listed in 4.2.2.1 and 4.2.2.2 (general and detailed defects):		III
Major	1.5	
Major and minor A (combined)	6.5	
Total (major, minor A, and minor B combined)	15.0	
For defects listed in 4.2.2.3 (size measurements):		S-3
One class	4.0	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

4.2.3 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Marking (exterior and unit packs)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling, imp oper taping, open and non-continuous heat sealed seams and closure of polyethylene bag. Incorrectly fabricated bag. Omission of vent hole in polyethylene bag. Alternative closure of the polyethylene bag not provided with tuck or reverse flap. Bulged or distorted container.
Content	Number of jackets per shipping container is more or less than required. 1/ Size shown on one or more jackets not as specified on shipping container. 1/

1/ For this defect, one shipping container in the sample shall be examined.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each fully-buttoned jacket shall be neatly folded to measure approximately 13 inches in length by 10 inches in width. Each folded jacket shall be inserted in a close-fitting clear polyethylene film bag having a thickness of 0.0015 inch (+ 25 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or a reverse flap.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. Jackets shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. Thirty-six jackets of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, alternately reversed top to bottom, two in length, one in width and eighteen in depth. Inside dimensions of each container shall approximate 23 inches in length, 14-1/2 inches in width and 14-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract, or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B packing. Thirty-six jackets of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, alternately reversed top to bottom, two in length, one in width, and eighteen in depth. Inside dimensions of each container shall approximate 23 inches in length, 14-1/2 inches in width and 14-1/2 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather-resistant containers. When specified (see 6.2), the shipping container shall be grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box specification, except that the inspection shall be in accordance with 4.2.3.

5.2.3 Commercial packing. Jackets, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready idnetification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantities and sizes contained therein.

6. NOTES

6.1 Intended use. The jackets are intended for use by female Military personnel of the Department of the Army as a component of the summer dress uniform.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bids.

6.4 Clothing manufacturers are alerted to the fact that knit fabrics may exhibit some differential in stability from piece to piece and lot to lot. Clothing manufacturers are cautioned to be cognizant of the stability characteristics of the pieces before initiation of cutting.

6.5 Suggested sewing needle. Size 9 ballpoint needle is recommended for all hemming (blindstitching) operations

6.6 Supersession data. This specification includes the requirements of Purchase Description LP/P. DES 5-76, Overblouse, Woman's Summer, Warp Knit, dated 18 March 1976.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:


Army - GL

Project No. 8410-0426

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.



FRONT

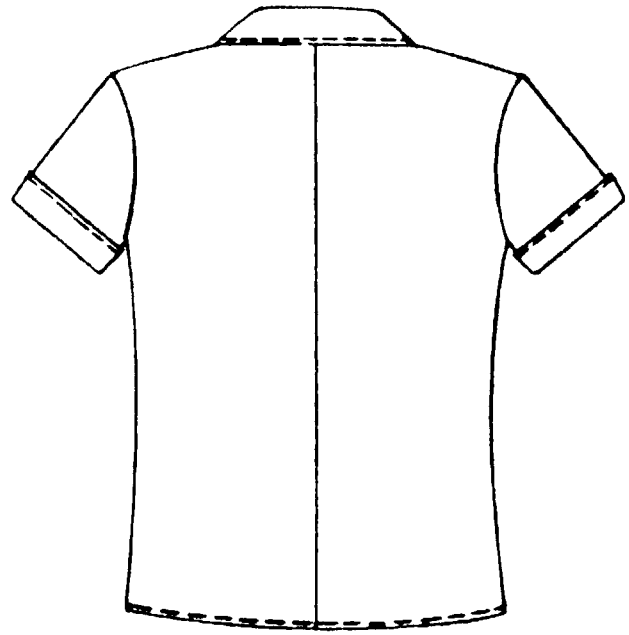

BACK

FIG. 1 JACKET, WOMAN'S, SUMMER, WARP KNIT SHORT SLEEVE
DRWG. 2-1-1278

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

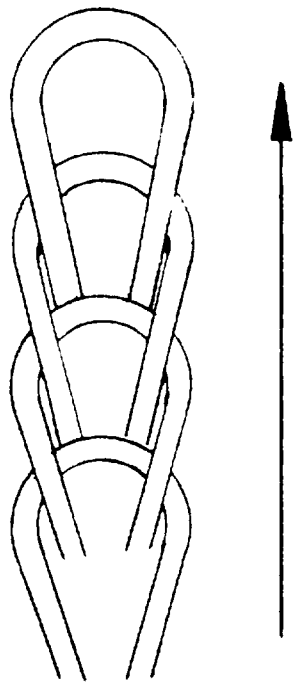


FIG 2 SCHEMATIC DIAGRAM DEMONSTRATING DIRECTION OF LOOPS (BACKSIDE OF FABRIC SHOWN)

DRWG. 2-1-1486

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-J-43990(GL)
JACKET, WOMAN'S, SUMMER, WARP KNIT (SHORT SLEEVE)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760
OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

NATICK OP 1 AUG 78
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:18Z
Check the source to verify that this is the current version before use.