MIL-S-43959A(GL)
24 September 1979
SUPERSEDING
MIL-S-43959(GL)
14 February 1977

MILITARY SPECIFICATION

SWEAT SHIRT: ZIPPER FRONT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for a knitted cotton/acrylic fleeced sweat shirt.

* 1.2 Classification. The sweat shirts shall be of one type in the following sizes (see 6.2):

Schedule of sizes

X-Small
Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: for Clothing, Equipage, and Tentage (General)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-T-43548	-	Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment
MIL-STD-1491	-	Glossary of Knitting Imperfections

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

Rules and Regulations Under the Flammable Fabrics Act

(Copies may be obtained from the Federal Trade Commission, Washington, DC 20580.)

3. REQUIREMENTS

3.1 Guide sample. A sample when furnished, is solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

3.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.5).

* 3.3 Materials (see 6.6). No flame retardant finish shall be permitted and the end item must meet the Flammable Fabrics Act requirements.

3.3.1 Knitting yarns. The knitting yarns for the facing, tie-in and backing yarn of the knitted jersey fleece cloth and the ribbed knit cloth shall be a blend of 50 ± 3 percent acrylic and the remaining percentage cotton. Yarn sizes shall be as specified in table I. Testing shall be as specified in 4.4.1.

3.3.2 Knitted cloth.

3.3.2.1 Jersey knit cloth. The cloth for the body of the sweat shirt shall be jersey knit using a facing, tie-in and backing yarn. The cloth shall be napped on the back.

3.3.2.2 Rib knit cloth.

3.3.2.2.1 Collar and waistband. The collar and waistband shall be a 1 by 1 seamless rib knit cloth. They shall be made and seamed in double thickness ribbed knit cloth. The sewn collar shall finish 3-1/2 inches ± 1/2 inch in width (see figure 1-G). The sewn waistband shall finish 2-1/2 inches ± 1/2 inch in width (see figure 1-J).

3.3.2.2.2 Cuffs. The cuffs shall be 1 by 1 rib knit cloth folded of double thickness and sewn doubled. The sewn cuffs shall finish 2-1/2 inches ± 1/2 inch in width (see figure 1-H).

3.3.2.3 Physical requirements. The knitted cloth shall conform to the requirements shown in table I, when tested as specified in 4.4.1.

TABLE I. Physical requirements

Characteristic	Jersey knit cloth	Ribbed knit cloth
Yarns sizes	28/1 (facing) 1/ 28/1 (tie-in) 1/ 16/1 (backing, fleece) 1/	14/1 3/
	Minimum	Minimum
Wales per inch	19	19
Courses per inch	22	26
Bursting strength pounds	65	70
Weight, oz/sq yd 2/	6.75	7.0
Thickness, inches at 0.01 lbs per sq inch	0.070	-

1/ Yarn sizes shall not be finer than those specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

2/ Based on single thickness of the cloth.

3/ Tolerance of ± 2 count is permitted.

* 3.3.2.4 Color. The color of the knitted cloth shall be gold-422. The color of the rib knit cloth shall match the color of the jersey knit cloth.

3.3.3 Thread. The thread shall be a cotton-covered polyester conforming to MIL-T-43548, ticket number 50, 2 or 3 ply for stitching and overedging.

* 3.3.3.1 Color and colorfastness. The color of the thread shall match the color of the jersey knit cloth. The thread shall show colorfastness to laundering, perspiration, and light equal to or better than standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration and light.

3.3.4 Slide fastener. The slide fastener shall be full length of the sweat shirt, manufactured of white nylon monofilament, ladder chain with an automatic lock, Talon style No. 783, size No. 6 or equal.

3.3.4.1 Slide fastener tape. The material for the tape shall be a blend of nylon and cotton, or polyester and cotton, and shall be white. The tape shall have a width of 9/16 to 5/8 inch.

3.3.5 Label. Each sweat shirt shall have a combination size, identification and instruction label conforming to type I, class 14 of DDD-L-20. The body of the instructions shall be as follows:

CARE INSTRUCTIONS

HAND OR MACHINE WASH IN COLD
OR WARM WATER (MAX. 110°F),
DO NOT BLEACH. TUMBLE DRY AT
LOW OR MEDIUM SETTING (MAX.
150°F). WASH AND DRY EACH
GARMENT SEPARATELY.

3.4 Design. The sweat shirt is full length with a front slide fastener closure extending through the ribbed knit convertible collar with gusset sides and sleeves and ribbed knit waistband and cuffs. (The wales of the collar, waistband and cuffs shall run in the same direction as the wales of the body material.)

3.5 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the specification shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam and stitching types as specified in table II shall conform to FED-STD-751. Whenever two or more methods of stitch types are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching.

3.6.2 Overedge stitching. The gage of the overedge stitching (stitch type 504 or 505) specified for stitching and seaming the sweat shirt shall be 3/16 ± 1/16 inch. The guide and knives for the overedge machine shall be set to trim only the ravelled edges of the fabric.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.4 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching, shall be overlapped not less than 1/2 inch. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch.

3.7 Manufacturing operations requirements. The sweat shirt shall be in accordance with all operation requirements, as specified in table II. The contractor is not required to follow the exact sequence of operations listed.

3.7.1 Shade and size marking. The cut parts of the sweat shirt shall be marked, ticketed or bundled to insure a uniform size and shade throughout. Any method of marking may be used except:

(a) Corrosive-metal fastening devices.
(b) Sew-on type tickets.
(c) Adhesive type tickets which discolor the material or leaves traces of paper or adhesive on the material after removal of the ticket.
(d) Pin tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. The sweat shirt shall be cut so that all the component parts of the jersey knit shall be cut lengthwise in the direction of the wales. b. Cut all the component parts of the jersey knit cloth for the garment from one piece of fabric. c. Cut the collar, waistband and cuffs from the same piece of rib knit cloth, for the sizes indicated. The wales of the rib knit shall be in the same direction as the jersey knit. The rib knit shall be of sufficient width to allow for double thickness.						
2.	Replacement of defective components. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages as specified in 4.4.2.1 are excluded, and replaced with non-defective and properly matched material.						
3.	Shade and size marking (see 3.7.1). Mark, ticket or bundle all component parts to insure a uniform shade, size and proper assembly throughout the sweat shirt.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Join shoulders.						
	Join fronts to back at shoulders.	504 or 505	SSa-1	10-14	50	50	50
5.	Set sleeves to armhole.						
	Position and set sleeves to armhole matching sleeve notch to shoulder seam. The shoulder seam shall be turned towards the back.	504 or 505	SSa-1	10-14	50	50	50
6.	Attach side body and sleeve panel (gusset).						
	a. Stitch the side body panel to each front and sleeve of the sweat shirt, in one continuous operation.	504 or 505	SSa-1	10-14	50	50	50
	b. Continue stitching the panel to each opposite side of the sleeve and back of the sweat shirt, in one continuous operation.	504 or 505	SSa-1	10-14	50	50	50
7.	Make and attach cuff.						
	a. Seam the raw edges of the cuff together forming a tubular cuff. Fold to form cuff, (seam inside).	504 or 505	SSa-1	10-14	50	50	50
	b. Position the seam of cuff at the center of the sleeve panel. Stitch cuff to sleeve with the wales of the cuff running in the same direction as the sleeve fabric. The seams of the sleeve panel shall be turned toward the back of the sleeve.	504 or 505	SSa-1	10-14	50	50	50

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach waistband.						
	Fold waistband to double thickness and stitch to body of the sweat shirt. The wales of the waistband shall run in the same direction as the body.	504 or 505	SSa-1	10-14	50	50	50
9.	Attach collar.						
	Join the bottom edge of the collar the entire length of the neckline to the sweat shirt. The shoulder seam shall be turned toward the back of the sweat shirt.	504 or 505	SSa-1	10-14	50	50	50
10.	Attach slide fastener.						
	Finished appearance. The slide fastener shall be smooth and flat. The stops at the top of the fastener shall be 1/8 to 1/4 inch from folded edge of collar. The stitching shall not interfere with the operation of the slider. The separating pin portion of the slide fastener shall be stitched to the left front and slider portion of the slide fastener shall be stitched to the right front of the sweat shirt, respectively.						
	a. Position the slide fastener to the left front, with the pre-marked slide fastener tape superimposed on the neckline seam, the bottom of the fastener tape even with the front waistband bottom of the sweat shirt, and the edge of the tape even with the front edge of the sweat shirt. Overedge stitch the tape and front sweat shirt together from bottom to neckline seam.	504 or 505	SSa-1	10-14	50	50	50

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. [illegible] MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Attach slide fastener. (cont'd)						
	b. Fold collar over, sandwich slide fastener tape between collar and continue overedge stitching to fold of collar. The excess tape shall be folded over and caught in the overedge stitching.	504 or 505	SSJ-1	10-14	50	50	50
	c. Turn collar and slide fastener to its finished position, with a fold allowance of 1/2 inch of body material and with the folded edge of the front of the sweat shirt positioned 3/16 inch from the edge of the chain. Top stitch through all plies the entire length of the front of the sweat shirt. The gage of the stitching shall be 5/16 inch from the edge of the chain.	301	LSbm-3(b)	10-14	50	50	
	d. Stitch the slide fastener to the right front utilizing the identical operations for the left front slide fastener.						
11.	Finish collar and attach combination label.						
	a. Overedge stitch the top layer of the collar to the neckline seam allowance (lower collar layer).	504 or 505	SSa-1	10-14	50	50	50
	b. Fold combination label in half, the size shall be visible, and position the label at center back. The label shall be caught in the collar stitching. Stitching shall cover all raw edge of the collar.	504 or 505	SSa-1	10-14	50	50	50

[illegible] EXHAUSTED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN / LOOPER	COVER
12.	Bartacking.						
	a. Bartack both sides of the slide fastener tape inside of the sweat shirt. The bartack shall be positioned 5/8 ± 1/8 inch from bottom of the plastic ends of the slide fastener and perpendicular to the overedge stitching of the slide fastener tape and through all plies and bartacking both the lines of the top stitching.	Bartack		28 per bartack	50	50	
	b. Bartack both ends of the collar, catching the stitching chain of the cover stitch of the collar, and both collar joining seams. The bartack shall be positioned on the outside of the sweat shirt 3/8 inch parallel from folded front edge, superimposed on the slide fastener tape stitching, divided equally between the collar joining seams and through all plies. The length of the bartacks shall be 3/8 ± 1/16 inch.	Bartack		28 per bartack	50	50	
13.	Clean sweat shirt.						
	a. Trim and remove all ends of thread of stitching inside and outside of sweat shirt.						
	b. Remove all spots, stains and all visible shade markings.						
	c. Close front slide fastener, fold sweat shirt neatly for packaging. (See section 5).						

NATICK Form 955

PREVIOUS EDITION OF OCT 76 MAY BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

* 3.10 Finished measurements. The finished measurements of the sweat shirt shall conform to the requirements in table III. All measurements and tolerances are expressed in inches.

TABLE III. Finished measurements

	Figure 1	Extra Small	Small	Medium	Large	Extra Large	Tolerances
1/2 Chest	A	21	22	23	24	25	± 1
Length	B	24	25	26	27	28	± 1
Armhole	C	9	9	10	10	11	± 3/4
Sleeve length	D	21-1/2	22-1/2	23-1/2	24-1/2	25-1/2	± 1
Neck opening	E	12	12	13	13	13	± 1/2
Panel (full width)	C1	4-1/4	4-1/2	4-3/4	5	5-1/4	± 1/2

The sweat shirt shall be laid flat on a table, with the front body panel seams superimposed on the back body panel seam and its slide fastener closed. The measurements shall be taken as described below.

A. 1/2 Chest. Measure from the folded edge to folded edge of the body and sleeve panel, on a straight line through the junctions of the armhole and body and sleeve panel seams at the underarm.

B. Length. Taken on a straight line from the junction of the shoulder and collar seams to bottom edge of ribbed waistband.

C. Armhole. Taken on a straight line from junction of shoulder and sleeve seam to bottom of armhole, plus one half the body sleeve panel (C + C1).

D. Sleeve length. Measure from the junction of shoulder and sleeve seam along outside folded edge to bottom of cuff.

E. Neck opening. Twice the measurement taken across the top edge of the collar opening.

C1. Body and sleeve panel (full width). The full width of the body and sleeve panel is twice the C1 measurement (C1 and C1). The panel width measurement shall be taken 3 inches below the junction of the armhole and body sleeve panel seam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

* 3.11 Workmanship. The finished sweat shirt shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required (see 6.2), the first article submitted in accordance with 3.2 shall be visually inspected as specified in 4.4.2.1 and 4.4.2.2 for compliance with design, construction, workmanship and dimensional requirements. The sample shall be tested for physical and chemical characteristics in accordance with 4.4.1. The presence of any defect, any dimension not within specified limits, or failure of any test shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Sampling and inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition to testing provisions contained in subsidiary specifications, drawings or standards, testing shall be performed on components listed in table IV for the characteristics shown therein. Unless otherwise indicated, testing shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The basis for lot size and sample units for testing shall be as follows:

Component	Lot units	Sample unit
Knitting yarn	Pounds	1 yard
Knitted cloth	Yards	1 yard full width of each material
Slide fastener	Slide fasteners	1 slide fastener

TABLE IV. Component tests

Material	Characteristic	Requirement reference	Test method
Materials	Flammability	3.3	1/
Knitting yarn	Cotton identification	3.3.1	1200 1/
	Acrylic identification	3.3.1	1/
	Acrylic fiber content	3.3.1	1/
	Yarn size	3.3.2.3	4021 1/
Knitted cloth	Type of knit:		
	Jersey	3.3.2.1	Visual 2/
	Rib	3.3.2.2	Visual 2/
	Texture:		
	Wales per inch	3.3.2.3	5070
	Courses per inch	3.3.2.3	5070
	Bursting strength	3.3.2.3	5120
	Weight (oz./sq.yd.)	3.3.2.3	5041
	Thickness (jersey cloth only)	3.3.2.3	4.5.1 3/ or 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

TABLE IV. Component testing (cont'd)

Material	Characteristic	Requirement reference	Test method
Slide fastener	Material identification	3.3.4	1/
	Style No. and size	3.3.4	1/
	Slide fastener tape:		
	Material identification	3.3.4.1	1/
	Width	3.3.4.1	Actual measurement

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be accetable for the stated requirements

2/ One determination per sample unit and the result reported as "pass" or "fail"

3/ Prior to thickness testing, test specimens shall be allowed to relax on a flat surface without pressure until equilibrium with standard conditions is reached.

4.4.2 End item examination. The sweat shirts shall be examined for those defects shown in 4.4.2.1 and 4.4.2.2. The inspection levels and acceptable quality levels (AQLs) for these examinations shall be in accordance with 4.4.2.3. The sample unit shall be one finished sweat shirt.

4.4.2.1 Visual examination.

Defect	Classification Major	Minor
Material defects and damages		
a. Any hole, cut, tear, dropped stitches or run, uneven napping, or mend 1/	X	
b. Uneven, ridgy or cockled cloth 1/		X
c. Fleeced cloth not napped on inside	X	
d. Any slub (more than three times normal diameter of yarn and clearly visible) on outside of shirt 1/		X
e. Snag 1/		X
f. Permanent crease in fabric	X	

1/ For knitted fabric imperfection definitions, see MIL-STD-1491.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Color		
Color not as specified	X	
Shaded parts		
Variation in shade within a part or between parts	X	
Cleanness		
a. Spot or stain, clearly noticeable:		
On outside:		
- more than 1/4 inch	X	
- up to 1/4 inch inclusive		X
On inside		X
b. Rancid odor	X	
c. Any marking clearly visible on outside	X	
d. One or more marking tickets not removed		X
e. Thread ends not trimmed, or loose threads not removed from sweat shirt		X
Component and assembly		
a. Any component part or required operation omitted or added (unless otherwise classified herein)	X	
b. Any operation not performed as specified (unless otherwise classified herein)		X
c. Cuffs, collar and waistband not double thickness of rib knit cloth	X	
d. Any component part not as specified	X	
Cutting		
Any component part not cut in accordance with specification requirements	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Defect	Classification: Major	Minor
Seams and stitching		
a. Accuracy of seaming and stitching:		
1. Seam or part twisted, puckered, or pleated	X	
2. Part of material caught in unrelated operation or stitching:		
- caught in, up to and including, 1/4 inch of stitching		X
- caught in, more than 1/4 inch of stitching	X	
3. End of stitching, when not caught in other seam or stitching, backtacked less than 1/4 inch		X
4. Stitching overlapping end of thread break less than 1/2 inch		X
5. Raw edge:		
- more than 1/2 inch up to and including 1 inch		X
- more than 1 inch long	X	
b. Gage of stitching and seam allowances:		
1. Irregular, i.e., unevenly gaged (to be scored only when condition exists along major portion of seam)		X
2. Width of seam allowance not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified		X
c. Stitches broken or missing:		
1. All stitching including overedging:		
- 1/4 to 1/2 inch inclusive		X
- more than 1/2 inch	X	
d. Skipped stitches or runoff stitches:		
On joining seam - use "Open seam" classification		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Seams and stitching (cont'd)		
e. Seam and stitch type: - seam type or stitch type not as specified	X	
f. Stitches per inch (to be scored only when condition exists on more than one-half the length of seam): - less than minimum or more than maximum specified		X
g. Stitch tension:		
1. Loose tension resulting in a loose seam: - 1/2 to 3/4 inch inclusive		X
- more than 3/4 inch	X	
2. Loose tension (exposed loops of top or bottom threads) more than 1/2 inch in length		X
3. Tight tension (stitches break when strain is applied in the direction of the seam or stitching)	X	
h. Open seam: - 1/4 to 1/2 inch inclusive		X
- more than 1/2 inch	X	
NOTE: One or more broken, or two or more continuous skipped or runoff stitches on joining seams constitutes an open seam.		
i. Any seam not facing toward direction specified		X
j. Bartack (one or more):		
1. Missing, insecure, misplaced, not specified size or type, or not serving intended purpose	X	
2. Loose stitch tension		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Label		
Combination (size, identification, and instruction) label:		
a. Omitted, incorrect, or illegible	X	
b. Not positioned or attached as specified		X
Waistband		
a. Not smooth, has pleats, is twisted or is stretched	X	
b. Less than 2 inches or more than 3 inches in width	X	
Collar		
a. Not smooth, has pleats, is twisted or stretched	X	
b. Collar less than 3 inches or more than 4 inches in width	X	
Sleeves		
a. Fullness not distributed evenly	X	
Cuffs		
a. Not smooth, have pleats, are twisted or stretched	X	
b. Cuff less than 2 inches or more than 3 inches in width		X
Slide fastener		
a. Slide fastener not positioned as specified	X	
b. Slide fastener does not function properly, pull detaches, slider binds or sticks, or chain unmeshes	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Slide fastener (cont'd)		
c. Stops at top of fastener are more than 1/4 inch below top of collar	X	
d. Stops at bottom of fastener are more than 1/4 inch above front waistband bottom	X	
e. Slide fastener pull tab not on outside of sweat shirt	X	
f. Slide fastener tapes wavy or puckered		X
g. Bartack omitted at bottom of slide fastener tape	X	
h. Slide fastener tape stitched too close to chain not permitting slider to move freely		X
i. Bartack omitted at neckline seam of slide fastener tape	X	

4.4.2.2 Size measurements. The finished sweat shirt shall be examined to determine compliance with dimensional requirements contained in table III. Any measurement deviating from the specified dimension and tolerance shall be scored as a defect. Sleeves unequal in length by more than 1/2 inch shall be scored as a measurement defect.

4.4.2.3 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

	AQL	Inspection level
For defects listed in 4.2.2.1 (general and detailed defects):		I
Major	1.5	
Major and minor (combined)	6.5	
For defects listed in 4.2.2.2 (size measurements):		S-3
One class	4.0	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

4.4.3 Packaging inspection. An examination shall be made to determine that preservation, packing and marking comply with the section 5 requirements and shall be scored in accordance with list below. The sample unit shall be one shipping container fully packaged with the exception that it need not be closed. Examination for the closure defects listed below shall be made on shipping containers fully packaged. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defects
Marking (exterior and unit pack)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flap, loose strapping, inadequate stapling, improper taping, or open and nonconforming sealed seams and closure of polyethylene bag Incorrectly fabricated bag. Alternative closure of the polyethylene bag not provided with tuck or reverse flap. Omission of vent hole in polyethylene bag. Bulged or distorted container.
Content	Number of sweat shirts per shipping container is more or less than required. 1/ Size shown on one or more sweat shirt not as specified on shipping container. 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.5 Methods of inspection.

4.5.1 Thickness test.

4.5.1.1 Preparation of specimen. The specimen shall be cut from different parts of a full width sample and shall measure not less than 6 inches by 6 inches. The specimen shall always be larger than the pressure foot on the test apparatus.

4.5.1.2 Apparatus. The test apparatus shall consist of a base plate and a circular pressure plate with a bearing surface of 20 square inches and a means of applying 0.01 pounds per square inch loading on the sample. This pressure shall be evenly distributed over the 20 square inch area. The thickness measuring device shall be capable of measuring the thickness of the sample (distance between base and pressure plate) to an accuracy of 0.01 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

4.5.1.3 Procedure. The 0.01 pound per square inch pressure shall be applied to the test specimen, and the thickness reading shall be taken and recorded as thickness.

4.5.1.4 Report. Five specimens shall be tested from each sample unit. The results shall be reported as the average of the five specimens tested and reported separately to the nearest 0.01 inch.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each sweat shirt shall be neatly folded in accordance with standard commercial practice. Each sweat shirt shall be inserted in a close-fitting clear polyethylene film bag having a thickness of 0.00125 inch (± 25 percent tolerance). The bag shall be formed with heat-sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat-sealed with the heat-seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Commercial packaging. The sweat shirt shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A packing. Sixty sweat shirts of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, water-proofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing. Sixty sweat shirts of one size only, [illegible] specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, minimum, grade 200 of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping containers shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.3 Commercial packing. The sweat shirt preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

5.3.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing and stenciling, a white paper label 5 by 4 inches, with the words "MIXED SIZES", plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The sweat shirts are intended for use by Army personnel.

* 6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

(a) Title, number and date of this specification.
(b) Size required (see 1.2).
(c) When a first article sample is required (see 3.2, 4.3 and 6.5).
(d) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Guide samples. For access to guide samples, address the procuring office issuing the invitation for bids.

6.4 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of paragraph 7-104.55 of Armed Services Procurement Regulations. The first article should be a preproduction sample. The first article should consist of one finished sweat shirt. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the specification (see 3.3).

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activities:

Army - MD
DLA - CT

Preparing activity:

Army - GL

Project No. 8415-A143

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

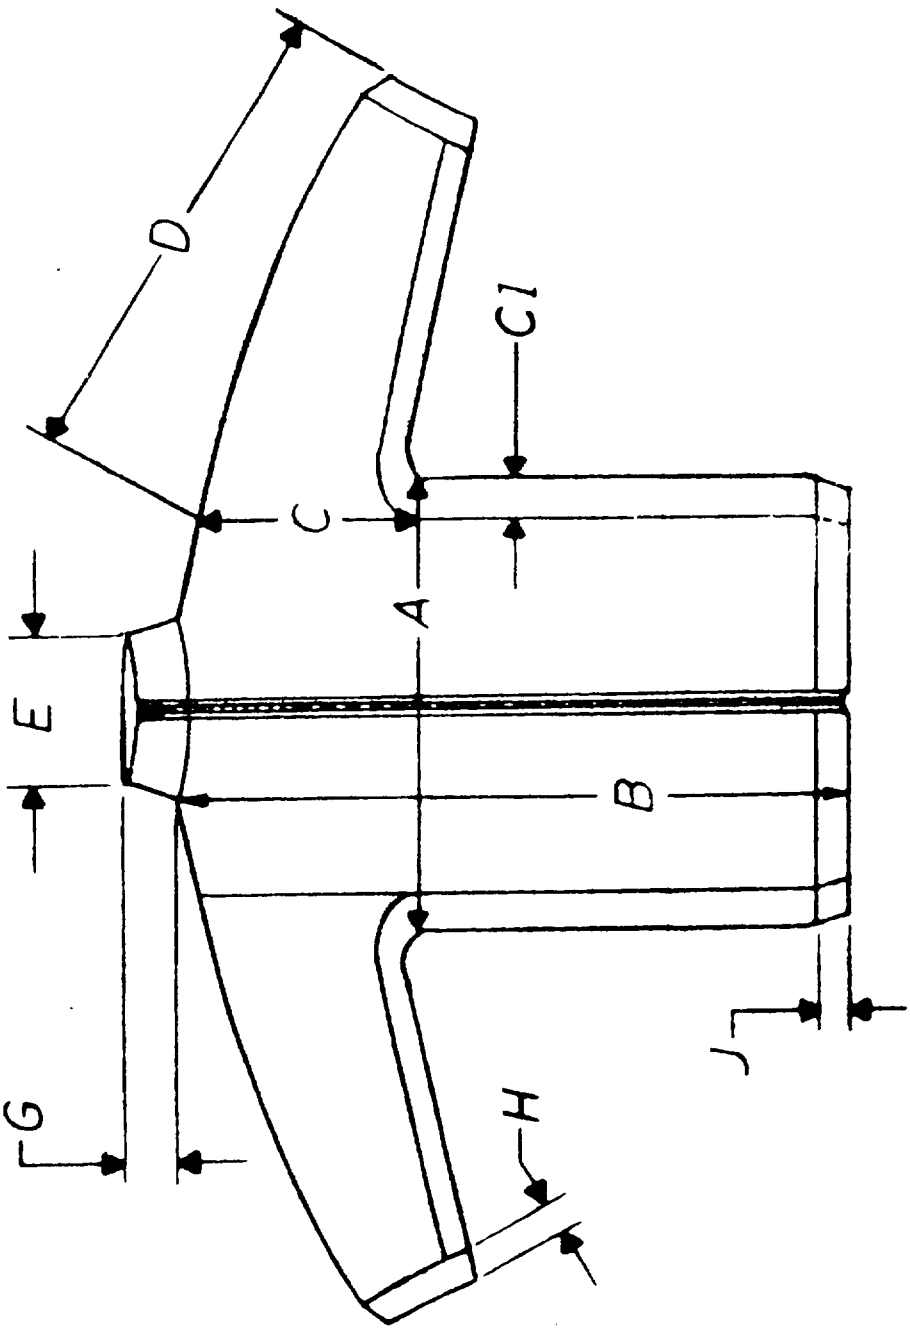


FIGURE 1. SWEATSHIRT ZIPPER FRONT - 11395

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

...ENT OF THE ARMY

...ICIAL BUSINESS
...ALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-10-21T23:11Z
Check the source to verify that this is the current version before use.