MIL-S-43960(GL)
18 February 1977
(See 6.7)

MILITARY SPECIFICATION

SWEAT PANTS: LEG ZIPPER

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for knitted cotton/acrylic fleeced sweat pants.

1.2 Classification. The sweat pants shall be of one type in the following classes and sizes (see 6.2).

Class 1 - Black
Class 2 - Dark Green
Class 3 - Maroon
Class 4 - Navy
Class 5 - Scarlet
Class 6 - Royal

Schedule of sizes

X-Small
Small
Medium
Large
X-Large

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: for Clothing, Equipage and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-T-43548	-	Thread, Polyester, Cotton-Covered

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-601	-	Rubber: Sampling and Testing
FED-STD-751	-	Stitches, Seams and Stitching

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1491	-	Glossary of Knitting Imperfections

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

LAWS AND REGULATIONS

Rules and Regulations Under the Flammable Fabric Act

(Copies may be obtained from the Federal Trade Commission, Washington, DC 20580.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. A sample, when furnished, is solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.5).

3.3 Materials. No flame retardant finish shall be permitted and the end item must meet the Flammable Fabrics Act requirements.

3.3.1 Knitting yarns. The knitting yarns for the facing, tie-in and backing yarn of the knitted jersey fleece cloth and the ribbed knit cloth shall be a blend of 50 $\pm$ 3 percent acrylic and the remaining percentage cotton. Yarn sizes shall be as specified in table I. Testing shall be as specified in 4.4.1.

3.3.2 Knitted cloth.

3.3.2.1 Jersey knit cloth. The cloth for the body of the sweat pants shall be jersey knit using a facing, tie-in and backing yarn. The cloth shall be napped on the back.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

3.3.2.2 Rib knit cloth.

3.3.2.2.1 Anklet (cuff). The anklet (cuff) shall be 1 by 1 seamless rib knit cloth. They shall be made and seamed in double thickness ribbed knit cloth. The sewn anklet (cuff) shall finish 2-1/2 inches ± 1/4 inch (6.4 ± 0.6 cm) in width for all sizes (see figure 1 - K).

3.3.2.3 Physical requirements. The knitted cloth shall conform to the requirements shown in table I when tested as specified in 4.4.1.

TABLE I. Physical requirements of knitted cloth

Characteristic	Jersey knit cloth	Ribbed knit cloth
Yarn sizes	28/1 (facing) 1/ 28/1 (tie-in) 1/ 16/1 (backing, fleece) 1/	14/1 3/
	Minimum	Minimum
Wales per inch (cm)	19 (7)	19 (7)
Courses per inch (cm)	22 (9)	26 (10)
Bursting strength, pounds (N)	65 (289)	70 (311)
Weight, oz/sq.yd g/m^2 2/	6.75 (229)	7.0 (237)
thickness, inches at 0.01 pounds/sq.inch (cm at 69 Pa)	0.070 (0.18)	-

1/ Yarn sizes shall not be finer than those specified.

2/ Based on single thickness of the cloth.

3/ Tolerance of ± 1 count is permitted.

3.3.2.4 Color. The color of the knitted cloth shall be as specified by class (see 1.2, 3.1, 6.2 and 6.3). The color of the rib knit cloth shall match the color of jersey knit cloth.

3.3.3 Elastic webbing. The elastic webbing shall meet the requirements of table II when tested as specified in 4.4.1.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE II. Physical requirements of elastic webbing

Characteristics	Requirement
Width, inches (cm)	1 ± 1/16 (2.5 ± 0.2 cm)
Color	White (bleached)
Thickness, inches (cm)	0.040 (min) (1.0 cm)
Weight per linear yd. oz. (g/m)	0.45 (min) (14 g/m)
Yarns, full width, inches: (cm)	
Ground warp	30 (min) 1/ 76(min)
Elastic strands	12 (min) 2/ 30(min)
Filling yarns per inch	158 (min) 3/ (401) (min)
Elastic strand gage	42 (min) 4/ (107) (min)
Weave	5/
Initial tension, lbs. (kg) at 50 percent elongation (kg)	0.75 (0.34)(min) - 1.25 (0.57)(max) 6/
Tension after accelerated ageing	7/

1/ 40/2 combed cotton and 16/2 carded yarns shall be used to make up the ground warp (± 2 counts).

2/ Heat resistant rubber with a 30/1 spun polyester bottom cover yarn or minimum 140 denier filament polyester yarn and with 4 ends of 20/1 carded cotton top cover yarn.

3/ 158 yarns per inch (62 cm) of 20/1 cotton yarn with two yarns per shed.

4/ Maximum fineness.

5/ The elastic webbing shall be composed of one ground warp (elastic strands wrapped with multiple polyester and cotton ends) and one filling weaving plain. In the warp arrangement, minimum 3 ends of 40/2 combed cotton yarns are along the edge away from the needle clearance area (3 sewing sections for a minimum of 9 ends). The balance of the warp consists of

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

16/2 carded yarns. The three wide spacing area are used to prevent the rubber yarns from being cut during the sewing operation.

6/ 10 pound carriage load.

7/ The tension of the webbing shall change not more than 20.0 percent from the initial tension after accelerated ageing (oven method).

3.3.4 Thread. The thread shall be cotton covered polyester conforming to MIL-T-43548, ticket number 50, 2 or 3 ply for stitching and overedging.

3.3.4.1 Color and colorfastness. The color of the thread shall match the color of the knitted materials as specified by class (see 1.2), except for the thread used in operation 9.b. for all classes, which shall be white. The thread shall show colorfastness to laundering, perspiration and light equal to or better than standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, perspiration and light. The thread for stitching operation 9.b, for all classes shall be white AH, C.A. 66050.

3.3.5 Slide fastener. The slide fastener shall be white nylon monofilament, ladder chain with an automatic lock, Talon style No. 705 or equal. The length of the finished slide fastener shall be 12 inches ± 1/2 inch (30.5 ± 1.3 cm) for all sizes (see figure 1 - LO.

3.3.5.1 Slide fastener tape. The material for the tape shall be a blend of nylon and cotton, or polyester and cotton, and shall be white. The tape shall have a width of 7/16 to 1/2 inch (1.1 to 1.3 cm).

3.3.6 Label. Each pair of sweat pants shall have a combination size, identification and instruction label conforming to type I, class 14 of DDD-L-20. The bouy of the instructions shall be as follows:

CARE INSTRUCTIONS

HAND OR MACHINE WASH IN COLD OR WARM WATER (MAX. 110°F, 43°C). DO NOT BLEACH. TUMBLE DRY AT LOW OR MEDIUM SETTING (MAX. 150°F, 66°C). WASH AND DRY EACH GARMENT SEPARATELY.

3.4 Design. The sweat pants shall have an all-around elastic waist, with a concealed right front inside patch pocket, tapered legs and ribbed knit anklet cuff and bottom, e.g., slide fastener openings. The wales of the anklet (cuffs) shall run in the same direction as the wales of the body material.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

3.5 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistences between the written specification and the figure, the written specification shall govern.

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam and stitching types as specified in table III shall conform to FED-STD-751. Whenever two or more methods of stitch types are given for the same part of the operation, any one of them may be used. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching.

3.6.2 Overedge stitching. The gage of the overedge stitching (stitch type 504 or 505) specified for stitching and seaming the sweat pants shall be 3/16 ± 1/16 inch (0.5 ± 0.2 cm). The guide and knives for the overedge machines shall be set to trim only the ravelled edges of the fabric.

3.6.3 Stitch per inch (cm). The minimum and maximum number of stitches per inch (cm) shall be as specified in table III.

3.6.4 Thread breaks and ends of seams. Ends of all seams and stitching when not caught in other seams shall be backtacked not less than 1/4 inch (0.6 cm). The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch (1.3 cm). Thread breaks shall be secured by stitching back of the break not less than 1/2 inch (1.3 cm).

3.7 Manufacturing operations requirements. The sweat pants shall be in accordance with all operation requirements as specified in table III. The contractor is not required to follow the exact sequence of operations listed.

3.7.1 Shade and size marking. The cut parts of the sweat pants shall be marked, ticketed or bundled to insure a uniform size and shade throughout. Any method of marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew on type tickets.
(c) Adhesive type tickets which discolor the material or leaves traces of paper or adhesive on the material after removal of the ticket.
(d) Pin tickets.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE III

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting.						
	a. The sweat pants shall be cut so that all the component parts of the jersey knit shall be cut lengthwise in the direction of the wales.						
	b. Cut all the component parts of the jersey knit cloth for the garment from one piece of fabric, except the patch pocket which may be cut from ends. Parts cut from ends shall approximate the shade of the basic material.						
	c. Cut the anklet (cuffs) from the same piece of rib knit cloth for the sizes indicated. The wales of the rib knit shall be in the same direction of the jersey knit. The rib knit shall be of sufficient width to allow double thickness.						
	d. Cut the elastic for the elastic waist of the sweat pants so that the finished measurements of the relaxed and extended waist conform to the requirements of table IV (see figure 1, A and A1.						
2.	Replacement of defective components.						
	Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages as specified in 4.4.2.1 are excluded and replaced with nondefective and properly matched material.						
3.	Shade and size marking (see 3.7.1).						
	Mark, ticket or bundle all component parts to insure a uniform shade size and proper assembly throughout the sweat pants.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE III (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make inside patch pocket.						
	a. Overedge top raw edge of pocket.	502 or 503	EFd-1	10-14 (4-6)	50	50	
	b. Fold the top 1 ± 1/4 inch (2.5 ± 0.6 cm) and stitch 3/16 ± 1/16 (0.5 ± 0.2 cm) from edge forming the hem. The inside of the pocket shall be the fleece side of the fabric.	301	LSd-1	10-14 (4-6)	50	50	
5.	Set inside patch pocket.						
	Finished appearance. The finished patch pocket shall measure 5-1/4 ± 1/2 inch (13.3 ± 1.3 cm) wide by 5-1/4 ± 1/2 inch (13.3 ± 1.3 cm) in length.						
	a. Mark and position the pocket on the inside right front of the sweat pants, 2-1/2 ± 1/4 inch (6.4 ± 0.6 cm) from the front crotch seam, the top point of the patch nearest the crotch seam shall be 3-3/4 ± 1/4 inch (9.5 ± 0.6 cm) and the opposite side top point 4-1/4 ± 1/4 inch (10.8 ± 0.6 cm) from the top raw edge of the front of the sweat pants.						
	b. Turn in the edges of the pocket 1/2 ± 1/8 inch (1.3 ± 0.3 cm) and stitch to the right inside front as indicated by marks and single stitch 1/8 ± 1/32 inch (0.3 ± 0.1 cm) from the edge.	301	LSd-1	12-14 (5-6)	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE III (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Join gusset inside leg and front and back seat seams.						
	a. Join gusset to left back leg panel at the crotch of the sweat pants.	504 or 505	SSa-1	10-14 (4-6)	50	50	50
	b. Join front and back left inside leg seam from the bottom of the leg to the front seat seam including the stitching of the gusset to the left front crotch of the sweat pants.	504 or 505	SSa-1	10-14 (4-6)	50	50	50
	c. Join front seat seam from top of the waist to the right front inside leg seam, including the stitching of the gusset to the right front crotch of the sweat pants.	504 or 505	SSa-1	10-14 (4-6)	50	50	50
	d. Join back seat seam, right back gusset to right crotch, and front and back right inside leg seam in one continuous operation from the bottom of the leg to the top of the waist.	504 or 505	SSa-1	10-14 (4-6)	50	50	50
7.	Overedge top of waist and attach combination label.						
	a. Overedge stitch around the total circumference of the top raw edge of the waist.	504 or 505	EFd-1	10-14 (4-6)	50	50	50
	b. Fold the combination label in half, the size shall be visible and position the label centered over the back seat seam at the waist. The combination label may be caught in the overedge stitching of the top raw edge of the waist.	504 or 505	SSa-1	10-14 (4-6)	50	50	50

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE III (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Attach anklet (cuff).						
	a. Fold anklet (cuff) to double thickness and over-edge stitch to each leg bottom. The wales of the anklet (cuff) shall run in the same direction as the leg fabric.	504 or 505	SSa-1	10-14 (4-6)	50	50	50
9.	Attach slide fasteners.						
	Finished appearance. The slide fastener shall be smooth and flat. The top stop of the fasteners shall be not more than 1/4 inch (0.6 cm) below finished fold of the top of the leg opening. The bottom stop of the fasteners shall not be more than 1/8 to 1/4 inch (0.3 to 0.6 cm) from bottom fold of the anklet (cuff).						
	a. Place slide fastener to the face of the leg opening with the edge of the slide fastener tape even with cut opening of the leg and the bottom stop of the slide fasteners 1/8 to 1/4 inch (0.3 to 0.6 cm) from bottom folded edge of anklet (cuff) and the top end stop of the fasteners 1/8 inch (0.3 cm) from top raw edge of leg opening. The excess tape at the bottom of the leg opening shall be folded over and caught in the stitching.						
	b. Stitch slide fasteners to the sweat pants' leg openings 1/4 inch (0.6 cm) from the chain, through all plies from the bottom folded edge of the anklet (cuff) of the leg opening to the end of leg opening. Turn in 1/8 inch (0.3 cm) of the raw edge of the end of the opening, and continue stitching around top ends of the tapes, closing the opening to the bottom of the anklet (cuff) in a continuous operation.	301 (white)	LSq-3(a)	10-14 (4-6)	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE III (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH (cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Attach slide fasteners. (cont'd)						
	c. Turn the slide fastener to its finished position and top stitch through all plies with two rows of parallel stitching. The first row shall be 3/16 ± 1/32 inch (0.5 ± 0.1 cm) from the edge of the chain whereas the second row shall be 3/8 ± 1/32 inch (1 ± 0.1 cm) from the edge of the chain. Both lines of stitching shall be a continuous operation starting at the bottom of the leg opening around the top and down the opposite side.	301	LSq-3(b)	10-14 (4-6)	50	50	
10.	Bartacking.						
	Bartack both sides of the slide fastener tape at the bottom of the leg opening. The bartack shall be positioned 3/8 ± 1/16 inch (1 ± 0.2 cm) from the bottom of the opening, perpendicular to the top stitching, through all plies, bartacking both lines of top stitching. The length of the bartack shall be 3/8 ± 1/16 inch (1 ± 0.2 cm).	Bartack		28 per bartack	50	50	
11.	Attach elastic to waist and form waist.						
	a. Butt both ends of the elastic together and stitch.	606 or 607	FSa-1	12-16 (4-6)	50	50	50
	b. Position the seam of the elastic adjacent to the seat seam of the center back. The waist shall be formed by folding over the top of the sweat pants over the elastic 1-1/2 ± 1/8 inch (3.8 ± 0.3 cm) (see figure 1 - J) and stitching the folded waist of the sweat pants with two rows of stitching through the elastic and sweat pants. The first row of stitching	301	SSbc-1	10-14 (4-6)	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE III (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH(cm)	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
11.	Attach elastic to waist and form waist. (cont'd) shall be 1/2 ± 1/16 inch (1.3 ± 0.2 cm) from the folded edge of the waist. The second row of stitching shall be 1/2 ± 1/16 inch (1.3 ± 0.2 cm) from the first row of stitching. The elastic shall abut the fold of the waist inside the formed tunnel and shall be stretched and stitched so that the finished relaxed and extended waist measurements conform to the requirements of table IV, A and A1.						
12.	Clean sweat pants. a. Trim and remove all ends of thread of stitching inside and outside of the sweat pants. b. Remove all spots, stains, and all visible shade markings.						
13.	Fold for packaging. Close the slide fasteners, fold sweat pants neatly for packaging (see section 5).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil - Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The finished measurements of the sweat pants shall conform to the requirements in table IV. All measurements and tolerances are expressed in inches and centimeters.

TABLE IV. Finished measurements

	Fig. 1	Extra Small	Small	Medium	Large	X-Large	Tolerance
Waist relaxed	A	12-1/2	13	13-1/2	14	14-1/2	± 1/2
(cm)		32	33	35	36	37	± 1.3
Waist (min. extended) (cm)	A[1]	18 46	19 48	20 51	22 56	23 58	- -
Inseam (from gusset) (cm)	B	25 64	25-1/2 65	26 66	26-1/2 67	27 69	± 1 ± 2.5
Length (outside)	C	37-1/2	39	40-1/2	42	43-1/2	+1
(cm)		95	99	103	107	110	± 2.5
Front rise & gusset (cm)	D	12-1/2 32	13-1/2 35	14-1/2 37	15-1/2 39	16-1/2 41	± 3/4 ± 2
Thigh (at gusset) (cm)	E	10 25	10-1/2 27	11 28	11-1/2 29	12 30	± 1/2 ± 1.3
Seat (cm)	F	20 51	21 53	22 56	23 58	24 61	± 1 ± 2.5
Gusset width (cm)	G	3-1/2 9	4 10	4 10	4-1/2 11	4-1/2 11	± 1/2 ± 1.3
Gusset length (cm)	H	8-1/2 22	9 23	9 23	9 23	9 23	± 1/2 ± 1.3

The sweat pants shall be laid flat on a table, with the front seat and gusset seams superimposed on the back seat and gusset seams and leg slide fastener closed, the measurements shall be taken as described below.

A. Waist relaxed. Measure from folded edge to folded edge.

A[1]. Waist extended by hand. Extend waist by hand to its maximum width and measure from folded edge to folded edge.

B. Inseam. Taken from the junction of the gusset and inside leg seam (E) to bottom of the leg.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

C. Length (outside). Measure along folded outside edge from the top edge of waist to bottom edge of leg.

D. Front (rise). Taken from E-1, along folded edge to top of waist.

E. Thigh (at gusset). Taken from point E, across leg to folded edge point E-1.

F. Seat. Measurement taken from folded edge to folded edge, through junction of top gusset and front seat seam.

G. Gusset width. Measurement taken from junction of gusset and inside leg seams to opposite junction of gusset and inside leg seams.

H. Gusset length. Measurement taken from junction of front gusset and seat seams, through the center of the gusset to the junction of the back gusset and seat seams.

3.11 Workmanship. The finished sweat pants shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required (see 6.2), the preproduction sample submitted in accordance with 3.2 shall be visually inspected as specified in 4.4.2.1 and 4.4.2.2 for compliance with design, construction, workmanship and

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

dimensional requirements. The sample shall be tested for physical and chemical characteristics in accordance with 4.4.1.

4.4. Quality conformance inspection. Sampling and inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1, above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents. In addition to testing provisions combined in subsidiary specifications, drawings or standards, testing shall be performed on components listed in table V for the characteristics shown therein. Unless otherwise indicated, testing shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values used in expressing the final results. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be in accordance with the following:

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

The basis for lot size and sample units for testing shall be as follows:

Component	Lot expressed as	Sample unit for testing
Knitting yarn	Pounds (kg)	1 yard (m)
Knitting cloth	Yards (m)	1 yard (m) full width of each material
Slide fastener	Slide fasteners	1 slide fastener
Elastic webbing	Yards (m)	6 yards (m)

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE V. Component testing

Material	Characteristic	Requirement reference	Test method
Materials	Flammability	3.3	1/
Knitting yarn	Cotton identification	3.3.1	1200 2/
	Acrylic identification	3.3.1	2/
	Acrylic fiber content	3.3.1	2/
	Yarn size	3.3.2.3	4021 2/
Knitted cloth	Type of knit:		
	Jersey	3.3.2.1	Visual 3/
	Rib	3.3.2.2	Visual 3/
	Texture:		
	Wales per inch	3.3.2.3	5070
	Courses per inch	3.3.2.3	5070
	Bursting strength	3.3.2.3	5120
	Weight (oz/sq.yd.)	3.3.2.3	5041
	Thickness (jersey cloth only)	3.3.2.3	4.5.1 4/ or 2/
Elastic webbing	Width	3.3.3	Visual
	Thickness	3.3.3	5030
	Weight per linear yd.oz.	3.3.3	5041
	Yarns full width, inches:		
	Ground warp	3.3.3	5050 2/
	Elastic strands	3.3.3	5050 2/
	Filling yarns per inch	3.3.3	5050 2/
	Elastic strand gage	3.3.3	4.5.2.1 2/
	Weave	3.3.3	Visual
	Initial tension, lbs. at 50% elongation	3.3.3	4.5.2.2 2/
	Tension after accelerated ageing	3.3.3	4.5.2.3 2/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

TABLE V. Component testing (cont'd)

Material	Characteristic	Requirement reference	Test method
Slide fastener	Material identification	3.3.5	2/
	Style No. and size	3.3.5	2/
	Slide fastener tape:		
	Material identification	3.3.5.1	2/
	Width	3.3.5.1	Actual measurement

1/ The contractor shall certify that no flame retardant finish was applied and that the end item meets the Flammable Fabric Act requirements.

2/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

3/ One determination per sample unit and the results reported as "pass" or "fail".

4/ Test specimens shall be allowed to relax on a flat surface without pressure until equilibrium with standard conditions is reached prior to subjection to tests.

4.4.2 End item examination. The sweat pants shall be examined for those defects shown in 4.4.2.1 through 4.4.2.3. The inspection level and acceptable quality levels (AQLs) for these examinations shall be in accordance with 4.4.2.4. The sample unit shall be one finished sweat pants.

4.4.2.1 General defects.

Defect	Classification Major	Minor
Materials, defects and damages		
a. Any hole, cut, tear, dropped stitches or run, uneven napping or mend 1/	X	
b. Uneven, ridgy, or cockled cloth 1/		X
c. Fleeced cloth not napped on inside	X	
d. Any slub (more than three times normal diameter of yarn and clearly visible) on outside of pants 1/		X

Source: https://assist.dla.mil -- Downloaded: 20261O-21T23:12Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Materials, defects and damages (cont'd)		
e. Snag 1/		X
f. Permanent crease in fabrics	X	
Color		
Color not as specified	X	
Shaded parts		
Variation in shade within a part or between parts	X	
Part cut from ends badly shaded		X
Cleanness		
a. Spot or stain, clearly noticeable		
- on outside	X	
- more than 1/4 inch (0.6 cm) up to 1/4 inch (0.6 cm)		X
- on inside		X
b. Rancid odor	X	
c. Any marking clearly visible on outside	X	
d. One or more marking tickets not removed		X
e. Thread ends not trimmed, or loose threads not removed from sweat pants		X
Component and assembly		
a. Any component part or required operation omitted or added (unless otherwise classified herein)	X	
b. Any operation not performed as specified (unless otherwise classified herein)		X
c. Anklet (cuff) not double thickness	X	
d. Any component part not as specified	X	

1/ For knitted fabric imperfection definitions, see MIL-STD-1491.

Cutting		
Any component part not cut in accordance with specification requirements	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the currentversion before use.

Defect	Classification Major	Minor
Seam and stitching		
a. Accuracy of seaming and stitching:		
1. Seams or part twisted, puckered or pleated	X	
2. Part of material caught in unrelated operation or or stitching:		
- caught in, up to and including 1/4 inch (0.6 cm) of stitching		X
- caught in, more than 1/4 inch (0.6 cm) of stitching	X	
3. End of stitching when not caught in other seams or stitching backtacked less than 1/4 inch (0.6 cm)		X
4. Stitching overlapping end of thread break less than 1/2 inch (1.3 cm)		X
5. Raw edge:		
- more than 1/2 inch (1.3 cm) long		X
- more than 1 inch (2.5 cm) long	X	
b. Gage of stitching and seam allowances:		
1. Irregular, i.e., unevenly gaged (to be scored only when condition exists along major portion of seam)		X
2. Width of seam allowance not as specified or not within range of gage specified or varies more than 1/16 inch (0.2 cm) when no range is specified		X
c. Stitches, broken or missing:		
1. All stitching including overedging:		
- 1/4 inch (0.6 cm) up to 1/2 inch (1.3 cm) inclusive		X
- more than 1/2 inch (1.3 cm)	X	
d. Skipped stitches or runoff stitches:		
On joining seam - use "Open seam" classification		
e. Seam and stitch type:		
- seam type or stitch type not as specified	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor
Seam and stitching (cont'd)		
f. Stitches per inch (cm) (to be scored only when condition exists on more than one half the length of seam):		
- less than minimum or more than maximum specified		X
g. Stitch tension:		
1. Loose tension resulting in a loose seam:		
- 1/2 inch (1.3 cm) up to 3/4 inch (1.9 cm) inclusive		X
- more than 3/4 inch (1.9 cm)	X	
2. Loose tension (exposed loops of top or bottom threads) more than 1/2 inch (1.3 cm) in length		X
3. Tight tension (stitches break when strain is applied in the direction of the seam of stitching)	X	
h. Open seam:		
- 1/4 inch (0.6 cm) up to 1/2 inch (1.3 cm) inclusive		X
- more than 1/2 inch (1.3 cm)	X	
NOTE: One or more broken, or two or more continuous skipped or runoff stitches or joining seams constitutes an open seam.		
i. Bartack: (one or more)		
1. Missing, insecure, misplaced, not specified size or type or not serving intended purpose	X	
2. Loose stitch tension		X
Label		
Combination (size, identification and instruction) label:		
a. Omitted, incorrect, or illegible	X	
b. Not positioned or attached as specified		X

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:12Z
Check the source to verify that this is the currentversion before use.

4.4.2.2 Detailed defects applicable to specific parts.

Defect	Classification Major	Minor
Waist		
Waistband, fold over less than 1-3/8 inches (3.5 cm) or more than 1-5/8 inches (4.1 cm)	X	
Slide fastener		
a. Slide fastener not positioned as specified	X	
b. Slide fastener does not function properly, pull detaches, slider binds or stitches or chain unmeshes	X	
c. Stops at top of fastener are more than 1/4 inch (0.6 cm) below fold of leg opening	X	
d. Stops at bottom of fastener are more than 1/4 inch (0.6 cm) above bottom fold of anklet (cuff)		X
e. Slide fastener pull tab not on outside of sweat pants	X	
f. Slide fastener tapes wavy or puckered		X
g. Bartack omitted or not positioned as specified at bottom of slide fastener tape	X	
h. Slide fastener tape stitched too close to chain not permitting slider to move freely		X

4.4.2.3 Size measurements. The finished sweat pants shall be examined to determine compliance with dimensional requirements contained in table IV. Any measurement deviating from the specified dimension and tolerance shall be scored as a defect.

4.4.2.4 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per hundred units (DHU) shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the currentversion before use.

	AQL	Inspection level
For defects listed in 4.2.2.1 and 4.2.2.2 (general and detailed defects):		I
Major	1.5	
Major and minor (combined)	6.5	
For defects listed in 4.2.2.3 (size measurements):		S-3
One class	4.0	

4.4.3 Packaging inspection. An examination shall be made to determine that the preservation-packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Examination for the closure defects listed below shall be made on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection levels shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defects
Marking (exterior and and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling, improper taping, open and noncontinuous heat sealed seams and closure of polyethylene bag. Incorrectly fabricated bag. Alternative closure of the polyethylene bag not provided with tuck or reverse flap. Omission of vent hole in polyethylene bag. Bulged or distorted container.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

Examine	Defects
Content	Number of sweat pants per shipping container is more or less than required. 1/ Size shown on one or more sweat pants not as specified on shipping container. 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.5 Test methods.

4.5.1 Thickness test.

4.5.1.1 Preparation of specimen. The specimen shall be cut from different parts of a full width sample and shall measure not less than 6 inches by 6 inches (15.2 by 15.2 cm). The specimen shall always be larger than the pressure foot on the test apparatus.

4.5.1.2 Apparatus. The test apparatus shall consist of a base plate and a circular pressure plate with a bearing surface of 20 square inches (130 cm^2) and means of applying 0.01 pounds per square inch (0.07 kPa) loading on the sample. This pressure shall be evenly distributed over the 20 square inch area (130 cm^2). The thickness measuring device shall be capable of measuring

4.5.1.3 Procedure. The 0.01 pound per square inch pressure (0.07 kPa) shall be applied to the test specimen, and the thickness reading shall be taken and recorded as thickness.

4.5.1.4 Report. Five specimens shall be tested from each sample unit. The results shall be reported as the average of the five specimens tested and reported separately to the nearest 0.01 inch (0.1 cm).

4.5.2 Elastic webbing testing.

4.5.2.1 Gage of rubber. The gage of rubber shall be determined by counting the actual number of strands, laid side by side, contained in one inch (2.5 cm). The gage is equivalent to the actual number of the rubber yarns contained in one inch (2.5 cm). A measuring device which measures the gage of rubber yarns may be utilized providing results are comparable.

4.5.2.2 Determination of initial tension. The test specimen shall be 14 inches (35.6 cm) in length and the full width of the webbing, except on webbing more than 3 inches (7.6 cm) in width, in which case the specimen shall be raveled so that the 3 inch (7.6 cm) width is centered in the webbing. Bench marks shall be exactly 10 inches (25.4 cm) apart on the specimen and sewn together on the marks to form a loop 10 inches (25.4 cm) in circumference. The loop specimen shall be placed over the pins attached to the clamps of the constant rate of load machine (see 6.6). The test specimen shall be loaded so that the autographic chart yields an elongation of 50 percent. The loading curve shall be recorded on the fifth cycle and each cycle shall take forty seconds to load and unload. The tension in pounds (kg) of the five individual specimens shall be determined on the loading curve at the specified elongation. The results shall be averaged and then divided by 2 and reported to the nearest 0.01 pounds (kg) and recorded as "B".

Source: https://assist.dla.mil -- Downloaded: 20261O-21T23:12Z
Check the source to verify that this is the current version before use.

4.5.2.3 Determination of tension after accelerated ageing. The specimens shall be prepared as specified in 4.5.2.2 and then subjected to accelerated ageing in conformance with Method 7221, FED-STD-601, except that the oven temperature shall be 300°F (149°C), and the time exposure shall be two hours. After ageing, the specimens shall be relaxed under standard conditions until they reach equilibrium and then tested in accordance with 4.5.2.2 for tension. The tension results after accelerated ageing shall be averaged and then divided by 2 and reported to the nearest 0.01 pounds (N) and recorded as "B".

4.5.2.3.1 Calculation. Calculation of percent change in tension after accelerated ageing shall be calculated as follows:

$$\frac{A - B}{A} \times 100 = \text{percent change in tension after accelerated ageing.}$$

A = Initial tension (pounds) (N).

B = Tension after accelerated ageing (pounds) (N).

The percent change shall be recorded to the nearest 0.1 percent.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each pair of sweat pants shall be neatly folded in accordance with standard commercial practices. Each pair of sweat pants shall be inserted in a close fitting clear polyethylene film bag having a thickness of 0.00125 inch (± 25 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch (0.6 cm) diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Commercial packaging. The sweat pants shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A packing. Sixty sweat pants of one size and class only preserved-packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same container.

5.2.2 Level B packing. Sixty sweat pants of one size and class only preserved-packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, minimum grade 200 of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one class only may be packed within the same container.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.3 Commercial packing. The sweat pants preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the Uniform Freight Classification or National Motor Freight Classification, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:12Z
Check the source to verify that this is the current version before use.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container packed with mixed sizes of one class only shall have securely attached to the end and side directly under the printing or stenciling, a white paper label 5 by 4 inches (12.7 by 10.2 cm) with the words "MIXED SIZES", plainly printed or stamped thereon and under these words shall be legibly printed or stamped the correct quantity and sizes contained therein.

6. NOTES

6.1 Intended use. The sweat pants are intended for use by Army personnel.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Class and size required (see 1.2).
(c) When first article sample is required (see 3.2, 4.3 and 6.5).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Guide samples. For access to guide samples, address the procuring office issuing the invitation for bids.

6.4 Metric units. Metric equivalents for customary units are shown in this specification. This information is provided only to familiarize readers with units that are expected ultimately to be adopted nationally.

6.5 First article. When a first article sample is required, it shall be inspected and approved under the appropriate provisions of paragraph 7-104.55 of Armed Services Procurement Regulations. The first article should be a

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

preproduction sample. The first article should consist of one pair of finished sweat pants. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for inspection and approval of the first article.

6.6 Constant rate of loading machine. The Scott Incline Plane Tester 1-P-4 meets the requirements for the loading and unloading time of the complete cycle.

6.7 Supersession data. This specification includes the requirements of NLABS PD-364 dated 21 December 1972 for Sweat Pants: Leg Zipper.

Custodian:

Army - GL

Preparing activity:

Army - GL

Project No. 8415-A019

Review activities:

Army - MD
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

1/ RELAXED
2/ EXTENDED BY HAND

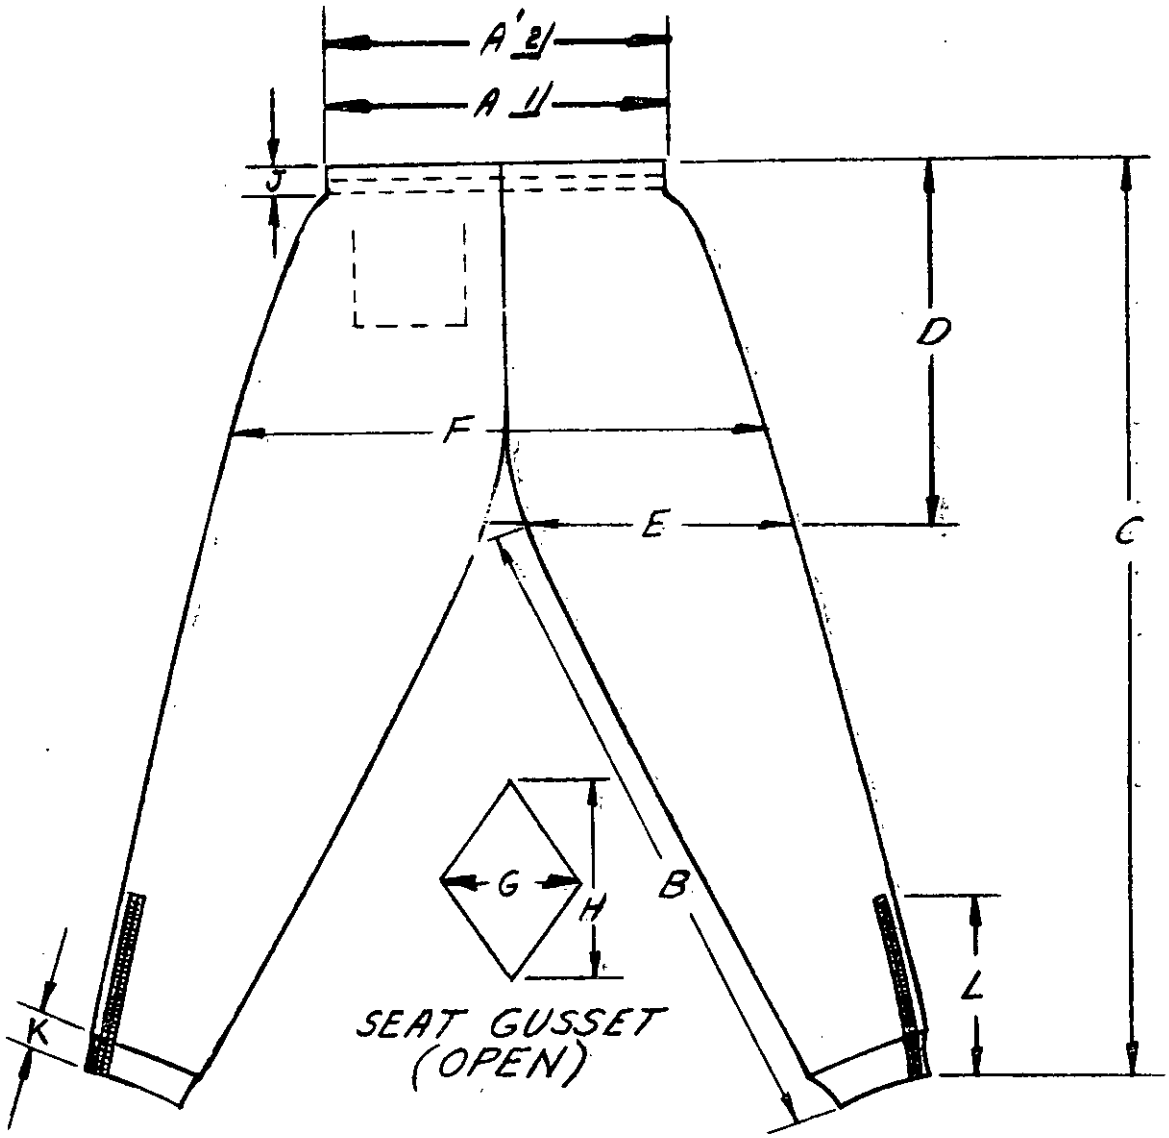


FIGURE 1-SWEAT PANTS: LEG ZIPPER

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/1682

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:12Z
Check the source to verify that this is the current version before use.