MIL-S-43985(GL)
8 June 1978
(See 6.5)

MILITARY SPECIFICATION

SLACKS, WOMAN'S, GABARDINE, ARMY GREEN 344

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for woman's gabardine slacks.

1.2 Classification. The slacks shall be one type in the following sizes.

Schedule of sizes

Short	Short +	Regular	Regular +	Long	Long +
6	6	6	6	6	
8	8	8	8	8	
10	10	10	10	10	10
12	12	12	12	12	12
14	14	14	14	14	14
16	16	16	16	16	16
18		18		18	18
20		20		20	
		22		22	

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
V-F-106	-	Fasteners, Slide Interlocking
V-T-280	-	Thread, Gimp, Cotton, Buttonhole
UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-326	-	Cloth, Silesia, Cotton
MIL-C-10176	-	Cloth, Gabardine: Wool, Polyester and Wool
MIL-T-43548	-	Thread, Polyester, Cotton-Covered
MIL-C-43718	-	Cloth, Twill, Polyester; Polyester and Cotton; Polyester and Rayon

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-656	-	Provisions for Evaluating Quality of Slacks, Women's

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the currentversion before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 Materials.

3.2.1 Basic material. The basic material shall be a polyester and wool, gabardine cloth, conforming to type II, class 12 of MIL-C-10176. The color shall be Army Green 344.

3.2.2 Waistband interlining. The material for the waistband interlining shall be natural, bleached, or black cotton silesia conforming to type I of MIL-C-326 except that the requirements for color matching shall not apply to the black silesia. Polyester and cotton cloth conforming to class 1 of MIL-C-43718 may be substituted for the cotton silesia cloth.

3.2.3 Elastic waistband stabilizer. The elastic waistband stabilizer shall be Ban-rol XL-90 or equal, and shall be 1 $\pm$ 1/16 inch (25 $\pm$ 2 mm) in width. Prior to the use of an "or equal" item, the contractor shall submit the item with supporting data to the contracting officer for approval (see 4.2.1).

3.2.4 Thread. The thread for all seaming and stitching shall be cotton-covered polyester thread, ticket Nos. 30-3 ply, 50-2 or 3 ply, and 70-2 ply conforming to MIL-T-43548. The thread shall be dyed Green E, C.A. 66034.

3.2.5 Gimp. The gimp for reinforcing buttonholes shall be cotton, Green E, C.A. 66034, conforming to type I or II, size 8 of V-T-280.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

3.2.6 Labels. Each pair of slacks shall have a combination size, identification and instruction label conforming to type I, class 14 of DDD-L-20. The instruction part of the label shall state the following:

DRY CLEAN ONLY
Use damp cloth for pressing.
Remove gloss marks at edges
and seams with iron and
damp cloth.
DO NOT REMOVE THIS LABEL

3.2.7 Buttons. The button shall conform to type II, class D, style 20 or 21, 24 line of V-B-871 and shall be Army Green BR, Cable 62015.

3.2.8 Slide fastener. The slide fastener shall conform to type I, style 3, size LS, brass or zinc chain with short tab pull of V-F-106, except that the salt spray test shall not apply. The color of the tape shall be Green, Shade X, Cable No. 66524. The length of the slide fastener shall be 7 inches (178 mm) for all sizes.

3.2.8.1 Colorfastness. The slide fastener tape shall show fastness to wet-drycleaning equal to or better than the standard sample. When no standard sample is available, the tape shall show "good" fastness to wet-drycleaning.

3.3 Design. The slacks have straight unhemmed legs with a slightly flared bottom, darts for fit in the front and back, a small pocket, an elasticized waistband and a side slide fastener closure with placket.

3.4 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Patterns. Standard patterns, which provide seam allowances of 1/4 inch (6 mm) for waistband and pocket construction, 3/8 inch (10 mm) for stitching between notches when attaching pocket to front, and 1/2 inch (13 mm) for all other seams, shall be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.5.1 List of pattern parts. The component parts of the slacks shall be cut from materials specified in accordance with the number of parts indicated below:

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the currentversion before use.

List of pattern parts

Material	Pattern nomenclature	Cut parts
Basic material	Front	2
	Back	2
	Waistband	1
	Pocket	2
	Placket	1
Elastic waistband stabilizer	Back waistband elastic	1
Cotton silesia or polyester/ cotton cloth	Front waistband interlining	1

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam and stitching types specified in table I shall conform to FED-STD-751. Whenever two or more seam or stitch types are given for the same part of the operation, any one of them may be used. When stitch type 401 is used, the looper thread (under thread) shall be on the inside of the slacks. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. The gage of overedge stitching shall be 3/16 inch (5 mm). The guides and knives on overedge machines shall be set to trim only the ravelled ends of the fabric.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitching produced with 301 stitch type, when not caught in other seams or stitching shall be backtacked not less than 1/4 inch (6 mm). Ends of a continuous line of stitching shall overlap not less than 1/2 inch (13 mm), except on labels where the overlap shall be not less than three stitches. Thread breaks (all stitch types) shall be secured by stitching back of the break not less than 1/2 inch (13 mm). Skipped stitches or thread breaks on 401 stitch type may be repaired using 301 stitch type.

3.6.4 Buttonhole. The buttonhole for the waistband shall be either a cut-first, eyelet-end, square-bar type worked over gimp with ends of gimp pulled through to the underside and bartacked, or an eyelet-end taper bar tape. The stitching shall be caught in the cloth with the purling on the outside and the cut lengths shall be 5/8 to 3/4 inch (16 to 19 mm).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.6.5 Bartacks. The bartacks shall measure 1/4 inch (6 mm) in length and contain 21 stitches.

3.7 Manufacturing operations requirements. The slacks shall be made in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations listed, unless otherwise specified. Any additional basting or holding stitches used to facilitate manufacture are permissible, provided the thread does not show on the finished slacks.

3.7.1 Pressing. All pressing specified in table I shall be done with a heated pressing iron or machine set at a suitable temperature for synthetics.

3.7.2 Marking. The cut parts of the slacks shall be marked to insure a uniform shade and size throughout garment. Any method of marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on type tickets.
(c) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting a. Cut the slacks in strict accordance with patterns furnished, which show directional lines, size, placement of pocket, darts, and notches for proper assembly of all parts. The cloth lay shall not be greater than 60 plies. b. Cut basic material parts out of one piece of material except the placket and pocket which may be cut from ends. Parts cut from ends shall approximate the shade of the slacks. c. The directional lines on the fronts and backs may vary from the warp direction by not more than 1 inch (25 mm). Measurements shall be taken at the top and bottom edges of the pattern from the directional line to the selvage edge of the fabric (even side of lay) and the difference between the two measurements shall not exceed 1 inch (25 mm). d. Cut front waistband interlining in warp direction. e. The elastic for waistband shall be cut in the relaxed state and shall conform exactly to the pattern.						
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified as defects in MIL-STD-656 shall be removed from production and replaced with non-defective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. Mark or ticket all parts, except those parts cut from ends, to insure a uniform shade and size throughout the slacks.						
4.	Overedge stitching. Overedge stitch the raw edges of outseams, inseams, side opening, center front seam, seat seam, and bottoms of fronts and backs.	502 or 503	EFd-1	6-8	70 70	70 70	
5.	Make darts. The darts shall be tapered on the inside without twists or puckers. Thread ends at lower end of darts shall not be trimmed closer than 1/2 inch (13 mm) in length.						
	a. Fold and stitch darts as indicated by notches and drill holes. Stitching shall extend 1/2 to 3/4 inch (13 to 19 mm) beyond drill hole.	301	OSf-1	10-14	50	50	
	b. Press folded darts toward the center front and center back.						
6.	Make pocket and attach label. a. Center label on pocket piece and stitch on all four sides.	301	LSbj-1	8-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make pocket and attach label. (cont'd)						
	b. Superimpose pocket pieces and safety stitch along sides and bottom edge. On the finished slacks the label shall face the wearer.	515 or 516 or 519	SSa-2	10-14	50 (chain stitch) and 70 (overedge stitch)	50 70	
7.	Make placket.						
	Fold placket in half lengthwise and with raw edges even, overedge stitch side and bottom.	502 or 503	SSa-1	6-8	70 70	70 70	
8.	Attach pocket.						
	a. Center pocket over darts on outside right front with top edges of pocket and top of front even and sides of pocket equidistant from each dart.						
	b. Slash through both plies of pocket and top of front, as indicated by notches on pocket. The slash shall extend the distance of the seam allowance.						
	c. With seam allowances of inner ply of pocket turned down (ply with label attached), stitch outer ply of pocket to top of front from notch to notch. Turn pocket up and raise stitch through outer ply of pocket and front 1/16 inch (2 mm) from turned edge. Do not catch inner ply of pocket in raise stitching. Turn pocket to inside.	301 or 401 and 301	LSq-2(a) LSq-2(a) LSq-2(b)	10-14 10-14 10-14	50 50 50	50 70 50	
	d. Place a 1/4 inch (6 mm) horizontal bartack at each corner of pocket opening at the turned edge. The bartacks shall be through both plies of pocket and the front.	Bartack		21 per tack	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Join outseams.						
	a. Match notches of left front and left back at the outseam and stitch 1/2 inch (13 mm) from edges with stitching terminating at bottom of side opening.	301 or 401	SSa-1	10-14	50 50	50 70	
	b. Match notches of right front and right back at the outseam and stitch 1/2 inch (13 mm) from edges.	301 or 401	SSa-1	10-14	50 50	50 70	
	c. Press outseams open and flat.						
10.	Make side opening.						
	Finished appearance. The placket shall be smooth and flat. The stops at top of fastener shall not be more than 1/4 inch (6 mm) below waistband on the finished pair of slacks. The welt on front shall completely cover the slide fastener when slide fastener is closed and the front shall overlap the back slightly at the bottom of placket (without an outside pleat). The stitching shall not interfere with the operation of the slider and the welt shall be uniform in width.						
	a. Place slide fastener on placket piece face up with the center of the closed chain 7/8 to 1 inch (22 to 25 mm) from overedging and stitch together 1/8 inch (3 mm) from back edge of chain nearest the overedging.	301	SSa-1	10-14	50	50	
	b. Turn left back at side opening to inside, as indicated by mark on pattern. Place folded edge of slack on tape so that the folded edge is 1/8 to 3/16 inch (3 to 5 mm) from back edge of teeth, and stitch through all plies 1/16 inch (2 mm) from folded edge.	301	LSah-1	10-14	50	50	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Make side opening. (cont'd)						
	c. Turn left front at side opening to inside, as indicated by marks on pattern and stitch to fastener tape forming a welt 1/2 to 5/8 inch (13 to 16 mm) wide, stitch across the bottom of welt to the side seam, catching the placket and ends of fastener tapes in the stitching. The stitching shall be 1/8 to 1/4 inch (3 to 6 mm) from the chain and the welt shall cover the slide fastener and the stitching along back edge when fastener is closed.	301		10-14	50	50	
11.	Join inseams.						
	a. Match notches at fronts and backs at inseams and join 1/2 inch (13 mm) from edge.	301 or 401	SSa-1	10-14	50 50	50 70	
	b. Press inseams open and flat.						
12.	Join front and seat seams.						
	a. Join front seam and seat seam in one continuous operation with a double needle seat seamer with the rows of stitching 1/64 to 1/32 inch (0.5 to 1 mm) apart. The ends of the inseam at crotch shall not be staggered by more than 1/4 inch (6 mm).	401	SSa-2	8-10 each row	50	70	
	b. Press seam open and flat.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Attach waistband.						
	a. Overedge stitch the side of waistband opposite notches.	502 or 503	EFd-1	6-8	70 70	70 70	
	b. Position front waistband interlining (silesia) to notched half of waistband so that the top edge of front interlining extends 1/4 inch (6 mm) beyond center fold line. Stitch the top edge of front waistband interlining through the waistband 1/8 to 3/16 inch (3 to 5 mm) from edge of silesia.	301 or 401	LSbj-1	10-14	50 50	50 70	
	c. Position waistband and silesia to top of slacks with notches matching and stitch 1/2 inch (13 mm) from raw edges, catching inside pocket ply in stitching, but leaving pocket opening free.	301 or 401	BSf-2(a)	10-14	50 50	50 70	
	d. Position back waistband elastic on overedge half of waistband with top edge of elastic 1/16 to 1/8 inch (2 to 3 mm) below center fold line of waistband and the end of the elastic 1/2 inch (13 mm) beyond outseam (1 inch (25 mm) beyond end of silesia). Stitch elastic through waistband, 1/2 inch (13 mm) from elastic end, the width of the elastic.	301 or 401	LSbj-1	10-14	50 50	50 70	
	e. The end of back waistband elastic shall be positioned 1/8 inch (3 mm) from the end of the waistband and stitched the width of the elastic 3/8 inch (10 mm) from end of elastic. Place a vertical row of stitching through elastic and waistband 2 ± 1/8 inches (51 ± 3 mm) back from edge of waistband.	301 or 401	LSbj-1	10-14	50 50	50 70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Attach waistband. (cont'd)						
	f. Fold waistband in half, face to face. Stitch ends of waistband, catching end of back waistband elastic. On end of waistband with silesia interlining, continue stitching across the extension to front of slacks. Turn and force out corners.	301 or 401	SSa-1	10-14	50 50	50 70	
	g. Turn waistband to finished position and stitch through front of slacks, 1/32 to 1/16 inch (1 to 2 mm), below fold of waistband catching overedged side of waistband. The stitching on the outside of the slacks shall be parallel with the waistband and shall be through the inner ply of pocket only.	301 or 401	BSf-2(a)	10-14	50 50	50 70	
14.	Make buttonhole.						
	Make a 5/8 to 3/4 inch (16 to 19 mm) horizontal buttonhole, centered on waistband extension with inside edge of eyelet 1/2 to 5/8 inch (13 to 16 mm) from front edge of extension.	Buttonhole		50-56 per buttonhole 21 per tack	50	50	
15.	Buttons.						
	Mark and sew a 24-line button to the outside back end of waistband, centered on waistband to properly engage buttonhole in waistband extension.	Hand or 101 or 301		3-4 double (thread) 20-24 (per button) 14-16 (per button)	30 30 30	 30	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE I MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
16.	Clean slacks. Trim thread ends (see operation 5) and remove all loose threads, spots, stains, and shade tickets.						
17.	Press slacks. a. Press the tops (including the placket opening) smooth with a heated pressing iron or machine. b. The legs shall be pressed smooth and creased in the center with a heated pressing iron or machine. The legs shall be creased so that the seams at the bottom will match and so that either the seams at the crotch will match or the inseam in the crotch will be slightly back of the outseam. c. Close slide fastener and button waistband.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.8 Measurements. The unhemmed slacks shall conform to the measurements shown in table II.

TABLE II. Measurements in inches (mm)

Sizes	6	8	10	12	14	16	18	20	22	Tolerance
1/2 waist 1/	10-3/4 (273)	11-1/4 (286)	11-3/4 (298)	12-1/2 (318)	13-1/4 (337)	14 (356)	15 (381)	16 (406)	17 (432)	± 1/2 (13)
1/2 waist 1/ for plus sizes	11-1/4 (286)	11-3/4 (298)	12-1/4 (311)	13 (330)	13-3/4 (349)	14-1/2 (368)	15-1/2 (394)	- -	- -	± 1/2 (13)
1/2 hip 2/	19 (483)	19-1/2 (495)	20 (508)	20-3/4 (527)	21-1/2 (546)	22-1/4 (565)	23-1/4 (591)	24-1/4 (616)	25-1/4 (641)	± 1/2 (13)
1/2 hip 2/ for plus sizes	20 (508)	20-1/2 (521)	21 (533)	21-3/4 (552)	22-1/2 (572)	23-1/4 (591)	24-1/4 (616)	- -	- -	± 1/2 (13)
Outseam 3/										
Short	39-1/2 (1003)	39-3/4 (1010)	40 (1016)	40-1/4 (1022)	40-1/2 (1029)	40-3/4 (1035)	41 (1041)	41-1/4 (1048)	41-1/2 (1130)	± 1/2 (13)
Regular	43-7/8 (1115)	44-1/8 (1120)	44-3/8 (1128)	44-5/8 (1133)	44-7/8 (1140)	45-1/8 (1146)	45-3/8 (1153)	45-5/8 (1158)	45-7/8 (1166)	± 1/2 (13)
Long	46-3/4 (1187)	47 (1194)	47-1/4 (1200)	47-1/2 (1207)	47-3/4 (1213)	48 (1219)	48-1/4 (1226)	48-1/2 (1232)	48-3/4 (1238)	± 1/2 (13)

With slide fastener closed and button fastened the slacks shall be laid flat on a table and measured as follows:

1/ 1/2 waist - measure from folded edge to folded edge at center of waistband with waistband in relaxed position.

2/ 1/2 hip - measure from folded edge to folded edge in the following manner:

Short and Short Plus - 8 inches (203 mm) from bottom edge of waistband.
Regular and Regular Plus - 8-1/2 inches (216 mm) from bottom edge of waistband.
Long and Long Plus - 9 inches (229 mm) from bottom edge of waistband.

3/ Outseam - measure from bottom edge of waistband to unhemmed bottom of slacks along outseam.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.9 Workmanship. The finished slacks shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. In addition, the contractor shall furnish a certificate of compliance stating that the elastic waistband stabilizer, or an "or equal" stabilizer if used, conforms in all respects to that approved by the contracting officer as required in 3.2.3.

4.2.2 End item examination. Sampling and examination of the end item shall be performed in accordance with MIL-STD-656. The slacks shall be classified as Dress ("D") slacks.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each pair of slacks shall be folded to approximately 23 by 14-1/2 inches (584 by 368 mm). Ten pairs of folded slacks of one size only may be stacked in a bundle, with the waistbands alternated, and securely tied with cotton tape or twine approximately 4 inches (102 mm) in from each end, provided the tie does not cause creasing of the slacks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Slacks shall be preserved-packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The intermediate pack and the quantity per intermediate pack shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A packing. Forty pairs of slacks, of one size only, preserved, packaged as specified in 5.1, shall be packed flat in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Singly packed slacks shall be positioned with waistbands alternated. Inside dimensions of each container shall approximate 23-1/2 inches (597 mm) in length, 15 inches (381 mm) in width and 15 inches (381 mm) in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.2.2. Inspection shall be in accordance with MIL-STD-656. Toward the end of the contract, or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B packing. Forty pairs of slacks, of one size only, preserved-packaged as specified in 5.1, shall be packed flat in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Singly packed slacks shall be positioned with waistbands alternated. Inside dimensions of each container shall approximate 23-1/2 inches (597 mm) in length, 15 inches (381 mm) in width and 15 inches (381 mm) in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight (49 g/m^2) kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.2.2. Inspection shall be in accordance with MIL-STD-656. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box specification, except that the inspection shall be in accordance with 4.2.2.

5.2.3 Level C packing. Slacks, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches (127 by 102 mm) with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantities and sizes contained therein.

6. NOTES

6.1 Intended use. The slacks are intended for wear by female military personnel of the Department of the Army with the AG 344 gabardine jacket.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Size required (see 1.2).
(c) Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Sample. For access to sample of the end item, address the procuring activity issuing the invitation for bids.

6.4 Metric equivalents. Metric equivalents, indicated in parentheses throughout this document, are based on practices, conversion factors, and symbols specified in ASTM E 380 Standard for Metric Practice, and are for information only. In each instance, the value stated in U.S. customary units shall be controlling.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

6.5 Supersession data. This document supersedes LP/P DES 9-76 Slacks, Woman's, Gabardine, Army Green 344, dated 17 May 1976.

Custodian:

Army - GL

Review activity:


Army - MD
DLA - CT

Preparing activity:


Army - GL

Project No. 8410-0416

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

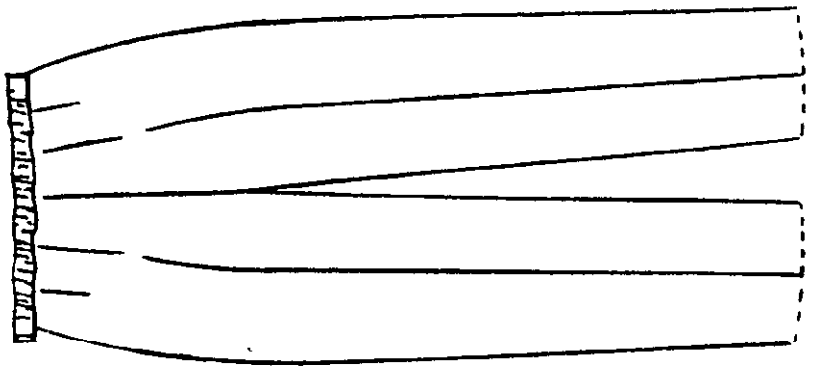

BACK

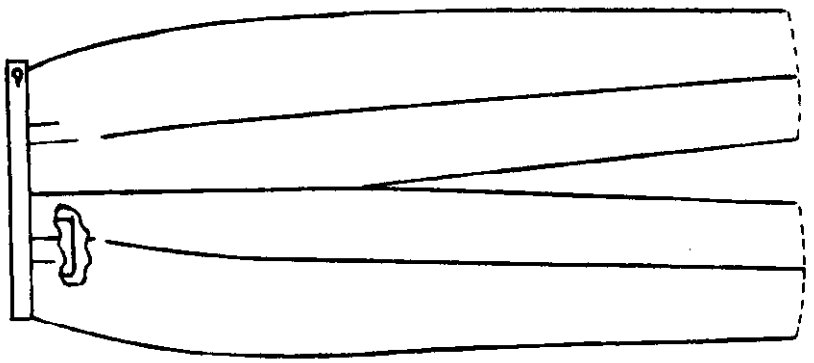

FRONT

FIG 1 SLACK WOMEN'S, GABARDINE, ARMY GREEN 344

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and *enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of* the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-43985(GL) SLACKS, WOMAN'S, GABARDINE, ARMY GREEN 344

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

NATICK OP 1 JUL 77

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.