MIL-S-43996(GL)
27 June 1979
SUPERSEDING
(See 6.6)

MILITARY SPECIFICATION

SKIRT, WOMAN'S, SUMMER, WARP KNIT

This specification is approved for use by Natick Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers a linen look polyester knitted skirt.

1.2 Classification. The skirt shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

Short	Short plus	Regular	Regular plus	Long
6		6		6
8	8+	8	8+	8
10	10+	10	10+	10
12	12+	12	12+	12
14	14+	14	14+	14
16	16+	16	16+	16
18		18		18
20		20		20
22		22		22

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:19Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-B-871	-	Button, Sewing Hole, and Button, Staple, (Plastic)
UU-P-268	-	Paper, Kraft, Wrapping
CCC-C-438	-	Cloth, Buckram, Cotton
DDD-L-20	-	Label: For Clothing, Equipage, and Tentage (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-B-371	-	Braid, Textile, Tubular
MIL-T-43548	-	Thread, Polyester, Cotton-Covered
MIL-C-43938	-	Cloth, Knitted, Warp, Linen Look, Polyester

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1188	-	Commercial Packaging of Supplies and Equipment
MIL-STD-1609	-	Provisions for Evaluating Quality of Women's Skirts

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

Technical Manual of the American Association of Textile Chemists and Colorists

(Application for copies of the AATCC Manual should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, P.O. Box 12215, Durham, NC 27709.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 Guide sample. A sample, when furnished, is solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Materials.

3.2.1 Basic material. The basic material for the skirt shall be a Medium Green 388, polyester, linen look, knitted cloth conforming to MIL-C-43938.

3.2.2 Buckram. The material to provide reinforcement for the buttonhole shall be natural or bleached cotton buckram conforming to type II, class 1 of CCC-C-438.

3.2.3 Elastic waistband stabilizer. The elastic waistband stabilizer shall be Ban-rol XL-91T or equal, and shall be 1 ± 1/16 inch in width. Prior to the use of an "or equal" item the contractor shall submit the item with supporting data to the contracting officer for approval (see 4.2.1).

3.2.4 Thread. The thread for all seaming and stitching shall be cotton-covered polyester thread, ticket numbers 50-2 ply, 50-3 ply, and 70-2 ply conforming to MIL-T-43548. The thread shall be dyed to match the basic material.

3.2.5 Button. The button for the waistband closure shall conform to type II, class K, style 25, size 20-line of V-B-871. The color of the button shall approximate the shade of the basic fabric.

3.2.6 Hanger loop braid. The material for the hanger loop shall be white and shall conform to type IX or type X, class 1 of MIL-B-371.

3.2.7 Slide fastener. The slide fastener shall be manufactured of polyester or nylon monofilament with an automatic lock, and shall be equal to commercial size No. 2. The tape shall have a width (each side) of 7/16 to 1/2 inch. The complete slide fastener shall not shrink more than 2 percent when tested as specified in 4.2.1. The length of the slide fastener shall be 7 inches for all sizes.

Source: https://assist.dla.mil -- Downloaded: 202640-21T23:19Z
Check the source to verify that this is the currentversion before use.

3.2.7.1 Slide fastener tape. The material for the tape shall be a blend of nylon and cotton, or polyester and cotton. The tape shall be dyed to match the shade of the basic material and shall show "good" fastness to laundering. Testing for colorfastness shall be as specified in 4.2.1.

3.2.8 Labels. Each skirt shall have a combination size identification label and an instruction label conforming to type I of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply. The coating requirements of type I shall apply.

3.2.8.1 Combination label. The combination size identification label shall conform to classes 1 and 2.

3.2.8.2 Instruction label. The instruction label shall conform to class 3. The following information should be included. Use 6 point type for body copy.

LAUNDERING INSTRUCTIONS

MACHINE WASH

- Use wash and wear cycle
- Wash with warm water, 120°F using soap or mild detergent
- DO NOT STARCH OR BLEACH
- Dry in tumble dryer at warm setting. Remove immediately at end of drying cycle.

NOTE: It is preferred that the garment be slightly damp rather than overly dried. Shape and hang on a wooden hanger.

HAND WASH

- Hand wash in warm water with soap or mild detergent
- DO NOT WRING OR TWIST
- DO NOT STARCH
- Place wet skirt on wooden hanger and hang to dry

3.3 Design. The skirt has six panels, a top-stitched center front panel, a slide fastener closure on left side and an elasticized waistband with a one button closure. The skirt is unhemmed and has an A-line silhouette.

3.4 Figures. Figure 1 and figure 2 are furnished for information only. To the extent of any inconsistencirs between the specification and the figures, the specification shall control.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:19Z
Check the source to verify that this is the currentversion before use.

3.5 Patterns. Standard patterns for use in cutting working patterns will be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns provide a seam allowance of 1/4 inch for waistband construction; 3/8 inch for waistband attachment; 1/2 inch on side front to center front panel seams, and 3/4 inch for side seams and side back to center back panel seams.

3.5.1 Pattern parts. The component parts of the skirt shall be cut from materials specified in accordance with the pattern parts listed in table I.

TABLE I. Pattern parts

Material	Pattern nomenclature	Cut parts
Polyester, linen look, knitted cloth (see 3.2.1	Center front	1
	Side front	2
	Center back	1
	Side back	2
	Waistband	1
Cotton buckram cloth (see 3.2.2)	Buttonhole reinforcement	1

3.6 Construction.

3.6.1 Stitches, seams, and stitchings. Stitch, seam, and stitching types, specified in table II, shall conform to FED-STD-751. Where two or more seam or stitch types are given for the same operation, any one of them may be used. When stitch type 401 is used, the looper (underthread) shall be on the inside of the skirt. Seam allowances shall be maintained with seams sewn so that no raw edges, runoffs, twists, pleats, puckers, or open seams will result. All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching. Seams required to be worked out that have a depth between the fold of 1/16 inch or more shall be considered a defect.

3.6.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.3 Thread breaks and ends of seams. Ends of all seams and stitchings, when not caught in other seams or stitching, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than three stitches. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

3.6.4 Buttonhole. The buttonhole shall be cut-first, eyelet-end, taper bar and shall be clean-cut and correctly positioned, with the stitching securely caught in the fabric, and the end securely tacked.

3.7 Pressing. Pressing, as required in table II, shall be performed with a heated pressing iron or machine, set at a suitable temperature for synthetics.

3.8 Manufacturing operations requirements. The skirt shall be manufactured in accordance with all operation requirements specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any basting or holding stitching used to facilitate manufacturing is permissible provided that the thread is removed or does not show on the finished skirt.

3.8.1 Shade and size marking. The component parts of the skirt shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(a) Corrosive metal fastening devices
(b) Sew-on type tickets
(c) Adhesive type tickets which discolor the material or leave traces of paper or adhesive on the material after removal of the tickets
(d) Pin tickets

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting (see 6.5). a. Spread the material on the cutting table without tension so that the knit loops of each layer of fabric all face in one lengthwise direction. Place the patterns on the fabric so that the directional lines are in the warp directions, and the arrows are pointing in the direction of the loops as indicated by figure 2. Note: The direction of the loops can be observed on the backside of the fabric. b. The cut parts from the top and bottom ply should match the pattern. c. Cut the skirts in strict accordance with the patterns furnished, which show directional lines, sizes, and notches for assembly of parts. Directional lines shall be placed in the warp direction of the material. d. Cut all basic parts of the skirt out of the same piece of material. e. Cut the braid for hanger loops (two each) of sufficient length to measure 1-1/2 ± 1/4 inches long (folded) in the finished skirt (see operation 7). f. Cut the elastic stabilizer for the applicable skirt sizes as follows:						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting (see 6.5). (cont'd)						
	Skirt stabilizer, cut Size / Length, inches 6 — 22-3/4 8 — 23-3/4 10 — 24-3/4 12 — 26-1/4 14 — 27-3/4 16 — 29-1/4 18 — 30-3/4 20 — 32-3/4 22 — 34-3/4						
	NOTE: Add one extra inch for all plus sizes.						
	g. Cut buttonhole reinforcement, (see 3.2.2).						
2.	Replacement of damaged parts.						
	Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in MIL-STD-1609, are excluded and replaced with non-defective and properly matched material.						
3.	Shade and size markings (see 3.8.1).						
	Mark or ticket all parts to insure a uniform shade and proper assembly of the skirt.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Make fronts and backs.						
	a. Starting at waistline with notches matched, stitch side fronts to center front and side backs to center back.	401	LSq-2(a)	8-12	50-2	70-2	
	b. Fold seam allowance toward the center of skirt and top stitch 5/16 ± 1/32 inch from fold on center fronts.	301	LSq-2(b)	8-12	50-2	50-2	
	c. Press back seams open.						
5.	Join front to back.						
	a. Starting at top, stitch fronts to backs leaving opening on left side.	401	SSa-1	8-12	50-2	70-2	
	b. Press side seams open.						
6.	Make skirt closure.						
	Finished appearance. The stops at the top of fastener shall be not more than 3/8 inch below waistband on the finished skirt. The welt on front skirt shall completely cover the slide fastener when slide fastener is closed and the front skirt shall overlap the back skirt slightly (with-out an outside pleat). The stitching shall not interfere with the operation of the slider and the welt shall be uniform in width.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make skirt closure. (cont'd)						
	a. Place slide fastener (chain side down) on back of skirt with the chain in line with the side seamline and stitch to opening, following the curve of the hip. Do not stretch fabric.	301	LSr-2(a) or LSs-2(a)	8-12	50-3	50-2	
	b. Turn slide fastener to its finished position and stitch 1/16 inch from folded edge of skirt through fastener tape.	301	LSr-2(b) or LSs-2(b)	8-12	50-3	50-2	
	c. Fold front opening in line with side seamline and stitch to fastener tape, forming a welt 1/2 ± 1/16 inch wide. Stitch across bottom of welt to the sideseam catching the ends of fastener tapes in the stitching. The welt stitching shall be 1/4 ± 1/16 inch from the chain and the welt shall cover the slide fastener and the stitching along back edge when fastener is closed. Do not stretch fabric.	301		8-12	50-3	50-2	
	NOTE: Prior to operation c., the left side of the fastener tape may be stitched to the front opening, following the curve of the hip.						
7.	Attach waistband, labels, and hanger loops.						
	Finished appearance. The waistband width shall be uniform. The hanger loops shall be positioned over the right sideseam and directly back of left sideseam allowance. The labels shall be positioned side by side on center of back with the size and identification label on the left side (when skirt is worn). The stitching shall not be through the label printing.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Attach waistband, labels, and hanger loops. (cont'd)						
	a. Attach buttonhole reinforcement piece (see 3.2.2) to elastic, by overlapping 7/8 to 1 inch on the elastic and stitch with one row of stitching 1/8 to 3/16 inch from end of stabilizer and one row of stitching 1/8 to 3/16 inch from end of reinforcement piece. The other end of the buttonhole reinforcement piece should be caught in the 1/4 inch seam of waistband end.	301	LSa-1	8-12	50-2	50-2	
	b. Stitch elastic waistband stabilizer to seam allowance of waistband 1/16 to 1/8 inch from edge of stabilizer, from end to end.	301	LSa-1	6-8	50-2	50-2	
	c. Overedge stitch the opposite side of the waistband.	502 or 503	EFd-1	6-10	70-2	70-2	
	d. Position seam allowance of top of skirt and waistband, with the raw edges even. Stitch stabilizer to skirt, through waistband, matching notches, and easing in the fullness.	401	BSf-2(a)	8-12	50-2	70-2	
	e. Fold the waistband in half lengthwise, and stitch both ends of waistband 1/4 inch from raw edge. NOTE: The edge of the elastic stabilizer shall be even with folded waistband.	301	SSa-1	8-12	50-2	50-2	
	f. Turn the two corners and force out points (Trim ends if necessary). Stitch the overedged side of waistband through skirt, from one end of side opening to other end; catching the hanger loops and the labels. NOTE: The stitching at the outside of the skirt shall be even with waistband, and the stitching shall not catch the outside of waistband.	301	BSf-2(b)	8-12	50-2	50-2	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make buttonhole. Finished appearance. The buttonhole shall be eyelet and taper bar. The inside edge of the eyelet shall be 3/8 to 1/2 inch from end of waistband. The buttonhole shall be centered (1/4 inch off center tolerance) on waistband. The buttonhole shall finish 1/2 to 5/8 inch in length. When a purl type buttonhole is used, the purling shall be on the outside of the waistband.	Buttonhole		52-56	50-2	50-2	
9.	Attach button. a. Mark or gage position for the button on the waistband to correspond with buttonhole.						
	b. Sew the button on the mark indicated at end of waistband.	Hand		button 3 per button double thread	50-3		
		Machine: 101 or 301		14-16 per button	50-3		
				14-16 per button	50-3	50-3	
10.	Clean skirt. Trim thread ends and remove all loose threads, spots, stains, and shade tickets.						
11.	Press skirt. a. Press the entire skirt. b. Remove gloss marks, wrinkles, and impressions from thread, tickets, or seams.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

3.9 Measurements. The unhemmed skirt shall conform to the finished measurements shown in table III.

TABLE III. Finished measurements in inches

Sizes	6	8	10	12	14	16	18	20	22	Tolerance
1/2 Waist 1/	11-3/4	12-1/4	12-3/4	13-1/2	14-1/4	15	16	17	18	± 1/4
1/2 Waist (plus sizes)		12-3/4	13-1/4	14	14-3/4	15-1/2				± 1/4
1/2 Hip 2/	18	18-3/4	19-1/2	20-1/4	21	21-3/4	22-3/4	23-3/4	24-3/4	± 1/2
1/2 Hip (plus sizes)		19-1/4	20-1/2	21-1/4	22	22-3/4				
1/2 Sweep 4/	22-3/4	23-1/2	24-1/4	25	25-5/8	26-1/2	27-1/2	28-1/2	29-3/8	± 1/2
1/2 Sweep (plus sizes)		24	25-1/4	26	26-3/4	27-1/2				± 1/2
Lengths (unhemmed) 3/										
Short	26-1/2	26-3/4	27	27-1/4	27-1/2	27-3/4	28	28-1/4	28-1/2	± 1/2
Regular	28	28-1/4	28-1/2	28-3/4	29	29-1/4	29-1/2	29-3/4	30	± 1/2
Long	29-3/4	30	30-1/4	30-1/2	30-3/4	31	31-1/4	31-1/2	31-3/4	± 1/2

NOTE: Place the buttoned skirt flat upon a table and measure as follows:

1/ Measure from folded edge to folded edge at center of waistband.

2/ Measure across skirt at bottom of side opening, from folded edge to folded edge, shorts 1/2 inch below side opening, Regulars 1 inch below side opening, and Longs 1-1/2 inches bwlow side opening.

3/ Measure length from the lower edge of the waistband at center front to bottom edge.

4/ Measure across bottom from folded edge to folded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. The finished skirt shall conform to the quality of the product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, the contractor shall furnish a certificate of compliance stating that the elastic waistband stabilizer is Ban-rol XL-91T, or if an "or equal" stabilizer is used that it conforms in all respects to that approved by the contracting officer as required in 3.2.3. A certificate of compliance shall also be furnished indicating that all components of the slide fastener comply with the requirements specified in 3.2.7, except shrinkage. Testing shall be performed on the component listed in table IV for the characteristic shown therein. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet the test requirement specified. The sample size shall be as specified below and the sample unit shall be one slide fastener.

Lot size	Sample size
800 or less	2
801 to 22,000 inclusive	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

TABLE IV. Component test

Component	Characteristic	Requirement paragraph	Test method
Slide fastener	Shrinkage	3.2.7	4.2.2
Slide fastener tape	Colorfastness to: Laundering	3.2.7.1	5610

4.2.2 End item examination. Sampling and examination of the end item shall be performed in accordance with MIL-STD-1609. This skirt shall be classified as a Dress ("D") skirt.

4.3 Test methods.

4.3.1 Slide fastener shrinkage test. The completed slide fastener shall be tested for shrinkage as follows.

4.3.1.1 Apparatus and materials. The following apparatus and material are required for laundering:

(a) Automatic washing machine (see 6.3)
(b) Automatic dryer (see 6.3)
(c) AATCC Standard Detergent 124 or equivalent
(d) Dummy pieces for ballast - 3 by 3 feet hemmed pieces of type 128 cotton sheeting which, when added to test slide fastener, will make a 4-pound load.

4.3.1.2 Preparation of specimens. Each slide fastener sample shall be exposed to Standard Atmospheric Conditions for Testing as specified in FED-STD-191 until equilibrium is reached. The chain shall be closed and the specimen marked as follows:

(a) The closed slide fastener shall be laid flat without tension on a smooth surface.
(b) Two lines shall be marked 5 inches apart crosswise (from selvage edge to back of chain) on both tapes with laundry-proof ink.

4.3.1.3 Procedure. The test specimens shall be subjected to one laundering cycle using the apparatus specified in 4.3.1.1 and the following procedures for laundering and drying. The closed slide fastener test specimens shall be placed in the washer with dummy pieces (4.3.1.1.d) bringing the washing load to 4 pounds. Fill to the full water level of the washer with water of a hardness not to exceed 50 parts per million and at a temperature of 140 ± 5°F. Add 140 g of detergent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

Set the washer for a 12-minute cycle on the Normal setting. Allow the washing to proceed automatically through the final spin cycle. Remove the load immediately at the completion of the final spin and separate the specimens and dummy pieces when required, if tangled. Place the complete washed load in the dryer and dry at the Normal cycle and at a setting which generates a temperature rated 140 to 160°F. Operate the dryer until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. The laundered and dried slide fasteners shall be exposed again to Standard Atmospheric Conditions for Testing as specified in FED-STD-191 until equilibrium is reached.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each skirt shall be folded in evenly from each side in a lengthwise fold resulting in a bottom width of 11 inches. The top of the skirt shall then be folded over towards the bottom so that the completely folded skirt measures approximately 14 by 11 inches. Each folded skirt shall be unit packed in a close-fitting clear polyethylene film bag having a thickness of 0.0015 inch (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4-inc diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Commercial. Skirts shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing. Sixty skirts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, alternately reversed top to bottom, two in length, one in width and thirty in depth. Inside dimensions of each container shall approximate 23 inches in length, 14-1/2 inches in width and 14-1/2 inches in depth. Approximate dimensions are furnished as a guide only. A fiberboard pad of the same material as the box liner shall be used as a separator and placed over the skirts after the first thirty (2 stacks of 15) have been packed. The pad shall measure approximately 1/2-inch less than the length

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

and width dimensions inside the box liner. Two diagonal corners of the pad shall be clipped to provide finger holes. Alternatively, in lieu of the box liner and separator pad, a full height "H" divider of the same material as the box liner may be used. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract, or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B packing. Sixty skirts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, alternately reversed top to bottom, two in length, one in width and thirty in depth. Inside dimensions of each container shall approximate 23 inches of length, 14-1/2 inches in width and 14-1/2 inches in depth. Approximate dimensions are furnished as a guide only. A fiberboard pad of the same material as the box liner shall be used as a separator and placed over the skirts after the first thirty (2 stacks of 15) have been packed. The pad dhsll measure approximately 1/2-inch less than the length and width dimensions inside the box liner. Two diagonal corners of the pad shall be clipped to provide finger holes. Alternatively, in lieu of the box liner and separator pad, a full heigh "H" divider of the same material as the box liner may be used. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636 except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.2.3.

5.2.3 Commercial packing. Skirts, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

5.3.1 Polyethylene bagged unit packs. Polyethylene bagged unit packs shall have the required identification information legibly printed or stamped in black direcly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantities and sizes contained therein.

6. NOTES

6.1 Intended use. The skirts are intended for use by female Military personnel of the Department of the Army as a component of the summer dress uniform.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification
(b) Sizes required (see 1.2).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 Apparatus. The recommended apparatus for test procedure in 4.2.2.4 subparagraphs (a) and (b) are:

(a) Kenmore Automatic Washing Machine Model 600, or similar washing machine. In case of dispute, the Kenmore Model 600 shall be used.
(b) Kenmore Automatic Dryer Model 600, or equivalent.

6.4 Sample and shade samples. For access to sample and shade samples of the material, address the procuring activity issuing the invitation for bids.

6.5 Clothing manufacturers are alerted to the fact that knit fabrics may exhibit some differential in stability from piece to piece and lot to lot. Clothing manufacturers are cautioned to be cognizant of the stability characteristics of the pieces before initiation of cutting.

6.6 Supersession data. This specification includes the requirements of Purchase Description LP/P DES 4-76, Skirt, Woman,s Summer, Warp Knit, dated 10 March 1976.

Source: https://assist.dla.mil -- Downloaded: 202610-21T23:19Z
Check the source to verify that this is the current version before use.

Custodian:

Army - GL

Review activities:


Army - MD
DLA - CT

Preparing activity:


Army - GL

Project No. 8410-0429


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

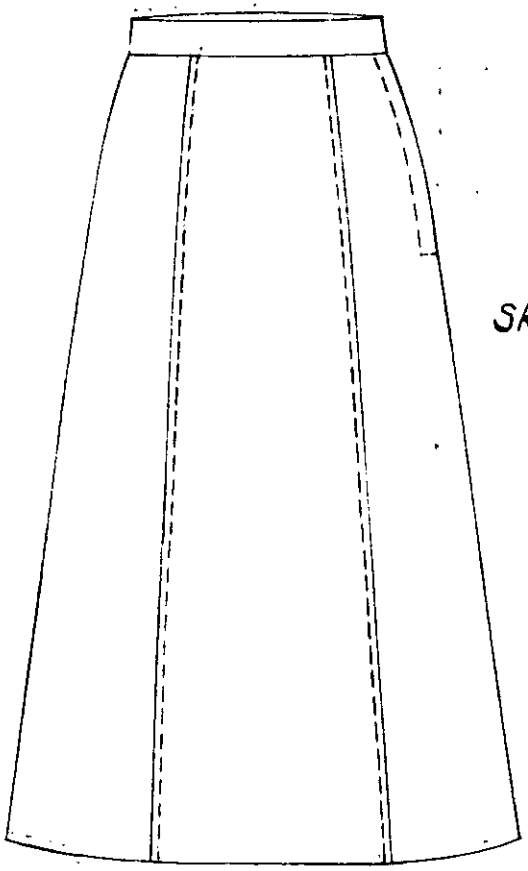

FRONT

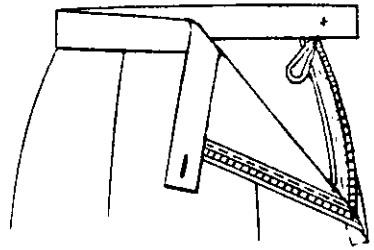

SKIRT CLOSURE TURNED BACK
TO SHOW ZIPPER
ATTACHMENT

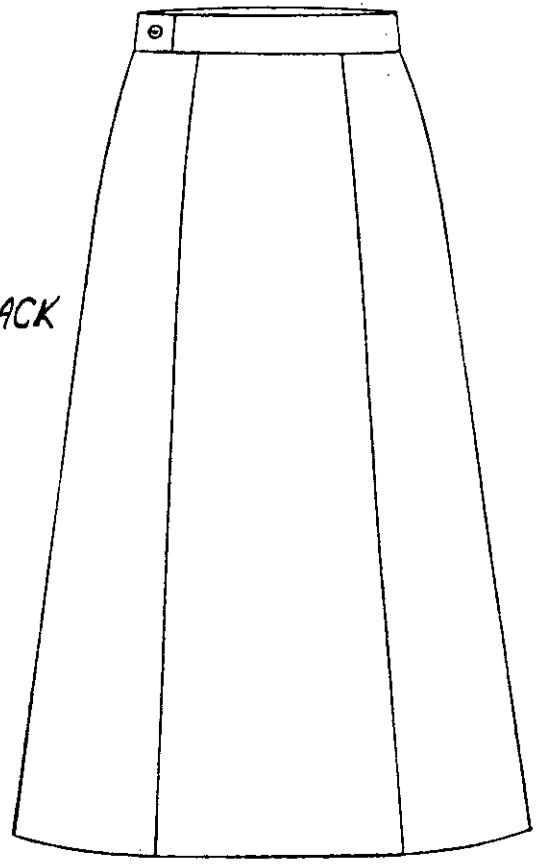

BACK

FIG. 1 SKIRT, WOMAN'S, SUMMER, WARP KNIT

E-1-1282 A

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

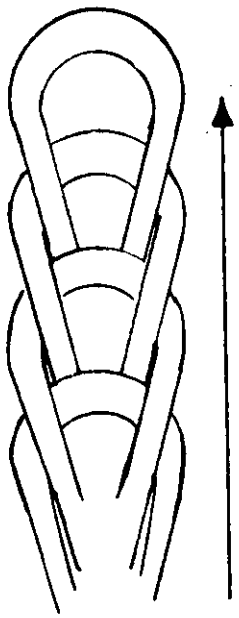


FIG. 2 SCHEMATIC DIAGRAM DEMONSTRATING DIRECTION OF LOOPS (BACKSIDE OF FABRIC SHOWN)

A-2-1-1370

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

DRDNA-ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S. MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

NATICK OP 1 AUG 78
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-S-43996(GL) - Skirt, Woman's, Summer, Warp Knit

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:19Z
Check the source to verify that this is the current version before use.