(See 6.6)

MILITARY SPECIFICATION

TUNIC, WOMAN'S, RIB KNIT

1. SCOPE

1.1 Scope. This specification covers a tunic made of polyester rib knit material.

1.2 Classification. The tunic shall be of one type in the following sizes as specified (see 6.2):

Schedule of sizes

Short	Regular	Long
6	6	6
8	8	8
10	10	10
12	12	12
14	14	14
16	16	16
18	18	18
20	20	20
22	22	22

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Command, Natick, MA 01760, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8410

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

UU-P-268	-	Paper, Kraft, Wrapping
DDD-L-20	-	Label: for Clothing, Equipage, and Tentage (General Use)
DDD-T-86	-	Tape, Textile; Cotton, General Purpose (Unbleached, Bleached, or Dyed)
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-T-43548	-	Thread, Polyester, Cotton-Covered
MIL-C-43983	-	Cloth, Knitted, Polyester, Rib Knit

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-1491	-	Glassary of Knitting Imperfections

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Technical Manual of the American Association of Textile Chemists and Colorists

(Application for copies of the AATCC Manual should be addressed to the American Association of Textile Chemists and Colorists, Research Triangle Park, Post Office Box 12215, Durham, NC 27709.)

NATIONAL MOTOR FREIGHT CLASSIFICATION ASSOCIATION, INC. AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, NW, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riversde Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Guide sample. A sample, when furnished, is solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.2 Materials.

3.2.1 Basic material. The basic material for the tunic shall be polyester, rib knit cloth conforming to MIL-C-43983.

3.2.2 Collar material. The material for the collar shall be made from polyethylene glycol terephthalate fiber. The yarn shall be regular tenacity, semi-dull, nominal 150 denier which has been texturized by the false twist or friction twist methods. The yarn shall be the same yarn and from the same dye lot as used in the tunic material.

3.2.2.1 Physical requirements. The finished collar shall conform to the following requirements when tested as specified in 4.2.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

Weight, ounces per square yard (minimum)	15.0
Wale ribs/inch	8-9
Courses/inch (minimum)	29

3.2.2.2 Knit. The knit collar shall be manufactured using four yarns knitting as one. The knit design shall be as shown in figure 2 (see 4.2.1).

3.2.2.3 Colorfastness. The dyed and finished collars shall show fastness to laundering (after 3 cycles), crocking, perspiration, sublimation, and light equal to or better than the basic material.

3.2.2.3.1 Matching. The color of the finished collar shall match the standard sample under artificial daylight having a color temperature of 7500 Kelvin and shall be a good approximation to the standard sample under incandescent lamplight at 2800 Kelvin.

3.2.2.4 Dimensional measurements of collar. The dimensional measurements of the collar (relaxed state) required to manufacture the tunic shall be as follows:

Width in inches: (all sizes)	4 ± 1/4
Length in inches:	
Sizes:	
6-8-10	13 ± 1/4
12-14-16	13-1/2 ± 1/4
18-20-22	14 ± 1/4

NOTE: One long edge of each collar shall be a selvedge edge which shall serve as the outer edge when fabricated.
Testing shall be as specified in 4.2.1.

3.2.2.5 Finish. The collar shall be washed or dry cleaned, and steamed in the open atmosphere prior to fabrication. The character of the finish shall be equal to that of the standard sample.

3.2.3 Thread. The thread shall be ticket number 70, cotton-covered polyester thread conforming to MIL-T-43548.

3.2.4 Stay tape. The cotton tape for staying the back shoulder shall conform to type I, class 1, 1/4 inch width of DDD-T-86. The tape shall be preshrunk.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.2.5 Slide fastener. The slide fastener shall be manufactured of polyester or nylon monofilament with an automatic lock, and shall be equal to commercial size No. 2. The complete slide fastener shall not shrink more than 2 percent when tested as specified in 4.2.1. The length of slide fastener shall be 10 inches for all sizes.

3.2.5.1 Slide fastener tape. The material for the tape shall be a blend of nylon and cotton, or polyester and cotton. The tape shall have a width of 7/16 to 1/2 inch. The tape shall be dyed to match the shade of the basic material and shall show "good" fastness to laundering (after 3 cycles) when tested as specified in 4.2.1.

3.2.6 Labels. Each tunic shall have a size label and a combination identification-instruction label conforming to type I of DDD-L-20. The fastness to laundering requirements of DDD-L-20 shall apply.

3.2.6.1 Size label. The size label shall conform to class 2.

3.2.6.2 Combination label. The combination identification-instruction label shall conform to classes 1 and 3, with the item description, contract number and contractor's name preceeding the body of instructions. The combination label shall conform to the coating requirements of class 3 label. The body of instructions shall be as follows:

Hand or machine wash in lukewarm suds.

Rinse thoroughly.

Do not Wring or Twist.

Drip-dry on non-rusting hanger, or tumble dry at low setting.

Touch up with warm iron on reverse side if necessary.

3.3 Design. The tunic is an easy fitting garment with a hemmed bottom, long hemmed sleeves, a 1-5/8 inch turtleneck collar and a back zipper which closes to within 1/4 inch of the fold at the top of the turtleneck (see figure 1).

3.4 Figures. Figure 1 is furnished for information only. To the extent of any inconsistencies between the specification and the figure, the specification shall control. Figure 2 is furnished to show the actual knit design required for the collar (see 3.2.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.5 Patterns. Standard patterns to be used to cut working patterns shall be furnished by the Government. The working patterns shall be identical to the Government patterns which shall not be altered in any way. The patterns indicate size, directional lines, placement of slide fastener, and a collar (working) shaper (group graded as marked). The seam allowances are 1/4 inch for all operations.

3.5.1 Pattern parts. The component parts of the tunic shall be cut from the material specified in accordance with pattern parts listed in table I.

TABLE I. Pattern parts

Material	Nomenclature of parts	Cut parts
Knitted, polyester, rib knit (see 3.2.1)	Front	1
	Back	1
	Sleeve	2
	Collar (working) shaper	

3.6 Construction.

3.6.1 Stitches, seams and stitching. Stitch, seam, and stitching types as specified in table II shall conform to FED-STD-751. Whenever two or more methods of seams or stitches are given for the same part of the operation, any one of them may be used. When stitch type 401 is used, the looper (under thread) shall be on the inside of the tunic. Seam allowances shall be maintained with seams sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams will result (see 6.5). All seams shall start and finish evenly. Thread tension shall be maintained so that there is no tight or loose stitching.

3.6.2 Overedge stitching. The gage of the overedge stitching (stitch type 504 or 505) specified for joining shoulders and side seams, closing and setting the sleeves, and stitching the collar to the tunic shall be 3/16 $\pm$ 1/16 inch. The guide and knives for the overedge machines shall be set to trim only the ravelled edges of the fabric.

3.6.3 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

3.6.4 Thread breaks and ends of seams. Ends of all seams and stitching, when not caught in other seams, shall be backtacked not less than 1/4 inch. The ends of a continuous line of stitching, except on labels, shall be overlapped not less than 1/2 inch. The ends of label stitching shall be overlapped not less than three stitches. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch. Skipped stitches or thread breaks on 401 stitch type may be repaired by using 301 stitch type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.7 Pressing. As required in table II, pressing shall be performed with a heated pressing iron, set at a suitable temperature for synthetics.

3.8 Manufacturing operations requirements. The tunic shall be manufactured in accordance with all operation requirements as specified in table II. The contractor is not required to follow the exact sequence of operations listed. Any basting or holding stitching used to facilitate manufacturing is permissable provided that the thread is removed or does not show on the finished tunic.

3.8.1 Shade and size marking. The component parts of the tunic shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

(a) Metal fastening devices.

(b) Sew-on type tickets.

(c) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting. a. Cut the tunic in strict accordance with patterns furnished which show directional lines, sizes, and all notches for proper assembly of all parts. NOTE: The notches on the pattern may be altered by the contractor to resemble half moons to minimize runs in the fabric. b. Cut all parts of the garment out of one piece of material. NOTE: 1. Extreme caution should be exercised when cutting the slit for the slide fastener at the center back. The designated length of the opening shall be in accordance with the mark on the pattern. NOTE: 2. During the processing and finishing of the rib knit fabric, a crease may be set into the fabric. Care should be excercised during the spreading and cutting so that the crease does not appear in the body of the tunic. c. If the collar material is received from the collar manufacturer in roll form, the collars shall be cut in accordance with the lengths specified in 3.2.2.4.						
2.	Replacement of defective components. During the spreading, cutting, and manufacturing process, components having material defects or damages that are classified in 4.2.2.1 shall be removed from production and replaced with non-defective and properly matched components.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Shade markings. (see 3.8.1)						
4.	Join shoulders.						
	a. Stitch 1/4 inch tape on each back shoulder seam from the armhole to neck edge and along neck edge to slide fastener opening. The line of the stitching shall be 1/8 inch from the raw edges of shoulder holding tape taut to prevent material from stretching.	301 or 401	SSa-1	6-8	70	70	
	b. Join fronts to backs at shoulder.	504 or	SSa-1	10-14	70	70	
5.	Attach collar.						
	Finished appearance. The collar shall be carefully joined to the tunic to provide a smooth collar without pleats, raw edges, twisting, or stretching. The outeredge of the collar shall always be the finished edge of the collar material. The side of the collar with the tucked stitches shall be the face and shall appear on the outside of the tunic when the collar is turned down.						
	a. Steam sponge the cut collar and dry.						
	b. Cut unfinished edge of collar in accordance with furnished collar (working) shaper.						
	c. Seam collar over neck line catching the size label in the seaming. The size label shall be positioned 1 ± 1/8 inch to the left of the slide fastener (as worn). See operation 12 for optional method of attaching labels. Shoulder seams should face toward back of tunic.	504 or 505	SSa-1	10-14	70	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Attach slide fastener.						
	Finished appearance. The slide fastener shall be smooth and flat. The stops at the top of fastener shall be not more than 1/4 inch below fold of collar. The stitching shall not interfere with the operation of the slider.						
	a. Fold collar back at center back 1-5/8 ± 1/8 inch. With edge of slide fastener tape even with the cut opening of center back and the top stop of the slide fastener 1/4 inch from the folded edge of the collar, place a 1/4 inch bartack below bottom stop of slide fastener catching both sides of tape.	Bartack	-	28 per bartack	70	70	
	b. Stitch slide fastener to tunic opening 1/8 inch from chain, through all plies, (catching the excess folded tape) and backtacking the end of the slide fastener stitching. Do not stretch fabric.	301	SSa-1	10-14	70	70	
	c. Trim excess collar fabric, turn slide fastener to its finished position and stitch 1/16 inch from the edge of the tape through fastener tape and under part of the collar only. The stitching shall be the length of the under part of the collar, and shall not be visible or catch the top portion of the collar.	301	-	10-14	70	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
7.	Assemble fastener.						
	a. Attach slider and with the ends of the chain even, backtack (running tack) both sides of the chain of the slide fastener, closing the bottom opening.	301	SSa-1	12-14	70	70	
	b. Trim bottom end of slide fastener tape (if necessary) to finish 1 ± 1/8 inch and with the ends of the chain even, staple the fastener together at bottom with the staple overlapping the scoops. The staple shall be positioned 1/4 ± 1/16 inch below the running tack with the clinched part of the staple toward the wearer.						
8.	Sew in sleeves.						
	Position and set sleeves to armholes as indicated by notches and overedge stitch the armhole catching all plies of material. The fullness shall be distributed evenly between notches on cap of sleeve and from notches on back of sleeve to underarm seam. The shoulder seams shall face towards the back of the tunic.	504 or 505	SSa-1	10-14	70	70	
9.	Join sides and underarm seams.						
	Join sides and undersleeves by seaming in one continuous operation. Armhole seam shall meet at the underarm seam (1/8 inch tolerance). The combination label shall be caught in the left side seam (as worn) 3 ± 1/4 inches from the finished hem of the tunic.	504 or 505	SSa-1	10-14	70	70	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Hem sleeves.						
	Fold bottom of sleeve to inside and blindstitch. The hem shall finish 1-3/4 ± 1/8 inch. The portion of the underarm seam caught in the hem shall be turned towards the back of the sleeve (as worn).	103	EF1-1	3-4 partially penetrating the fabric	70		
11.	Hem bottom.						
	Fold bottom hem to inside of tunic and blindstitch. The hem shall finish 1-3/8 ± 1/8 inch. The portion of the side seams caught in the hem shall be turned towards the back of the tunic.	103	EF1-1	3-4 partially penetrating the fabric	70	70	
12.	Attach labels (optional method).						
	Position the labels as specified in operations 5c and 9, and stitch edge of labels to seam allowances backtacking the ends of the label stitching.	301	SSa-1	10-14	70	70	
13.	Clean tunic.						
	Trim all ends of thread and remove all loose threads. Remove all spots, stains, and visible shade markings.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
14.	Press tunic. a. Press sleeve hems, bottom hem, and the remainder of the tunic lightly, with moderately heated iron set on a synthetic setting, to remove any wrinkles or other marks. Do not use a steam iron, pressing machine (steam or otherwise), or steam table. Do not crease sleeves, side or shoulder in the pressing. NOTE: Special pressing forms may be necessary for pressing the tunic. The ease in the underarm area prevents this garment from being properly pressed flat. b. Fold tunic neatly for packaging (see section 5).						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.9 Measurements. Finished measurements shall be as shown in table III.

TABLE III. Finished Measurements (in inches)

Sizes	6	8	10	12	14	16	18	20	22	Tol.
1/2 bust 1/	18-3/8	18-7/8	19-3/8	19-7/8	20-3/8	21-1/8	21-7/8	22-7/8	23-7/8	±1/2
1/2 hip sweep 2/	19-3/8	19-7/8	20-3/8	20-7/8	21-3/8	22-1/8	22-7/8	23-3/8	24-7/8	±1/2
Back length 3/										
Short	26	26-1/4	26-1/2	26-3/4	27	27-1/4	27-1/2	27-3/4	28	±1/4
Regular	27-1/4	27-1/2	27-3/4	28	28-1/4	28-1/2	28-3/4	29	29-1/4	±1/4
Long	28-7/8	29-1/8	29-3/8	29-5/8	29-7/8	30-1/8	30-3/8	30-5/8	30-7/8	±1/4
Sleeve length 4/										
Short	20-3/4	21	21-1/4	21-1/2	21-3/4	22	22-1/4	22-1/2	22-3/4	±1/4
Regular	22	22-1/4	22-1/2	22-3/4	23	23-1/4	23-1/2	23-3/4	24	±1/4
Long	23-3/8	23-5/8	23-7/8	24-1/8	24-3/8	24-5/8	24-7/8	25-1/8	25-3/8	±1/4

The tunic shall be laid flat on a table and measured as follows:

1/ half-bust - Measure from folded edge to folded edge at underarm seam.

2/ half hip sweep - Measure from folded edge to folded edge at bottom.

3/ back length - Measure from top folded edge of collar along center back to bottom edge.

4/ sleeve length - Measure from shoulder seam along outside folded edge to bottom of sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

3.10 Workmanship. The finished tunic shall conform to the quality of the product established by this specification. As a final step in the contractor's production control plan, before formation of the lot, each tunic with it's slide fastener closed, shall be examined on an inspection table. A tunic containing a selected major defect shall not be included in the end item lot. The selected major defects are those defects listed in 4.2.2.1 and 4.2.2.2 identified by an asterisk (*). The occurence of defects other than selected major defects shall not exceed the limits established by the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Quality conformance inspection. Sampling and inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. In addition, testing shall be performed on the components listed in table IV for the characteristics shown therein. Unless otherwise indicated, testing shall be conducted in accordance with FED-STD-191. All test reports shall contain the individual values used in expressing the final result. The lot shall be unacceptable if one or more sample units fail to meet any of the test requirements specified. The lot size and sample size shall be as specified below. The sample unit for testing the collar material shall be 3 yards full width. The sample unit for testing the slide fastener shall be one slide fastener.

Lot size	Sample size
800 or less	2
801 to 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

TABLE IV. Component testing

Component	Characteristic	Requirement paragraph	Test method
Collar material	Polyester material identification	3.2.2	1/
	Tenacity	3.2.2	1/
	Luster	3.2.2	1/
	Yarn denier	3.2.2	1/
	Texturization	3.2.2	1/
	Weight	3.2.2.1	5041
	Wale ribs/inch	3.2.2.1	5070
	Courses/inch	3.2.2.1	5070
	Knit design	3.2.2.2	1/
	Colorfastness to:		
	Laundering (after 3 cycles)	3.2.2.3	5610
	Crocking	3.2.2.3	5651
	Perspiration	3.2.2.3	5680
	Sublimation	3.2.2.3	5642
	Light	3.2.2.3	5660
	Width	3.2.2.4	actual measurement 2/
	Length	3.2.2.4	actual measurement 2/
Slide fastener	Material identification	3.2.5	1/
	Size	3.2.5	1/
	Shrinkage	3.2.5	4.3.1
	Length	3.2.5	actual measurement
	Slide fastener tape:		
	Material identification	3.2.5.1	1/
	Width	3.2.5.1	actual measurement
	Colorfastness to laundering (after 3 cycles	3.2.5.1	5610

1/ Unless otherwise specified, a certificate of compliance is required and will be acceptable for the stated requirement.

2/ The collar measurement shall be taken while the collar is laid flat and relaxed on a table and before it has been cut to match the shaper.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

4.2.2 End item examination. After formation of the lot, the tunic shall be examined for the defects listed in 4.2.2.1 through 4.2.2.3 and in accordance with the acceptable quality levels (AQLs) specified in 4.2.2.4 except that if one or more of the defects found in the sample is an asterisk (*) defect, it shall be cause for rejection of the lot. The sample unit shall be one finished tunic.

4.2.2.1 General defects.

Defect	Classification Major	Minor A	Minor B
Pressing			
a. Omitted		X	
b. Burned or scorched	X		
c. Gloss, wrinkles, or creases			X
d. Sleeve side or shoulder creased			X
e. Overpressed, e.g., seam impressing	X		
f. Creases in front underarm area		X	
Material defects and damages			
a. Hole, cut, tear, mend, run, or dropped stitch 1/	X		
b. Slubs (more than twice the size of the normal diameter of the yarn) 1/		X	
c. Snag 1/	X		
d. Barre or cockled fabric 1/		X	
e. Needle chew	X		
f. Thin place or mend 1/	X		
g. Permanent crease in fabric	X		
Shaded parts			
Variation in shade within a part or between parts	X		
Cleanness			
a. Spot or stain, clearly noticeable:			
- on outside	X		
- on inside			X

1/ For knitted fabric imperfection definitions, see MIL-STD-1491.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Cleanness (cont'd)			
b. Any marking clearly visible on outside	X		
c. One or more marking tickets not removed			X
d. Thread ends not trimmed, or loose threads not removed from tunic			X
e. Visible basting thread not removed			X
Component and assembly			
a. Any component part or required operation omitted or added (unless otherwise classified herein)	X		
b. Any operation not performed as specified (unless otherwise classified herein)			X
Cutting			
Any component part not cut in conformance with directional lines indicated on patterns or not cut in accordance with specification requirements	X		
Seams and stitching			
a. Accuracy of seaming and stitching:			
1. Seams or part twisted, puckered, or pleated	X		
2. Part of material caught in unrelated operation or stitching:			
- caught in up to and including 1/4 inch of stitching		X	
- caught in more than 1/4 inch of stitching	X		
3. End of stitching when not caught in other seams or stitching backtacked less than 1/4 inch			X
4. Stitching overlapping end of thread break less than 1/2 inch			X
5. Ends of a continuous line of stitching overlapped less than three stitches on labels or less than 1/2 inch on all other continuous stitching			X
6. Raw edge more than 1/4 inch long			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
b. Gage of stitching and seam allowances:			
1. Irregular, i.e., unevenly gaged or corresponding stitchings not uniformly gaged (to be scored only when condition exits along major portion of seam)		X	
2. Width not as specified or not within range of gage specified or varies more than 1/16 inch when no range is specified			X
c. Stitches broken or missing:			
1. On all stitching except overedging:			
- up to 1/4 inch inclusive			X
- more than 1/4 inch to 1 inch inclusive		X	
- more than 1 inch	X		
2. On overedging: (see "open seam" classification)			
d. Skipped stitches or runoff stitches:			
1. On joining seam - use "open seam" classification			
2. On overedge stitching, more than 1 inch		X	
e. Seam and stitch type:			
- seam type or stitch type not as specified		X	
- looper thread of 401 stitch type finishing on outside of tunic	X		
f. Stitches per inch (to be scored only when condition exists on major portion of seam):			
- less than minimum or more than maximum specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Seams and stitching (cont'd)			
g. Stitch tension:			
1. Loose tension resulting in a loose seam	X		
2. Loose tension (exposed loops of top or bottom threads) more than 1/2 inch in length			X
3. Tight tension (stitches break when strain is applied in the direction of the seam of stitching)		X	
h. Open seam: (on overedge stitching and joining seams)			
- up to 1/4 inch, inclusive			X
- more than 1/4 to 1/2 inch inclusive		X	
- more than 1/2 inch	X		
NOTE: One or more broken or two or more continuous skipped or runoff stitches on joining seams constitutes an open seam.			
Labels			
Size or combination (identification and instruction) label:			
a. Omitted, incorrect, or illegible		X	
b. Not positioned or attached as specified		X	

4.2.2.2 Detailed defects applicable to specific parts.

Defect	Classification Major	Minor A	Minor B
Collar			
a. Outeredge of collar is not the finished edge of the collar material	(*)		
b. Not smooth, has pleat(s), is twisted or stretched	(*)		
c. Collar at center back folded less than 1-5/8 inches or more than 1-7/8 inches		X	
d. Face of collar (tucked stitches) on inside when collar is turned down	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

Defect	Classification Major	Minor A	Minor B
Sleeves			
a. Fullness not distributed evenly	X		
b. Underarm seam out of line at side seam:			
- 1/8 inch to 3/16 inch		X	
- more than 3/16 inch	X		
Slide fastener			
a. Slide fastener not positioned as specified		X	
b. Slide fastener does not function properly, pull detaches, slider binds or catches, or chain unmeshes	X		
c. Stops at top of fastener are more than 1/4 inch below fold of collar		X	
d. Slide fastener pull tab not on outside of tunic		X	
e. Slide fastener tapes wavy or puckered (too tight or too full)		X	
f. Backtack (running tack) or staple omitted at bottom of slide fastener tape	X		
g. Slide fastener tape stitched too close to chain not permitting slider to move freely		X	
h. Staple not positioned 1/4 $\pm$ 1/16 inch below running tack			X
i. Clinched part of staple facing tunic		X	
Hems			
a. Sleeve hem less than 1-5/8 inches or more than 1-7/8 inches wide		X	
b. Bottom hem less than 1-1/8 inches or more than 1-3/8 inches wide		X	
c. Not of uniform width, i.e., narrow or wider in places		X	
d. Blindstitching omitted, or shows through to outside of tunic	X		
Seams			
a. Underarm and shoulder seam(s) not facing toward back of tunic			X
b. Stay tape omitted from shoulder seam(s)	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

4.2.2.3 Size measurements.

Half bust Half hip sweep Back length Sleeve length	Any measurement deviating from the nominal dimensions and tolerance specified in table III shall be scored as a defect.
Equal length of sleeves	Sleeves unequal in length by more than 1/4 inch shall be scored as a measurement defect.

4.2.2.4 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

	AQL	Inspection level
For defects listed in 4.2.2.1 and 4.2.2.2 (general and detailed defects):		III
Major	1.5	
Major and Minor A (combined)	6.5	
Total (Major, Minor A and Minor B combined)	15.0	
For defects listed in 4.2.2.3 (size measurements):		S-3
One class	4.0	

4.2.3 Packaging inspection. An examination shall be made to determine that the preservation-packaging, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

Examine	Defects
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling, improper taping, open and noncontinuous heat sealed seams and closure of polyethylene bag. Incorrectly fabricated bag. Alternative closure of the polyethylene bag not provided with tuck or reverse flap. Omission of vent hole in polyethylene bag. Bulged or distorted container.
Content	Number of tunics per shipping container is more or less than required. 1/ Size shown on one or more tunics not as specified on shipping container. 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.3 Methods of test.

4.3.1 Slide fastener shrinkage test. The completed slide fastener shall be tested for shrinkage as follows:

4.3.1.1 Preparation of specimens. Each slide fastener shall be exposed to Standard Atmospheric Conditions for Testing Textiles as specified in Section 4 of FED-STD-191 until equilibrium is reached. The chain shall be closed and the specimens marked as follows:

(a) The closed slide fastener shall be laid flat without tension on a smooth surface.

(b) The back of the slide fastener shall be marked with two lines 5 inches apart using laundry-proof ink. Both marks shall extend completely across the back of the slide fastener.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

4.3.1.2 Procedure. Test specimens shall be subjected to one laundering cycle using the apparatus specified in 4.3.1.4 and the following procedures for laundering and drying. The closed slide fastener test specimens shall be placed in the washer with dummy pieces (4.3.1.4.d) bringing the washing load to 4 pounds. Fill to the full water level of the washer with water of a hardness not to exceed 50 parts per million and at a temperature of 140 ± 5°F. Add 140 grams of detergent. Set the washer for a 12 minute cycle on the Normal setting. Allow the washing to proceed automatically through the final spin cycle. Remove the load immediately at the completion of the final spin and separate the specimens and dummy pieces when required, if tangled. Place the complete washed load in the dryer and dry at the Normal cycle and at a setting which generates 140 to 160°F. Operate the drying until the load is dry and continue tumbling 5 minutes with the heat turned off (cool-down cycle). Remove the load immediately after the machine stops. The laundered and dried slide fasteners shall be exposed again to Standard Atmospheric Conditions for Testing Textiles until equilibrium is reached.

4.3.1.3 Evaluation. The shrinkage shall be evaluated as follows:

(a) The closed slide fastener shall be laid on a flat, smooth surface with no tension.

(b) The distance between the ink marks on both tapes shall be measured and recorded to the nearest 1/32 of an inch.

(c) The percent shrinkage shall be calculated for both tapes and recorded separately as the percent of the original measurement. Both tapes shall meet the requirement specified (see 3.2.5).

4.3.1.4 Apparatus and materials. The following apparatus and material is required for laundering:

(a) Automatic washing machine (see 6.3).

(b) Automatic dryer (see 6.3).

(c) AATCC Standard Detergent 124 or equivalent.

(d) Dummy pieces for ballast - 3 by 3 feet hemmed pieces of type 128 cotton sheeting which, when added to test zippers, will make a 4-pound load.

5. PACKAGING

5.1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Each tunic, with slide fastener closed, shall be neatly folded to measure approximately 12 inches in length by 12 inches in width. Each folded tunich shall be inserted in a close-fitting clear polyethylene film bag having a thickness of 0.0015 inch (± 20 percent tolerance). The bag shall be formed with heat sealed seams that are straight, continuous, and parallel to each other and the formed edges of the bag. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. The bag may be fabricated from polyethylene film tubing or sheeting. A 1/4 inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or a reverse flap.

5.1.2 Level C. Tunics shall be preserved-packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The unit pack and the quantity per unit pack shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Forty tunics of one size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, altenatively reversed top to bottom, two in length, one in width and twenty in depth. Inside dimensions of each container shall approximate 24-1/2 inches in length, 12-1/2 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract or when there are less than the required amount per shipping container of the same size, mixed sizes may be packed within the same container.

5.2.2 Level B. Forty tunics of one size only, preserved-packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 200 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, alternately reversed top to bottom, two in length, one in width and twenty in depth. Inside dimensions of each container shall approximate

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

24-1/2 inches in length, 12-1/2 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completly covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B or UU-P-268. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification, except that the inspection shall be in accordance with 4.2.3. Toward the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same container.

5.2.2.1 Weather resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the box specification, except that the inspection shall be in accordance with 4.2.3.

5.2.3 Level C packing. Tunics, preserved-packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, unit packs and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

5.3.2 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED SIZES" plainly printed or stamped thereon, and under these words shall be legibly printed or stamped the correct quantities and sizes contained therein.

6. NOTES

6.1 Intended use. Tunics are intended for use by female military personnel of the Department of the Army for wear with the Army Green 344 garbadine jacket and slacks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Size required (see 1.2).

(c) Selection of applicable levels of preservation-packaging and packing (see 5.1 and 5.2).

(d) When weather resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 The recommended apparatus for test procedure in 4.3.1.4 (a) and (b) are:

(a) Kenmore Automatic Washing Machine Model 600, or similar washing machine. In case of dispute, the Kenmore Model 600 shall be used.

(b) Kenmore Automatic Dryer Model 600, or equivalent.

6.4 Samples. For access to guide sample and samples of the collar material, address the procuring activity issuing the invitation for bids.

6.5 Suggested sewing techniques. Experienchas shown that if precautions are observed in using proper components and setting up the sewing machines, seam puckering will be held to an acceptable minimum level. The needles used should be as fine as possible consistent with the size or diameter of the thread. The finest feed (approximately 18 teeth per inch) possible should be used with a presser foot to exactly match the shape and size of the feed. The face of the presser foot should be hightly polished to eliminate roughness and reduce drag. The bobbin tension should be adjusted so that when a full bobbin is placed in the bobbin case and threaded through the tension spring, the bobbin and case will ride slowly down the thread when the free end of the thread is held in the vertical position. Needle tension should be adjusted after the bobbin tension to provide slightly more needle thread than bobbin thread in the stitch. A size 9 ballpoint needle should be used on all hemming (blindstitching) operations.

6.6 Supersession data. This document supersedes LP/P.DES 10-76 Tunic, Woman's, Rib Knit dated 17 May 1976.

Preparing activity:

Army - GL

Project No. 8410-0415

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.


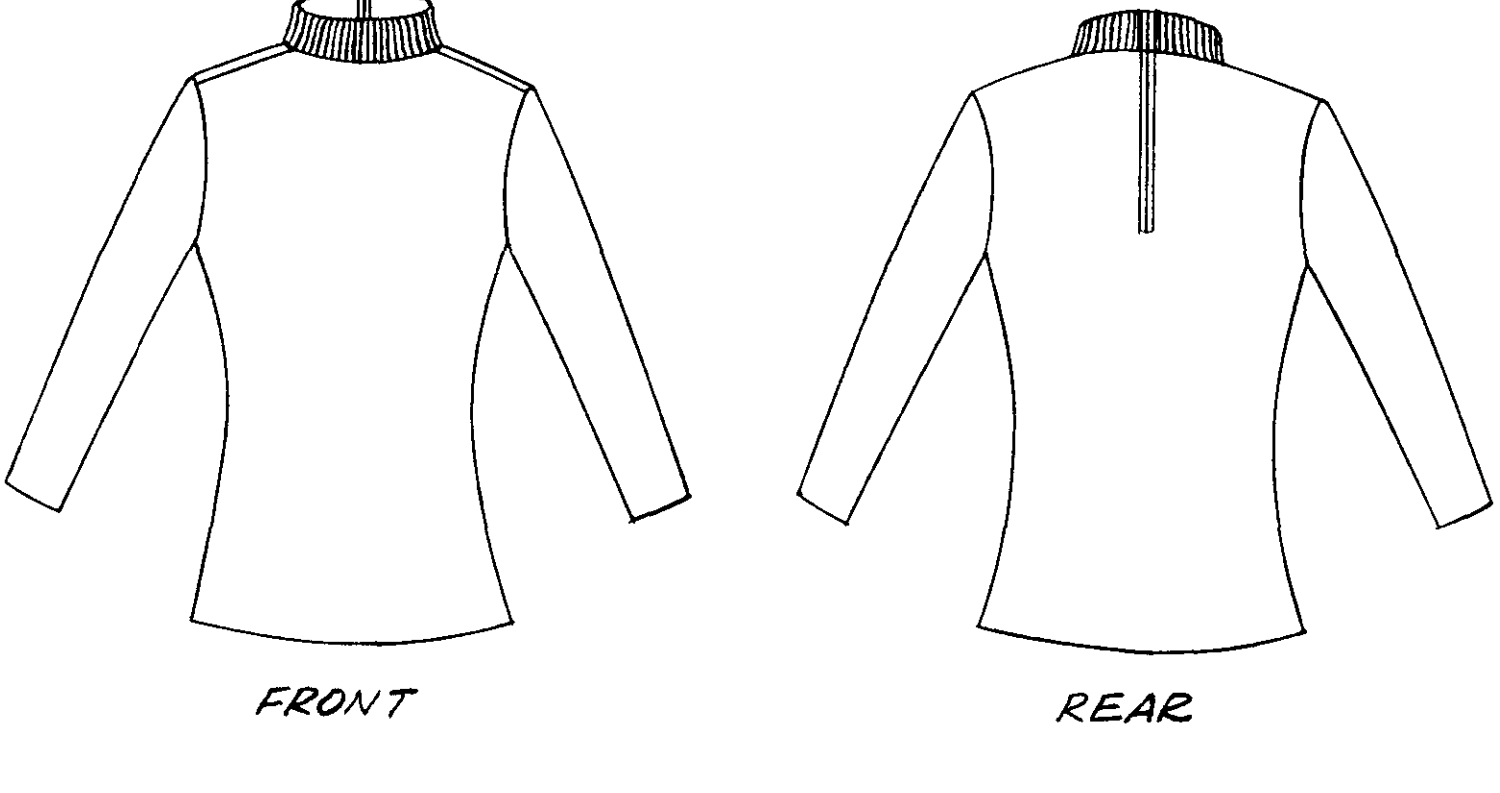



FIG. 1 TUNIC, WOMAN'S, RIB KNIT

2-1-1807

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

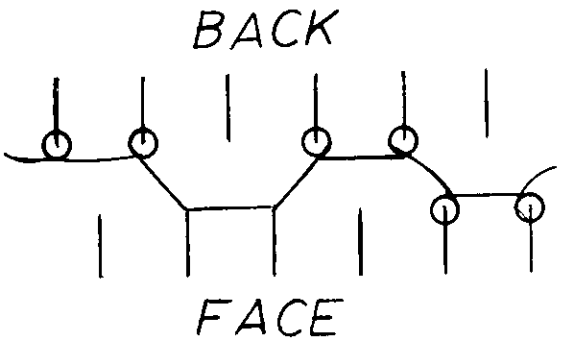

FEED 1

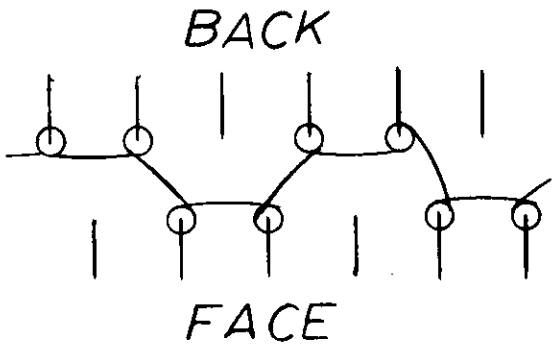

FEED 2

KNIT CONSTRUCTION

KEY: Y INDICATES NEEDLE HAS KNITTED.
Y INDICATES NEEDLE HAS TUCKED.

FIG. 2-TUNIC, WOMEN'S, RIB KNIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK RESEARCH and DEVELOPMENT COMMAND
NATICK, MASSACHUSETTS 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
DRXNM-~~XB~~ ES

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD-314

U.S.MAIL

Commander
US Army Natick Research and Development Command
ATTN: DRXNM-~~XXX~~ ES
Natick, MA 01760

NATICK OP 1 JUL 77
FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-T-43984(GL)

TUNIC, WOMAN'S, RIB KNIT

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T23:16Z
Check the source to verify that this is the current version before use.