MIL-E-1/1243A
6 March 1973
SUPERSEDING
MIL-E-1/1243(NAVY)
25 February 1959

MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MAGNETRON
TYPE 7111

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Pulse, tunable frequency range of 8,500 to 9,600 MHz, integral magnet, air cooled, 220 kw nominal peak power output

ABSOLUTE RATINGS:

Independent:

Parameter:	If (surge)	tk	VSWR	Tuner torque	T(anode)	T(input bushing)	epy	Input pressurization	Output pressurization	Input altitude	Output altitude
Unit:	a	sec	---	in.-oz	°C	°C	kv	psia	psia	ft	ft
Maximum:	12	---	1.5:1	200	150	165	23.0	---	45	6,000	0
Minimum:	---	150	---	---	-55 (Note 2)	-55 (Note 2)	---	12	15	---	---

Dependent:

Parameter:	Ef	If	ib	Pi	pi	Du	tpc	prr
Unit:	V	A	a	W	kw	---	µs	pps
Maximum:	15	3.6	27.5	630	630	0.0011	2.6	5,500
Minimum:	---	---	15	---	---	---	0.20	---

tpc µs	rrv kv/µs (Note 1)		tfc µs (Note 24)
Min	Min	Max	Max
2.5	70	200	0.60
1.0	70	200	0.45
0.25	70	200	0.15

PHYSICAL CHARACTERISTICS:

Dimensions: See figures 1 and 2
Mounting position: Any
Mounting support: Mounting flange
Weight: 12 pounds approx
Magnet: See note 25

Cooling: Forced-air required (see note 6)
Marking: See note 7
Coupling: Modified UG-51/U conforming to MIL-F-3922

TEST CONDITIONS:

Parameter: / Unit:	Ef V	tk sec	tpc µs	rrv kv/µs	Du ---	Ib mAdc	VSWR ---	F MHz
Test condition 1: (Notes 3, 4, & 13)								
Maximum:	---	150	0.30	---	---	---	1.05	F1, F2, F3
:	13.75	---	---	---	0.001	27.5	---	---
Minimum :	--- (Note 5)	---	0.20	200 (Note 1)	---	---	---	---
Test condition 2: (Notes 3, 4, & 13)								
Maximum:	---	150	2.60	---	---	---	1.05	F1, F2, F3
:	13.75	---	---	---	0.001	27.5	---	---
Minimum :	--- (Note 5)	---	2.10	180 (Note 1)	---	---	---	---

Frequency		
F	MHz	±
F1	8,500	5
F2	9,000	5
F3	9,600	5

GENERAL:

Qualification - Required

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TEST	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	Qualification inspection							
1143	Forced cooling	2, 6, 9	2		ΔT	---	90	°C
1031	Operation vibration	23, 26, 28	2	F = F3	ΔF	---	±0.5	MHz
		15, 22, 28	2	F = F3; t = 3 minutes	MP	---	1.0	%
1042	Shock, specified pulse	10	-	Condition J; no voltages	---	---	---	---
4223	Tuner torque	-	2	T = 150°C operating; T = -55°C nonoperating	---	---	200	in.-oz
4266	Direct-interelectrode capacitance	-	-	Cathode terminal to mounting flange	Cin	9	13	pF
4223	Mechanical tuning fatigue	12	-		---	500	---	Cycles
4308	RF bandwidth	14	1, 2	Ib = 15 to 27.5 mAdc	BW	---	2.5/tpc	MHz
4308	Minor lobe ratio	14	1	Ib = 15 to 27.5 mAdc	Ratio	8	---	dB
		14	2	Ib = 15 to 27.5 mAdc	Ratio	6	---	dB
4250	Power output	-	2		Po	200	---	W
4311	Frequency pushing figure	16	2	ib = 15 to 27 a	ΔF/Δa	---	1.0	MHz/a
4027	Temperature coefficient	17	2	F = F2; T = 70° to 150°C	ΔF/ΔT	---	0.25	MHz/°C
1026	Temperature range, operating	18, 29	2	F = F2	MP	---	1.0	%
	Quality conformance inspection, part 1	8	-					
4003	Pressurizing	-	-	40 to 45 psia, input and output assemblies	---	---	---	---
1301	Heater current	-	-	Ef = 13.75 V; tk = 150 sec (min)	If	2.9	3.3	A
4303	Heater warmup time	5	1, 2	Ef = 13.75 V; tk = 150 sec (max)	---	---	---	---
4223	Mechanical tuning range	-	1	Upper limit	F	9,000	---	MHz
				Lower limit	F	---	8,500	MHz
4308	RF bandwidth	14	1, 2		BW	---	2.5/tpc	MHz
4308	Minor lobe ratio	14	1		Ratio	8	---	dB
		14	2		Ratio	6	---	dB

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:19Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	NOTES	TEST	CONDITIONS	SYMBOL	LIMITS		UNIT
						MINIMUM	MAXIMUM	
	Quality conformance inspection, part 1 -Continued							
1031	Sweep-frequency vibration	21, 26	-	No voltages; F = 50 to 500 Hz; 5 G; 3 planes	---	---	---	---
4315	Stability	15	1		MP	---	0.25	%
			2		MP	---	0.50	%
4315	Starting stability	15, 27	2	F = F2	MP	---	0.5	%
4306	Pulse voltage	-	2		epy	20	23	kv
4250	Power output	-	2		Po	200	---	W
4310	Frequency pulling figure	-	2	VSWR = 1.5	ΔF	---	15	MHz
	Quality conformance inspection, part 2							
1031	High-frequency vibration	-	-	No voltages	---	---	---	---
4223	Resettability	4	2	F = 8,550 ±5 MHz; F = 9,000 ±5 MHz; F = 9,550 ±5 MHz	ΔF	---	20	MHz
4223	Operating torque or force	4, 11	-	T = 25° ±5°C	---	---	150	in.-oz
	Quality conformance inspection, part 3							
---	Life test	19	-	Group D; VSWR = 1.5 (min) with phase varying 360 electrical degrees approx every 15 minutes	---	480 400	--- ---	cycles hv/hrs
---	Life-test end points:							
					Po	160	---	W
4250	Power output	-	2	Upper limit	F	9,600	---	MHz
4223	Mechanical tuning range	-	2	Lower limit	F	---	8,500	MHz
			2		BW	---	3.0/tpc	MHz
4308	RF bandwidth	14	1, 2		Ratio	6	---	dB
4308	Minor lobe ratio	14	1, 2					
					MP	---	0.5	%
4315	Stability	15	1		MP	---	1.0	%
			2					
					F	---	25	MHz
---	Tuning characteristics	20	2					

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

NOTES:

1. The rate of rise of voltage (rrv) shall be expressed in kilovolts per microsecond, defined as the steepest tangent to the leading edge of the voltage pulse above 50 percent amplitude. Any capacitance used in the viewing system shall not exceed 6 pF.

2. The temperature shall be measured at the point shown on figure 1.

3. A minimum air pressure of 15 psia shall be maintained within the output waveguide in order to prevent electrical breakdown. Minimum air pressure at the cathode stem shall be 600 mmHg.

4. The tube shall meet the limits specified herein after it has been subjected to the shock and vibration tests.

5. The heater voltage for standby operation is 13.75 volts ±10 percent. The preferred formula by which the heater voltage shall be reduced after the application of high voltage is as follows:

$$Ef = 13.75\left(1 - \frac{Pi}{450}\right) \pm 10 \text{ percent for Pi up to 100 watts}$$

$$Ef = 13.75\left(1 - \frac{Pi}{450}\right)^{+20 \text{ percent}}_{-10 \text{ percent}} \text{ for } 100 < Pi < 450 \text{ watts}$$

$$Ef = 0 \text{ for } Pi > 450 \text{ watts}$$

An alternate formula that may be used in replacement application is as follows:

For Pi up to 100 watts Ef = 13.75 ±10 percent

$$\text{For Pi greater than 100 watts } Ef = 14\left(1 - \frac{Pi}{1,120}\right)^{+10 \text{ percent}}_{-20 \text{ percent}}$$

6. With a total airflow of approximately 40 cfm at approximately 760 mmHg, 25°C, divided equally and directed through the cooling fins toward the body of the tube from two 3/4-inch (19.05 mm) ducts placed 1/2 to 3/4 inch (12.7 to 19.05 mm) from the cooling fins, the specified rise above ambient temperature shall not be exceeded.

7. In addition to regular markings, the tuner dial settings for the following frequencies shall be marked on the tube. The accuracy of these settings shall be ±10 MHz at the start of life under conditions of test condition 2 with the anode temperature 115° ±10°C as measured at the point specified on figure 1 when tuning is performed in the direction marked on the tube.

Frequency (MHz)	Dial setting	Frequency (MHz)	Dial setting
8,500	---	9,150	---
8,650	---	9,300	---
8,800	---	9,450	---
9,000	---	9,600	---

8. Unless otherwise specified, the AQL for all tests listed under quality conformance inspection, part 1, shall be 1.0, inspection level II.

9. The frequency shall be the frequency of minimum power output between 8,500 and 9,600 MHz.

10. Following impact tests, the tube shall show no mechanical failure and shall meet all power output and voltage requirements of test condition 2 and operating torque or force of quality conformance inspection, part 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

NOTES: -Continued

11. The torque required to activate the tuning shaft and to tune the tube over the required frequency range in each direction shall not be greater than the specified amount. The tuning mechanism should be capable of withstanding a torque of 200 inch ounce at the ends of its travel.

12. The tuner shaft shall operate at a speed of 85 ±10 rpm for at least the specified number of cycles. At the completion of this test, the tube shall show no mechanical failure and shall meet all the electrical requirements of test condition 1. One cycle is defined as a complete traverse from one end of the tuning range to the other and back again.

13. The modulator shall be such that the energy per pulse delivered to the tube, if arcing occurs, shall not greatly exceed the normal energy per pulse. The tube heater shall be protected against arcing by use of a connector that places a minimum of 4,000 pF across the heater directly at the input terminals.

14. The spectrum shall be measured with a VSWR of 1.5 introduced in the load at a distance no greater than 1 meter from the tube coupling flange, the phase being adjusted to produce maximum spectrum degradation. A satisfactory spectrum is one whose slope does not change sign more than once for power levels greater than the specified dB below its peak.

15. Stability shall be measured with the tube terminated in a transmission line of 1.5 VSWR adjusted in phase to produce maximum instability. A missing pulse is defined as one whose energy within a ±1 percent frequency range of the normal operating frequency is 70 percent or less than that of a normal pulse. The tube shall be considered stable if the specified missing pulse limit is not exceeded during any 3-minute interval of a 6-minute test period.

16. The pushing factor shall be measured in three steps, 4 amperes each (15A to 19A, 19A to 23A, 23A to 27A) and no value shall exceed the limits specified herein.

17. The frequency shall be measured at the extremes of any 30°C temperature range. The anode temperature shall be measured at the point shown on figure 1.

18. With anode temperature of -55°C, heater voltage of 13.75 V shall be applied for a maximum of 150 seconds before application of anode voltage. Stability test shall be 1-minute duration, to begin after 30 seconds of anode operation. F = 9,000 MHz.

19. Starting at 8,500 MHz and increasing to 9,600 MHz, then decreasing to 8,500 MHz, the frequency of the tube will be changed in 150 MHz increments after each 50 hours (approximately) of high-voltage operation. The duration of the switching interval between test condition 1 and test condition 2 shall not exceed 5 seconds. The following cycle shall be used for the life test:

Condition	ib(A)	Ef(V)	Duration (minutes)
Standby	0	13.75	2.5
Test condition 1	27.5	0	25.0
Test condition 2	27.5	0	25.0
off	0	0	7.5

20. At each of the dial settings and under the operating conditions specified in note 7, the measured frequency shall not differ from the stated frequency by more than the amount specified when tuning is performed in the direction indicated on the tube.

21. At the completion of this test, the tube shall meet the power output and voltage requirements of test condition 2.

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:19Z
Check the source to verify that this is the current version before use.

22. A missing pulse is defined as one whose energy within ±1 percent frequency range of the normal operating frequency is 70 percent or less than that of a normal pulse. The tube shall be considered stable if the specified missing pulse limit is not exceeded during the vibration time and acceleration levels as specified in the operating vibration test.

23. This test is performed at the frequency of maximum tuning sensitivity. At the specified vibration conditions, the continuous frequency modulation shall not exceed the indicated limit. Repetitive frequency changes occurring at a rate higher than 2 Hz shall be considered as frequency modulation and shall be within the limits specified herein. Frequency shifts in excess of 1 MHz shall occur not more than three times in the test interval in each plane. In no 1 second interval shall the frequency shift more than 3 MHz. At no time during a run shall the frequency deviate by more than 5 MHz from the frequency at the start of a run.

24. The time of fall of current (tfc) is measured from the zero to 85 percent level of the trailing edge of the current pulse.

25. In handling and mounting the tube, care shall be exercised to prevent demagnetization.

26. The TUT shall be fastened rigidly to the vibration platform and vibrated with a simple harmonic motion over the frequency range. The frequency shall be varied over the complete range at a uniform rate.

27. This test shall be the first test performed after the specified holding period.

28. The tube shall be mounted in a resonance free jig and vibrated with sinusoidal excitation in each of three mutually perpendicular planes through the following amplitudes:

    t = 1 minute, 15 to 30 Hz at 0.1-inch angular displacement
    t = 2 minutes, 30 to 500 Hz at 2 G

    The frequency shall increase from 15 to 500 Hz then decrease to 15 Hz with approximately logarithmic progression, and shall require approximately 15 minutes to traverse the range. Interpulse frequency stability and rf stability shall not exceed the limits specified herein.

29. A missing pulse is defined as one whose energy within a ±1 percent frequency range of the normal operating frequency is 70 percent or less than that of a normal pulse. The tube shall be considered stable if the specified missing pulse limit is not exceeded during the 1-minute test period.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activity:
DSA - ES

User activities:
Army - MU
Navy - AS, OS, MC, CG, SH
Air Force - 11

Preparing activity: Navy - EC

Agent: DSA - ES

(Project 5960-2716)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

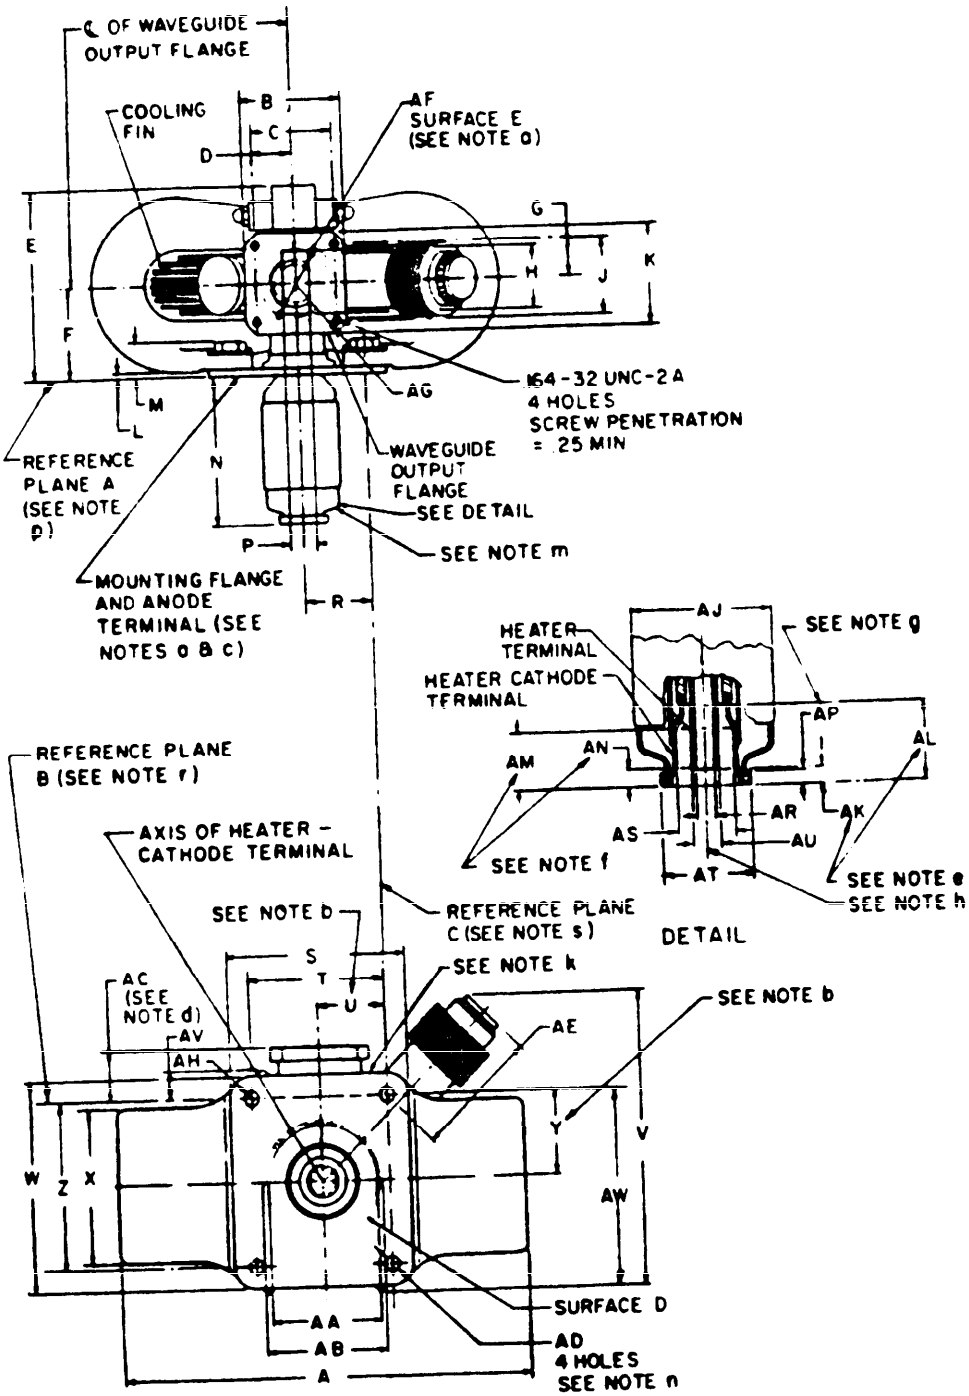


FIGURE 1. Outline drawing of electron tube type 7111.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses.	
	Minimum	Maximum
Qualification inspection		
B	1.800 (45.72)	1.860 (47.24)
H	1.112 (28.24)	1.132 (28.75)
K	1.800 (45.72)	1.860 (47.24)
M	---	.625 (15.88)
P	.487 (12.37)	.507 (12.88)
AG	1.125 (28.58)	1.187 (30.15)
AH	.375 (9.53)	.437 (11.10)
AJ	---	1.500 (38.10)
Quality conformance inspection, part 1		
C	1.470 (37.34)	1.478 (37.54)
D	.735 (18.67)	.739 (18.77)
G	.674 (17.12)	.678 (17.22)
J	1.348 (34.24)	1.356 (34.44)
L	.031 (.79)	---
N	2.562 (65.07)	2.750 (69.85)
R	1.205 (30.61)	1.295 (32.89)
T	2.490 (63.25)	2.510 (63.75)
V	---	6.000 (152.40)
W	---	3.875 (98.43)
X	---	2.875 (73.03)
Z	2.990 (75.95)	3.010 (76.45)
AA	2.000 (50.80)	2.187 (55.55)DIA
AB	2.187 (55.55)	2.312 (58.72)DIA
AC	.875 (22.23)	.937 (23.80)
AK	.125 (3.18)	.187 (4.75)
AL	.750 (19.05)	---
AM	.516 (13.11)	---
AN	---	.156 (3.96)
AP	.115 (2.92)	.135 (3.43)
AR	.164 (4.17)	.174 (4.42)
AS	.532 (13.51)	.545 (13.84)DIA
AT	.825 (20.96)	.838 (21.29)DIA
AU	.235 (5.97)	.265 (6.73)DIA

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses.	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	---	7.687 (195.25)
E	---	3.406 (86.51)
F	1.610 (40.89)	1.702 (43.23)
S	---	3.468 (88.09)
AD	.275 (6.99)	.287 (7.29)
AE	---	2.750 (69.85)
AV	---	.628 (15.95)
AW	---	3.638 (92.41)
Reference dimensions		
U	1.250 (31.75)	
Y	1.500 (38.10)	
AF	1.625 (41.28) DIA	
AZ	1.000 (25.40)	

FIGURE 1. Outline drawing of electron tube type 7111 - (continued).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

a. Surface E of the waveguide output flange, and the entire mounting flange are made so that they may be used to provide a hermetic seal.

b. The axis of the heater-cathode terminal shall be within the confines of a cylinder whose radius is .0468 (1.19 mm) and whose axis is perpendicular to reference plane A at the specified location.

c. All points on mounting flange shall lie within .015 (.38 mm) above or below reference plane A.

d. The limits include angular as well as lateral deviations.

e. These dimensions define extremities of the .169 (4.29 mm) internal diameter of the cylindrical heater-terminal.

f. These dimensions define extremities of the .540 (13.72 mm) internal diameter of the cylindrical heater-cathode terminal.

g. No part of the connector device for the heater and heater-cathode terminals shall bear against the underside of this lip.

h. The heater terminal and the heater-cathode terminal shall be concentric within .010 (.25 mm).

k. Anode temperature shall be measured at junction of waveguide and anode back.

m. Cathode temperature shall be measured here.

n. 1.0938 (27.78 mm) minimum long stud through the mounting holes shall not interfere with any part of the tube.

p. Reference plane A is define as the plane through that portion of the mounting flange designated as annular surface D.

r. Reference plane B is defined as the plane which is perpendicular to plane A and passes through the exact centers of mounting-flange holes No. 2 and 3.

s. Reference plane C is defined as the plane which is perpendicular to plane A and plane B and passes through the exact center of mounting-flange holes No. 3 and 4.

FIGURE 1. Outline drawing of electron tube type 7111 - (continued).

Source: https://assist.dla.mil -- Downloaded: 202610-15T14:19Z
Check the source to verify that this is the current version before use.

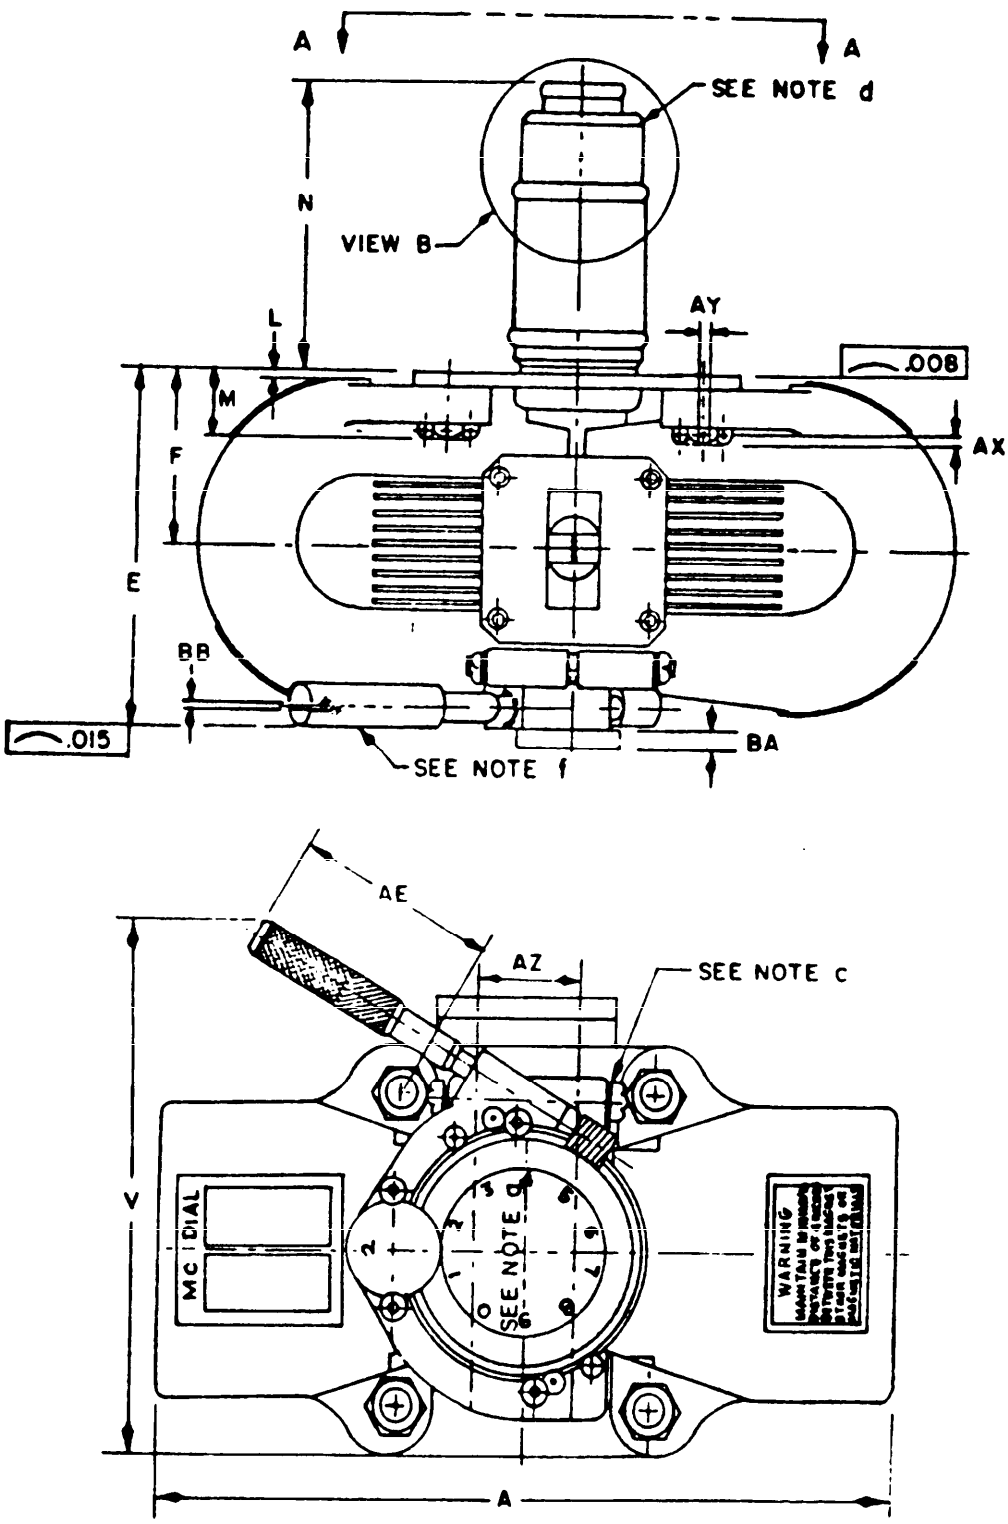


FIGURE 2. Outline drawing of electron tube type 7111 (alternate).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

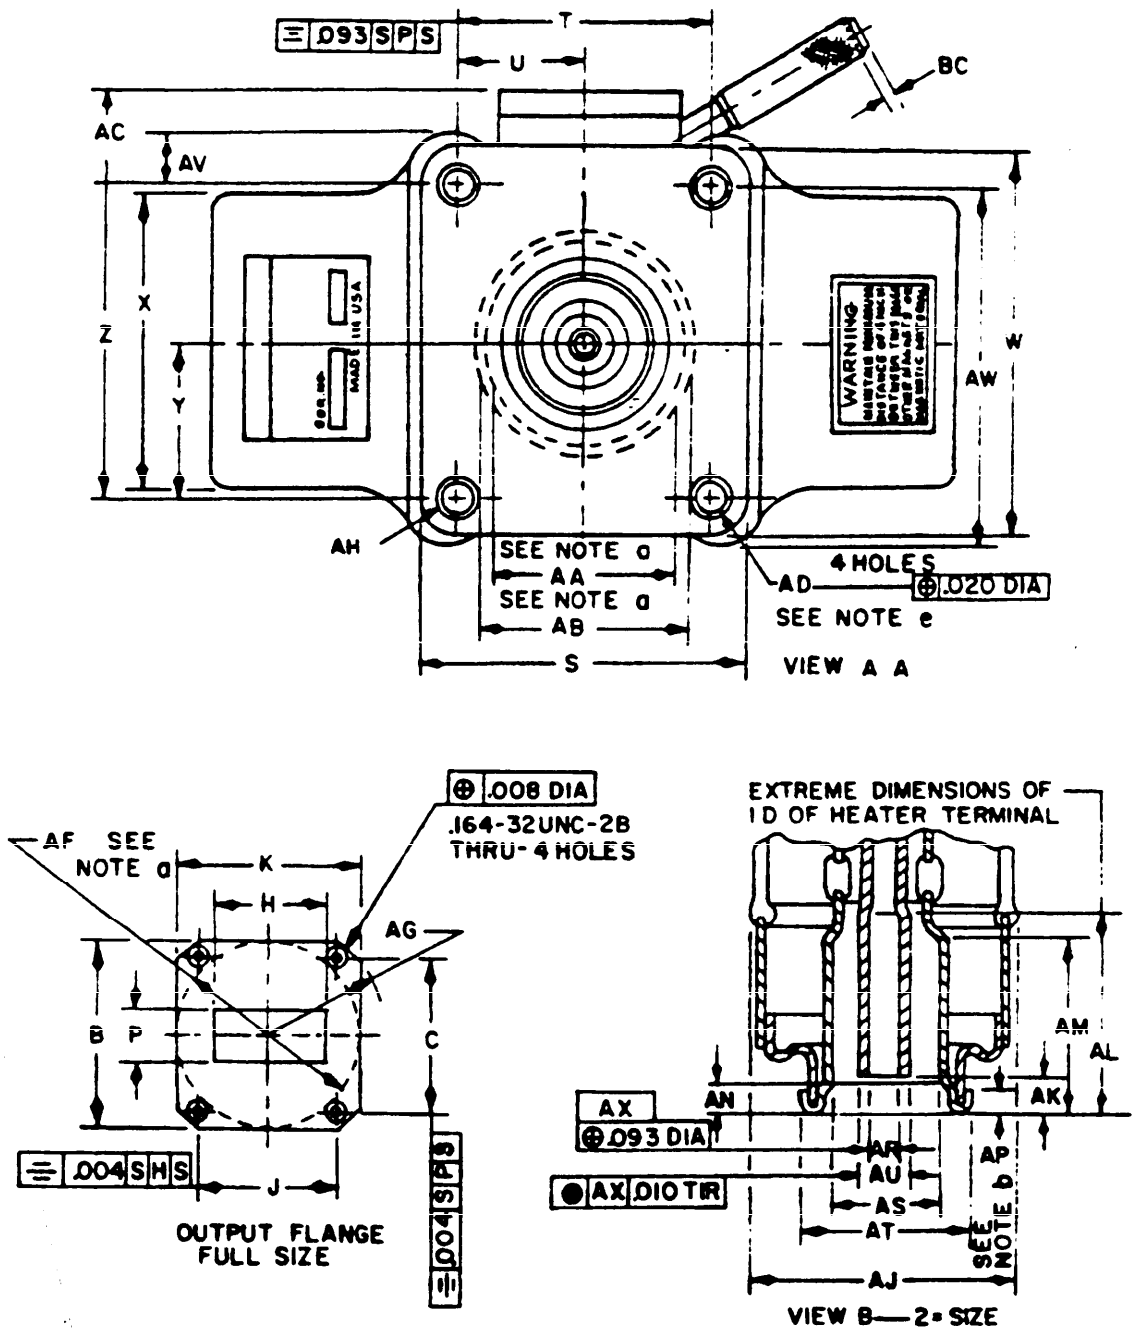


FIGURE 2. Outline drawing of electron tube type 7111 (alternate) - continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses.	
	Minimum	Maximum
Qualification inspection		
B	1.800 (45.72)	1.860 (47.24)
H	1.112 (28.24)	1.132 (28.75)
K	1.800 (45.72)	1.860 (47.24)
M	---	.625 (15.88)
P	.487 (12.37)	.507 (12.88)
AG	1.125 (28.58)	1.187 (30.15)
AH	.375 (9.53)	.437 (11.10)
AJ	---	1.500 (38.10)
Quality conformance inspection, part 1		
C	1.470 (37.34)	1.478 (37.54)
J	1.348 (34.24)	1.356 (34.44)
L	.031 (.79)	---
N	2.562 (65.07)	2.750 (69.85)
T	2.490 (63.25)	2.510 (63.75)
V	---	6.000 (152.40)
W	---	3.875 (98.43)
X	---	2.875 (73.03)
Z	2.990 (75.95)	3.010 (76.45)
AA	2.000 (50.80)	2.187 (55.55) DIA
AB	2.187 (55.55)	2.312 (58.72) DIA
AC	.875 (22.23)	.937 (23.80)
AK	.125 (3.18)	.187 (4.75)
AL	.750 (19.05)	---
AM	.516 (13.11)	---
AN	---	.156 (3.96)
AP	.115 (2.92)	.135 (3.43)
AR	.164 (4.17)	.174 (4.42)
AS	.532 (13.51)	.545 (13.84) DIA
AT	.825 (20.96)	.838 (21.29) DIA
AU	.235 (5.97)	.265 (6.73) DIA

Ltr	Dimensions in inches with metric equivalents (mm) in parentheses.	
	Minimum	Maximum
Quality conformance inspection, part 2		
A	---	7.687 (195.25)
E	---	3.406 (86.51)
F	1.610 (40.89)	1.702 (43.23)
S	---	3.468 (88.09)
AD	.275 (6.99)	.287 (7.29)
AE	---	2.750 (69.85)
AV	---	.628 (15.95)
AW	---	3.638 (92.41)
AX	.039 (.99)	.069 (1.75)
AY	.041 (1.04)	.051 (1.30)
Reference dimensions		
U	1.250 (31.75)	
Y	1.500 (38.10)	
AF	1.625 (41.28) DIA	
AZ	1.000 (25.40)	
BA	.1875 (4.76)	
BB	.0625 (1.59)	
BC	.0938 (2.38)	

NOTES:
a. These surfaces may be used for hermetic seal.
b. No part of the connector device for the heater and heater-cathode terminals shall bear against the underside of this lip.
c. Anode temperature shall be measured at junction of waveguide and anode block.
d. Cathode temperature shall be measured here.
e. A 1.0938 (27.78 mm) inch min long stud thru the mounting hole shall not interfere with any part of the tube.
f. Tuner is held in position when handle is released and tunable when handle is pushed in.
g. Dial protector may be removed before installing tube.

FIGURE 2. Outline drawing of electron tube type 7111 (alternate) - continued.

Source: https://assist.dla.mil -- Downloaded: 202640-15T14:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:19Z
Check the source to verify that this is the current version before use.