INCH-POUND

MIL-PRF-1/1232D
2 July 1999
SUPERSEDING
MIL-E-1/1232C
8 May 1972

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, GAS SWITCHING
TYPE 7166

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: TR, frequency range 1,220 to 1,365 MHz, nominal peak power rating 1.5 Mw.

ABSOLUTE RATINGS:

Parameter: Unit:	Incident power Mw	Du ---	Ebb V dc	Ii µA dc	Alt ft
Maximum:	2.0	0.001	---	200	10,000
Minimum:	---	---	-750	100	---

PHYSICAL CHARACTERISTICS:

Dimensions: See figure 1.
Mounting: See figure 2. 1/
Weight: 9 pounds (approximate).

TEST CONDITIONS:

Parameter: Unit: Tolerance:	Incident power Mw ± 5%	tp1 µs ± 0.15	tp2 µs ± 0.15	prr pps ---	Ii µA dc ---	F MHz ---
Test condition 1:	0.50	4.0	1.0	250	100	F3
Test condition 2:	2.00	4.0	---	250	100	F3

Frequency		
F	MHz	±
1	1,220	1%
2	1,255	1%
3	1,292	1%
4	1,325	1%
5	1,365	1%

See footnotes at end of table I.

GENERAL:

Preproduction sample approval: Required. 2/

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	Method	Notes	Test	Conditions	Symbol	Limits		Unit
						Min	Max	
Preproduction sample approval inspection								
Humidity	1011	---	---		---	---	---	---
Degradation due to vibration	4021	---	---	t = 1 hour	---	---	---	---
Mechanical insertion	---	1/ 3/	---		---	---	---	---
Conformance inspection, part 1		4/	---					
Ignitor voltage drop	4406	---	---	Ii = 100 µA dc	Eid	275	475	V dc
Spike-leakage energy	4452	---	1		Ws	---	0.25	erg
Flat-leakage power	4452	---	1		pf	---	75	mw
Temperature cycling (nonoperating)	1027	---	---		---	---	---	---
Ignitor ignition time	4401	---	---	Ebb = -750 V dc; Ri = 4.5 Meg	t	---	5.0	sec
Low-level VSWR	4473	5/	---	F = (F1, F2, F3, F4, and F5) ± 0.1%	σ	---	1.3	---
Arc loss	4488	---	1		La	---	0.3	dB
Conformance inspection, part 2								
Dielectric material strain	4101	---	---		---	---	---	---
Insertion loss	4416	---	---	F = F3 ± 5%	Li	---	0.5	dB
Ignitor interaction	4421	---	---	ΔIi = 100 µA dc	ΔLi	---	0.2	dB
Ignitor noise ratio	4460	---	---	Fo = 1,300 MHz; Ii = 100 µA dc	Nr	---	1.3	---
Recovery time	4471	---	2		t	---	20	µs

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:18Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection - Continued.

Inspection	Method	Notes	Test	Conditions	Symbol	Limits		Unit
						Min	Max	
Conformance inspection, part 3								
Life test	---	6/ 7/	2	Group D; F = F3 ± 3%; R = 2.5 Meg	t	1,000	---	hours
Life-test end points:	---							
Spike-leakage energy	4452	---	1		Ws	---	0.50	erg
Ignitor noise ratio	4460	---	---	Ii = 100 µA dc	Nr	---	1.5	---
Recovery time	4471	---	2		t	---	25	µs
Ignitor voltage drop	4406	---	---	Ii = 100 µA dc	Eid	---	550	V dc
Insertion loss	4416	---	---		Li	---	0.7	dB
Arc loss	4488	---	1		La	---	0.3	dB
Temperature cycling life test	1027	---	---	10 cycles	---	---	---	---

1/ A suitable gasket shall be bolted between the tube and the mounting seat. Tubes shall be supplied with gaskets at both ends.

2/ Preproduction sample approval requirements hereby replace any qualification requirements referable to the product covered herein. The term "First article testing" shall be considered as synonymous with the term "Preproduction sample approval testing." All tests applicable herein (including all preproduction sample approval and conformance inspection, parts 1, 2, and 3) shall be performed during preproduction sample inspection. A failure of any one tube in any of the tests shall be cause for decision of preproduction sample disapproval.

3/ The tube shall be capable of being inserted and removed from its seat a minimum of 15 times with no deterioration in the tube's electrical characteristics.

4/ Unless otherwise specified, the acceptance level for all tests listed under conformance inspection, part 1, shall be 1.0 percent, inspection level II.


5/ A swept frequency method may be used for this test.

6/ The TR tube will be terminated with a waveguide to type N transition (VSWR not to exceed 1.1:1 at test frequency) and a coaxial type N crystal mount connected to the transition. The mount will contain a type 1N21WE crystal which will be terminated by a dc ground return of 100 ± 10 ohms. The crystal mount will have a VSWR not to exceed 1.5 when tested with a microwave source at the test frequency which provides a crystal dc current between 0.3 ma to 1.5 ma in a 100 ohms termination. At the beginning of life test, the crystal noise figure (NF receiver) shall not exceed 7.0 dB under the standard 1N21WE test conditions. The actual crystal noise figure at the beginning of life shall be recorded.

7/ The crystal noise figure degradation from the initial value shall not exceed 1.5 dB maximum. One crystal failure will be allowed during the life test. If a crystal failure occurs, a new crystal shall be inserted in the mount and the life test shall continue for a minimum of 100 hours.

8/ Changes from previous issue. Revision letters are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:18Z
Check the source to verify that this is the current version before use.

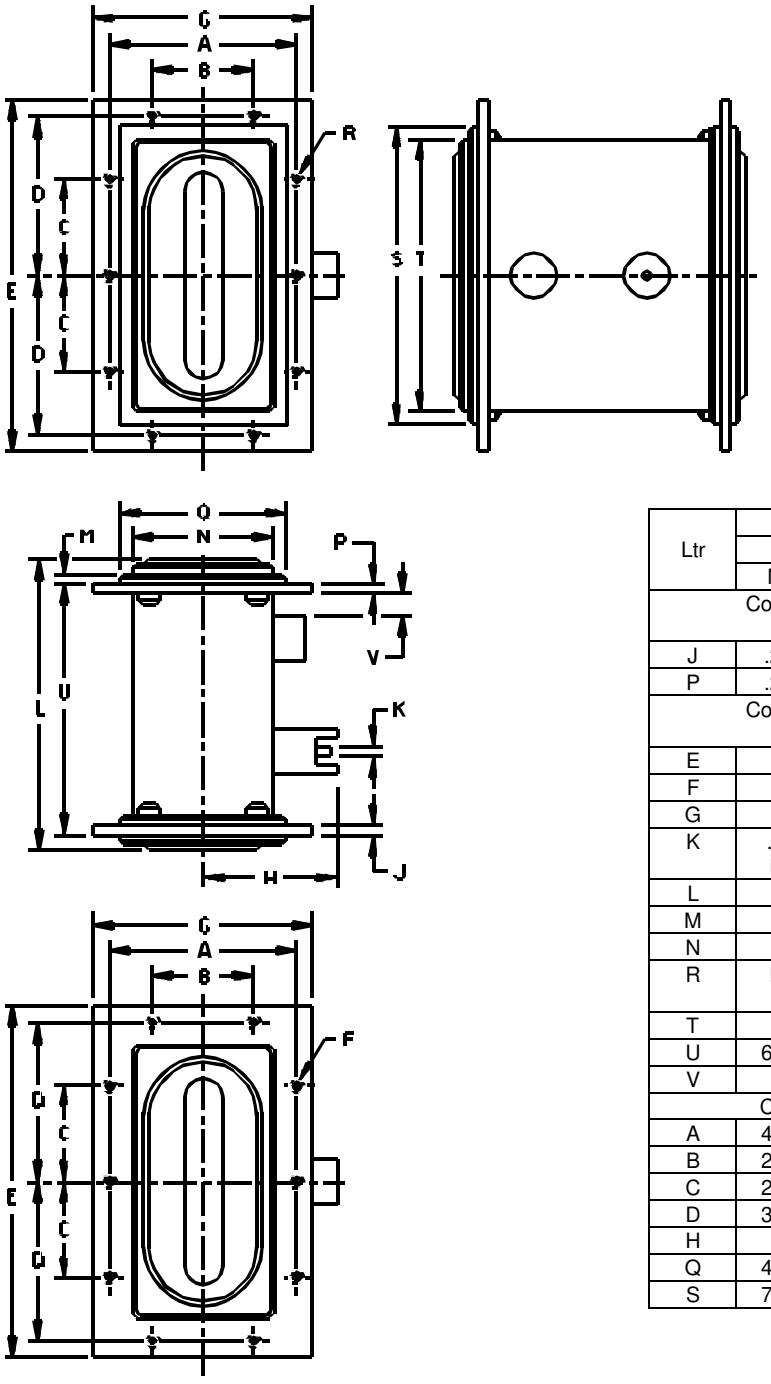


Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
Conformance inspection, part 1 2/				
J	.240	.260	6.10	6.60
P	.240	.260	6.10	6.60
Conformance inspection, part 1 4/				
E	See note			
F	5/16-18UNC-2A (10) holes			
G	See note			
K	.245 DIA	.255 DIA	6.22 DIA	6.48 DIA
L	---	7.250	---	184.15
M	.240	.260	6.10	6.60
N	---	3.475	---	88.27
R	Dr. size S-.348 (10) holes		Dr. size S- 8.84 (10) holes	
T	---	6.725	---	170.82
U	6.150	6.250	156.21	158.75
V	.562	---	14.27	---
Conformance inspection, part 2				
A	4.618	4.634	117.30	117.70
B	2.492	2.508	63.30	63.70
C	2.367	2.383	60.12	60.53
D	3.930	3.946	99.82	100.23
H	---	3.3125	---	84.14
Q	4.105	4.125	104.27	104.78
S	7.355	7.375	186.82	187.33

NOTE: This dimension shall conform to the requirements of MIL-PRF-3922/52A-001.

FIGURE 1. Outline drawing of electron tube type 7166.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:18Z
Check the source to verify that this is the current version before use.

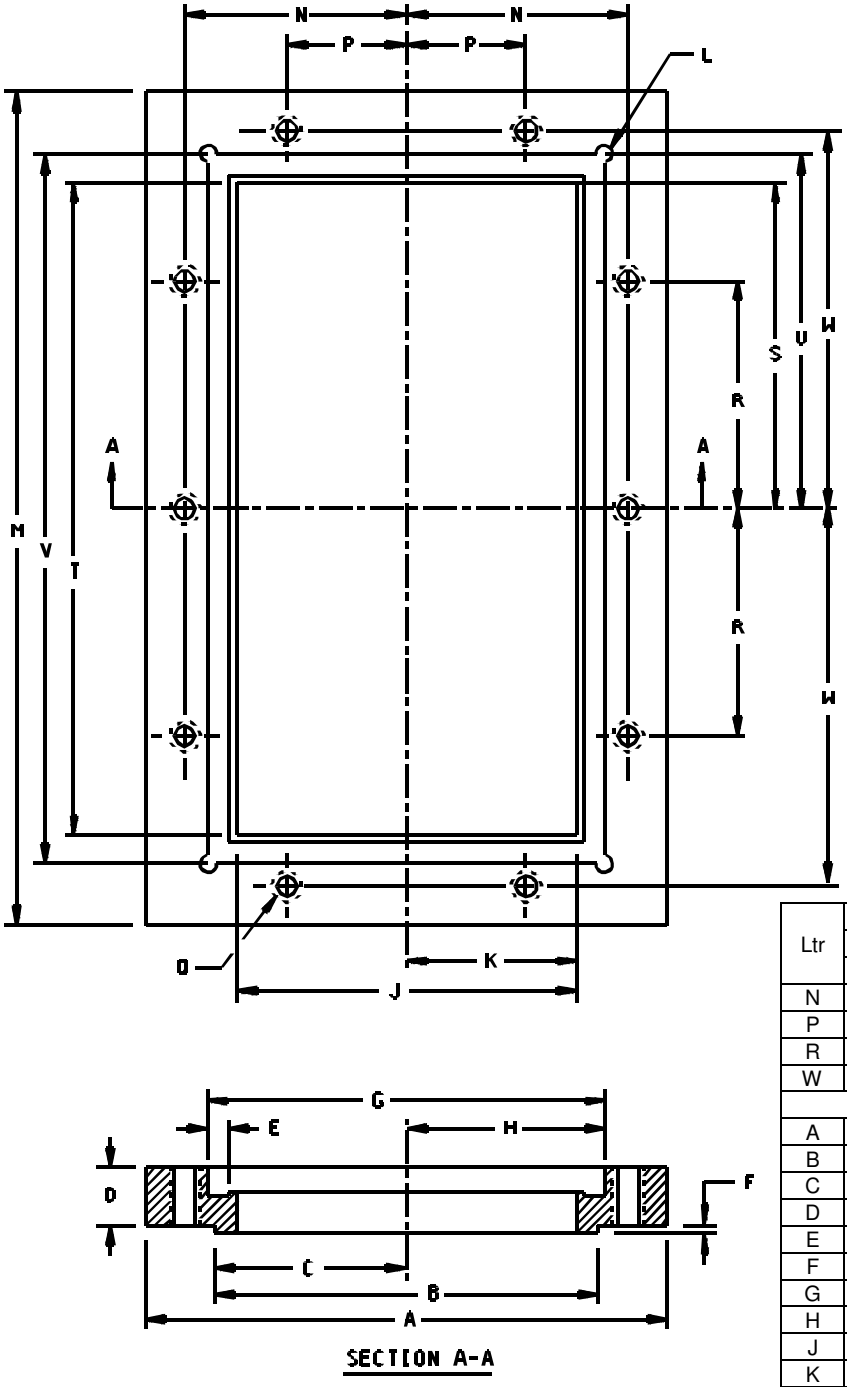

Ltr	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
N	2.309	2.317	58.65	58.85
P	1.246	1.254	31.65	31.85
R	2.371	2.379	60.22	60.43
W	3.934	3.942	99.92	100.13
Nominal				
A	5.437		138.10	
B	4.000		101.60	
C	2.000		50.80	
D	.600		15.24	
E	.2188 TYP		5.56 TYP	
F	.080		2.03	
G	4.135		105.03	
H	2.067		52.50	
J	3.537		89.84	
K	1.768		44.91	
L	.2188 RAD x .270 DEEP TYP		5.56 RAD x 6.86 DEEP TYP	
M	8.6875		220.66	
Q	5/16-18UNC-2B (10) holes			
S	3.393		86.18	
T	6.787		172.39	
U	3.692		93.78	
V	7.385		187.58	

FIGURE 2. Mounting seat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:18Z
Check the source to verify that this is the current version before use.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy AS, CG, MC, OS, SH
Air Force - 17, 19, 99

Preparing activity:
DLA - CC

(Project 5960-3536)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T14:18Z
Check the source to verify that this is the current version before use.