[INCH-POUND]
A-A-59475
22 November 1999
SUPERSEDING
MIL-S-11183F
31 December 1985

COMMERCIAL ITEM DESCRIPTION

SCALES, DIAL AND BEAM INDICATING, BAKER'S, DOUGH PIECE CHECKING

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-S-11183F for all federal agencies.

1. SCOPE. This commercial item description (CID) covers dial and beam indicating baker's scales used in bakeries to check the weight of dough pieces leaving the divider and before entering the proofer. The type II scale is primarily intended for use in field bakeries.

2. CLASSIFICATION. The design shall be one of the manufacturer's current production models, with standard accessories offered by the manufacturer, to meet all the requirements specified. The scales shall be one of the following types and classes, as specified (see 7.3(b)).

Type I - Over and under scale

Class 1 - Avoirdupois, 3-pound capacity
Class 2 - Metric, 1500-gram capacity

Type II - Even-balance scale, 5-pound capacity

3. SALIENT CHARACTERISTICS

3.1 Performance.

3.1.1 Accuracy. The scales and weights shall meet the applicable requirements of National Institute of Standards and Technology (NIST) Handbook 44, "Specification, Tolerances, and Other Technical Requirements for Weighing and Measuring Devices".

3.1.2 Certification. The scales shall be certified by National Sanitation Foundation (NSF) International or meet the requirements of NSF C-2 "Special Equipment and/or Devices".

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent to: Defense Supply Center Richmond (DSCR), ATTN: DSCR-VBD, 8000 Jefferson Davis Highway, Richmond, VA 23297-5610.

AMSC N/A FSC 6670

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

3.1.3 Overload. When subjected to a load and counterweight of 125 percent of the required capacity, the scales shall sustain no permanent deformation, bends, breakage, or separation of parts and shall return to the initial zero position when the load is removed.

3.2 Design and construction.

3.2.1 Type I. The type I scale shall be a bench scale with a dial indicator and a tare beam. The scale shall show an over or under weight indication on the dial face by a balance indicator when objects are placed on the load receiver. The scale shall have a platform load receiver and a weight platter (for removable weights) that counterbalance the weight of objects being weighed on the platform load receiver.

3.2.1.1 Class 1. The class 1 scale shall be designed to weigh in the avoirdupois weight system and shall have a minimum capacity of 3 pounds. The tare beam for the scale shall have a capacity of 1 pound with maximum graduations of 1/4 ounce. The dial indicator chart shall have an over and under indication of 1 ounce with maximum graduations of 1/4 ounce.

3.2.1.2 Class 2. The class 2 scale shall be designed to weigh in the metric system and shall have a minimum capacity of 1500 grams. The tare beam shall have a capacity of 500 grams with maximum graduations of 5 grams. The dial indicator chart shall have an over and under indication of 25 or 30 grams with maximum graduations of 5 grams.

3.2.1.3 Dial indicator. The dial indicator shall be readable from both ends of the scale and shall be enclosed in a metal housing. There shall be a clear enclosure over the chart. The dial indicator chart shall be marked to indicate the zero position and the over and under indication.

3.2.1.4 Tare beam. The tare beam shall be notched and shall have a poise. The poise shall not be detachable from the tare beam without the use of tools.

3.2.1.5 Damping device. The scale shall have a hydraulic damping device. The damping device shall be accessible for adjusting for temperature changes or for adjusting damping oscillation.

3.2.1.6 Load receiver and weight receiver. The load receiver and weight receiver shall be constructed of corrosion resisting material.

3.2.2 Type II. The type II scale shall be an even-balance bench with two 9-inch flat plates constructed of corrosion resisting material, a tare beam, and balance weights. One plate shall be used to hold the balance weights and the other plate shall be used to hold the item to be weighed. The scale shall be designed to weigh in the avoirdupois system and shall have a minimum capacity of 5 pounds. The tare beam shall have a capacity of 1 pound with maximum graduations of 1/4 ounce.

3.3 Weights and weight box. Weights shall be furnished with the scale as specified in table I. Weights shall be constructed of corrosion resisting material or shall be coated to resist corrosion. All weights shall be marked with the weight value. There shall be a wooden or durable plastic box to contain the weights.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

TABLE I. Counter weights required.

Scale	Quantity	Weights
Type I, Class 1	2	1 pound
	1	500 grams
Type I, Class 2	1	500 grams
	2	200 grams
	1	100 grams
Type II	1	2 pounds
	2	1 pound

3.4 Repair and maintenance. Provisions shall be made to allow for weight adjustment, service, and replacement of components without disturbing or disassembly of major components. There shall be free access to inspect, service, and adjust balance of tare beam and dial indicator, when applicable, without requiring disassembly of any component on the unit.

3.5 Workmanship. The finished scale shall have no burrs, slivers, splinters or broken, loose or missing fasteners.

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with public law 94-580 or Code of Federal Regulations (CFR) requirements of 41CFR 1-1.25.

4.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using avoirdupois units, provided they fall within specified tolerances using conversion tables contained in the latest version of Federal Standard No. 376B, "Preferred Metric Units For General Use By the Federal Government", and all other requirements of this commercial item description are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The scales provided shall meet the salient characteristics of this commercial item description; conform to the producer’s own drawings, specifications, standards, and quality assurance practices; and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Warranty. The manufacturer’s standard commercial warranty shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1 Preservation, packing, and marking. For acquisition purposes, the products shall be preserved, packed, and marked as specified in the acquisition order (see 7.3(c)).

7. NOTES

7.1 Sources of documents.

7.1.1 NIST. National Institute of Standards and Technology documents may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, DC 20402.

7.1.2 NSF. National Sanitation Foundation documents may be obtained from NSF International, P.O. Box 130140, Ann Arbor, MI 48113-0140.

7.1.3 Government documents. Printed CFR and Federal Standards may be obtained from the U.S. Government Printing Office, Superintendent of Documents, Mail Stop: SSOP, Washington, DC 20402-9328. Electronic copies of CFR documents may be obtained from http://www.access.gpo.gom. Electronic copies of Federal Standards may be obtained from http://astimage.daps.dla.mil/quicksearch/.

7.2 Ordering data. Acquisition documents must specify the following information:

a. Title, number, and date of this document
b. Type and class of scale required (see 2)
c. Packaging requirements (see 6.1)

7.3 Part identification number (PIN). The following part identification numbering system is for government purposes and does not constitute a requirement for the contractor.

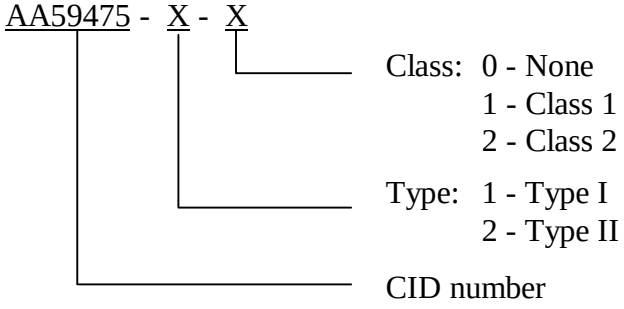

7.4 National stock number (NSN). The following NSN corresponds to this CID. This NSN may not be indicative of all possible NSNs associated with this document.

Assigned NSN	Type	Class
6670-00-164-0550	II	None

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.

7.5 Sources of supply. The manufacturers and/or suppliers listed below are known to supply products which meet the salient characteristics requirements of this document. Competition is not limited to the listed firms.

Detecto Division
Cardinal Scale Manufacturing Company
P.O. Box 151
Webb City, MO 64870

A-1 Scale Service, Incorporated
4807 NW Industrial Drive
San Antonio, TX 78238

Algen Scale Corporation
68 Enter Lane
Hauppauge, NY 11788

MILITARY INTERESTS:

Custodian:
Army - GL
Navy - MC

Reviewers:
Army - MD
Navy - YD2

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - FCGC

Preparing activity:
DLA - GS

(Project 6670-0203)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:15Z
Check the source to verify that this is the current version before use.