
FED. SUP CLASS
6150

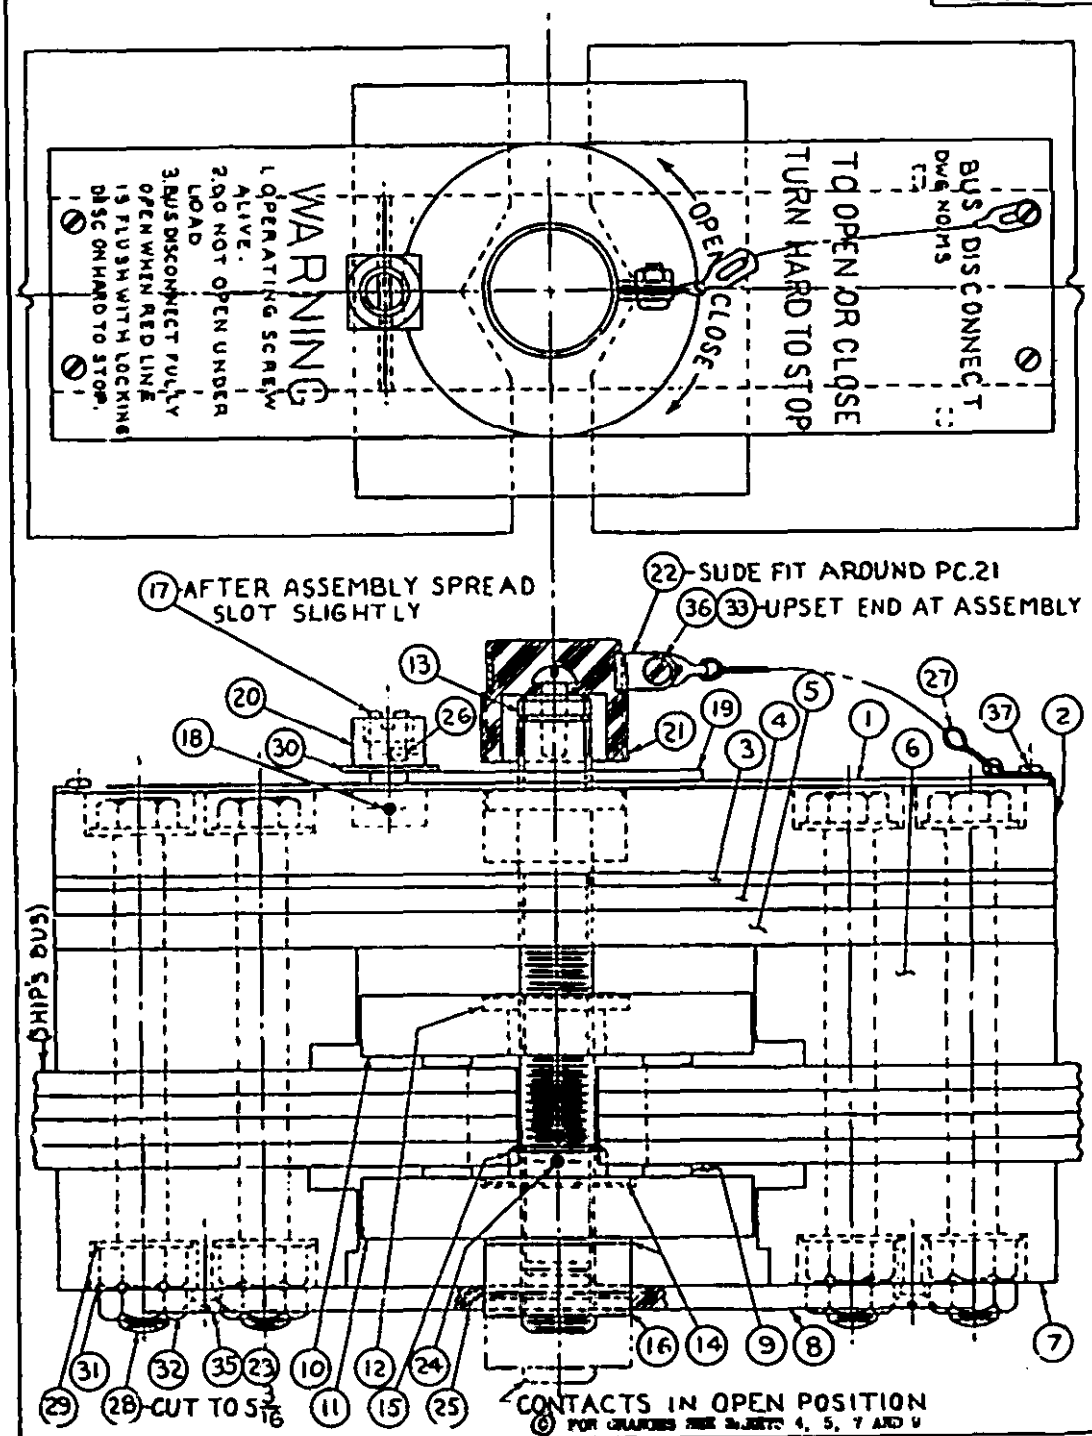

APPROVED 21 May 1962 REVISED A 8 March 1963 B 8 August 1963 C 10 January 1968

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. SHIPS
Other Cons

TITLE BUS DISCONNECT QUICK OPENING SYMBOL 1484

MILITARY STANDARD


MS 17831 (SHIPS)

PROCUREMENT SPECIFICATION NONE

SUPERSEDES

SHEET 1 OF 9


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

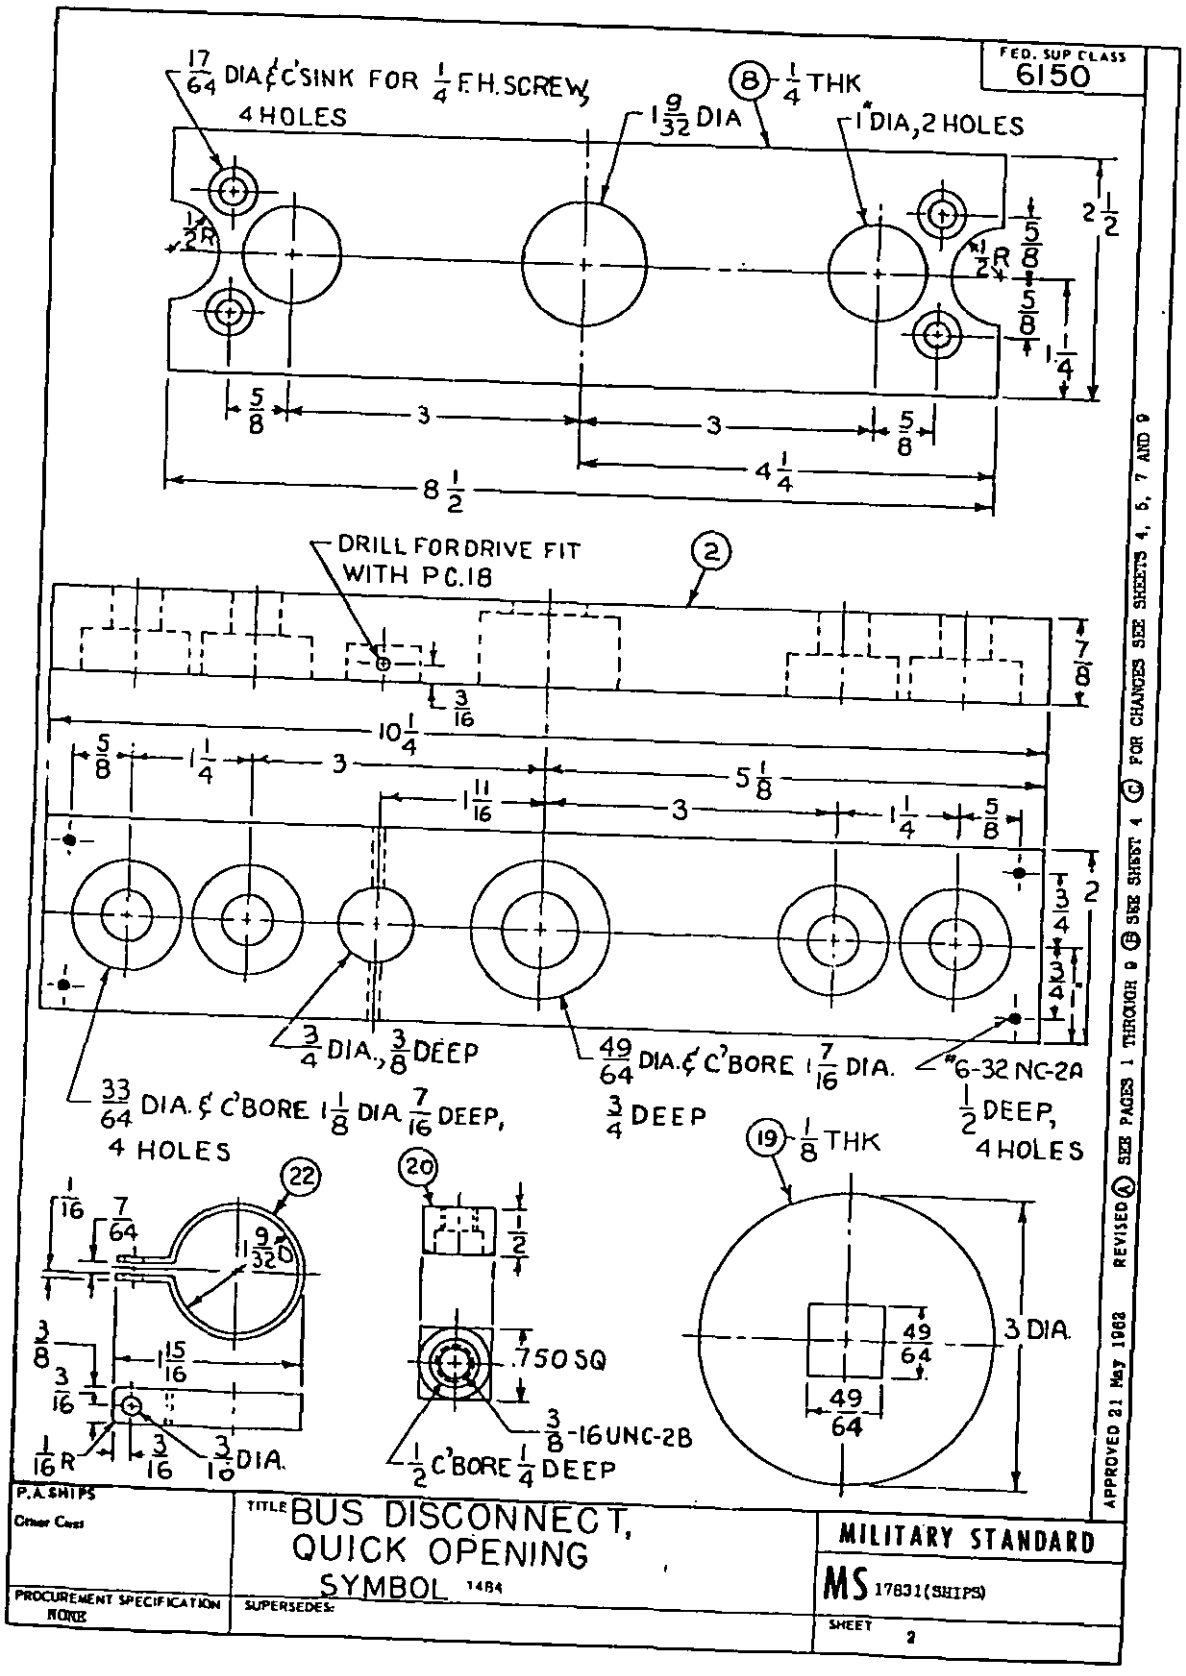

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6150

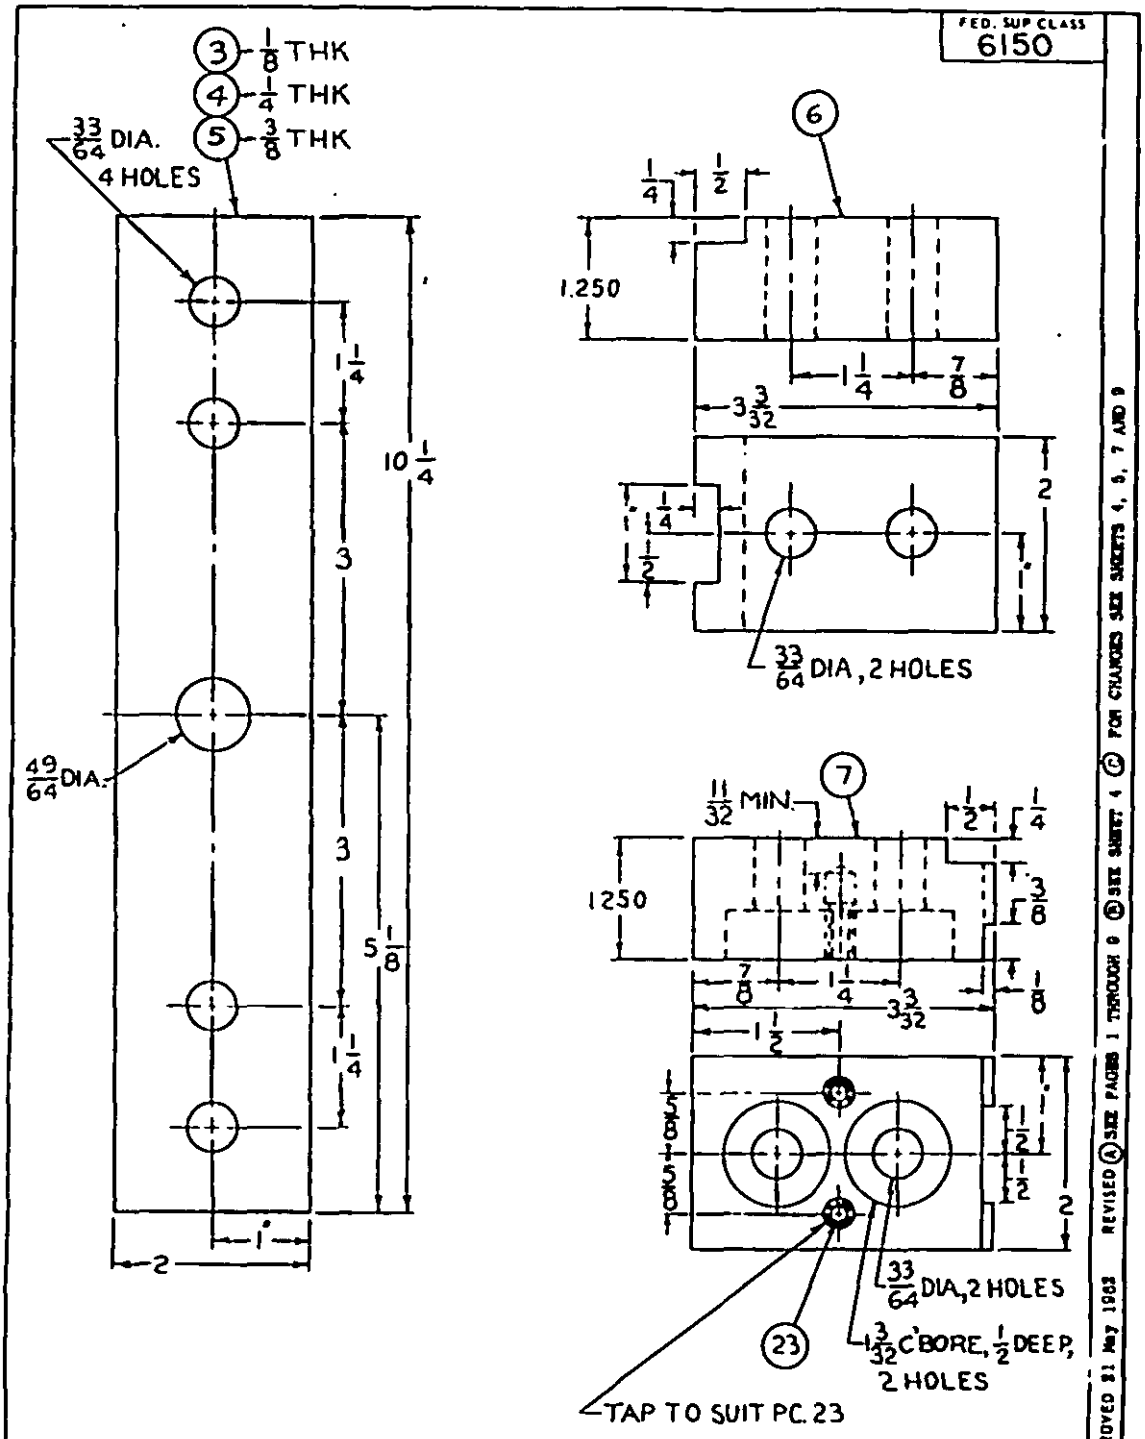


APPROVED 31 May 1963 REVISED (A) SEE PAGES 1 THROUGH 9 (B) SEE SHEET 4 (C) FOR CHANGES SEE SHEETS 4, 6, 7 AND 9

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

P.A SHIPS Other Cust	TITLE BUS DISCONNECT, QUICK OPENING SYMBOL 1484	MILITARY STANDARD MS 17831(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6150

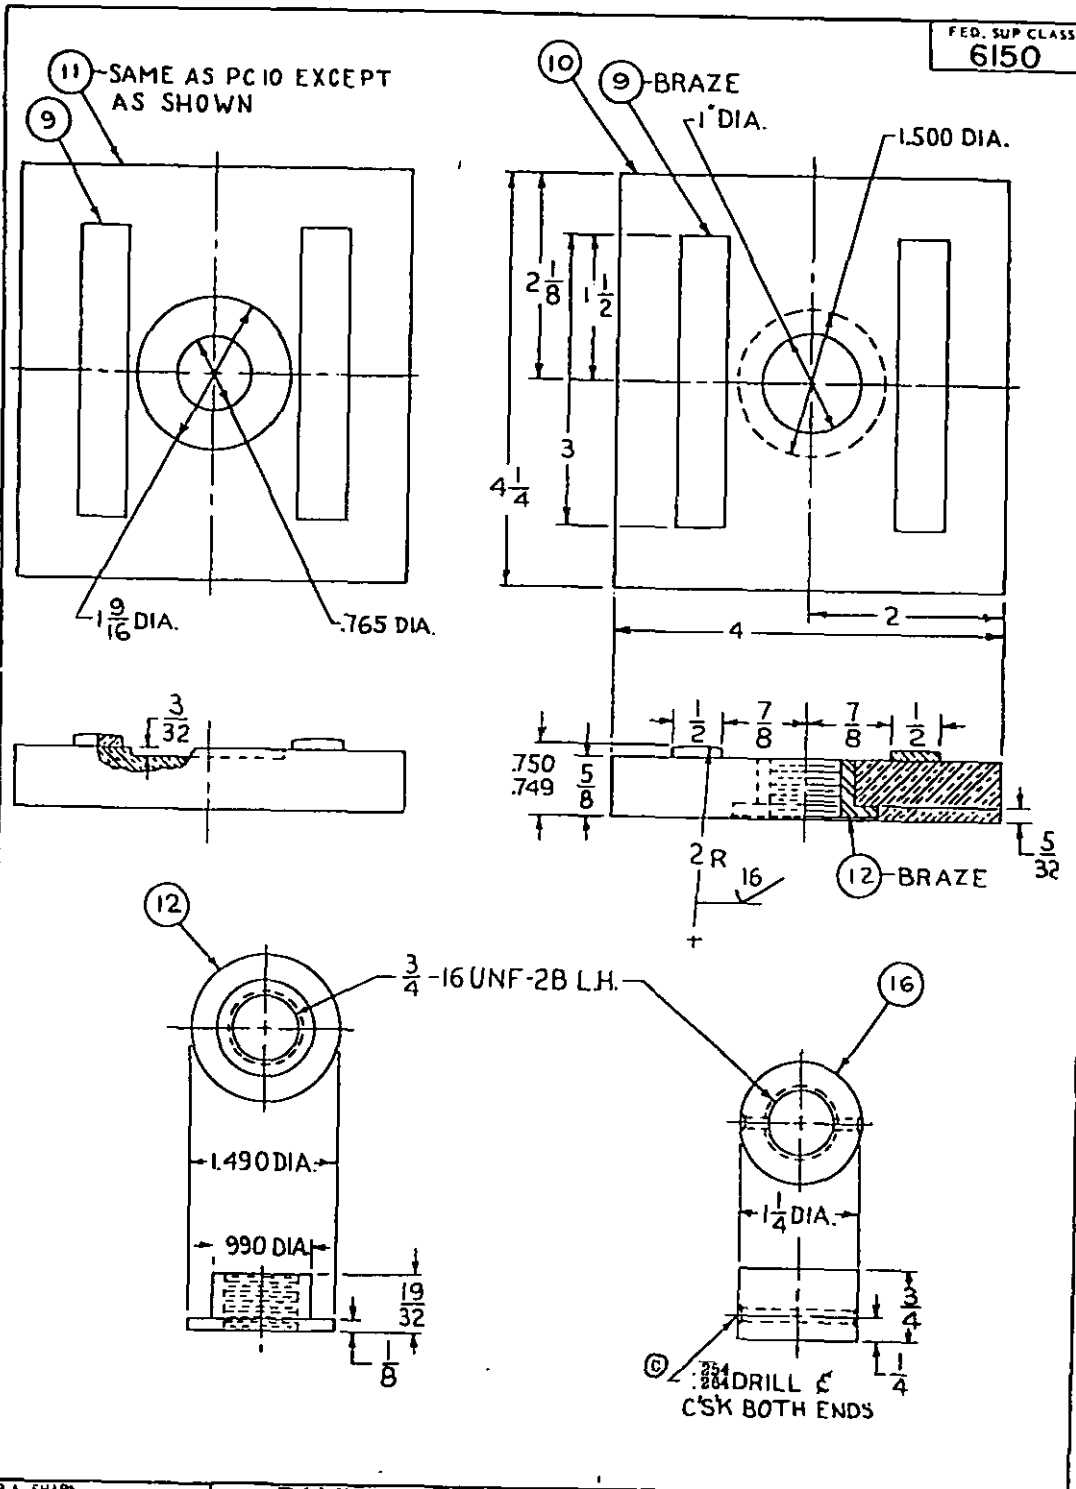

APPROVED 21 May 1962 REVISED (A) SEE PAGES 1 THROUGH 9 (B) SEE SHEET 4 (C) FOR CHANGES SEE SHEETS 4, 5, 7 AND 9

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. SHIPS Other Cust	TITLE BUS DISCONNECT, QUICK OPENING SYMBOL 1484	MILITARY STANDARD MS 17831 (SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 6150

LIST OF MATERIAL - QUANTITIES FOR ONE UNIT


PC. NO.	NAME	QTY.	MATERIAL	SPECIFICATION	REQUIREMENTS
1	NAMEPLATE	1	LAMINATED PLASTIC		TYPE GMG
2	BLOCK, SUPPORT	1	LAMINATED PLASTIC		TYPE GMG
3	FILLER	1	LAMINATED PLASTIC		TYPE GMG
4	FILLER	1	LAMINATED PLASTIC		TYPE GMG
5	FILLER	1	LAMINATED PLASTIC		TYPE GMG
6	BLOCK, SPACER (FRONT)	2	LAMINATED PLASTIC		TYPE GMG
7	BLOCK, SPACER (BACK)	2	LAMINATED PLASTIC		TYPE GMG
8	PLATE, GUIDE	1	LAMINATED PLASTIC		TYPE GMG
9	CONTACT, INLAY	4	SILVER		999 FINENESS
10	BLOCK, CONTACT (FRONT)	1	COPPER	QQ-B-825	SEE REQ'T. 3 & 4
⑥ 11	BLOCK, CONTACT (BACK)	1	COPPER	QQ-B-825	SEE REQ'T. 3 & 4
⑥ 12	INSERT, CONTACT BLOCK	1	CRES.		CLASS 303
13	SCREW, OPERATING	1	CRES.		CLASS 303
14	WASHER, FLAT	2	CRES.		
15	COLLAR (INSIDE)	1	CRES.		
16	COLLAR (OUTSIDE)	1	CRES.		
17	STUD	1	CRES.		
18	PIN	1	CRES.		
19	DISC, LOCKING	1	LAMINATED PLASTIC		TYPE GMG
20	NUT, SQUARE	1	CRES.		
21	CAP, PROTECTIVE	1	PLASTIC	MIL-M-14	MEX-20
22	CLAMP	1	CRES.		
23	INSERT, HELI-COIL	4		MS 122161	
⑥ 24	RIVET, CHMK, SEE REQ'T. 7	1	CRES.		
⑥ 25	RIVET, CHMK, SEE REQ'T. 7	1	CRES.		
26	PELLET, 1/8 DIA. X 5/32 LG.	1	NYLON		
27	CHAIN, PLUMBERS	6"	BRASS		
28	BOLT, HEX. HD. 1/2-13 X 5 1/2 LG.	4	STEEL		CADMIUM PLATE
29	WASHER, FLAT, 1" O.D. X 9/16 I.D. X .062 THK.	8	STEEL		CADMIUM PLATE
30	WASHER, FLAT, 1" O.D. X 13/32 I.D. X .062 THK.	1	CRES.		
31	NUT, HEX. 1/2-13	4	STEEL		CADMIUM PLATE
32	NUT, JAM, 1/2-13	4	STEEL		CADMIUM PLATE
33	NUT, HEX #8-32	1	STEEL		CADMIUM PLATE
34	SCREW, RD. HD., 1/4-80 X 3/4 LG.	1	STEEL		CADMIUM PLATE
35	SCREW, FL. HD., 1/4-80 X 5/8 LG.	4	STEEL		CADMIUM PLATE
36	SCREW, PAN. HD. #8-32 X 3/8 LG.	1	STEEL		CADMIUM PLATE
37	SCREW, PAN. HD. #6-32 X 5/8 LG.	4	STEEL		CADMIUM PLATE

APPROVED 21 May 1962 REVISED Ⓐ SEE PAGES 1 THROUGH 9 Ⓑ SEE SHEET 4 Ⓒ FOR CHANGES SEE SHEETS 4, 5, 7 AND 9

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


P.A. SHIPS Other Cose	TITLE BUS DISCONNECT, QUICK OPENING SYMBOL 1484	MILITARY STANDARD MS 17891(SHIPS)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 6

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

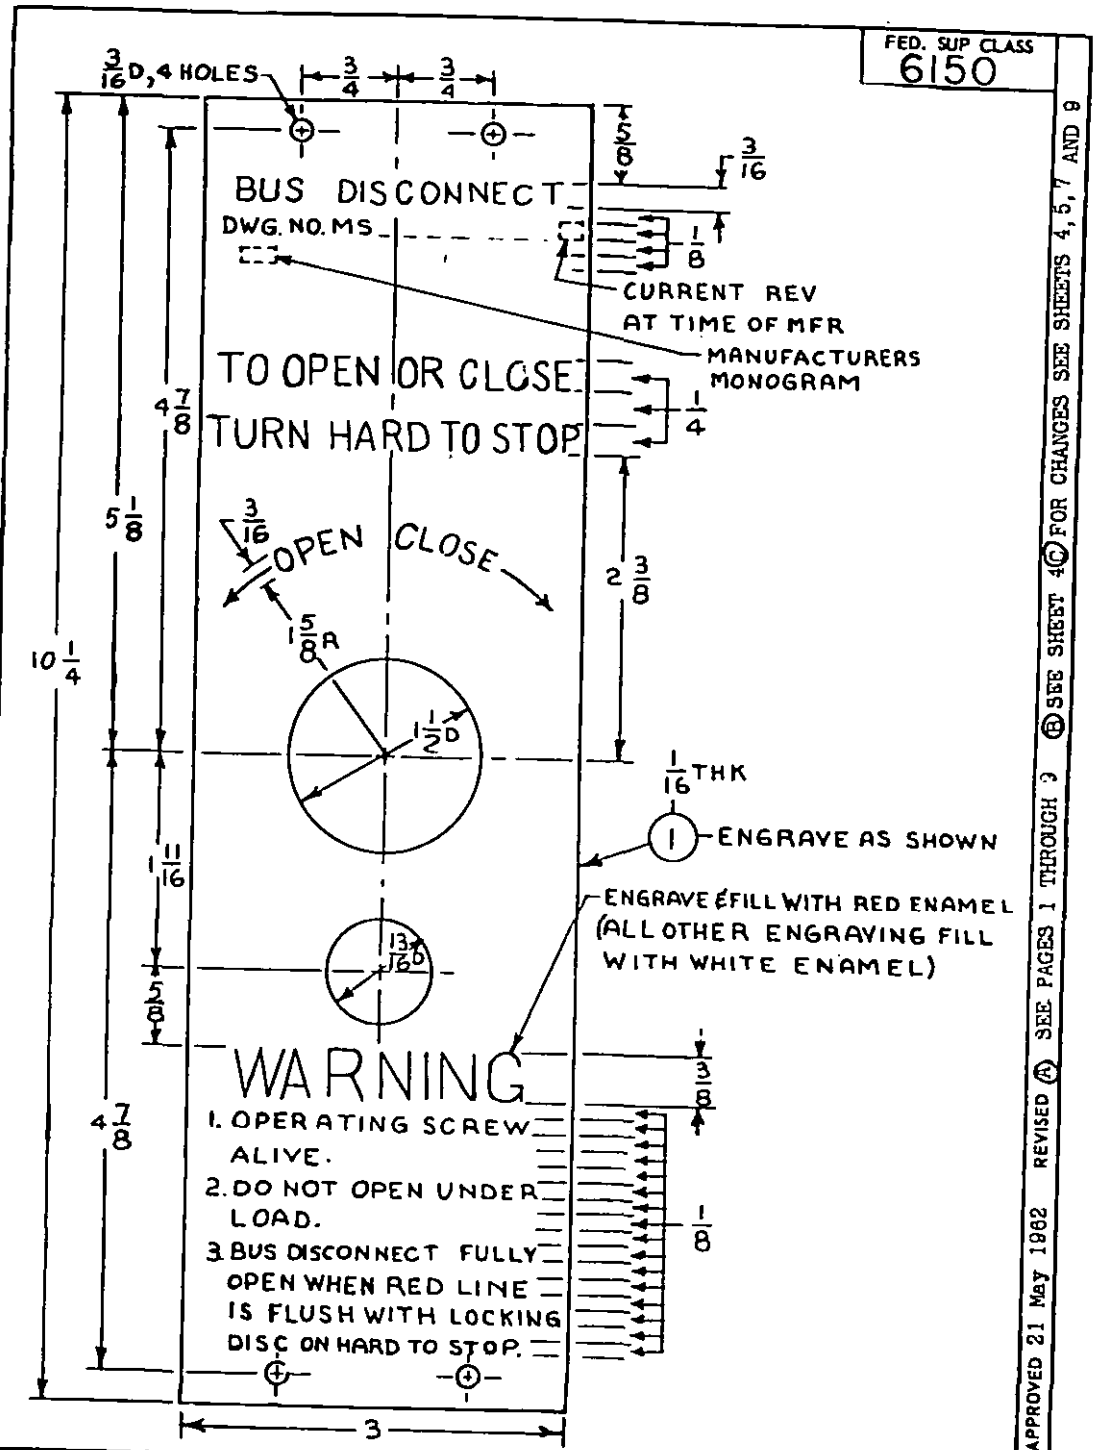

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

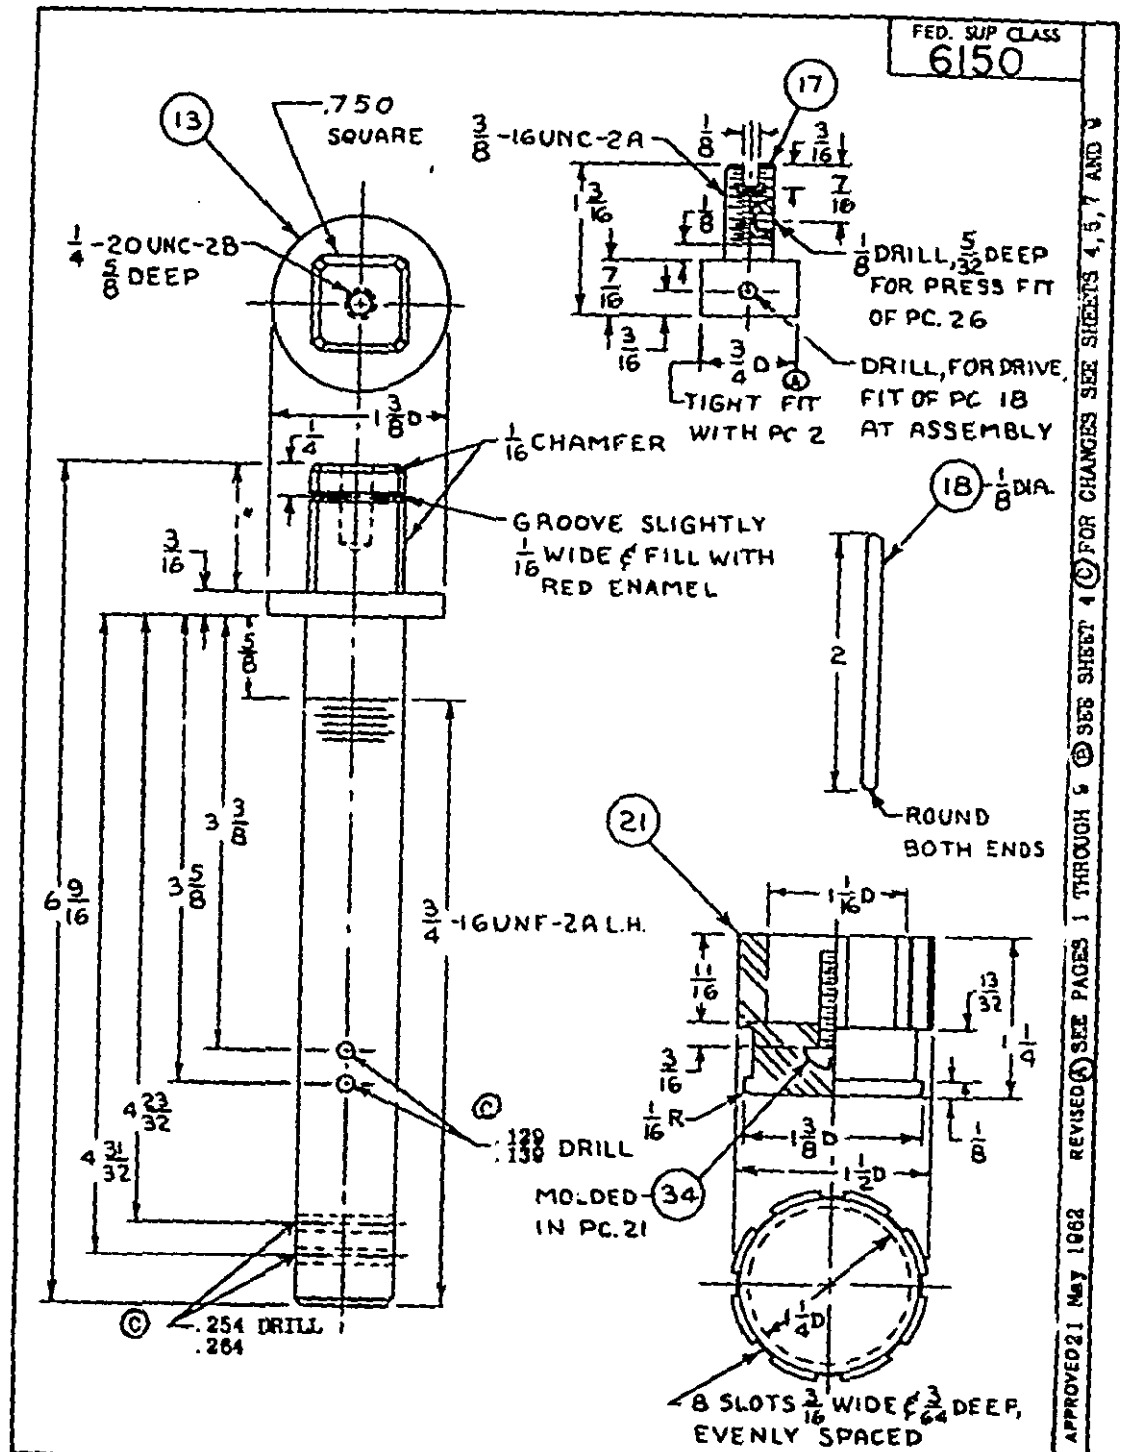

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6150

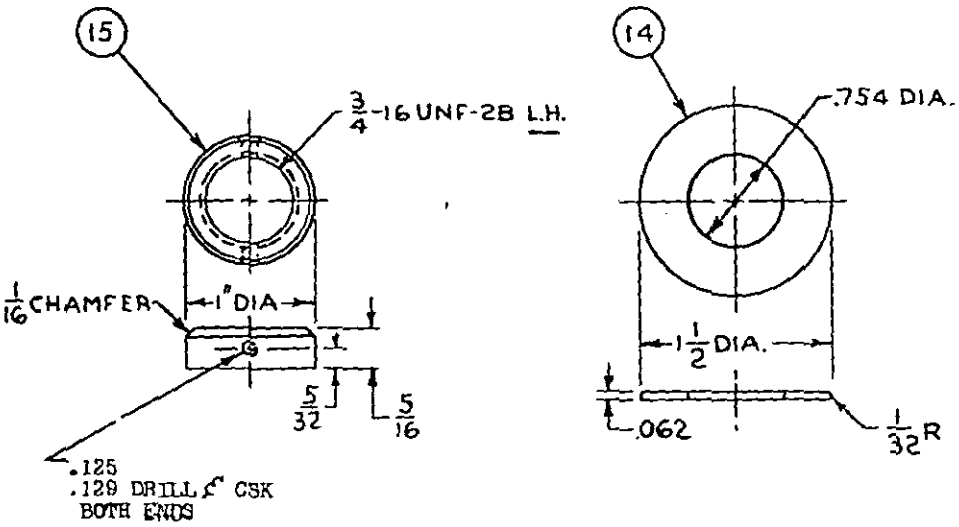


TABLE I

RATING OF QUICK OPENING BUS DISCONNECT				DISCONNECT TEMP		MILLIVOLT DROP *	
SIZE OF BUS BAR	AMPERE	TIME	TEMP RISE	START	END	12" CTR	6" CTR
(4) 1/4 X 5	7,000	CONTINUOUS	70°C	——	——		
(4) 1/4 X 5	10,000	1/2 HR.	55°C	32°C	87°C		
(4) 1/4 X 5	12,000	1/2 HR.	101°C	43°C	144°C		
(4) 1/4 X 5	5,400	CONTINUOUS	55°C	——	79.4°C	11.5	8.4
(4) 1/4 X 5	10,000	1/2 HR.	52.2°C	75°C	127.2°C	25.1	18.2
(4) 1/4 X 5	10,500	1/2 HR.	76.7°C	75°C	151.7°C	30.2	22.2
(4) 1/4 X 5	12,000	1/2 HR.	95°C	75°C	170°C	34.2	24.8

* MILLIVOLT DROP AT DISCONNECT TEMP.

APPROVED 21 May 1962 REVISED (A) SEE PAGES 1 THROUGH 8 (B) SEE SHEET 4 (C) FOR CHANGES SEE SHEETS 4, 5, 7 AND 8

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. SHIPS Other Cust	TITLE BUS DISCONNECT, QUICK OPENING SYMBOL 1484	MILITARY STANDARD MS 17831(SHIPS)
Procurement Specification NONE	SUPERSEDES.	SHEET 8

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:09Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6150

REQUIREMENTS

1. DETAIL AND GENERAL REQUIREMENTS SHALL COMPLY WITH NOTES 2,23,25,44,66 & 67 OF MILITARY STANDARD MS16662.

2. SAMPLING, INSPECTION AND TEST PROCEDURE SHALL COMPLY WITH NOTES 37,40, 54,55,56b & 65 OF MILITARY STANDARD MS16662.

3. SILVER BRAZING ALLOY SHALL BE COMMERCIAL GRADE BAG-1a. THE SURFACE TO BE BRAZED SHALL BE ESTABLISHED AT NOT LESS THAN .002 IN. AND NOT MORE THAN .005 IN. AT ANY GAP SECTION.

4. AFTER FINISH MACHINING, PCS. 9, 10 & 11 SHALL BE SILVER-PLATED TO A MINIMUM OF .002 IN. THICKNESS.

© 5. EDGES, HOLES & MACHINED SURFACES OF GMG INSULATING MATERIAL SHALL BE GIVEN ONE COAT OF INSULATING VARNISH CLASS 105, TYPE AN OF MIL-I-24092.

6. CARE SHALL BE EXERCISED TO PROTECT CONTACT SURFACES FROM INJURY AT ALL TIMES.

© 7. RIVETS, PCS. 24 AND 25 SHALL BE SOLID STOCK .125±.003 DIA. AND .250±.003 DIA. RESPECTIVELY, LENGTH TO SUIT, HEADED-OVER AND GROUND SMOOTH BOTH ENDS AFTER ASSEMBLY, SEE SHEET 1.

NOTES

1. THIS BUS DISCONNECT IS NOT INTENDED TO INTERRUPT CURRENT.

2. THIS BUS DISCONNECT IS INTENDED TO BE OPERATED WITH INSULATED WRENCH SHOWN ON MS17832.

3. THIS BUS DISCONNECT IS INSULATED FOR MAXIMUM OF 1000 VOLTS. DISCONNECT VOLTAGE TO GROUND IS DICTATED BY BUS BAR SUPPORTS USED AT INSTALLATION.

4. WHEN CONNECTED TO FOUR 1/4 x 5 BUS BARS, THIS DISCONNECT IS DESIGNED TO CARRY 7000 AMPERES CONTINUOUSLY. FOR TEST DATA SEE TABLE I.

5. TYPICAL INSTALLATION OF THIS FITTING IS SHOWN ON BUSHIPS DWG. 9000-S6202-73980, SECTION 5, Sheet 153.

6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitation for bids.
8. Laminated plastic parts may be molded of plastic material. MIL-M-14, types MPI-20 or MAI-60, if desired.

PROJECT NO. 6150-NU10

APPROVED 21 MAY 1962 REVISED Ⓐ SEE PAGES 1 THROUGH 9 Ⓐ SEE SHEET 4 © FOR CHANGES SEE SHEETS 4,5,7 AND 9

P.A. SHIPS Other Cust	TITLE BUS DISCONNECT, QUICK OPENING SYMBOL 1484	MILITARY STANDARD MS 17381(SHIPS)
Procurement Specification NONE	SUPERSEDES:	SHEET 9

This military standard is approved by the Naval Ship Engineering Center Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1962-381-514/3841

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:09Z
Check the source to verify that this is the current version before use.