

FED. SUP CLASS
6240

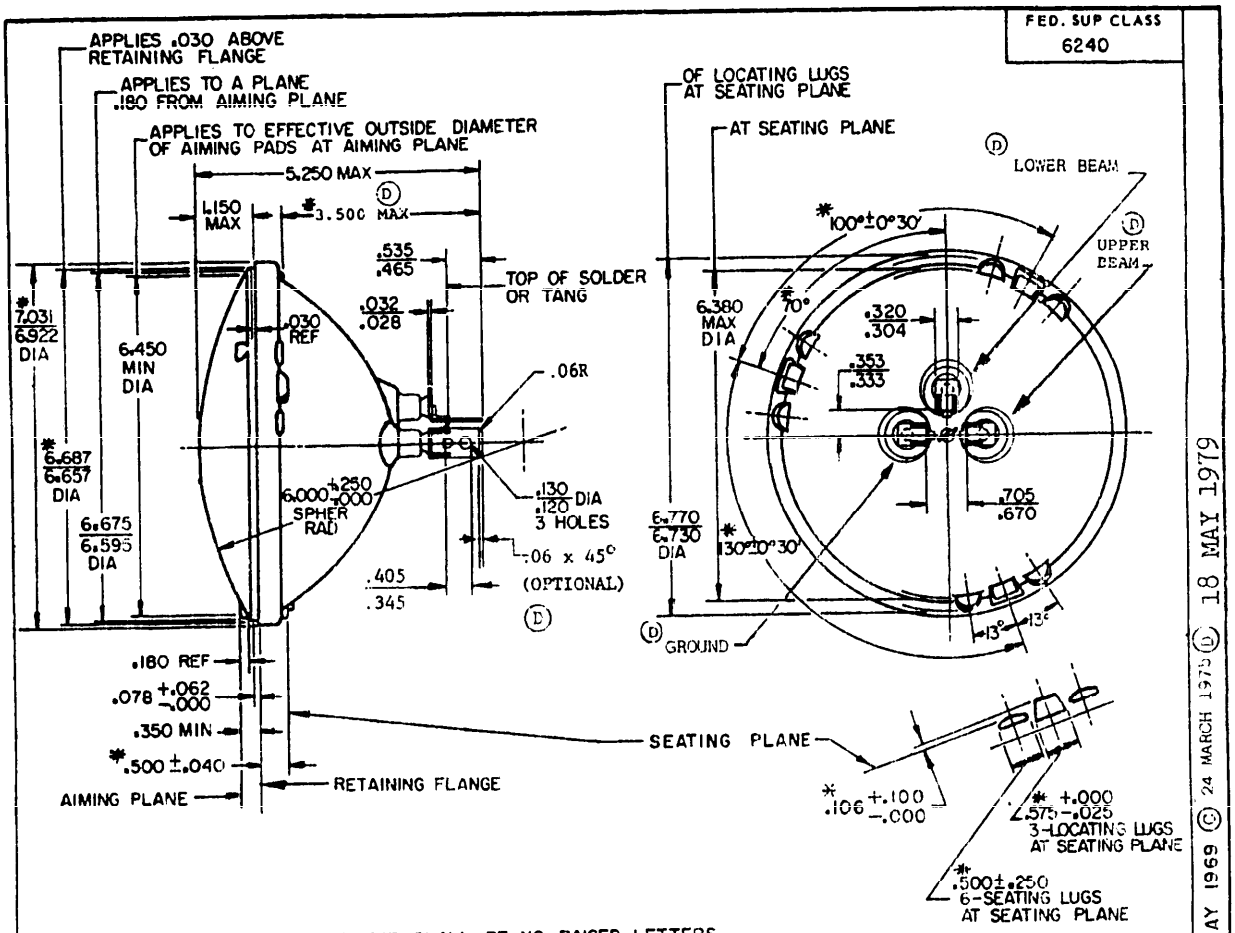

THERE SHALL BE NO RAISED LETTERS OR EMBOSSING ON OUTSIDE SURFACE OF LENS BETWEEN A MINIMUM DIA OF 1.50 AND A MAXIMUM DIA OF 3.60

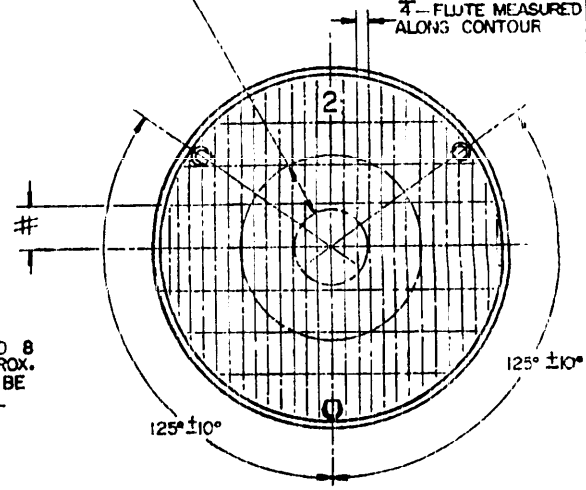

LENS TO BE DIVIDED INTO 8 HORIZONTAL ZONES APPROX. 13/16 HIGH. ZONES MAY BE SUBDIVIDED FOR OPTICAL REASONS.

(D) DENOTES CHANGES

ARMY MS PART NO.	RATED VOLTS	RATED WATTS	DESIGN VOLTS	DESIGN MAX AMPS	FILAMENT TYPE	RATED AVG LAB LIFE	DESCRIPTION
MS 18009 - 6015	12	60/50	12.8/12.8	5.02/4.20	C-6/C-6	200/320 HRS.	CLEAR GLASS LENS, PRISMATIC — 50W. FILAMENT SHIELD

P.A. ARMY-AT Other Cust AF-99

INTERNATIONAL INT. ABCA NATO

TITLE
LAMP, INCANDESCENT — SEALED BEAM, PAR 56, HEADLAMP, 12 VOLT, 3 CONTACT LUG TYPE

MILITARY STANDARD
MS 18009
SHEET 1 OF 3

PROCUREMENT SPECIFICATION W-L-50

SUPERSEDES

REVIEWERS: DLA-GS
USERS: NAVY-YD, SH

APPROVED 23 NOVEMBER 1962 REVISED (A) 16 DECEMBER 1968 (B) 21 MAY 1969 (C) 24 MARCH 1975 (D) 18 MAY 1979

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


6240-0324

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:12Z
Check the source to verify that this is the current version before use.

UPPER BEAM

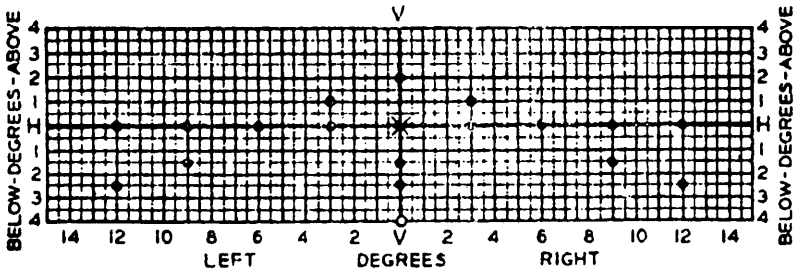

LOWER BEAM

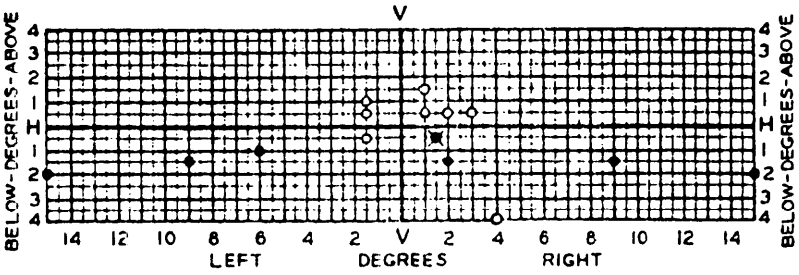

POINTS MARKED ○ DESIGNATE MAXIMUM CANDELA
POINTS MARKED ● DESIGNATE MINIMUM CANDELA
POINTS MARKED ▣ DESIGNATE MAX AND MIN CANDELA

TABLE 1—TEST POINT VALUES FOR 7 IN (178 mm) TYPE 2 SEALED BEAM UNITS

Upper Beam (One 7 in (178 mm) Unit)			Lower Beam (One 7 in (178 mm) Unit)		
Test Points, deg[c]	cd, max[a]	cd, min	Test Points, deg[c]	cd, max	cd, min
2U-V	—	1,000	10U to 90U[b]	125	—
1U-3R and 3L	—	2,000	1U-1-1/2L to L	700	—
H-V	—	20,000	1/2U-1-1/2L to L	1,000	—
			1/2D-1-1/2L to L	2,500	—
			1-1/2U-1R to R	1,400	—
H-3R and 3L	—	10,000			
H-6R and 6L	—	3,250	1/2U-1R to 3R	2,700	—
H-9R and 9L	—	1,500	1/2D-1-1/2R	20,000	8,000
H-12R and 12L	—	750	1D-6L	—	750
			1-1/2D-2R	—	15,000
1-1/2D-V	—	5,000			
1-1/2D-9R and 9L	—	1,500	1-1/2D-9L and 9R	—	750
2-1/2D-V	—	2,500	2D-15L and 15R	—	700
2-1/2D-12R and 12L	—	750	4D-4R	12,500	—
4D-V	5,000	—			

[a] Maximum candela at any test point shall not exceed 75,000.
[b] From the normally exposed surface of the lens.
[c] A tolerance of ±1/4 deg in location may be allowed for at any test point.

APPROVED 23 NOVEMBER 1962 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 3

P.A. Other Cust	INTERNATIONAL INT.	TITLE: LAMP, INCANDESCENT — SEALED BEAM, PAR 56, HEADLAMP, 12 VOLT, 3 CONTACT LUG TYPE	MILITARY STANDARD MS 18009
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 2 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6240

(D) REQUIREMENTS:

1. TYPE III(AUTOMOTIVE) OF PROCUREMENT SPECIFICATION.
2. LAMPS SHALL BE IN ACCORDANCE WITH SAE STANDARD ON SEALED BEAM HEADLAMP UNITS FOR MOTOR VEHICLES, SAE J579.
3. MS DASH NUMBER CORRELATES WITH INDUSTRY NUMBER.
4. IN ACCORDANCE WITH UNIFORM VEHICLE CODE AND STATE HIGHWAY REGULATIONS, THE MOUNTING HEIGHT OF HEADLAMPS SHALL BE NO LESS THAN 24 OR MORE THAN 54 INCHES FROM THE HORIZONTAL CENTERLINE OF THE LAMP TO THE NORMAL GROUND LEVEL.
5. DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± .010 ON DECIMALS, ± 1/32 ON FRACTIONS, ± 1° ON ANGLES.
6. MARKING SHALL CONSIST OF THE MS DASH NUMBER, VOLTAGE RATING AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(D) NOTES:

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
2. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSION, NOTATIONS, AND REFERENCED DOCUMENTS.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
4. THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATIONS WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

CERTAIN PROVISIONS OF THIS STANDARD, IDENTIFIED BY AN ASTERISK (*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS ABCA QSTAG-208 AND NATO STANAG 4005. WHEN REVISION OR CANCELLATION OF THIS MILITARY STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 23 NOVEMBER 1962 REVISED (D) FOR CHANGES SEE SHEETS 1 AND 3

P.A. Other Cus.	INTERNATIONAL INT.	TITLE: LAMP, INCANDESCENT — SEALED BEAM, PAR 56, HEADLAMP, 12 VOLT, 3 CONTACT LUG TYPE	MILITARY STANDARD MS 18009
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.