
(PROJECT NO. 5306-0586)

FED. SUP CLASS 5306

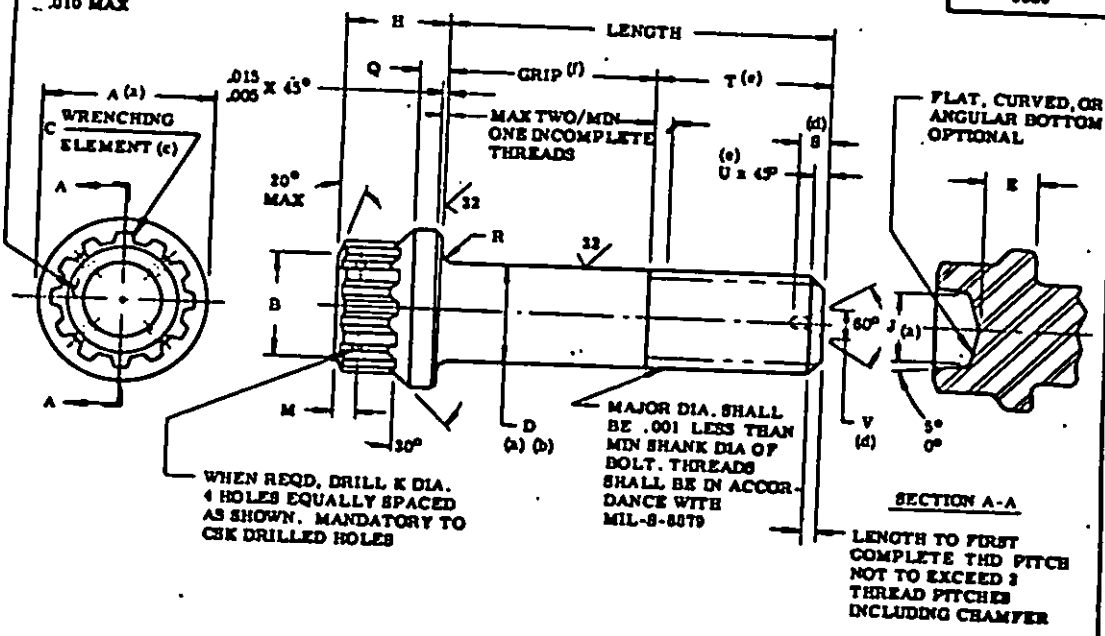

NOTES:

(A)
1. MATERIAL: ALLOY STEEL PER AMS 6487.
2. HARDNESS: ROCKWELL C46-50
3. SURFACE TEXTURE IN ACCORDANCE WITH ANSI (ASA) B46.1 - 1962.
4. PLATING: CADMIUM COATED (VACUUM DEPOSITED): MIL-C-8837, TYPE II, CLASS 3.
5. DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±2°
6. DIMENSIONS TO BE MET AFTER PLATING.
7. DESIGN AND USAGE INFORMATION: THESE BOLTS ARE DESIGNED TO BE USED WITH MS21084 NUTS AND MS21206 WASHERS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) REVISED

APPROVED 28 JAN 1972 REVISED (A) 6 OCT 1975

P.A. NAVY - AS Other Cust USAF - 11 ARMY - AV	TITLE BOLT, TENSION, STEEL, 220 KSI Fbu, 450°F., EXTERNAL WRENCHING, SPLINE DRIVE, FLANGED HEAD	MILITARY STANDARD MS21297
PROCUREMENT SPECIFICATION MIL-B-8906	SUPERSEDES	SHEET 1 OF 6

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15329

REVISED SYMBOLS
DSA - ES
ARMY - AT

USER SYMBOLS
ARMY - MI

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5306

DIA DASH NO.	NOMINAL SIZE	THREAD UNJF-3A	A - DIA (a)		B - DIA		C(c) WRENCHING ELEMENT	D - DIA (a) (b)		DASH NO.
			MAX	MIN	MAX	MIN		MAX	MIN	
03	NO. 10	.1900-32	.359	.349	.188	.173	8	.1895	.1885	03
04	1/4	.2500-28	.470	.460	.250	.235	10	.2495	.2485	04
05	5/16	.3125-24	.585	.575	.375	.360	12	.3120	.3110	05
06	3/8	.3750-24	.701	.691	.438	.423	14	.3745	.3735	06
07	7/16	.4375-20	.817	.807	.500	.485	16	.4370	.4360	07
08	1/2	.5000-20	.932	.922	.562	.547	20	.4995	.4985	08
09	9/16	.5625-18	1.047	1.037	.625	.610	22	.5615	.5605	09
10	5/8	.6250-18	1.163	1.153	.688	.673	24	.6240	.6230	10
12	3/4	.7500-16	1.394	1.384	.812	.797	28	.7490	.7480	12
14	7/8	.8750-14	1.625	1.615	.938	.923	32	.8740	.8730	14
16	1	1.0000-12	1.856	1.846	1.062	1.047	38	.9990	.9980	16
18	1 1/8	1.1250-12	2.087	2.077	1.250	1.235	42	1.1240	1.1225	18
20	1 1/4	1.2500-12	2.318	2.308	1.375	1.360	48	1.2490	1.2475	20
22	1 3/8	1.3750-12	2.549	2.539	1.500	1.485	52	1.3740	1.3725	22
24	1 1/2	1.5000-12	2.780	2.770	1.625	1.610	56	1.4990	1.4975	24

DASH NO.	E MIN	H ±.010	J (a) +.010 -.030	K ±.005	M	Q MAX	Q MIN	R - RAD. MAX	R - RAD. MIN	S MAX (d)	T MIN REF (e)	DASH NO.
03	.113	.205	.100	.037	.062	.037	.017	.022	.016		.408	03
04	.149	.250	.125			.046	.026	.028	.022		.495	04
05	.187	.312	.215		.070	.055	.035	.035	.029		.589	05
06	.224	.337	.260			.064	.044	.043	.033		.659	06
07	.262	.393	.320			.073	.053	.049	.039		.763	07
08	.299	.450	.380		.094	.082	.062	.055	.045		.838	08
09	.336	.505	.440			.091	.071	.061	.051		.935	09
10	.374	.562	.500			.100	.080	.068	.058		1.005	10
12	.449	.600	.570	.055		.118	.098	.080	.070	.200	1.173	12
14	.523	.700	.650		.125	.136	.116	.093	.083		1.348	14
16	.599	.800	.740			.154	.134	.105	.095	.260	1.546	16
18	.674	.900	.840			.172	.152	.118	.108		1.696	18
20	.749	1.000	1.070			.190	.170	.130	.120	.320	1.836	20
22	.824	1.100	1.140		.188	.208	.188	.143	.133		1.976	22
24	.899	1.200	1.200			.226	.206	.155	.145		2.116	24

APPROVED 28 JAN 1972 REVISED (A) FOR CHGS SEE SHT 1

P.A. NAVY - AS
Other Cust
USAF - 11
ARMY - AV

TITLE
BOLT, TENSION, STEEL, 220 KSI Ftu, 450°F., EXTERNAL WRENCHING, SPLINE DRIVE, FLANGED HEAD

MILITARY STANDARD
MS21297
SHEET 2 OF 6

PROCUREMENT SPECIFICATION
MIL-B-8906

SUPERSEDES:

DD FORM 672-1 (Coordinated)

Previous editions of this form are obsolete.

PLATE NO. 15320

USER SYMBOLS:
ARMY - MI

REVIEWER SYMBOLS:
DSA - IS
ARMY - AT

"Review/coordination is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for requisition use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5306

DASH NO.	U REF (e)	V MAX (d)	CENTER DRILL SIZE (d)	BEARING AREA (MEAN DIA) SQ. IN.	ULTIMATE TENSILE STRENGTH LB MIN	DOUBLE SHEAR STRENGTH LB MIN	CONCENTRICITY X (a)	CONCENTRICITY Z (b)	DASH NO.
03	.039			.0517	4,770	7,450	.004	.0045	03
04	.045			.0914	8,540	13,000	.005		04
05	.052			.1442	13,500	20,200	.006		05
06				.2106	20,900	29,100	.008		06
07	.063			.2896	28,300	39,700	.009	.0060	07
08				.3786	37,600	51,800	.010		08
09	.069			.4808	47,900	65,600	.011		09
10				.5945	59,900	81,000	.012		10
12	.078	.187	2	.7512	86,900	117,000	.015		12
14	.089			1.1673	119,000	159,000	.018	.0090	14
16	.104	.250	3	1.5465	155,000	207,000	.020		16
18				1.9438	198,000	262,000	.022		18
20		.312	4	2.4020	247,000	324,000	.025		20
22				2.9060	301,000	392,000	.028	.0120	22
24				3.4638	361,000	466,000	.030		24

(a) DIMENSIONS A, D AND J SHALL BE CONCENTRIC TO EACH OTHER WITHIN VALUES SPECIFIED FOR X T.I.R.
(b) DIMENSIONS D AND THREAD PITCH DIAMETER SHALL BE CONCENTRIC TO EACH OTHER WITHIN VALUES SPECIFIED PER Z T.I.R.
(c) WRENCHING ELEMENT PER MS33787. DRIVERS PER MIL-W-6982.
(d) ON BOLT SIZES .750 INCH AND LARGER, CENTER DRILLING OF SHANK IS OPTIONAL.
(e) REFERENCE DIMENSIONS ARE FOR DESIGN PURPOSES ONLY AND ARE NOT INSPECTION OR MANUFACTURING REQUIREMENTS.
(f) GRIP LENGTH OF BOLT SHALL BE MEASURED FROM UNDERSIDE OF HEAD TO THE END OF FULL CYLINDRICAL PORTION OF SHANK.

APPROVED 28 JAN 1972 REVISED (A) FOR CHGS SEE SHT 1

P.A. NAVY - AS
Other Cust
USAF - 11
ARMY - AV

PROCUREMENT SPECIFICATION MIL-B 8906

TITLE
BOLT, TENSION, STEEL, 220 KSI Ftu, 450° F., EXTERNAL WRENCHING, SPLINE DRIVE, FLANGED HEAD

SUPERSEDES

MILITARY STANDARD
MS21297
SHEET 3 OF 6

DD FORM 1 SEP 65 672-1 (Coordinated)

REVIEWER SYMBOLS: DSA - ES, ARMY - AT
USER SYMBOLS: ARMY - MI

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft specifications should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
DSA - ES
ARMY - AT

USER SYMBOLS:
ARMY - MI

GRIP DASH NO.	GRIP ±.010	DIAMETER DASH NUMBERS 03	04	05	06	07	08	09	10	12	14	16	18	20	22	24
		LENGTH ±.015														
003	.188	.610	.698	.792	.862	.966	1.040	1.138	1.208	1.376	1.550	1.748	1.898	2.038	2.178	2.318
004	.250	.673	.760	.854	.924	1.028	1.103	1.200	1.270	1.438	1.613	1.811	1.961	2.101	2.241	2.381
005	.312	.736	.822	.916	.986	1.090	1.166	1.262	1.332	1.500	1.676	1.874	2.024	2.164	2.304	2.444
006	.375	.798	.885	.979	1.049	1.153	1.228	1.325	1.395	1.563	1.738	1.936	2.086	2.226	2.366	2.506
007	.438	.860	.948	1.042	1.112	1.216	1.290	1.388	1.458	1.626	1.800	1.998	2.148	2.288	2.428	2.568
008	.500	.923	1.010	1.104	1.174	1.278	1.353	1.450	1.520	1.688	1.863	2.061	2.211	2.351	2.491	2.631
009	.562	.986	1.072	1.166	1.236	1.340	1.416	1.512	1.582	1.750	1.926	2.124	2.274	2.414	2.554	2.694
010	.625	1.048	1.135	1.229	1.299	1.403	1.478	1.575	1.645	1.813	1.988	2.186	2.336	2.476	2.616	2.756
011	.688	1.110	1.198	1.292	1.362	1.466	1.540	1.638	1.708	1.876	2.050	2.248	2.398	2.538	2.678	2.818
012	.750	1.173	1.260	1.354	1.424	1.528	1.603	1.700	1.770	1.938	2.113	2.311	2.461	2.601	2.741	2.881
013	.812	1.236	1.322	1.416	1.486	1.590	1.666	1.762	1.832	2.000	2.176	2.374	2.524	2.664	2.804	2.944
014	.875	1.298	1.385	1.479	1.549	1.653	1.728	1.825	1.895	2.063	2.238	2.436	2.586	2.726	2.866	3.006
015	.938	1.360	1.448	1.542	1.612	1.716	1.790	1.888	1.958	2.126	2.300	2.498	2.648	2.788	2.928	3.068
016	1.000	1.423	1.510	1.604	1.674	1.778	1.853	1.950	2.020	2.188	2.363	2.561	2.711	2.851	2.991	3.131
017	1.062	1.486	1.572	1.666	1.736	1.840	1.916	2.012	2.082	2.250	2.426	2.624	2.774	2.914	3.054	3.194
018	1.125	1.548	1.635	1.729	1.799	1.903	1.978	2.075	2.145	2.313	2.488	2.686	2.836	2.976	3.116	3.256
019	1.188	1.610	1.698	1.792	1.862	1.966	2.040	2.138	2.208	2.376	2.550	2.748	2.898	3.038	3.178	3.318
020	1.250	1.673	1.760	1.854	1.924	2.028	2.103	2.200	2.270	2.438	2.613	2.811	2.961	3.101	3.241	3.381
021	1.312	1.736	1.823	1.916	1.986	2.090	2.166	2.263	2.332	2.500	2.676	2.874	3.024	3.164	3.304	3.444
022	1.375	1.798	1.885	1.979	2.049	2.153	2.228	2.325	2.395	2.563	2.738	2.936	3.086	3.226	3.366	3.506
023	1.438	1.860	1.948	2.042	2.112	2.216	2.290	2.388	2.458	2.626	2.800	2.998	3.148	3.288	3.428	3.568
024	1.500	1.923	2.010	2.104	2.174	2.278	2.353	2.450	2.520	2.688	2.863	3.061	3.211	3.351	3.491	3.631
025	1.562	1.986	2.072	2.166	2.236	2.340	2.416	2.512	2.582	2.750	2.926	3.124	3.274	3.414	3.554	3.694
026	1.625	2.048	2.135	2.229	2.299	2.403	2.478	2.575	2.645	2.813	2.988	3.186	3.336	3.476	3.616	3.756
027	1.688	2.110	2.198	2.292	2.362	2.466	2.540	2.638	2.708	2.876	3.050	3.248	3.398	3.538	3.678	3.818
028	1.750	2.173	2.260	2.354	2.424	2.528	2.603	2.700	2.770	2.938	3.113	3.311	3.461	3.601	3.741	3.881
029	1.812	2.236	2.322	2.416	2.486	2.590	2.666	2.762	2.832	3.000	3.176	3.374	3.524	3.664	3.804	3.944
030	1.875	2.298	2.385	2.479	2.549	2.653	2.728	2.825	2.895	3.063	3.238	3.436	3.586	3.726	3.866	4.006
031	1.938	2.360	2.448	2.542	2.612	2.716	2.790	2.888	2.958	3.126	3.300	3.498	3.648	3.788	3.928	4.068
032	2.000	2.423	2.510	2.604	2.674	2.778	2.853	2.950	3.020	3.188	3.363	3.561	3.711	3.851	3.991	4.131
033	2.062	2.486	2.572	2.666	2.736	2.840	2.916	3.013	3.082	3.250	3.426	3.624	3.774	3.914	4.054	4.194
034	2.125	2.548	2.635	2.729	2.799	2.903	2.978	3.075	3.145	3.313	3.488	3.686	3.836	3.976	4.116	4.256

FED. SUP CLASS 5306

APPROVED 28 JAN 1972 REVISED (A) FOR CHGS SEE SHT 1

P.A. NAVY - AS
Other Cust
USAF - 11
ARMY - AV

PROCUREMENT SPECIFICATION
MIL-B - 8906

TITLE
BOLT, TENSION, STEEL, 220KSI Ftu, 450° F., EXTERNAL WRENCHING, SPLINE DRIVE, FLANGED HEAD

SUPERSEDES:

MILITARY STANDARD
MS21297
SHEET 4 OF 6

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft annotation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
DSA - IS
ARMY - AT

USER SYMBOLS:
ARMY - MI

DD FORM 1426, SEP 67 — 672-1 (Continued)

PREPARING ACTIVITY: MIL-B-8906

P.A.: NAVY - AS
Other Cust: USAF - 11, ARMY - AV

SUPERSEDES:

TITLE: BOLT, TENSION, STEEL, 220 KSI Fbu, 450° F., EXTERNAL WRENCHING, SPLINE DRIVE, FLANGED HEAD

MILITARY STANDARD

MS21297

SHEET 5 OF 6

FSC 5306

GRIP DASH NO.	GRIP +.010	DIAMETER DASH NUMBERS														
		03	04	05	06	07	08	09	10	12	14	16	18	20	22	24
		LENGTH +.015														
035	2.188	2.610	2.695	2.792	2.862	2.966	3.040	3.138	3.203	3.376	3.550	3.748	3.895	4.038	4.176	4.318
036	2.250	2.673	2.760	2.854	2.924	3.028	3.103	3.200	3.270	3.438	3.613	3.811	3.961	4.101	4.241	4.381
037	2.312	2.736	2.822	2.916	2.986	3.090	3.166	3.262	3.332	3.500	3.676	3.874	4.024	4.164	4.304	4.444
038	2.375	2.798	2.885	2.979	3.049	3.153	3.228	3.325	3.395	3.563	3.738	3.936	4.086	4.226	4.366	4.506
039	2.438	2.860	2.948	3.042	3.112	3.216	3.290	3.388	3.458	3.626	3.800	3.998	4.148	4.288	4.428	4.568
040	2.500	2.923	3.010	3.104	3.174	3.278	3.353	3.450	3.520	3.688	3.863	4.061	4.211	4.351	4.491	4.631
041	2.562	2.986	3.072	3.166	3.236	3.340	3.416	3.512	3.582	3.750	3.926	4.124	4.274	4.414	4.554	4.694
042	2.625	3.048	3.135	3.229	3.299	3.403	3.478	3.575	3.645	3.813	3.988	4.186	4.336	4.476	4.616	4.756
043	2.688	3.110	3.195	3.292	3.362	3.466	3.540	3.638	3.708	3.876	4.050	4.248	4.398	4.538	4.678	4.818
044	2.750	3.173	3.260	3.354	3.424	3.528	3.603	3.700	3.770	3.938	4.113	4.311	4.461	4.601	4.741	4.881
045	2.812	3.236	3.322	3.416	3.486	3.590	3.666	3.762	3.832	4.000	4.176	4.374	4.524	4.664	4.804	4.944
046	2.875	3.298	3.385	3.479	3.549	3.653	3.728	3.825	3.895	4.063	4.238	4.436	4.586	4.726	4.866	5.006
047	2.938	3.360	3.448	3.542	3.612	3.716	3.790	3.888	3.958	4.126	4.300	4.498	4.648	4.788	4.928	5.068
048	3.000	3.423	3.510	3.604	3.674	3.778	3.853	3.950	4.020	4.188	4.363	4.561	4.711	4.851	4.991	5.131
049	3.062	3.486	3.572	3.666	3.736	3.840	3.916	4.012	4.082	4.250	4.426	4.624	4.774	4.914	5.054	5.194
050	3.125	3.548	3.635	3.729	3.799	3.903	3.978	4.075	4.145	4.313	4.488	4.686	4.836	4.976	5.116	5.256
051	3.188	3.610	3.698	3.792	3.862	3.966	4.040	4.138	4.208	4.376	4.550	4.748	4.898	5.038	5.178	5.318
052	3.250	3.673	3.760	3.854	3.924	4.028	4.103	4.200	4.270	4.438	4.613	4.811	4.961	5.101	5.241	5.381
053	3.312	3.736	3.822	3.916	3.986	4.090	4.166	4.262	4.332	4.500	4.676	4.874	5.024	5.164	5.304	5.444
054	3.375	3.798	3.885	3.979	4.049	4.153	4.228	4.325	4.395	4.563	4.738	4.936	5.086	5.226	5.366	5.506
055	3.438	3.860	3.948	4.042	4.112	4.216	4.290	4.388	4.458	4.626	4.800	4.998	5.148	5.288	5.428	5.568
056	3.500	3.923	4.010	4.104	4.174	4.278	4.353	4.450	4.520	4.688	4.863	5.061	5.211	5.351	5.491	5.631
057	3.562	3.986	4.072	4.166	4.236	4.340	4.416	4.512	4.582	4.750	4.926	5.124	5.274	5.414	5.554	5.694
058	3.625	4.048	4.135	4.229	4.299	4.403	4.478	4.575	4.645	4.813	4.988	5.186	5.336	5.476	5.616	5.756
059	3.688	4.110	4.198	4.292	4.362	4.466	4.540	4.638	4.708	4.876	5.050	5.248	5.398	5.538	5.678	5.818
060	3.750	4.173	4.260	4.354	4.424	4.528	4.603	4.700	4.770	4.938	5.113	5.311	5.461	5.601	5.741	5.881
061	3.812	4.236	4.322	4.416	4.486	4.590	4.666	4.762	4.832	5.000	5.176	5.374	5.524	5.664	5.804	5.944
062	3.875	4.298	4.385	4.479	4.549	4.653	4.728	4.825	4.895	5.063	5.238	5.436	5.586	5.726	5.866	6.006
063	3.938	4.360	4.448	4.542	4.612	4.716	4.790	4.888	4.958	5.126	5.300	5.498	5.648	5.788	5.928	6.068
064	4.000	4.423	4.510	4.604	4.674	4.778	4.853	4.950	5.020	5.188	5.363	5.561	5.711	5.851	5.991	6.131
066	4.125	4.548	4.635	4.729	4.799	4.903	4.978	5.075	5.145	5.313	5.488	5.686	5.836	5.976	6.116	6.256
068	4.250	4.673	4.760	4.854	4.924	5.028	5.103	5.200	5.270	5.438	5.613	5.811	5.961	6.101	6.241	6.381

APPROVED 28 JAN 1972 REVISED (A) FOR CHGS SEE SHT 1

FED. SUP CLASS 5306

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS:
DSA - IS
ARMY - AT

USER SYMBOLS:
ARMY - MI

DD FORM 1426 SEP 65 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM MAY BE USED.

PLATE NO. 18329

P.A. NAVY - AS
Other Cust
USAF - 11
ARMY - AV

PROCUREMENT SPECIFICATION
MIL-B-8906

SUPERSEDES:

TITLE
BOLT, TENSION, STEEL, 220KSI Ftu, 450°F., EXTERNAL WRENCHING, SPLINE DRIVE, FLANGED HEAD

MILITARY STANDARD
MS21297

SHEET 6 OF 6

FED. SUP CLASS
5306

GRIP DASH NO.	GRIP +.010	DIAMETER DASH NUMBERS														
		03	04	05	06	07	08	09	10	12	14	16	18	20	22	24
		LENGTH +.015														
070	4.375	4.798	4.885	4.979	5.049	5.153	5.228	5.325	5.395	5.563	5.738	5.936	6.086	6.226	6.366	6.506
072	4.500	4.923	5.010	5.104	5.174	5.278	5.353	5.450	5.520	5.688	5.863	6.061	6.211	6.351	6.491	6.631
074	4.625	5.048	5.135	5.229	5.299	5.403	5.478	5.575	5.645	5.813	5.988	6.186	6.336	6.476	6.616	6.756
076	4.750	5.173	5.260	5.354	5.424	5.528	5.603	5.700	5.770	5.938	6.113	6.311	6.461	6.601	6.741	6.881
078	4.875	5.298	5.385	5.479	5.549	5.653	5.728	5.825	5.895	6.063	6.238	6.436	6.586	6.726	6.866	7.006
080	5.000	5.423	5.510	5.604	5.674	5.778	5.853	5.950	6.020	6.188	6.363	6.561	6.711	6.851	6.991	7.131
082	5.125	5.548	5.635	5.729	5.799	5.903	5.978	6.075	6.145	6.313	6.488	6.686	6.836	6.976	7.116	7.256
084	5.250	5.673	5.760	5.854	5.924	6.028	6.103	6.200	6.270	6.438	6.613	6.811	6.961	7.101	7.241	7.381
086	5.375	5.798	5.885	5.979	6.049	6.153	6.228	6.325	6.395	6.563	6.738	6.936	7.086	7.226	7.366	7.506
088	5.500	5.923	6.010	6.104	6.174	6.278	6.353	6.450	6.520	6.688	6.863	7.061	7.211	7.351	7.491	7.631
090	5.625	6.048	6.135	6.229	6.299	6.403	6.478	6.575	6.645	6.813	6.988	7.186	7.336	7.476	7.616	7.756
092	5.750	6.173	6.260	6.354	6.424	6.528	6.603	6.700	6.770	6.938	7.113	7.311	7.461	7.601	7.741	7.881
094	5.875	6.298	6.385	6.479	6.549	6.653	6.728	6.825	6.895	7.063	7.238	7.436	7.586	7.726	7.866	8.006
096	6.000	6.423	6.510	6.604	6.674	6.778	6.853	6.950	7.020	7.188	7.363	7.561	7.711	7.851	7.991	8.131
098	6.125							7.075	7.145	7.313	7.488	7.686	7.836	7.976	8.116	8.256
100	6.250							7.200	7.270	7.438	7.613	7.811	7.961	8.101	8.241	8.381
102	6.375							7.325	7.395	7.563	7.738	7.936	8.086	8.226	8.366	8.506
104	6.500							7.450	7.520	7.688	7.863	8.061	8.211	8.351	8.491	8.631
106	6.625							7.575	7.645	7.813	7.988	8.186	8.336	8.476	8.616	8.756
108	6.750							7.700	7.770	7.938	8.113	8.311	8.461	8.601	8.741	8.881
110	6.875							7.825	7.895	8.063	8.238	8.436	8.586	8.726	8.866	9.006
112	7.000							7.950	8.020	8.188	8.363	8.561	8.711	8.851	8.991	9.131

DIAMETER DASH NO. AT TOP OF TABLE, PLUS GRIP DASH NO. FIRST COLUMN ON LEFT OF TABLE CONSTITUTES A COMPLETE DASH NO. IDENTIFYING SPECIFIED LENGTHS OF A GIVEN SIZE OF BOLT.

ADD LETTER 'H' BEFORE DASH NO. TO DESIGNATE DRILLED HEAD. FIRST TWO DASH NUMBERS DESIGNATE DIAMETER IN SIXTEENTHS. LAST THREE DASH NUMBERS DESIGNATE GRIP LENGTH IN SIXTEENTHS.

UNASSIGNED DASH NOS. SHALL NOT BE USED.

EXAMPLES OF PART NUMBER: MS21297-04016 = 1/4-28 BOLT, 1.510 LONG, 1.000 GRIP, UNDRILLED HEAD.
MS21297H04016 = 1/4-28 BOLT, 1.510 LONG, 1.000 GRIP, DRILLED HEAD.
MS21297-05020 = 5/16-24 BOLT, 1.854 LONG, 1.250 GRIP, UNDRILLED HEAD.
MS21297H05020 = 5/16-24 BOLT, 1.854 LONG, 1.250 GRIP, DRILLED HEAD.

APPROVED 28 JAN 1972 REVISED (A) FOR CHGS SEE SHT 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.