

FED. SUP CLASS
6125

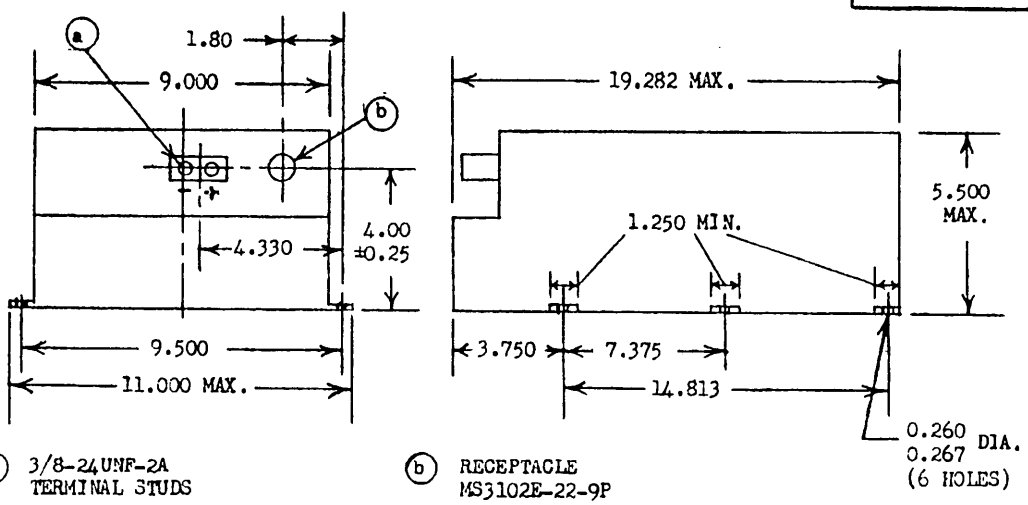

(a) 3/8-24UNF-2A TERMINAL STUDS

(b) RECEPTACLE MS3102E-22-9P

INPUT	
Voltage (Nominal)	115/200 Volts
Frequency (Nominal)	400 cps
Phase	3
OUTPUT	
Voltage (Nominal) D.C.	28 Volts
Current to 30,000 ft. alt.	200 Amp.
EFFICIENCY	
At sea level, 25 ± 15°C, half rated load to rated load	85% Min.
WEIGHT (lbs.)	37.75 Max.

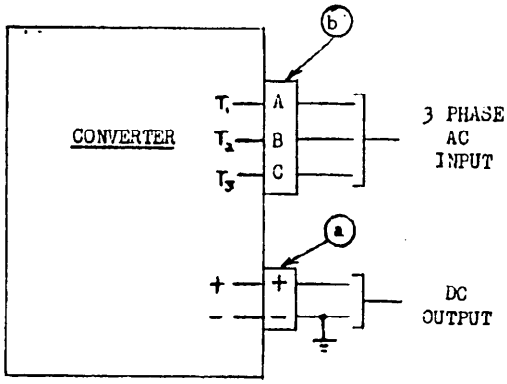

Input Phase Rotation A,B,C

MS PART NO.
MS 28127-1

For any combination of conditions listed below the output voltage shall remain within the indicated limits.

Conditions	Output Voltage Limits
Input voltage varied between 109.5/190 and 121/210 volts and input frequency varied between 380 to 420 cps.	
Load varied from 0 to 210 amperes.	Low 24.2 High 35.0
Load varied from 10 to 210 amperes	Low 24.2 High 30.5
Ambient temperature and altitude: Altitude conditions from sea level to 30,000 ft. Maximum ambient of 71°C at sea level decreasing proportionally to 15°C at 30,000 ft. Minimum ambient of -55°C from sea level to 30,000 ft.	
Mounted base down with the major axis within ±16° of the horizontal.	

APPROVED 12 Oct 60 REVISED (A) 28 February 1964

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A.	TITLE	MILITARY STANDARD
NAVY - BUWEPS Other Cust	CONVERTER, 200 AMPERE, CLASS A	MS28127(WEP)
Procurement Specification MIL-C-7115	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 SEP 57 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP CLASS
6125

Notes:

1. All dimensions are shown in inches. Tolerances are ±0.015 unless otherwise shown.
2. The weight and volume limitations shown on this drawing shall include the weight and volume of all auxiliary apparatus necessary to make this unit conform to the procurement specification.
3. This drawing and procurement specification complement one another, and together completely define the product.
4. BLANK.
5. Paragraph 4.6.19 of Specification MIL-C-7115C dated 25 September 1962 is not applicable.
6. Cooling. The unit shall be self cooled by convection. The maximum allowable external frame temperature is 149°C. Tests shall be conducted with a still air volume of 3 times the volume of the unit around the unit.
7. BLANK.
8. BLANK.
9. Power Factor shall not be less than 0.90 from half rated load to full load.
10. BLANK.
11. Ripple Voltage shall not exceed 3.74 volts, peak to peak, under any load at any required input condition.
12. Parallel Operation. Two identical units supplied from the same source shall operate in parallel and share the system load within 10% at any system load from 200 to 400 amps. at any required input condition.

    With two units in parallel supplying a 200 ampere total load, one unit shall be de-energized but remain on the bus. The output voltage shall remain within 24.2 and 30.5V when performed at any required input condition.
13. Overload. The unit shall be capable of the following cycles of operation:
    a. 150% of rated current for 5 minutes with a minimum output of 25V and rated current for 25 minutes, for a total of 7 hours.
    b. 250% of rated current for 1 minute with a minimum output of 23V and rated current for 25 minutes, for a total of 7 hours.
14. Short Circuit Capacity. At any required operating condition the unit shall be capable of sustaining a fault for 1.0 second to be applied three times. The unit shall be temperature stabilized at rated load before each application, and shall deliver a minimum of 2300 amps. with a maximum shorting resistance of 0.006 ohm.

APPROVED 12 Oct 60 REVISED (A) 28 February 1964

P.A.	TITLE	MILITARY STANDARD
NAVY - BUWEPS Other Cust	CONVERTER, 200AMPERE, CLASS A	MS28127(WEP)
Procurement Specification MIL-C-7115	SUPERSEDES:	SHEET 2 OF 3

DD FORM 1 SEP 67 672 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureau of Naval Weapons Department of the NAVY and is mandatory for use by this activity. All other military activities are required to employ this standard where suitable.

15. Inverse Voltage. With a voltage of 200V DC applied to the output terminals for a period of 7 hours the leakage current shall not exceed 300 milliamperes.

16. Overvoltage. The unit shall withstand 132.5/230V rms for 10 seconds and 231/400V rms for 0.10 second at 400 cycles.

17. Acoustical Noise. With the unit in a soundproof room, the acoustical noise measured at 12 inches from the unit case shall not exceed a maximum of 78 db. Measurements shall be taken at the sides, at the corners and above the unit, from zero to full load in 25% load steps at the following input conditions:

    a. 115/200V at 400 cps
    b. 121/210V at 380 cps
    c. 109.5/190V at 420 cps

18. Radio Noise Interference shall be in accordance with MIL-I-6181 and conducted at 10,100 and 200 ampere load with the following exceptions:

Frequency in Megacycles		Conducted Interference in DB Above One Microvolt per MC
0.15 to 0.37	(A)	119.1 max.
0.37 to 0.65		115.7 max.
0.65 to 1.2		109.7 max.
1.2 to 1.6		100.0 max.

Frequency in Megacycles		Radiated Interference in DB Above One Microvolt per MC
0.15 to 0.18	(A)	83.6 max.
0.18 to 0.65		79.1 max.
0.65 to 4.0		72 max.

19. Operating Position. The unit shall be capable of operation for 5 minutes in any position.

20. Blank.

21. Life Test shall be conducted for 1000 hours at sea level and 71°C. Operating temperatures shall be taken and recorded.

    At the completion of each 250 hours the unit shall comply with the following tests:

    a. Room ambient voltage regulation.
    b. Inverse voltage test for 15 minutes.
    c. Short circuit test for one application.
    d. Acoustical noise.

22. Not for use on new aircraft.

APPROVED 11 Oct 60 REVISED (A) 28 February 1964

P.A. NAVY - BUWEPS Other Cust	TITLE CONVERTER, 200 AMPERE, CLASS A	MILITARY STANDARD MS 28127(WEP)
Procurement Specification MIL-C-7115	SUPERSEDES:	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:57Z
Check the source to verify that this is the current version before use.