

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

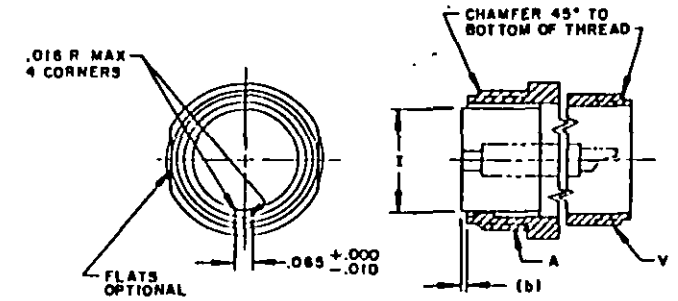

STYLE S (SOCKET INSERT)(b)

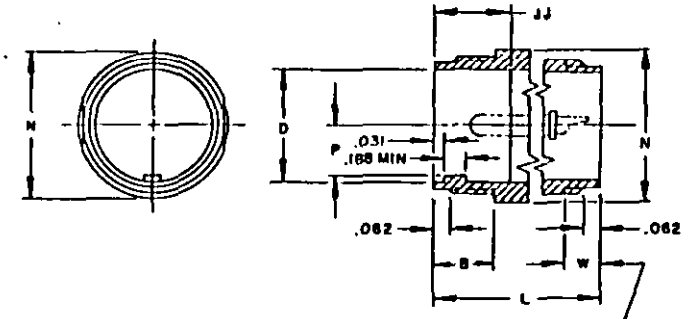

STYLE P (PIN INSERT)

CLASS A - SOLID SHELL
CLASS B - SPLIT SHELL

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 ID	I MAX INSERT DIA	(c) JJ +.031 -.000 INSERT LOCATION	L MAX OVERALL LENGTH	(a) N MAX OVERALL OD	P +.015 -.000 KEY HEIGHT	W THREAD	W MIN USABLE THREAD	FOR INSERT ARRANGEMENT, SEE DRAWING
8S	1/2-28	.375	.370	.250	.562	1.469	.844	.130	1/2-28	.375	MIL-STD-1651
10S	5/8-24		.448	.320		1.531	.969	.185	5/8-24		
10SL				.448		1.688	1.062	.224			
12S	3/4-20		.557								
12		.625			.750	2.062					
14S	7/8-20	.375	.682	.525	.562	1.688	1.156	.263	3/4-20		
14		.625			.750	2.062					
16S	1 -20	.375	.807	.650	.562	1.688	1.250	.325	7/8-20		
16		.625			.750	2.062					
18	1-1/8-18		.932	.770			1.344	.385	1 -20		
20	1-1/4-18		1.058	.925		2.188	1.469	.463	1-3/16-18		
22	1-3/8-18		1.182	1.020			1.594	.510			
24	1-1/2-18		1.307	1.145		2.312	1.719	.573	1-7/16-18		
28	1-3/4-18		1.526	1.365			1.969	.683			
32	2 -18		1.776	1.615		2.438	2.219	.808	1-3/4-18	.438	
36	2-1/4-16		1.995	1.830			2.469	.915	2 -18	.500	
40	2-1/2-16		2.245	2.045			2.719	1.023	2-1/4-16		
44	2-3/4-16		2.495	2.300		2.562	2.969	1.150	2-1/2-16	.562	
48	3 -16		2.745	2.550			3.219	1.275	3 -16	.625	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3745-02

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101C 31 AUG 1990
SUPERSEDING
AN3101
AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION. MIL-C-5015

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

© NOTES:

(a) SIZES 8S THRU 40 OF CLASSES A AND B ARE CANCELLED AFTER 1 JAN 1991. FOR REPLACEMENT PURPOSES, USE MS3101F OR MS3101R. MANUFACTURERS MAY CONTINUE TO SUPPLY THESE SIZES OF CLASSES A AND B UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR NEW DESIGN USE MS3451W WITH THE APPROPRIATE M85049/31 BACKSHELL.
(b) SIZES 44 AND 48 OF CLASSES A AND B ARE INACTIVE FOR NEW DESIGN.
(c) WHERE RESILIENT INSERTS ARE USED, JJ MAY BE .109 LESS THAN THAT INDICATED.
(d) SOCKET INSERT OF HARD MATERIAL SHALL EXTEND .016 MAXIMUM BEYOND OR .002 MAXIMUM BELOW SHELL. SOCKET INSERT OF RESILIENT MATERIAL SHALL EXTEND .047 + .000 -.047 BEYOND SHELL AS SHOWN.
(e) DIMENSION W SHALL BE NOT LESS THAN THREAD DIAMETER Y.
(f) CONNECTORS MS3101A (OR B) REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3101A (OR B) CONNECTORS.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

CERTAIN PROVISIONS OF THIS SPECIFICATION ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS ASCC 12/14 AND NEPR 28. WHEN AMENDMENT, REVISION OR CANCELLATION OF THIS SPECIFICATION IS PROPOSED WHICH WILL MODIFY THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES TO CHANGE THE AGREEMENT OR MAKE OTHER APPROPRIATE ACCOMMODATIONS.

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3745-02

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101C 31 AUG 1990
SUPERSEDING
AN3101
AMSC- N/A


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

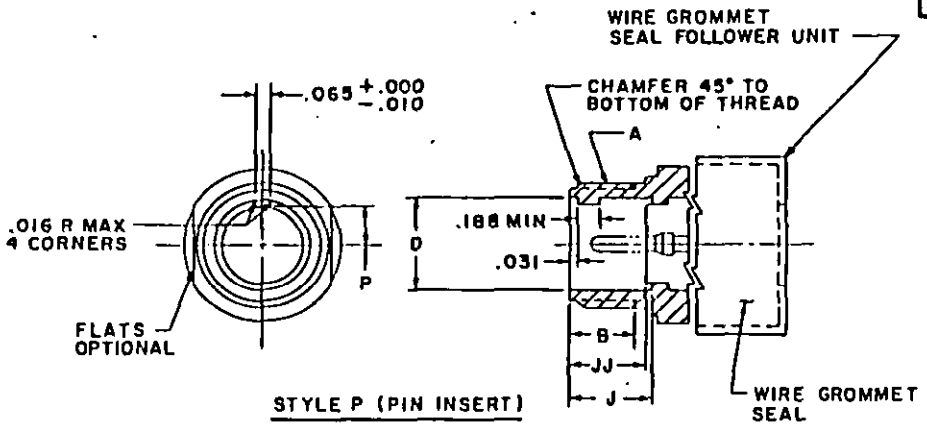

STYLE P (PIN INSERT)

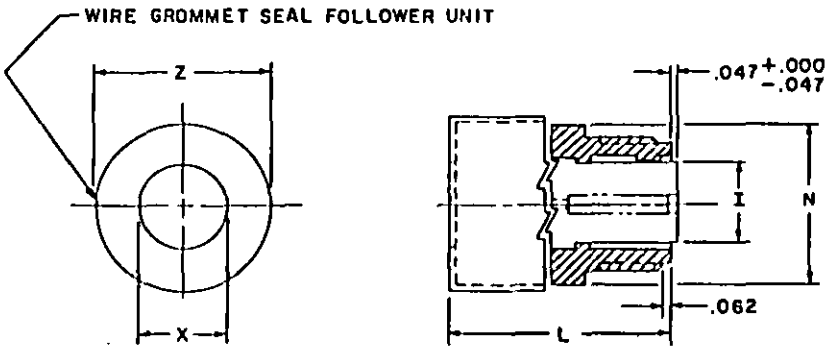

STYLE S (SOCKET INSERT)

CLASS R - ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.016 -.000 ID	I MAX INSERT DIA	J +.031 -.000 CNT SHELL SHLDR	JJ +.031 INSERT LOCATION	(a) L MAX OVERALL LENGTH	R MAX OD	P +.015 -.000 KEY WIDTH	E CABLE CLEARANCE MIN	Z MAX ACROSS NUT	FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.370	.250	.562	.484	1.838	.844	.130	.172	1.046	MIL-STD-1651
10S	5/8-24		.448	.320				.969	.165			
10SL				.448				1.062	.224	.281	1.175	
12S	3/4-20		.557									
12		.675			.750	.672	2.181					
14S	7/8-20	.375	.682	.525	.562	.484	1.838	1.156	.263	.406	1.343	
14		.675			.750	.672	2.181					
16S		.375			.562	.484	1.838					
16	1 -20	.625	.807	.650	.750	.672	2.181	1.281	.325	.500		
18	1-1/8-18		.932	.770			2.281	1.344	.385	.531	1.609	
20	1-1/4-18		1.058	.925				1.500	.463	.656		
22	1-3/8-18		1.182	1.020				1.625	.510	.750	1.890	
24	1-1/2-18		1.307	1.145				1.750	.573	.781	2.170	
28	1-3/4-18		1.526	1.365				2.000	.683	.922		
32	2 -18		1.776	1.615			2.372	2.250	.808	1.156	2.656	
36	2-1/4-18		1.995	1.830				2.500	.915	1.250	2.927	
40	2-1/2-16		2.245	2.045				2.750	1.023	1.562	3.348	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3745-02

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101C 31 AUG 1990
SUPERSEDING
AN3101
AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

(c) (a) CLASS R IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3451W WITH THE APPROPRIATE M85049/31 BACKSHELL.
(b) ADD .375 FOR SIZE "0" CONTACTS.
(c) MS3101R CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING MS3101E AND AN3101E CONNECTORS WITHOUT SADDLE TYPE CABLE CLAMP.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3745-02

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101C 31 AUG 1990
SUPERSEDING
AN3101
AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


DD FORM 672 MAY 1988 PREVIOUS EDITIONS ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

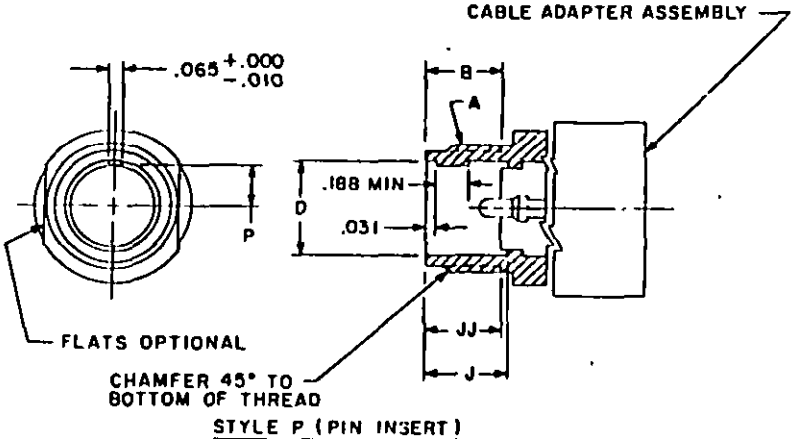

STYLE P (PIN INSERT)

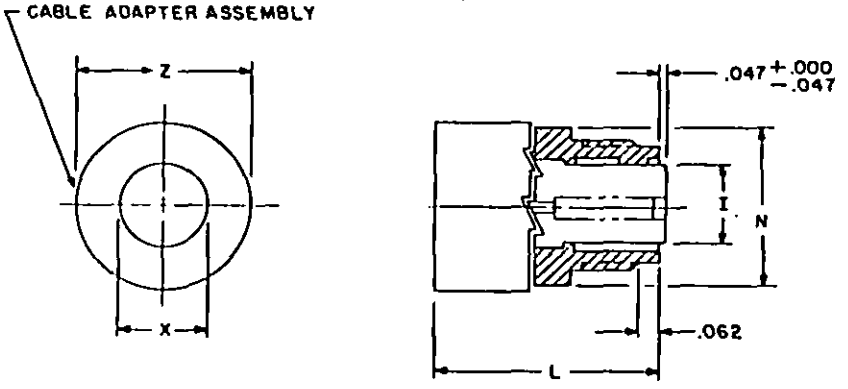

STYLE S (SOCKET INSERT)

CLASS E – ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 I.D.	F MAX INSERT DIA	J +.031 -.000 INT SHELL SHLDR	JJ +.031 INSERT LOCATION	(a) L MAX OVERALL LENGTH	N MAX O.D.	P +.015 -.000 KEY HEIGHT	NN MAX CLOSED	S MIN CABLE CLEARANCE	Z MAX ACROSS WIRE GROMMET SEAL		FOR INSERT ARRANGEMENT SEE
8S	1/2-28		.370	.250				.844	.130					
10S	5/8-24	.375	.448	.320	.562	.484	2.250	.969	.193	.200	.172	1.046		
10SL														
12S	3/4-20		.557	.448				1.062	.224		.281	1.125		
12		.625			.750	.672	2.625							MIL-STD 1651
14S	7/8-20	.375	.682	.525	.562	.484	2.250	1.156	.263	.312	.406	1.343		
14		.625			.750	.672	2.625							
16S	1 -20	.375	.807	.650	.562	.484	2.250	1.281	.325	.380	.500	1.484		
16							2.625							
18	1-1/8-20		.932	.770			2.688	1.344	.385	.422	.531	1.609		
20	1-1/4-18		1.058	.925			2.750	1.500	.443	.531	.656	1.890		
22	1-3/8-18	.625	1.182	1.020	.750	.672		1.625	.510		.740			
24	1-1/2-18		1.307	1.145			2.969	1.750	.573	.594	.781	2.170		
28	1-3/4-18		1.526	1.385			3.031	2.000	.683		.922			
32	2 -18		1.776	1.675				2.250	.808	.790	1.156	2.658		
36	2-1/4-16		1.995	1.830			3.281	2.500	.915		1.250	2.922		
40	2-1/2-16		2.245	2.045			3.500	2.750	1.023	1.100	1.562	3.531		

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3745-02

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101C 31 AUG 1990
SUPERSEDING
AN3101
AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-03-23T12:58Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

Form approved
OMB No. 0704-0188

NOTES:

(c) (a) CLASS E IS CANCELLED AFTER 1 JAN 1991. USE MS3101F AS A REPLACEMENT FOR MS3101E WITH SADDLE TYPE CLAMP AND MS3101R FOR MS3101E WITHOUT SADDLE TYPE CLAMP. MANUFACTURERS MAY CONTINUE TO SUPPLY CLASS E UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR NEW DESIGN USE MS3451W WITH THE APPROPRIATE MS5049/31 BACKSHELL.
(b) ADD .375 FOR SIZE "0" CONTACTS.
(c) MS3101E CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3101E CONNECTORS.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3745-02

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101C 31 AUG 1990
SUPERSEDING
AN3101
AMSC- N/A FSC 5935


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

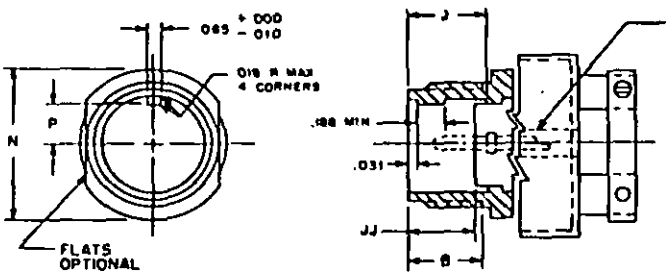

STYLE P (PIN INSERT)

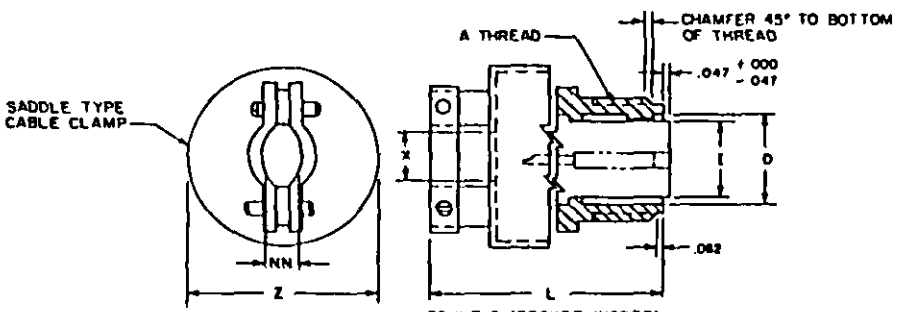

STYLE S (SOCKET INSERT)

CLASS F - ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 I.D.	I MAX INSERT DIA	J +.031 -.000 INT SHELL SHLDR	JJ +.031 INSERT LOCATION	(a) L MAX OVERALL LENGTH	N MAX O.D.	P +.015 -.000 KEY HEIGHT	NN MAX CLOSED	T MIN CABLE CLEARANCE	Z MAX ACROSS WIRE GROMMET SEAL		FOR INSERT ARRANGEMENT SEE
8S	1/2-28		.370	.250				.844	.130					
10S	5/8-24	.375	.448	.320	.562	.484	2.250	.969	.165	.200	.172	1.046		
10SL														
12S	3/4-20		.557	.448				1.062	.224		.281	1.125		
12		.625			.750	.672	2.625							MIL-STD 1651
14S	7/8-20	.375	.682	.525	.562	.484	2.250	1.156	.263	.312	.406	1.343		
14		.625			.750	.672	2.625							
16S	1 -20	.375	.807	.650	.562	.484	2.250	1.281	.325	.360	.500	1.484		
16							2.625							
18	1-1/8-18		.932	.770			2.688	1.344	.385	.422	.531	1.609		
20	1-1/4-18		1.058	.925			2.750	1.500	.463	.531	.656	1.890		
22	1-3/8-18	.625	1.182	1.020	.750	.672		1.625	.510		.740			
24	1-1/2-18		1.307	1.145			2.969	1.750	.573	.594	.781	2.170		
28	1-3/4-18		1.526	1.365			3.031	2.000	.683		.922			
32	2 -18		1.776	1.615				2.250	.808	.790	1.156	2.656		
36	2-1/4-18		1.995	1.830			3.281	2.500	.915		1.250	2.922		
40	2-1/2-16		2.245	2.069			3.500	2.750	1.023	1.100	1.562	3.531		

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3745-02

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101C 31 AUG 1990
SUPERSEDING
AN3101
AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

Form approved
OMB No. 0704-0188

NOTES:

(c) (a) CLASS F IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3451W WITH APPROPRIATE M85049/52 BACKSHELL.
(b) ADD .375 FOR SIZE "0" CONTACTS.
(c) MS3101F CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING MS3101E AND AN3101E CONNECTORS WITH SADDLE CLAMPS.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3745-02	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3101C 31 AUG 1990 SUPERSEDING AN3101 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.