

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

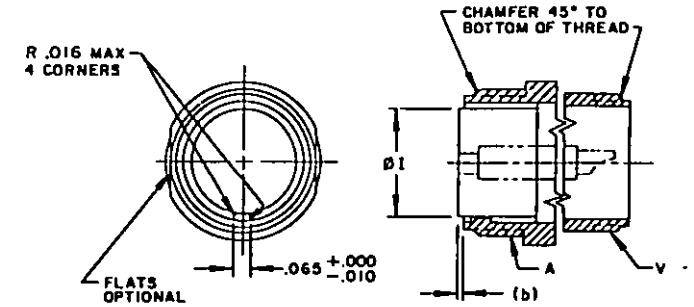

STYLE S (SOCKET INSERT)(b)

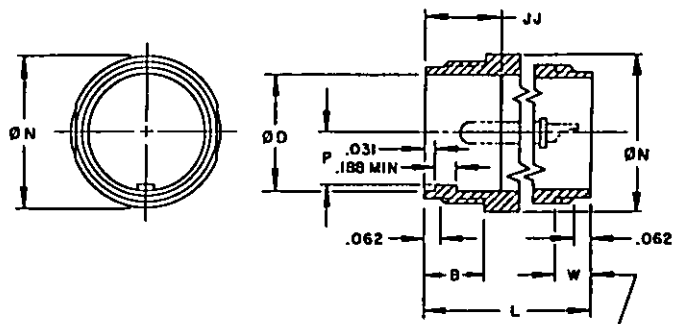

STYLE P (PIN INSERT)

CLASS A – SOLID SHELL
CLASS B – SPLIT SHELL

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 Ø INSIDE	ØI MAX INSERT	(c) JJ +.031 -.000 INSERT LOCATION	L MAX OVERALL LENGTH	(e) N MAX OVERALL Ø OUTSIDE	P +.015 -.000 KEY HEIGHT	V THREAD	W MIN USABLE THREAD	FOR INSERT ARRANGEMENT, SEE DRAWING
8S	1/2-28	.375	.370	.250	.562	1.469	.844	.130	1/2-28	.375	MIL-STD-1651
10S	5/8-24		.448	.320		1.531	.969	.165	5/8-24		
10SL				.448							
12S	3/4-20		.557			1.688	1.062	.224			
12		.625			.750	2.062					
14S	7/8-20	.375	.682	.525	.562	1.688	1.156	.263	3/4-20		
14		.625			.750	2.062					
16S	1 -20	.375	.807	.650	.562	1.688	1.250	.325	7/8-20		
16		.675			.750	2.062					
18	1-1/8-18		.932	.770			1.344	.385	1 -20		
20	1-1/4-18		1.058	.975		2.188	1.469	.463	1-3/16-18		
22	1-3/8-18		1.182	1.020			1.594	.510			
24	1-1/2-18		1.307	1.145		2.3	1.719	.573	1-7/16-18		
28	1-3/4-18		1.526	1.365			1.969	.583			
32	2 -18		1.776	1.615		2.438	2.219	.808	1-3/4-18	.438	
36	2-1/4-16		1.995	1.830			2.469	.915	2 -18	.500	
40	2-1/2-16		2.245	2.045			2.719	1.023	2-1/4-16		
44	2-3/4-16		2.495	2.300		2.562	2.969	1.150	2-1/2-16	.562	
48	3 -16		2.745	2.550			3.219	1.275	3 -16	.625	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3888

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER
MS3101 20 AUG 92 REV D

SUPERSEDING
MS3101 C 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:57Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

Form approved
OMB No. 0704-0188

NOTES:

Ⓓ (a) SIZES 8S THRU 40 OF CLASSES A AND B ARE CANCELLED AFTER 1 JAN 1991. FOR REPLACEMENT PURPOSES, USE MS3101F OR MS3101R. MANUFACTURERS MAY CONTINUE TO SUPPLY THESE SIZES OF CLASSES A AND B UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR NEW DESIGN USE MS3451W WITH THE APPROPRIATE M85049/31 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3401.
(b) SIZES 44 AND 48 OF CLASSES A AND B ARE INACTIVE FOR NEW DESIGN.
(c) WHERE RESILIENT INSERTS ARE USED, JJ MAY BE .109 LESS THAN THAT INDICATED.
(d) SOCKET INSERT OF HARD MATERIAL SHALL EXTEND .016 MAXIMUM BEYOND OR .032 MAXIMUM BELOW SHELL. SOCKET INSERT OF RESILIENT MATERIAL SHALL EXTEND .047 + .000-.047 BEYOND SHELL AS SHOWN.
(e) DIMENSION W SHALL BE NOT LESS THAN THREAD DIAMETER V.
(f) CONNECTORS MS3101A (OR B) REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3101A (OR B) CONNECTORS.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

*CERTAIN PROVISIONS OF THIS SPECIFICATION SHEET ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENTS ASCC 12/14 AND NEPR 28. WHEN AMENDMENT, REVISION OR CANCELLATION OF THIS SPECIFICATION SHEET IS PROPOSED WHICH WILL MODIFY THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES TO CHANGE THE AGREEMENT OR MAKE OTHER APPROPRIATE ACCOMODATIONS.

Ⓓ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3888	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3101 20 AUG 92 REV D SUPERSEDING MS3101 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 8


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T12:57Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

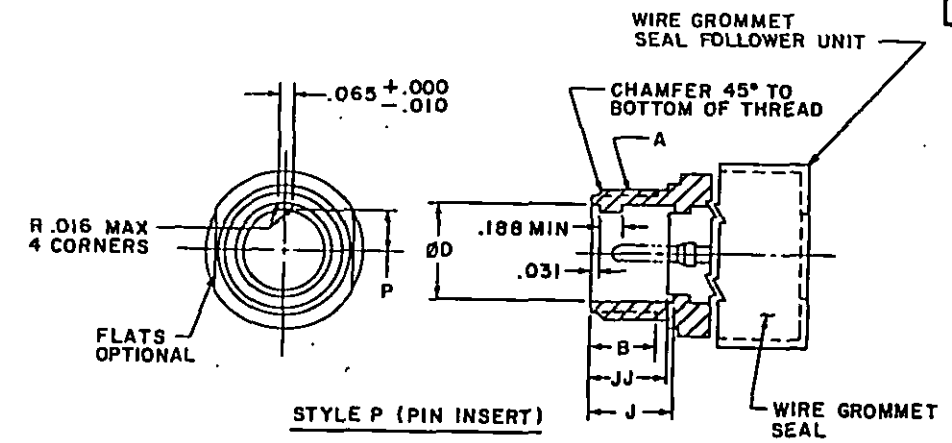

STYLE P (PIN INSERT)

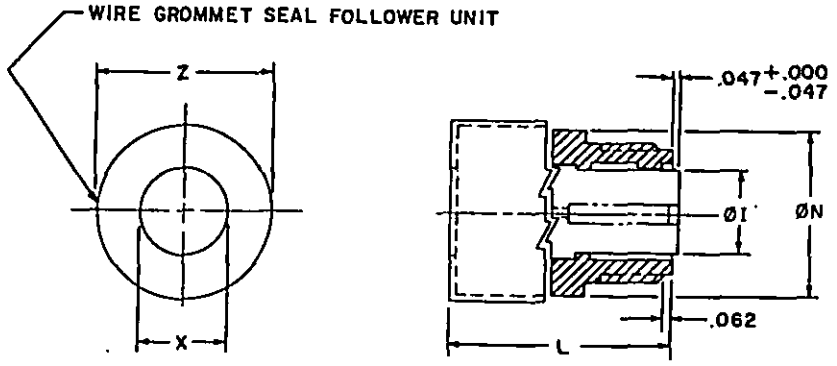

STYLE S (SOCKET INSERT)

CLASS R – ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 ID INSIDE	ØJ MAX INSERT	J +.031 -.000 INT SHELL SHLDR	JJ +.031 INSERT LOCATION	(4) L MAX OVERALL LENGTH	N MAX ØD OUTSIDE	P +.015 -.000 KEY HEIGHT	S CABLE CLEARANCE MIN	T MAX ACROSS NUT	FOR INSERT ARRANGEMENT SEE
85	1/2-28	.375	.370	.250	.562	.484	1.838	.844	.130	.172	1.046	MIL-STD-1651
105	5/8-24		.448	.320				.969	.165			
105L												
125	3/4-20		.557	.448				1.062	.224	.281	1.125	
12		.625			.750	.672	2.181					
145	7/8-20	.375	.682	.525	.562	.484	1.838	1.156	.263	.406	1.343	
14		.625			.750	.672	2.181					
165		.375			.562	.484	1.838					
16	1 -20	.625	.807	.650	.750	.672	2.181	1.281	.325	.500		
18	1-1/8-18		.932	.770			2.281	1.344	.385	.531	1.609	
20	1 1/4-18		1.058	.925				1.500	.463	.656		
22	1-3/8-18		1.182	1.020				1.625	.510	.750	1.890	
24	1-1/2-18		1.307	1.145				1.750	.573	.781	2.170	
28	1-3/4-18		1.526	1.385				2.000	.683	.922		
32	2 -18		1.776	1.615			2.322	2.250	.808	1.156	2.656	
36	2-1/4-16		1.995	1.830				2.500	.915	1.250	2.922	
40	2-1/2-16		2.245	2.045				2.750	1.023	1.562	3.328	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3888

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3101 — 20 AUG 92 REV D

SUPERSEDING MS3101 C — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T12:57Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

Ⓓ (a) CLASS R IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3451W WITH THE APPROPRIATE M85049/31 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3401.
(b) ADD .375 FOR SIZE "0" CONTACTS.
(c) MS3101R CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING MS3101E AND AN3101E CONNECTORS WITHOUT SADDLE TYPE CABLE CLAMP.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓓ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3888	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3101 20 AUG 92 REV D SUPERSEDING MS3101 C 31 AUG 90 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:57Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

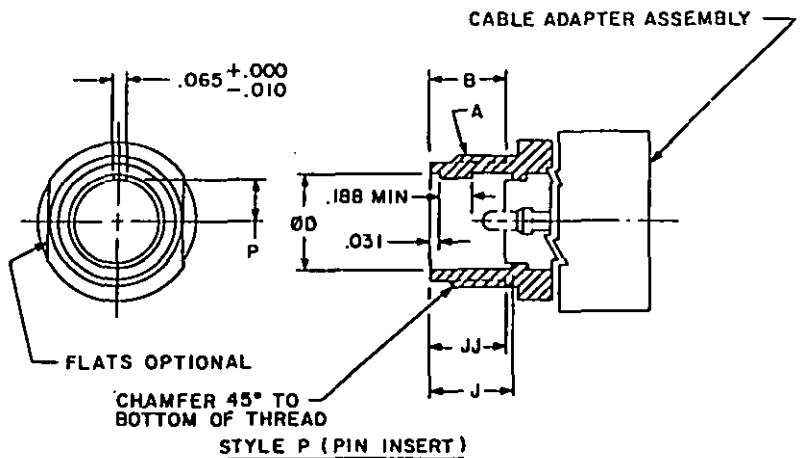

STYLE P (PIN INSERT)

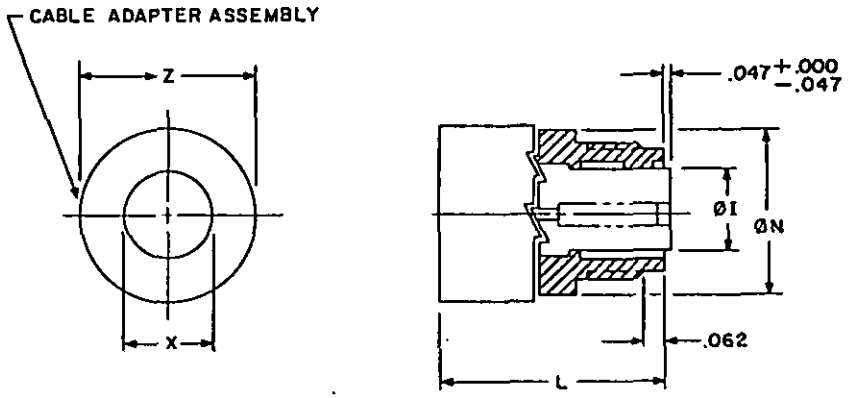

STYLE S (SOCKET INSERT)

CLASS E – ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 −.000 Ø INSIDE	ØI MAX INSERT	J +.031 −.000 INT SHELL SHLDR	JJ +.031 INSERT LOCATION	(a) L MAX OVERALL LENGTH	N MAX Ø OUTSIDE	P +.015 −.000 KEY HEIGHT	RN MAX CLOSED	X MIN CABLE CLEARANCE	Z MAX ACROSS WIRE GROMMET SEAL		FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.370	.250	.562	.484	2.250	.844	.130	.200	.172	1.046		MIL-STD 1651
10S	5/8-24		.448	.320				.969	.165					
10SL														
12S	3/4-20		.557	.448				1.062	.224		.283	1.125		
12		.625			.750	.672	2.625							
14S	7/8-20	.375	.682	.525	.562	.484	2.250	1.156	.263	.312	.406	1.343		
14		.625			.750	.672	2.625							
16S	1 -20	.375	.807	.650	.562	.484	2.250	1.281	.325	.360	.500	1.484		
16		.625			.750	.672	2.625							
18	1-1/8-18		.932	.770			2.688	1.344	.385	.422	.531	1.609		
20	1-1/4-18		1.058	.925			2.750	1.500	.463	.531	.656	.890		
22	1-3/8-18		1.182	1.020				1.625	.510		.740			
24	1-1/2-18		1.307	1.145			2.969	1.750	.573	.594	.781	2.170		
28	1-3/4-18		1.526	1.365			3.031	2.000	.683		.922			
32	2 -18		1.776	1.615				2.250	.808	.790	1.156	2.656		
36	2-1/4-16		1.995	1.830			3.281	2.500	.915		1.250	2.922		
40	2-1/2-16		2.245	2.045			3.500	2.750	1.023	1.100	1.562	3.531		

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3888

MILITARY, SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3101 — 20 AUG 92 REV D

SUPERSEDING MS3101 C — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:57Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

Ⓓ (a) CLASS E IS CANCELLED AFTER 1 JAN 1991. USE MS3101F AS A REPLACEMENT FOR MS3101E WITH SADDLE TYPE CLAMP AND MS3101R FOR MS3101E WITHOUT SADDLE TYPE CLAMP. MANUFACTURERS MAY CONTINUE TO SUPPLY CLASS E UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR NEW DESIGN USE MS3451W WITH THE APPROPRIATE M85049/31 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3401.
(b) ADD .375 FOR SIZE "0" CONTACTS.
(c) MS3101E CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3101E CONNECTORS.

EXAMPLE OF PART NUMBER:



DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓓ DENOTES CHANGE


PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3888	MILITARY SPECIFICATION SHEET TITLE *CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE*	SPECIFICATION SHEET NUMBER MS3101 20 AUG 92 REV D SUPERSEDING MS3101 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.		Page 6 of 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:57Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

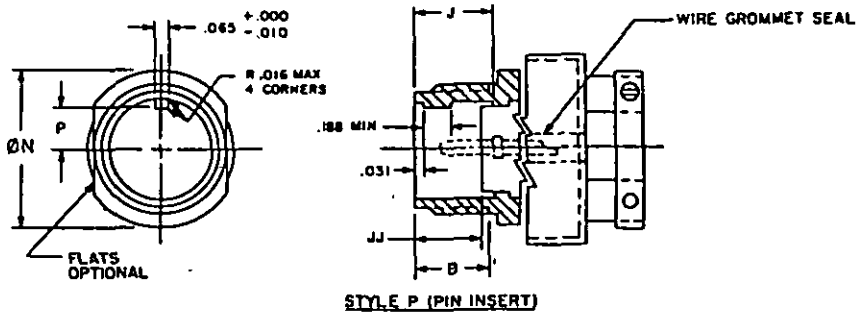

STYLE P (PIN INSERT)

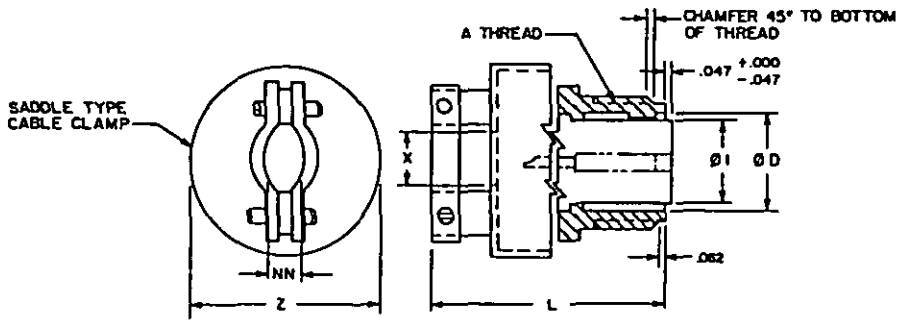

STYLE S (SOCKET INSERT)

CLASS F – ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B MIN USABLE THREAD	D +.015 -.000 Ø INSIDE	ØI MAX INSERT	J +.031 -.000 INT SHELL SHLDR	JJ +.031 INSERT LOCATION	(a) L MAX OVERALL LENGTH	N MAX Ø OUTSIDE	P +.015 -.000 KEY HEIGHT	RR MAX CLOSED	X MIN CABLE CLEARANCE	Z MAX ACROSS WIRE GROMMET SEAL		FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.370	.250	.562	.484	2.250	.844	.130	.200	.172	1.046		MIL-STD 1651
10S	5/8-24		.448	.320				.969	.165					
10SL											.281	1.125		
12S	3/4-20		.557	.448				1.062	.224					
12		.625			.750	.672	2.625							
14S	7/8-20	.375	.682	.525	.562	.484	2.250	1.156	.263	.312	.406	1.343		
14		.625			.750	.672	2.625							
16S	1 -20	.375	.807	.650	.562	.484	2.250	1.281	.325	.360	.500	1.484		
16		.625			.750	.672	2.625							
18	1-1/8-28		.932	.770			2.688	1.344	.385	.422	.531	1.609		
20	1-1/4-18		1.058	.925			2.750	1.500	.463	.531	.656	1.890		
22	1-3/8-18		1.182	1.020				1.625	.510		.740			
24	1-1/2-18		1.307	1.145			2.969	1.750	.573	.594	.781	2.170		
28	1-3/4-18		1.526	1.365			3.031	2.000	.683		.922			
32	2 -18		1.776	1.615				2.250	.808	.790	1.156	2.656		
36	2-1/4-16		1.995	1.830			3.281	2.500	.915		1.250	2.922		
40	2-1/2-16		2.245	2.045			3.500	2.750	1.023	1.100	1.562	3.531		

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3888

MILITARY SPECIFICATION SHEET

TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE

SPECIFICATION SHEET NUMBER MS3101 — 20 AUG 92 REV D

SUPERSEDING MS3101 C — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:57Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

(D) (a) CLASS F IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR NEW DESIGN USE MS3451W WITH APPROPRIATE MS5049/52 BACKSHELL. FOR SHIPBOARD JACKETED CABLES USE MS3401.
(b) ADD .375 FOR SIZE "0" CONTACTS.
(c) MS3101F CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING MS3101E AND AN3101E CONNECTORS WITH SADDLE CLAMPS.

EXAMPLE OF PART NUMBER:

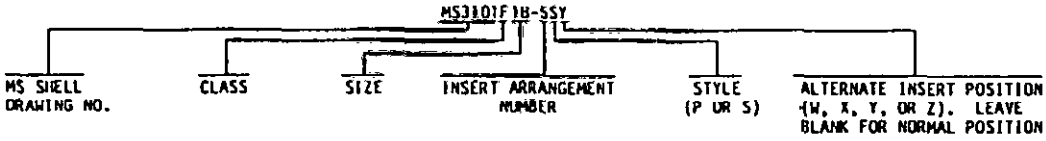

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3888	MILITARY SPECIFICATION SHEET TITLE CONNECTOR, PLUG, ELECTRIC, CABLE CONNECTING, SOLDER CONTACTS, AN TYPE	SPECIFICATION SHEET NUMBER MS3101 20 AUG 92 REV D SUPERSEDING MS3101 C 31 AUG 90 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:57Z
Check the source to verify that this is the current version before use.