

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

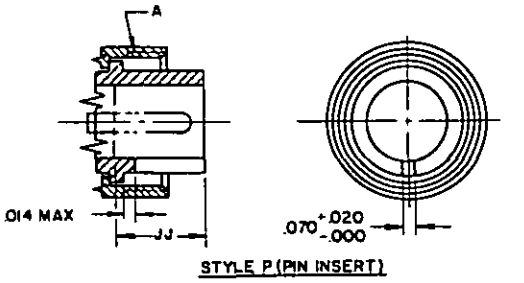

STYLE P (PIN INSERT)

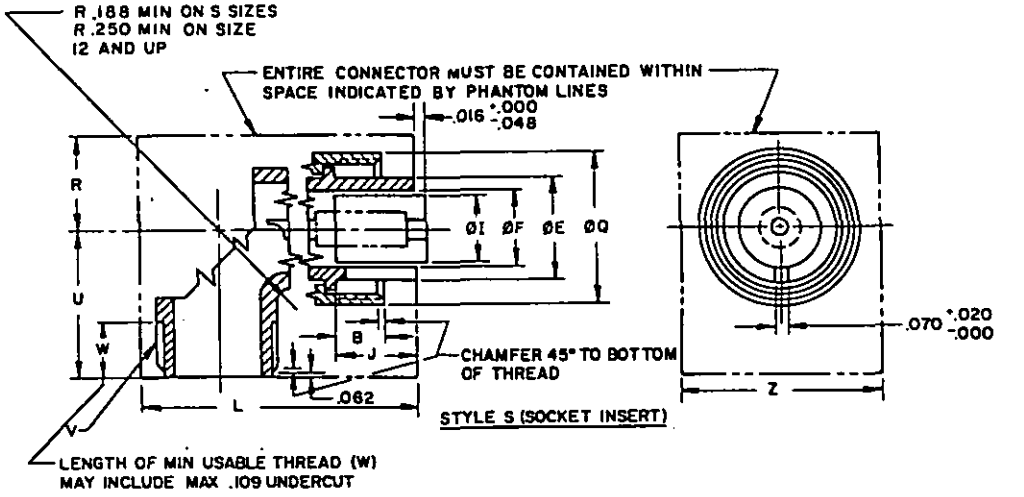

STYLE S (SOCKET INSERT)

LENGTH OF MIN USABLE THREAD (W) MAY INCLUDE MAX .109 UNDERCUT

CLASS A-SOLID SHELL

CLASS B-SPLIT SHELL

SIZE	A COUPLING THREAD	B +.000 -.062 EXTENSION COUPLING RING	ØE +.000 -.015	ØF MIN	ØI MAX INSERT	J LENGTH ENGAGEMENT ±.005	(a) JJ +.031 -.000 INSERT LOCATION	L MAX	ØQ MAX COUPLING RING	U MAX	V THREAD	W MIN USABLE THREAD	R MAX	Z MAX CLASS B ONLY	FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.365	.252	.250	.531	.562	1.750	.844	.938	1/2-28	.375	.422	.844	MIL-STD-1651
10S	5/8-24		.440	.323	.320				.969	1.000			.485	.969	
10SL			.446	—	.440			1.812			5/8-24		.531	1.062	
12S	3/4-20		.555	.450	.448			2.000	1.062	1.062					
12		.625				.719	.750	2.250							
14S	7/8-20	.375	.675	.526	.525	.531	.562	2.125	1.156	1.125	3/4-20		.656	1.156	
14		.625				.719	.750	2.312							
16S	1 -20	.375	.805	.651	.650	.531	.562	2.375	1.250	1.188	7/8-20		.750	1.312	
16		.625				.719	.750	2.562							
18	1-1/8-18		.930	.776	.770			2.688	1.344	1.312	1 -20		.828	1.344	
20	1-1/4-18		1.050	.932	.925			3.031	1.469	1.375	1-3/16-18		.906	1.625	
22	1-3/8-18		1.175	1.026	1.020				1.594				.969		
24	1-1/2-18		1.300	1.151	1.145			3.406	1.719	1.562	1-7/16-18		1.031	2.000	
28	1-3/4-18		1.520	1.370	1.365				1.969				1.156		
32	2 -18		1.770	1.620	1.615			3.750	2.219	1.875	1-3/4-18	.438	1.312	2.500	
36	2-1/4-16		1.980	1.838	1.830			3.938	2.469	2.062	2 -18	.500	1.438		
40	2-1/2-16		2.230	2.057	2.045			4.750	2.719	2.125	2-1/4-16		1.562	3.031	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3892

MILITARY SPECIFICATION SHEET

TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE

SPECIFICATION SHEET NUMBER
MS3108 20 AUG 92 REV D

SUPERSEDING
MS3108 C 31 AUG 90

AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

(D) (a) CLASS A PLUGS ARE CANCELLED AFTER 1 JAN 1991. FOR REPLACEMENT PURPOSES USE MS3108B. MANUFACTURES MAY CONTINUE TO SUPPLY MS3108A CONNECTORS UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR SHIPBOARD JACKETED CABLE USE MS3408.
(b) CLASS B PLUGS ARE INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991.
(c) WHERE RESILIENT INSERTS ARE USED, JJ MAY BE .109 LESS THAN THAT INDICATED.
(d) SOCKET INSERT OF HARD MATERIAL SHALL EXTEND .016 MAXIMUM BEYOND OR .032 MAXIMUM BELOW SHELL. SOCKET INSERT OF RESILIENT MATERIAL SHALL EXTEND .047 + .000-.047 BEYOND SHELL AS SHOWN.
(e) MS3108B CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING MS3108A, AN3108A OR AN3108B CONNECTORS.

EXAMPLE OF PART NUMBER:

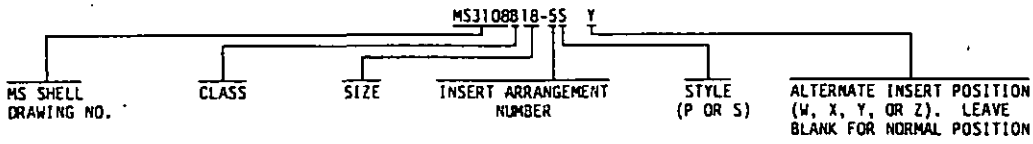

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

CERTAIN PROVISIONS OF THIS SPECIFICATION SHEET ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NEPR 28. WHEN AMENDMENT, REVISION OR CANCELLATION OF THIS SPECIFICATION SHEET IS PROPOSED WHICH WILL MODIFY THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES TO CHANGE THE AGREEMENT OR MAKE OTHER APPROPRIATE ACCOMODATIONS.

(D) DENOTES CHANGE


PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3892	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE	SPECIFICATION SHEET NUMBER MS3108 20 AUG 92 REV D SUPERSEDING MS3108 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 8

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

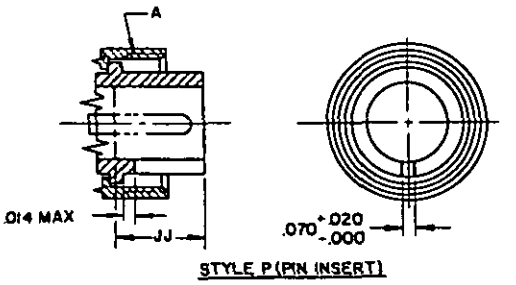

STYLE P (PIN INSERT)

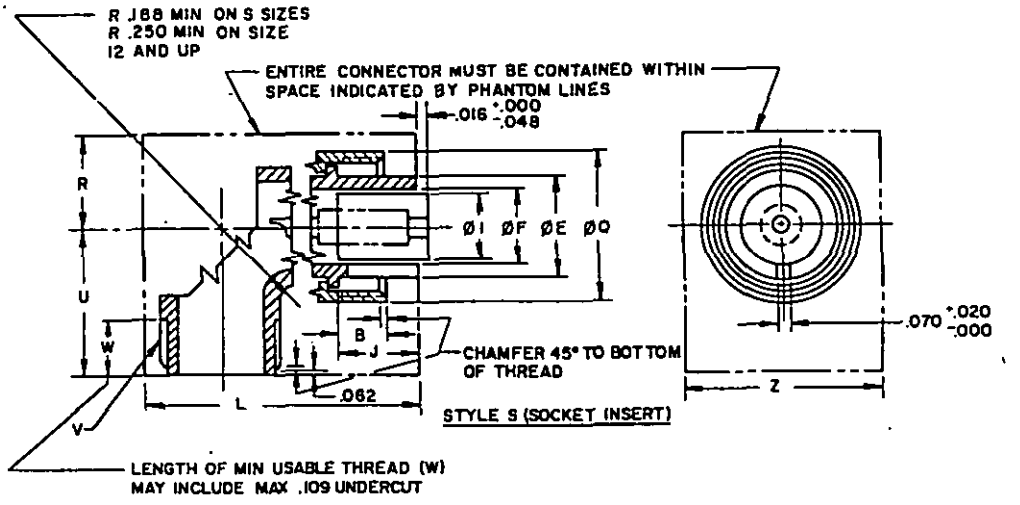

STYLE S (SOCKET INSERT)

CLASS K—FIREWALL

SIZE	A COUPLING THREAD	B +.000 -.062 EXTENSION COUPLING RING	ØE +.000 -.015	ØF MIN	ØI MAX INSERT	J LENGTH ENGAGE-MENT	JJ +.031 -.000 INSERT LOCATION	L MAX	ØQ MAX COUPLING RING	U MAX	V THREAD	W MIN USABLE THREAD	R MAX	Z MAX	FOR INSERT ARRANGEMENT SEE
8S	1/2-28	.375	.365	.252	.250	.531	.562	1.750	.844	1.000	1/2-28	.375	.422	.844	MIL-STD-1651
10S	5/8-24		.440	.323	.320			1.938	.969	1.250			.485	.969	
10SL			.446	—	.440			2.188							
12S	3/4-20		.555	.450	.448			2.312	1.062	1.406	5/8-24		.531	1.062	
12		.625				.719	.750	2.531							
14S	7/8-20	.375	.675	.526	.525	.531	.562	2.500	1.172	1.469	3/4-20		.656	1.156	
14		.625				.719	.750	2.719							
16S	1 -20	.375	.805	.651	.650	.531	.562		1.266	1.531	7/8-20		.750	1.312	
16		.625				.719	.750	2.938							
18	1-1/8-18		.930	.776	.770			3.188	1.359	1.625	1 -20		.828	1.344	
20	1-1/4-18		1.050	.932	.925			3.375	1.484	1.688	1-3/16-18		.906	1.625	
22	1-3/8-18		1.175	1.026	1.020			3.406	1.609				.969		
24	1-1/2-18		1.300	1.151	1.145			3.875	1.734	2.031	1-7/16-18		1.031	2.000	
28	1-3/4-18		1.520	1.370	1.365			4.094	1.984	2.312			1.156		
32	2 -18		1.770	1.620	1.615			4.438	2.234	2.438	1-3/4-18	.438	1.312	2.500	
36	2-1/4-16		1.980	1.838	1.830			5.000	2.484	2.656	2 -18	.500	1.438		
40	2-1/2-16		2.230	2.057	2.045			5.000	2.719	2.125	2-1/4-16		1.562	3.031	

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3892

MILITARY SPECIFICATION SHEET

TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE

SPECIFICATION SHEET NUMBER MS3108 — 20 AUG 92 REV D

SUPERSEDING MS3108 C — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil — Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

(D) (a) CLASS K PLUGS ARE INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR SHIPBOARD JACKETED CABLE USE MS3408.
(b) MS3108K CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3108K CONNECTORS.

EXAMPLE OF PART NUMBER:

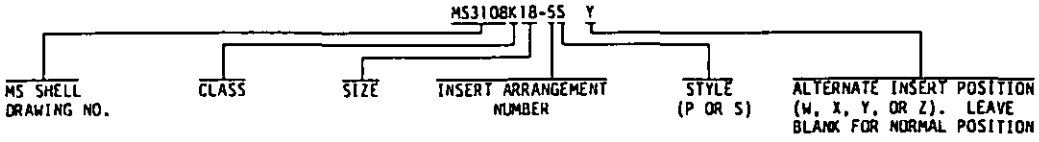

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(D) DENOTES CHANGE


PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3892	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE	SPECIFICATION SHEET NUMBER MS3108 20 AUG 92 REV D SUPERSEDING MS3108 C 31 AUG 90 AMSC- N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


SANDIA STATE REPRODUCTIONS

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:58Z
Check the source to verify that this is the current version before use.

Form approved
OMB No. 0704-0188

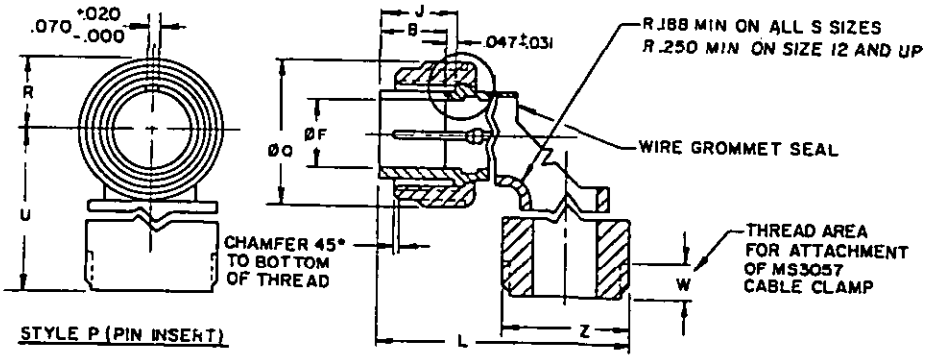

STYLE P (PIN INSERT)

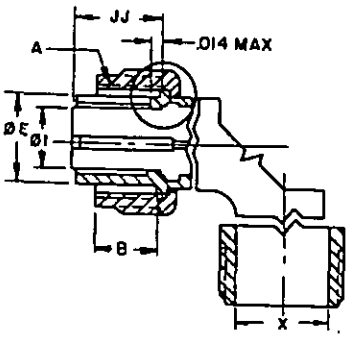

STYLE S (SOCKET INSERT)

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

CLASS E- ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B +.000/-.062 EXTENSION COUPLING RING	E +.000 -.015 Ø OUTSIDE	F MIN Ø INSIDE	ØI MAX INSERT	J +.005 LENGTH ENGAGE-MENT	JJ +.047 -.000 INSERT LOCATION	L MAX OVERALL LENGTH	ØQ MAX COUPLING RING	U MAX	X CABLE CLEARANCE MIN	R MAX	W MIN USABLE THREAD	FOR INSERT ARRANGE-MENT SEE	PACKING MS28900 DASH NO.	ØY +.005 -.010	Z MAX
8S	1/2-28	.375	.365	.252	.250	.531	.531	2.156	.844	1.469	.172	.422	.375	MIL-STD-1561	-8	.355	1.046
10S	5/8-24		.440	.323	.320				.969			.516			-10	.440	
10SL			.446	—	.440			2.188		1.500	.281					.446	1.125
12S	3/4-20		.555	.450	.448				1.062			.562			-12	.555	
12		.625				.719	.719	2.531								.555	
14S	7/8-20	.375	.675	.526	.525	.531	.531	2.312	1.156	1.594	.406	.625			-14	.675	1.343
14		.625				.719	.719	2.688								.675	
16S	1 -20	.375	.805	.651	.650	.531	.531	2.406	1.250	1.688	.500	.688			-16	.805	1.484
16		.625				.719	.719	2.781								.805	
18	1-1/8-18		.930	.776	.770			2.844	1.344	1.781	.531	.750			-18	.930	1.609
20	1-1/4-18		1.050	.932	.925			3.250	1.469	1.969	.656	.844			-20	1.050	1.890
22	1-3/8-18		1.175	1.026	1.020			3.250	1.594	2.000	.750	.906			-22	1.175	
24	1-1/2-18		1.300	1.151	1.145			3.719	1.719	2.125	.781	.953			-24	1.300	2.170
28	1-3/4-18		1.520	1.370	1.365			3.719	1.969	2.188	.922	1.094			-28	1.520	
32	2 -18		1.770	1.620	1.615			4.188	2.219	2.594	1.156	1.234	.438		-32	1.770	2.650
36	2-1/4-16		1.980	1.838	1.830			4.297	2.469	2.719	1.250	1.359	.500		-36	1.980	2.922
40	2-1/2-16		2.230	2.057	2.047			7.411	2.719	4.730	1.562	1.422			-40	2.230	3.531

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3892

MILITARY SPECIFICATION SHEET

TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE

SPECIFICATION SHEET NUMBER MS3108 — 20 AUG 92 REV D

SUPERSEDING MS3108 C — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 — PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.


Form approved
OMB No. 0704-0188

NOTES:

Ⓓ (a) CLASS E IS CANCELLED AFTER 1 JAN 1991. MANUFACTURERS MAY CONTINUE TO SUPPLY MS3108E CONNECTORS UNTIL 1 JAN 1992 OR EXHAUST THEIR INVENTORIES, WHICHEVER COMES FIRST. FOR REPLACEMENT PURPOSES USE MS3108R WITH APPROPRIATE MIL-C-85049 CLAMP. FOR SHIPBOARD JACKETED CABLE USE MS3408.

(b) MS3108E CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3108E CONNECTORS.

EXAMPLE OF PART NUMBER:

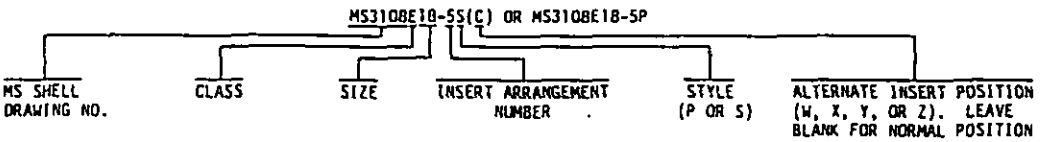

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓓ DENOTES CHANGE


PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3892	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE	SPECIFICATION SHEET NUMBER MS3108 20 AUG 92 REV D SUPERSEDING MS3108 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 6 of 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:58Z
Check the source to verify that this is the current version before use.


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

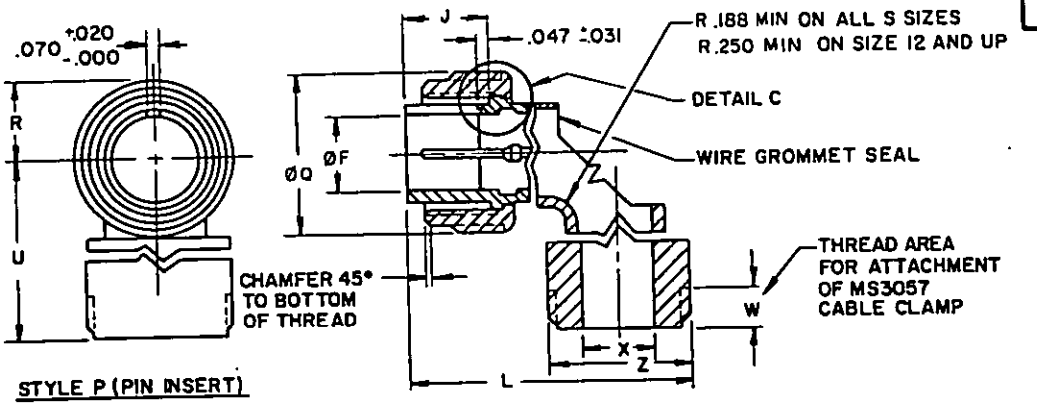

STYLE P (PIN INSERT)

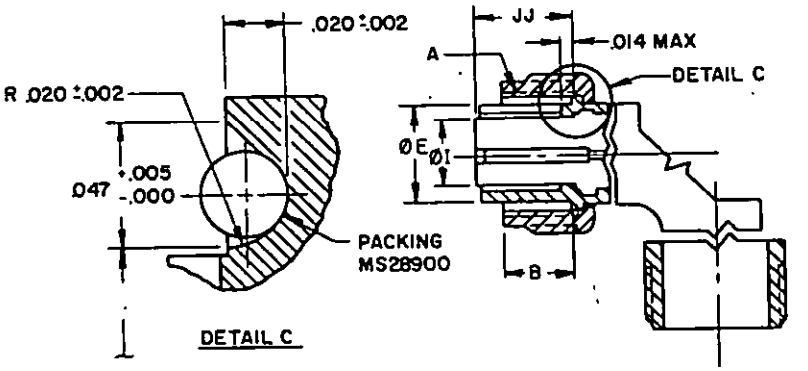

STYLE S (SOCKET INSERT)

CLASS R-ENVIRONMENT RESISTANT

SIZE	A COUPLING THREAD	B +.000/-.062 EXTENSION COUPLING RING	E +.000 -.015 ø OUTSIDE	F MIN ø INSIDE	I MAX ø INSERT	J +.005 LENGTH ENGAGEMENT	JJ +.047 -.000 INSERT LOCATION	L MAX OVERALL LENGTH	ØQ MAX COUPLING RING	U MAX	X CABLE CLEARANCE MIN	R MAX	W MIN USABLE THREAD	FOR INSERT ARRANGEMENT SEE	PACKING MS28900 DASH NO.	ØY +.005 -.010	Z MAX
8S	1/2-28	.375	.365	.252	.250	.531	.531	2.156	.844	1.469	.172	.422	.375	MIL-STD-1561	-8	.355	1.046
10S	5/8-24		.440	.323	.320				.969			.516			-10	.440	
10SL			.446	—	.440			2.188		1.500	.281					.446	1.125
12S	3/4-20	.625	.555	.450	.448	.719	.719	2.531	1.062			.562			-12	.555	
14S	7/8-20	.375	.675	.526	.525	.531	.531	2.312	1.156	1.594	.406	.625			-14	.675	1.343
14		.625				.719	.719	2.688								.675	
16S	1 -20	.375	.805	.651	.650	.531	.531	2.406	1.250	1.688	.500	.688			-16	.805	1.484
16		.625				.719	.719	2.781								.805	
18	1-1/8-18		.930	.776	.770			2.844	1.344	1.781	.531	.750			-18	.930	1.609
20	1-1/4-18		1.050	.932	.925			3.250	1.469	1.969	.656	.844			-20	1.050	1.890
22	1-3/8-18		1.175	1.026	1.020			3.250	1.594	2.000	.750	.906			-22	1.175	
24	1-1/2-18		1.300	1.151	1.145			3.719	1.719	2.125	.781	.953			-24	1.300	2.170
28	1-3/4-18		1.520	1.370	1.365			3.719	1.969	2.188	.922	1.094			-28	1.520	
32	2 -18		1.770	1.620	1.615			4.188	2.219	2.594	1.156	1.234	.438		-32	1.770	2.650
36	2-1/4-16		1.980	1.838	1.830			4.297	2.469	2.719	1.250	1.359	.500		-36	1.980	2.922
40	2-1/2-16		2.230	2.057	2.047			4.411	2.719	4.730	1.562	1.422			-40	2.230	3.531

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-CR NAVY-AS
AIR FORCE-85
REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99
USER: ARMY-AT, NAVY-OS, MC, CG
PROJECT NUMBER: 5935-3892

MILITARY SPECIFICATION SHEET

TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE

SPECIFICATION SHEET NUMBER MS3108 — 20 AUG 92 REV D

SUPERSEDING MS3108 C — 31 AUG 90

AMSC- N/A — FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

DD FORM 672 MAY 1988 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 20260-23T12:58Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-C-5015


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved
OMB No. 0704-0188

NOTES:

(D) (a) CLASS R IS INACTIVE FOR NEW DESIGN AFTER 1 JAN 1991. FOR SHIPBOARD JACKETED CABLE USE MS3408.
(b) MS3108R CONNECTORS REPLACE AND ARE INTERCHANGEABLE WITH CORRESPONDING AN3108E CONNECTORS.

EXAMPLE OF PART NUMBER:

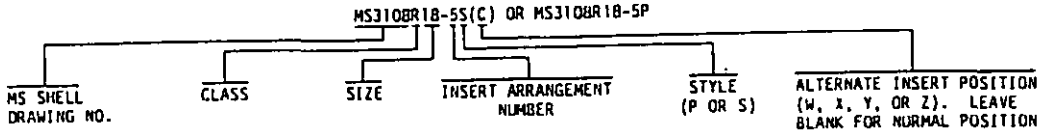

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

Ⓓ DENOTES CHANGE

PREPARING ACTIVITY: NAVY-AS CUSTODIANS: ARMY-CR NAVY-AS AIR FORCE-85 REVIEW: ARMY-MI, AV, ME, NAVY-SH, EC, AF-99 USER: ARMY-AT, NAVY-OS, MC, CG PROJECT NUMBER: 5935-3892	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, PLUG, ELECTRIC, SOLDER CONTACT, 90 DEGREE, AN TYPE	SPECIFICATION SHEET NUMBER MS3108 20 AUG 92 REV D SUPERSEDING MS3108 C 31 AUG 90 AMSC- N/A FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 8 of 8

Source: https://assist.dla.mil -- Downloaded: 202640-23T12:58Z
Check the source to verify that this is the current version before use.