INCH-POUND

MS3440D
w/AMENDMENT 1
27 September 2022
SUPERSEDING
MS3440D
14 January 2011


DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, NARROW FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H, SERIES 2

Inactive for new design after 15 December 1998.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

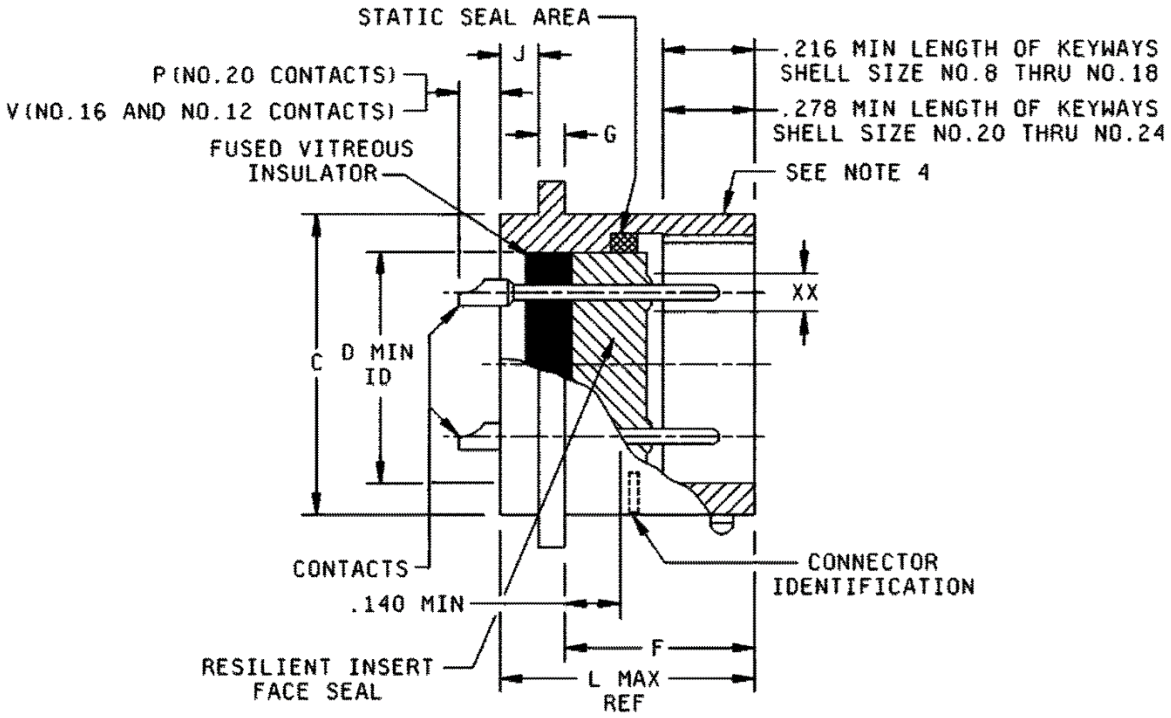


NOTE: For “XX”, see note 5 and table I for contact cavities requiring reduced dimensions.

FIGURE 1. Receptacle, class H, dimensions and configurations.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

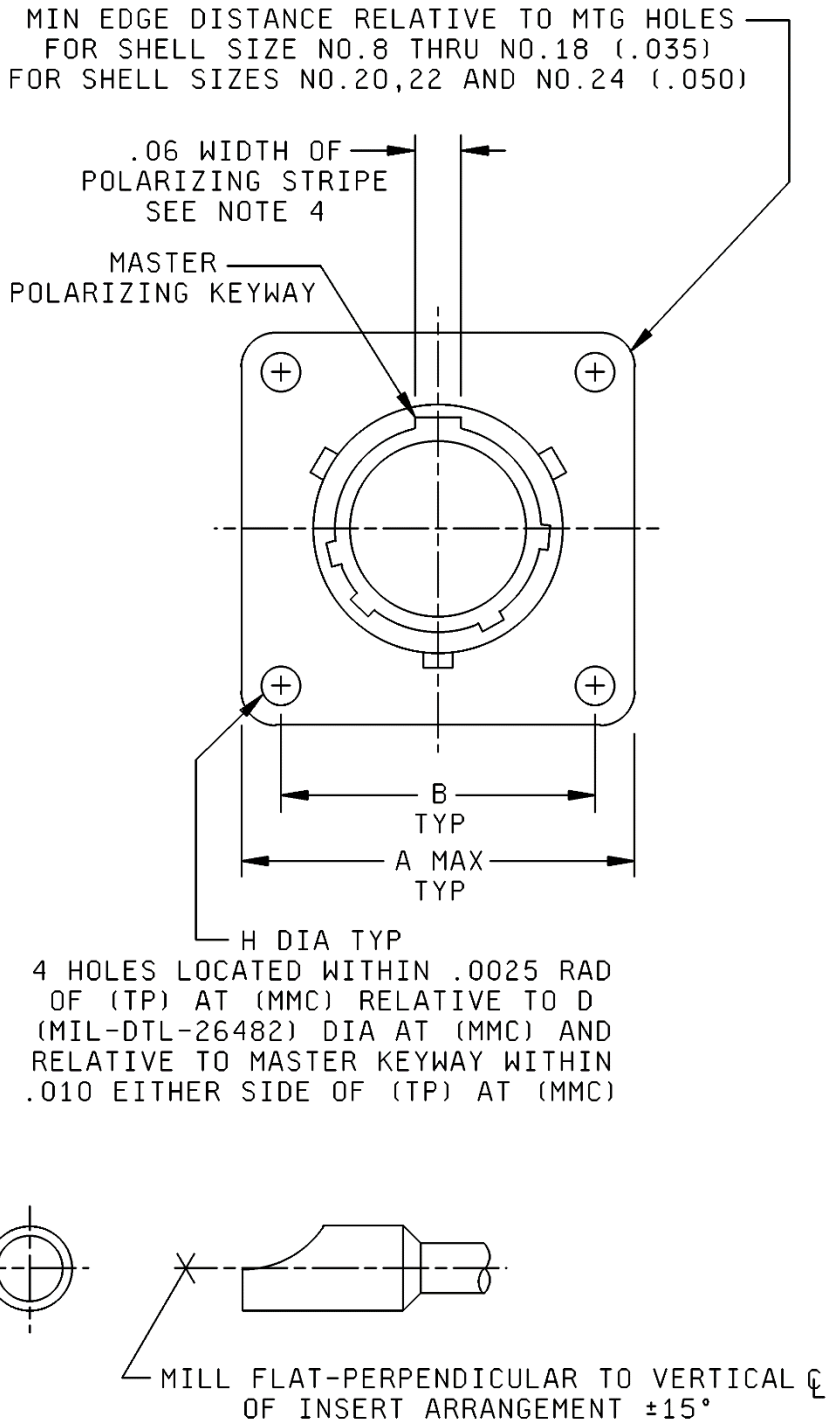

SOLDER POT ORIENTATION

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

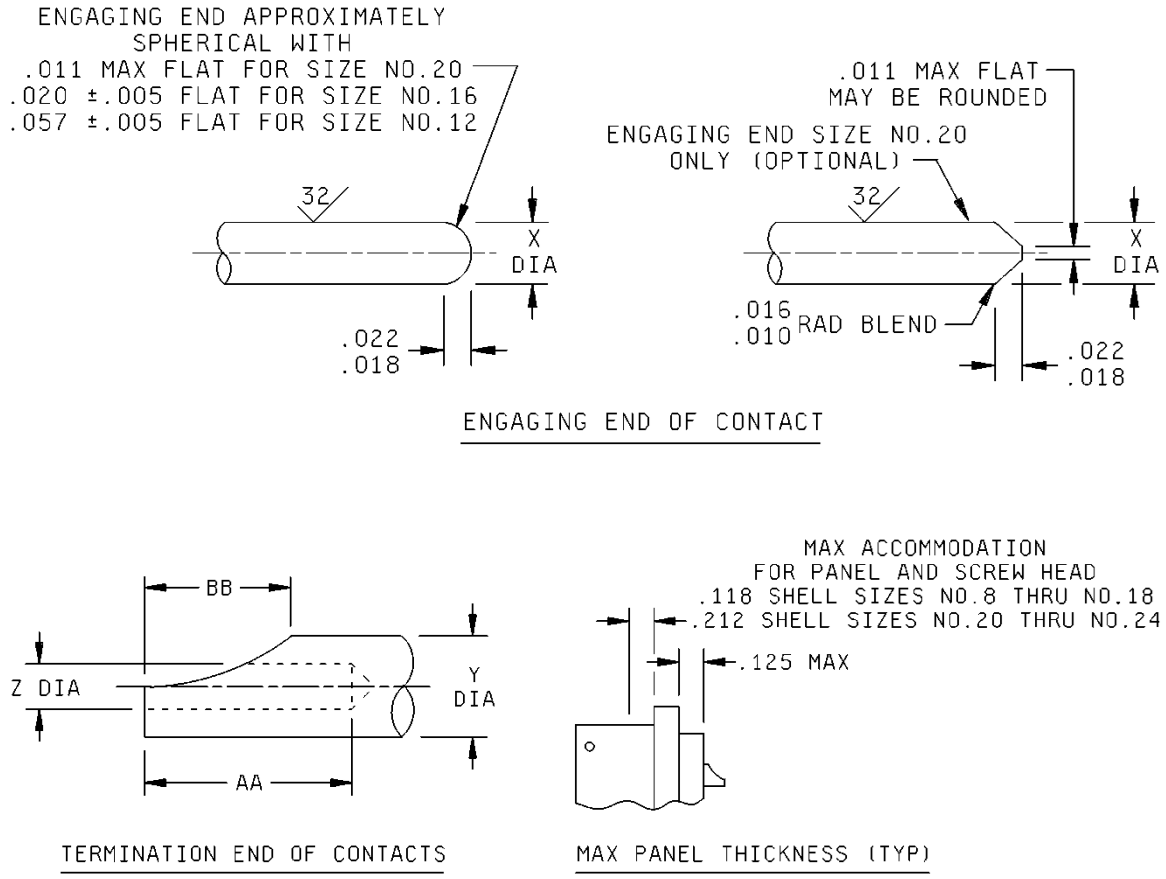

Contact size	X	Y	Z	AA	BB
20	.041 (1.04) .039 (0.99)	.088 (2.24) .061 (1.55)	.048 (1.22) .042 (1.07)	.188 (4.78) .109 (2.77)	.110 (2.79) .068 (1.73)
16	.0635 (1.61) .0615 (1.56)	.116 (2.95) .096 (2.44)	.075 (1.91) .069 (1.75)	.251 (6.38) .172 (4.37)	.141 (3.58) .109 (2.77)
12	.095 (2.41) .093 (2.36)	.150 (3.81) .130 (3.30)	.122 (3.10) .112 (2.84)	.251 (6.38) .172 (4.37)	.141 (3.58) .109 (2.77)

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

Shell size	A	B	C	D dia (min ID)	F	G
8	.828 (21.03)	.594 (15.09)	.563 (14.30) .557 (14.15)	.361 (9.17)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
10	.954 (24.23)	.719 (18.26)	.673 (17.09) .667 (16.94)	.489 (12.42)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
12	1.047 (26.59)	.812 (20.62)	.782 (19.86) .776 (19.71)	.606 (15.39)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
14	1.141 (28.98)	.906 (23.01)	.907 (23.04) .901 (22.89)	.731 (18.57)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
16	1.234 (31.34)	.969 (24.61)	1.032 (26.21) 1.026 (26.06)	.856 (21.74)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
18	1.328 (33.73)	1.062 (26.97)	1.157 (29.39) 1.151 (29.24)	.961 (24.41)	.598 (15.19) .578 (14.68)	.078 (1.98) .046 (1.17)
20	1.453 (36.91)	1.156 (29.36)	1.251 (31.78) 1.245 (31.62)	1.086 (27.58)	.660 (16.76) .640 (16.26)	.110 (2.79) .078 (1.98)
22	1.578 (40.08)	1.250 (31.75)	1.376 (34.95) 1.370 (34.80)	1.211 (30.76)	.660 (16.76) .640 (16.26)	.110 (2.79) .078 (1.98)
24	1.703 (43.26)	1.375 (34.93)	1.501 (38.13) 1.495 (37.97)	1.336 (33.93)	.660 (16.76) .640 (16.26)	.110 (2.79) .078 (1.98)

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

<table>
<tr><th>Shell size</th><th>H</th><th>J</th><th>L</th><th>P</th><th>V</th><th>Panel cutout dia</th><th>Max weight lbs (grams)</th></tr>
<tr><td>8</td><td rowspan="8">.120 (3.05)</td><td rowspan="6">.125 (3.18) .105 (2.67)</td><td rowspan="6">.801 (20.35)</td><td rowspan="8">.178 (4.52) .118 (3.00)</td><td rowspan="8">.248 (6.30) .188 (4.78)</td><td>.570 (14.48)</td><td>.038 (17.24)</td></tr>
<tr><td>10</td><td>.680 (17.27)</td><td>.044 (19.96)</td></tr>
<tr><td>12</td><td>.789 (20.04)</td><td>.052 (23.59)</td></tr>
<tr><td>14</td><td>.914 (23.22)</td><td>.070 (31.75)</td></tr>
<tr><td>16</td><td>1.039 (26.39)</td><td>.085 (38.56)</td></tr>
<tr><td>18</td><td>1.164 (29.57)</td><td>.098 (44.45)</td></tr>
<tr><td>20</td><td>.093 (2.36) .073 (1.85)</td><td>.863 (21.92)</td><td>1.258 (31.95)</td><td>.110 (49.90)</td></tr>
<tr><td>22</td><td rowspan="2">.125 (3.18) .105 (2.67)</td><td rowspan="2">.895 (22.73)</td><td>.146 (3.71) .086 (2.18)</td><td rowspan="2">.216 (5.49) .156 (3.96)</td><td>1.383 (35.13)</td><td>.150 (68.04)</td></tr>
<tr><td>24</td><td>.147 (3.73)</td><td>.146 (3.71) .086 (2.18)</td><td>1.508 (38.30)</td><td>.280 (127.01)</td></tr>
</table>

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Dimensional tolerances are .XX ± .01 inches (0.25 mm) and .XXX ± .005 (0.13 mm). Angular tolerances are X° ± 1°.
4. Polarizing stripes, color optional.
5. Insert arrangements requiring reduced diameters for raised seal barriers on outer row of contact cavities as indicated.
6. True position (TP) tolerances specified are in accordance with ASME Y14.5.

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

TABLE I. Contact cavities requiring reduced diameters (XX) for pins in outer row of contact cavities. 1/

Shell size	Insert arrangement	Contact cavities
8	-2, -3, -4, -33 and -98	All
12	-10	C, G
14	-12	A, B, C, D, E, F, G, H
14	-18	A, C, E, G, J, L
14	-19	B, D, F, H, K, M
16	-26	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R
18	-32	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T
22	-41	A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y

1/ The reduced diameter “XX” refers to the diameters of the raised seal barriers (pin barrier rings) to ensure proper sealing of pin and socket after mating. See MIL-DTL-26482, connector intermateability control dimensions (series 1 and series 2) for reduced diameter “XX” for contact size 20 only.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.
Connector mating: This connector mates with MS3475 and MS3476.
For insert arrangement: See MIL-STD-1669.
Intermateability dimensions are in accordance with MIL-DTL-26482.

Material:
Shell types A and B, 300 series stainless steel in accordance with ASTM A582/A582M and ASTM A276/A276M. Shell type C, cold rolled steel in accordance with ASTM A108.

Finish:
Shell types A and B, passivated in accordance with ASTM A967/A967M.
Shell type C, .0001 inch (2.54 µm) tin minimum in accordance with ASTM B545 or ASTM B339 over nickel in accordance with SAE-AMS-QQ-N-290. The use of pure tin, as an underplate or final finish, is prohibited both internally and externally. Tin content of connectors, their components and solder shall not exceed 97 percent, by mass. Tin shall be alloyed with a minimum of 3 percent lead, by mass.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN) example:

MS3440	H	24	C	61	P	W

MS3440	MS number
H	Class
24	Shell size
C	Termination type and shell material
61	Insert arrangement
P	Contact style
W	Insert position

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3475
MS3476
MIL-STD-1669
ASME Y14.5
ASTM A108
ASTM A276/A276M
ASTM A582/A582M
ASTM A976/A967M
ASTM B339
ASTM B545
SAE-AMS-QQ-N-290

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2022-160)

Review activities:
Army – AV
Navy – EC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.