INCH-POUND

MS35764F
29 May 2013
SUPERSEDING
MS35764E
29 December 1975

DETAILED SPECIFICATION SHEET

BOLT, SELF-LOCKING, HEXAGON HEAD, STEEL, GRADE 8, UNC-2A AND UNF-2A

INACTIVE FOR NEW DESIGN AFTER 18 NOVEMBER 1999.

This specification sheet is approved for all Departments and Agencies of the Department of Defense.

The requirements for acquiring the described herein shall consist of this specification sheet and procurement specification MIL-B-45912.

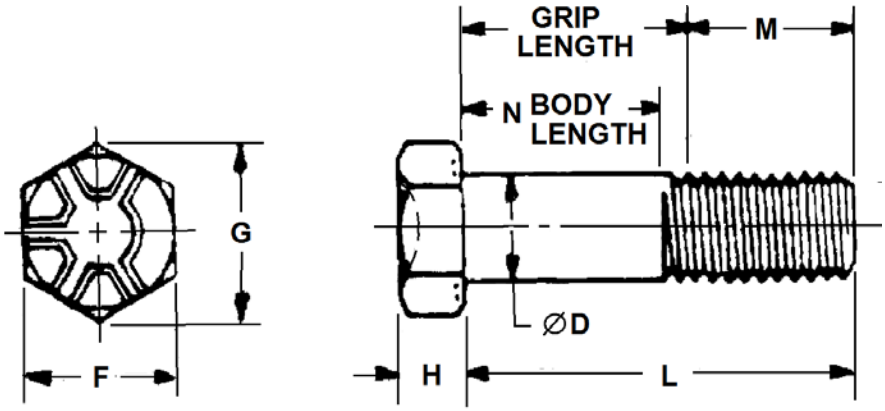


FIGURE 1. BOLT, SELF-LOCKING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions.

NOMINAL SIZE		.250				.3125				.375				.500			
THREADS PER INCH		20	28			18	24			16	24			13	20		
ØD BODY DIAMETER	MAX	.250				.3125				.375				.500			
	MIN	.245				.3065				.369				.493			
F ACROSS FLATS	MAX	.500				.562				.625				.812			
	MIN	.489				.551				.612				.798			
G ACROSS CORNERS	MAX	.577				.650				.722				.936			
	MIN	.557				.628				.698				.910			
H HEIGHT	MAX	.135				.198				.260				.327			
	MIN	.125				.188				.250				.312			
M THREAD LENGTH	REF	.750				.875				1.000				1.250			
N UNTHREADED * BODY LGT	MAX	.125	.089			.139	.104			.156	.104			.192	.125		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
.750	CAD	1201	1223			1245	1267			1289	1311			1395	1425		
	PHOS	1202	1224			1246	1268			1290	1312			1396	1426		
.875	CAD	1203	1225		.125	1247	1269			1291	1313			1397	1427		
	PHOS	1204	1226			1248	1270			1292	1314			1398	1428		
1.000	CAD	1205	1227		.250	1249	1271			1293	1315			1399	1429		
	PHOS	1206	1228			1250	1272			1294	1316			1400	1430		
1.250	CAD	1207	1229	.100	.500	1251	1273		.375	1295	1317		.250	1401	1431		
	PHOS	1208	1230			1252	1274			1296	1318			1402	1432		
1.500	CAD	1209	1231	.350	.750	1253	1275	.208	.625	1297	1319	.062	.500	1403	1433		.250
	PHOS	1210	1232			1254	1276			1298	1320			1404	1434		
1.750	CAD	1211	1233	.600	1.000	1255	1277	.458	.875	1299	1321	.312	.750	1405	1435	.019	.500
	PHOS	1212	1234			1256	1278			1300	1322			1406	1436		
2.000	CAD					1257	1279	.708	1.125	1301	1323	.562	1.000	1407	1437	.269	.750
	PHOS					1258	1280			1302	1324			1408	1438		
2.250	CAD					1259	1281	.958	1.375	1303	1325	.812	1.250	1409	1439	.519	1.000
	PHOS					1260	1282			1304	1326			1410	1440		
2.500	CAD									1305	1327	1.062	1.500	1411	1441	.769	1.250
	PHOS									1306	1328			1412	1442		
2.750	CAD									1307	1329	1.312	1.750	1413	1443	1.019	1.500
	PHOS									1308	1330			1414	1444		
3.000	CAD													1415	1445	1.269	1.750
	PHOS													1416	1446		
3.250	CAD													1417	1447	1.519	2.000
	PHOS													1418	1448		
3.500	CAD													1419	1449	1.769	2.250
	PHOS													1420	1450		
3.750	CAD													1421	1451	2.019	2.500
	PHOS													1422	1452		

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions. (Continued)

NOMINAL SIZE		.625				.750				1.000				1.250			
THREADS PER INCH		11	18			10	16			8	12			7	12		
ØD BODY DIAMETER	MAX	.625				.750				1.000				1.250			
	MIN	.617				.741				.990				1.219			
F ACROSS FLATS	MAX	1.000				1.125				1.500				1.875			
	MIN	.983				1.106				1.477				1.850			
G ACROSS CORNERS	MAX	1.155				1.299				1.732				2.165			
	MIN	1.121				1.261				1.684				2.066			
H HEIGHT	MAX	.390				.458				.582				.697			
	MIN	.375				.438				.562				.677			
M THREAD LENGTH	REF	1.500				1.750				2.250				2.750			
N UNTHREADED * BODY LGT	MAX	.227	.139			.250	.156			.312	.208			.357	.208		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
1.000	CAD	1515	1543														
	PHOS	1516	1544														
1.250	CAD	1517	1545			1571	1599										
	PHOS	1518	1546			1572	1600										
1.500	CAD	1519	1547			1573	1601										
	PHOS	1520	1548			1574	1602										
1.750	CAD	1521	1549			1575	1603			1679	1705						
	PHOS	1522	1550		.250	1576	1604			1680	1706						
2.000	CAD	1523	1551			1577	1605			1681	1707			1729	1753		
	PHOS	1524	1552		.500	1578	1606		.250	1682	1708			1730	1754		
2.250	CAD	1525	1553			1579	1607			1683	1709			1731	1755		
	PHOS	1526	1554		.750	1580	1608		.500	1684	1710			1732	1756		
2.500	CAD	1527	1555			1581	1609			1685	1711			1733	1757		
	PHOS	1528	1556	.227	1.000	1582	1610		.750	1686	1712			1734	1758		
2.750	CAD	1529	1557			1583	1611			1687	1713			1735	1759		
	PHOS	1530	1558	.477	1.250	1584	1612	.200	1.000	1688	1714		.500	1736	1760		
3.000	CAD	1531	1559			1585	1613			1689	1715			1737	1761		
	PHOS	1532	1560	.727	1.500	1586	1614	.450	1.250	1690	1716		.750	1738	1762		
3.250	CAD	1533	1561			1587	1615			1691	1717			1739	1763		
	PHOS	1534	1562	.977	1.750	1588	1616	.700	1.500	1692	1718	.125	1.000	1740	1764		.500
3.500	CAD	1535	1563			1589	1617			1693	1719			1741	1765		
	PHOS	1536	1564	1.227	2.000	1590	1618	.950	1.750	1694	1720	.375	1.250	1742	1766		.750
3.750	CAD	1537	1565			1591	1619			1695	1721			1743	1767		
	PHOS	1538	1566	1.477	2.250	1592	1620	1.200	2.000	1696	1722	.625	1.500	1744	1768	.071	1.000
4.000	CAD	1539	1567			1593	1621			1697	1723			1745	1769		
	PHOS	1540	1568	1.727	2.500	1594	1622	1.450	2.250	1698	1724	.875	1.750	1746	1770	.321	1.250
4.500	CAD	1541	1569			1595	1623			1699	1725	1.375		1747	1771		
	PHOS	1542	1570	2.227	3.000	1596	1624	1.950	2.750	1700	1726		2.250	1748	1772	.821	1.750
5.000	CAD									1701	1727			1749	1773		
	PHOS									1702	1728	1.875	2.750	1750	1774	1.321	2.250

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE II. Length Tolerance.

NOMINAL SIZE	.250 .3125 .375	.4375 .500	.5625 .625 .750	.875 1.000	1.250
LENGTH	TOLERANCE (+.000)				
THRU 1.000	-.030	-.030	-.030		
OVER 1.000 THRU 2.500	-.040	-.060	-.080	-.100	-.120
OVER 2.500 THRU 4.000	-.060	-.080	-.100	-.140	-.160
OVER 4.000				-.160	-.180

REQUIREMENTS:

1. MATERIAL: Steel, SAE Grade 8 in accordance with procurement specification.

2. PROTECTIVE COATING: Cadmium plated in accordance with SAE AMS-QQ-P-416, Type II, Class 2. Zinc phosphate coated in accordance with MIL-DTL-16232, Type Z, Class 2.

3. THREADS: Threads shall be in accordance with FED-STD-H28.

4. DIMENSIONS: All dimensions are in inches.

5. HEAD DIMENSIONS: For head dimensions see procurement specifications.

* 6. UNTHREADED LENGTH: Bolts too short for full thread length shall have threads extending over the full length. The distance from the underside of the head to the first complete (full form) thread, as measured with a ring thread gage, shall not exceed the maximum unthreaded - body length “N”.

7. HEAD MARKINGS: Heads shall be marked on top with the manufacturer’s identification and the number 8 to designate Grade 8 material. Raised marking are preferred.

8. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35764-1201.

9. Referenced documents shall be of the issue in effect as of the date of invitation for bid.

10. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

11. Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE III. Grade 8 – Reference Information Only.

NOMINAL SIZE	THREADS PER INCH	PROOF LOAD LBS (MIN)	RECOMMENDED AXIAL LOAD (LBS)	*RECOMMENDED TIGHTENING TORQUE (FT – LBS)
.250	20 28	3800 4350	2850 3263	11 14
.3125	18 24	6300 6950	4725 5213	21.5 27
.375	16 24	9300 10550	6975 7913	40.5 55
.500	13 20	17050 19200	12788 14363	102 126
.625	11 18	27100 30700	20325 23025	212 263
.750	10 16	40100 44750	30075 33563	390 464
1.000	8 12	72700 79550	54525 59663	889 1050
1.250	7 12	116300 128750	87225 96563	1956 2253

NOTES:

1. Torque based on 0.2 coefficient of friction.

2. Torque and axial load based upon 75% of proof load value.

3. The self-locking feature of these bolts is full effective when tightened to the torque values shown herein. Lockwashers or locknuts are not needed. (See note 5)

* 4. Torque values are to be shown adjacent the bolt part number callouts upon assembly drawings. They are subject to upward or downward revision by the agency responsible for the assembly drawings when the tightening fraction coefficient for specific applications is found to vary from as shown in (1) above.

5. Where material softer than the bolt material is fastened, plain washer of material as hard as the bolt of adequate thickness and larger in diameter than the bolt shall be used under the bolt head.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Part Numbers and Dimensions.

The following former dash numbers of MS35764 are INACTIVE FOR NEW DESIGN AFTER 15 MAY 1973. These inactive dash numbers have smaller “F” and “G” dimensions that the new dash numbers in TABLE I and have Type II, Class 3 cadmium plating per SAE AMS-QQ-P-416.

NOMINAL SIZE		.250				.3125				.375				.4375			
THREADS PER INCH		20	28			18	24			16	24			14	20		
D	BODY DIAMETER MAX	.250				.3125				.375				.4375			
	BODY DIAMETER MIN	.245				.3065				.369				.4305			
F	ACROSS FLATS MAX	.436				.500				.562				.625			
	ACROSS FLATS MIN	.428				.489				.551				.612			
G	ACROSS CORNERS MAX	.505				.577				.650				.722			
	ACROSS CORNERS MIN	.488				.557				.628				.698			
H	HEAT HEIGHT MAX	.135				.198				.260				.291			
	HEAT HEIGHT MIN	.125				.188				.250				.281			
M	THREAD LENGTH REF	.750				.875				1.000				1.250			
N	UNTHREADED * BODY LGT MAX	.125	.089			.139	.104			.156	.104			.179	.125		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
.750	CAD	803	1003			817	1017			831	1031			846	1046		
	PHOS	203	603			217	617			231	631			246	646		
.875	CAD	804	1004			818	1018			832	1032			847	1047		
	PHOS	204	604		.125	218	618			232	632			247	647		
1.000	CAD	805	1005			819	1019			833	1033			848	1048		
	PHOS	205	605		.250	219	619			233	633			248	648		
1.250	CAD	807	1007			821	1021			835	1035			850	1050		
	PHOS	207	607	.100	.500	221	621		.375	235	635		.250	250	650		
1.500	CAD	808	1008			822	1022			836	1036			851	1051		
	PHOS	208	608	.350	.750	222	622	.208	.625	236	636	.062	.500	251	651		.375
1.750	CAD	809	1009			823	1023			837	1037			852	1052		
	PHOS	209	609	.600	1.000	223	623	.458	.875	237	637	.312	.750	252	652	.161	.625
2.000	CAD	810	1010			824	1024			838	1038			853	1053		
	PHOS	210	610	.850	1.250	224	624	.708	1.125	238	638	.562	1.000	253	653	.411	.875
2.250	CAD	811	1011			825	1025			839	1039			854	1054		
	PHOS	211	611	1.100	1.500	225	625	.958	1.375	239	639	.812	1.250	254	654	.661	1.125
2.500	CAD	812	1012			826	1026			840	1040			855	1055		
	PHOS	212	612	1.350	1.750	226	626	1.208	1.625	240	640	1.062	1.500	255	655	.911	1.375
2.750	CAD	813	1013			827	1027			841	1041			856	1056		
	PHOS	213	613	1.600	2.000	227	627	1.458	1.875	241	641	1.312	1.750	256	656	1.161	1.625
3.000	CAD	814	1014			828	1028			842	1042			857	1057		
	PHOS	214	614	1.850	2.250	228	628	1.708	2.125	242	642	1.562	2.000	257	657	1.411	1.875
3.250	CAD													858	1058		
	PHOS													258	658	1.661	2.125
3.500	CAD										1044			859	1059		
	PHOS										644	2.062	2.500	259	659	1.911	2.375
3.750	CAD													860	1060		
	PHOS													260	660	2.161	2.625
4.000	CAD													861	1061		
	PHOS													261	661	2.411	2.875

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Part Numbers and Dimensions. (Continued)

NOMINAL SIZE		.500				.5625				.625				.750			
THREADS PER INCH		13	20			12	18			11	18			10	16		
ØD BODY DIAMETER	MAX	.500				.5625				.625				.750			
	MIN	.493				.5545				.617				.741			
F ACROSS FLATS	MAX	.750				.812				.875				1.000			
	MIN	.736				.798				.860				.983			
G ACROSS CORNERS	MAX	.866				.938				1.010				1.155			
	MIN	.840				.910				.980				1.121			
H HEAT HEIGHT	MAX	.327				.390				.390				.456			
	MIN	.312				.375				.375				.438			
M THREAD LENGTH	REF	1.250				1.375				1.500				1.750			
N UNTHREADED * BODY LGT	MAX	.192	.125			.208	.139			.227	.139			.250	.156		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
.750	CAD	864	1064			882	1082										
	PHOS	264	664			282	682										
.875	CAD	865	1065			883	1083										
	PHOS	265	665			283	683										
1.000	CAD	866	1066			884	1084			900	1100				1116		
	PHOS	266	666			284	684			300	700				716		
1.250	CAD	868	1068			886	1086			902	1102			918	1118		
	PHOS	268	668			286	686			302	702			318	718		
1.500	CAD	869	1069			887	1087			903	1103			919	1119		
	PHOS	269	669		.250	287	687			303	703			319	719		
1.750	CAD	870	1070			888	1088			904	1104			920	1120		
	PHOS	270	670	.019	.500	288	688		.375	304	704		.250	320	720		
2.000	CAD	871	1071			889	1089			905	1105			921	1121		
	PHOS	271	671	.289	.750	289	689		.625	305	705		.500	321	721		.250
2.250	CAD	872	1072			890	1090			906	1106			922	1122		
	PHOS	272	672	.519	1.000	290	690	.125	.875	306	706		.750	322	722		.500
2.500	CAD	873	1073			891	1091			907	1107			923	1123		
	PHOS	273	673	.769	1.250	291	691	.375	1.125	307	707	.227	1.000	323	723		.750
2.750	CAD	874	1074			892	1092			908	1108			924	1124		
	PHOS	274	674	1.019	1.500	292	692	.625	1.375	308	708	.477	1.250	324	724	.202	1.000
3.000	CAD	875	1075			893	1093			909	1109			925	1125		
	PHOS	275	675	1.269	1.750	293	693	.875	1.625	309	709	.727	1.500	325	725	.450	1.250
3.250	CAD	876	1076			894	1094			910	1110			926	1126		
	PHOS	276	676	1.519	2.000	894	694	1.125	1.875	310	710	.977	1.750	326	726	.700	1.500
3.500	CAD	877	1077			895	1095			911	1111			927	1127		
	PHOS	277	677	1.769	2.250	295	695	1.375	2.125	311	711	1.227	2.000	327	727	.950	1.750
3.750	CAD	878	1078			896	1096			912	1112			928	1128		
	PHOS	278	678	2.019	2.500	296	696	1.625	2.375	312	712	1.477	2.250	328	728	1.200	2.000
4.000	CAD	879	1079			897	1097			913	1113			929	1129		
	PHOS	279	679	2.269	2.750	297	697	1.875	2.675	313	713	1.727	2.500	329	729	1.450	2.250
4.500	CAD									914	1114			930	1130		
	PHOS									914	714	2.227	3.000	330	730	1.950	2.750

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE IV. Part Numbers and Dimensions. (Continued)

NOMINAL SIZE		.875				1.000				1.250			
THREADS PER INCH		9	14			8	12			7	12		
ØD BODY DIAMETER	MAX	.875				1.000				1.250			
	MIN	.866				.990				1.239			
F ACROSS FLATS	MAX	1.125				1.312				1.688			
	MIN	1.106				1.292				1.663			
G ACROSS CORNERS	MAX	1.299				1.516				1.949			
	MIN	1.261				1.473				1.896			
H HEAD HEIGHT	MAX	.520				.582				.697			
	MIN	.500				.562				.677			
M THREAD LENGTH REF		2.000				2.250				2.750			
N UNTHREADED * BODY LENGTH	MAX	.278	.179			.312	.206			.357	.208		
L LENGTH	FINISH	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX	DASH NO.		BODY LGT MIN	GRIP LGT MAX
1.250	CAD		1133				1148						
	PHOS		733				748						
1.500	CAD	934	1134								1177		
	PHOS	334	734								777		
1.750	CAD	935	1135			950	1150						
	PHOS	335	735			350	750						
2.000	CAD	936	1136			951	1151			979	1179		
	PHOS	336	736			351	751			379	779		
2.250	CAD	937	1137			952	1152			980	1180		
	PHOS	337	737			352	752			380	780		
2.500	CAD	938	1138			953	1153			981	1181		
	PHOS	338	738		.500	353	753			381	781		
2.750	CAD	939	1139			954	1154			982	1182		
	PHOS	339	739		.750	354	754		.500	382	782		
3.000	CAD	940	1140			955	1155			983	1183		
	PHOS	340	740	.167	1.000	355	755		.750	383	783		
3.250	CAD	941	1141			956	1156			984	1184		
	PHOS	341	741	.417	1.250	356	756	.125	1.000	384	784		.500
3.500	CAD	942	1142			957	1157			985	1185		
	PHOS	342	742	.667	1.500	357	757	.375	1.250	385	785		.750
3.750	CAD	943	1143			958	1158			986	1186		
	PHOS	343	743	.917	1.750	358	758	.625	1.500	386	786	.071	1.000
4.000	CAD	944	1144			959	1159			987	1187		
	PHOS	344	744	1.167	2.000	359	759	.875	1.750	387	787	.321	1.250
4.500	CAD	945	1145			960	1160			988	1188		
	PHOS	345	745	1.667	2.500	360	760	1.375	2.250	388	788	.821	1.750
5.000	CAD	946	1146			961	1161			989	1189		
	PHOS	346	746	2.167	3.000	361	761	1.875	2.750	389	789	1.321	2.250

* See Requirement 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

TABLE V. Interchangeability Table.

Cadmium or zinc plated bolts covered by the dash numbers given in the original issue of this standard are canceled after 13 September 1966. The canceled bolts should be used for maintenance purposes until existing stocks are depleted. Replacement shall be in accordance with this table. The new dash numbers given in this table have been inactivated (see TABLE IV).

DASH NUMBERS									
CANCELLED MS35764	NEW MS35764	CANCELLED MS35764	NEW MS35764	CANCELLED MS35764	NEW MS35764	CANCELLED MS35764	NEW MS35764	CANCELLED MS35764	NEW MS35764
3	803	77	877	152	952	452	1052	523	1123
4	804	78	878	153	953	453	1053	524	1124
5	805	79	879	154	954	454	1054	525	1125
7	807	82	882	155	955	455	1055	526	1126
8	808	83	883	156	956	456	1056	527	1127
9	809	84	884	157	957	457	1057	528	1128
10	810	86	886	158	958	458	1058	529	1129
11	811	87	887	159	959	459	1059	530	1130
12	812	88	888	160	960	460	1060	533	1133
13	813	89	889	161	961	461	1061	534	1134
14	814	90	890	179	979	464	1064	535	1135
17	817	91	891	180	980	465	1065	536	1136
18	818	92	892	181	981	466	1066	537	1137
19	819	93	893	182	982	468	1068	538	1138
21	821	94	894	183	983	469	1069	539	1139
22	822	95	895	184	984	470	1070	540	1140
23	823	96	896	185	985	471	1071	541	1141
24	824	97	897	186	986	472	1072	542	1142
25	825	100	900	187	987	473	1073	543	1143
26	826	102	902	188	988	474	1074	544	1144
27	827	103	903	189	989	475	1075	545	1145
28	828	104	904	403	1003	476	1076	546	1146
31	831	105	905	404	1004	477	1077	548	1148
32	832	106	906	405	1005	478	1078	550	1150
33	833	107	907	407	1007	479	1079	551	1151
35	835	108	908	408	1008	482	1082	552	1152
36	836	109	909	409	1009	483	1083	553	1153
37	837	110	910	410	1010	484	1084	554	1154
38	838	111	911	411	1011	486	1086	555	1155
39	839	112	912	412	1012	487	1087	556	1156
40	840	113	913	413	1013	488	1088	557	1157
41	841	114	914	414	1014	489	1089	558	1158
42	842	118	918	417	1017	490	1090	559	1159
46	846	119	919	418	1018	491	1091	560	1160
47	847	120	920	419	1019	492	1092	561	1161
48	848	121	921	421	1021	493	1093	577	1177
50	850	122	922	422	1022	494	1094	579	1179
51	851	123	923	423	1023	495	1095	580	1180
52	852	124	924	424	1024	496	1096	581	1181
53	853	125	925	425	1025	497	1097	582	1182
54	854	126	926	426	1026	500	1100	583	1183
55	855	127	927	427	1027	502	1102	584	1184
56	856	128	928	428	1028	503	1103	585	1185
57	857	129	929	431	1031	504	1104	586	1186
58	858	130	930	432	1032	505	1105	587	1187
59	859	134	934	433	1033	506	1106	588	1188
60	860	135	935	435	1035	507	1107	589	1189
61	861	136	936	436	1036	508	1108		
64	864	137	937	437	1037	509	1109		
65	865	138	938	438	1038	510	1110		
66	866	139	939	439	1039	511	1111		
68	868	140	940	440	1040	512	1112		
69	869	141	941	441	1041	513	1113		
70	870	142	942	442	1042	514	1114		
71	871	143	943	444	1044	516	1116		
72	872	144	944	446	1046	518	1118		
73	873	145	945	447	1047	519	1119		
74	874	146	946	448	1048	520	1120		
75	875	150	950	450	1050	521	1121		
76	876	151	951	451	1051	522	1122		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Air Force - 99
DLA - IS

Preparing Activity:
DLA - IS

(Project 5306-2013-002)

Review Activities:
Army – AT, CR4, MI
Navy – MC, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:27Z
Check the source to verify that this is the current version before use.