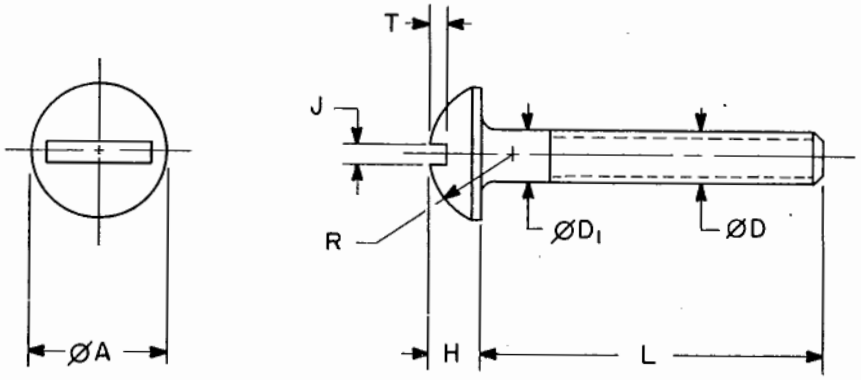


TABLE I. DASH NUMBERS AND DIMENSIONS

ØD NOMINAL SIZE		#6 .1380	#8 .1640					#10 .1900	
THREADS PER INCH		32 UNC-2A	32 UNC-2A					32 UNF-2A	
$ØD_1$ BODY	MAX	.1380	.1640	.1640	.1640	.1640	.1640	.1900	.1900
	MIN	.1141	.1399	.1399	.1399	.1399	.1399	.1658	.1658
ØA HEAD	MAX	.321	.384	.384	.406	.422	.384	.448	.448
	MIN	.303	.364	.364	.386	.408	.364	.425	.425
H HEAD HEIGHT	MAX	.086	.102	.085	.081	.085	.102	.118	.125
	MIN	.076	.092	.075	.071	.075	.092	.103	.110
R HEAD RADIUS	MAX	.211	.254	.254	.346	.254	.254	.283	.283
J SLOT WIDTH	MAX	.048	.054	.054	.054	.054	.054	.060	.060
	MIN	.039	.045	.045	.045	.045	.045	.050	.050
T SLOT DEPTH	MAX	.050	.050	.040	.040	.050	.058	.068	.068
	MIN	.037	.037	.027	.027	.037	.045	.053	.053
L LENGTH TOLERANCE		DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
.125			2						
.140			6		3				
.156			7						
.172			8						
.187			9			10			
.218			11						
.234				12					
.250			13					4	
.281	+0		14						
.296	-.031			15					
.312			16			17			
.344			18						
.375		1	19						
.406			20						
.438			21						
.500			22						5
.562			23						
.625							24		

Ⓐ ENTIRE STANDARD REVISED

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY – AR Other Cust NAVY – EC		SCREW, MACHINE, BOOM SUPPORT ASSEMBLY	MS51475
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.

USER ACTIVITIES:
NAVY – MC

REVIEWER ACTIVITIES:
ARMY – CR
DLA – IS

APPROVED 10 JUN 83 REVISED Ⓐ 27 SEPT 88

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

REQUIREMENTS:

1. MATERIAL: STEEL, CORROSION RESISTANT, TYPE 300 SERIES, IN ACCORDANCE WITH PROCUREMENT SPECIFICATION. BRASS, IN ACCORDANCE WITH QQ-B-613, QQ-B-626, OR QQ-W-321.

2. CLEANED, DESCALED AND PASSIVATED: CORROSION RESISTANT STEEL SCREWS SHALL BE CLEANED, DESCALED, AND PASSIVATED IN ACCORDANCE WITH QQ-P-35, TYPE I.

3. PROTECTIVE COATING AND SURFACE TREATMENT: WHEN REQUIRED, CORROSION RESISTANT STEEL SCREWS SHALL BE BLACK OXIDE COATED IN ACCORDANCE WITH PROCUREMENT SPECIFICATION. BRASS SCREWS SHALL HAVE BLACK CHEMICAL FINISH IN ACCORDANCE WITH MIL-F-495, NICKEL PLATING IN ACCORDANCE WITH QQ-N-290, GRADE E, OR NO PROTECTIVE COATING.

4. MAGNETIC PERMEABILITY: CORROSION RESISTANT STEEL SCREWS SHALL MEET THE MAGNETIC PERMEABILITY REQUIREMENTS OF THE PROCUREMENT SPECIFICATION.

5. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.

6. THREAD LENGTH: SCREWS SHALL BE THREADED TO WITHIN A DISTANCE OF NOT LESS THAN TWO THREADS OF THE BEARING SURFACE OF THE HEAD.

7. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER TAKEN FROM TABLE I, FOLLOWED BY A MATERIAL CODE LETTER AND A FINISH CODE LETTER IF APPLICABLE.

EXAMPLE: MS51475-4B

- FINISH CODE:
  FOR CORROSION RESISTANT STEEL: "B" BLACK OXIDE COATING
  NO CODE - CLEANED, DESCALED AND PASSIVATED

  FOR BRASS:
  "C" - BLACK CHEMICAL FINISH
  "N" - NICKEL PLATING
  NO CODE - NO PROTECTIVE COATING OR SURFACE TREATMENT
- DASH NUMBER
- MATERIAL CODE:
  "-" - CORROSION-RESISTANT STEEL
  "B" - BRASS
- BASIC MS NUMBER

MS51475-4B INDICATES - SCREW, MACHINE, BOOM SUPPORT ASSEMBLY; .1900-32 UNF-2A; .250 LENGTH; CORROSION RESISTANT STEEL

MS51475B4 INDICATES - SCREW, MACHINE, BOOM SUPPLY ASSEMBLY; .1900-32 UNF-2A; .250 LENGTH; BRASS; NO PROTECTIVE COATING OR SURFACE TREATMENT.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
NAVY - MC

REVIEWER ACTIVITIES:
ARMY - CR
DLA - IS

APPROVED 10 JUN 83
REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY - AR Other Cust NAVY - EC		SCREW, MACHINE, BOOM SUPPORT ASSEMBLY	MS51475
PROCUREMENT SPECIFICATION FF-S-92	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.