
FED. SUP CLASS
5305

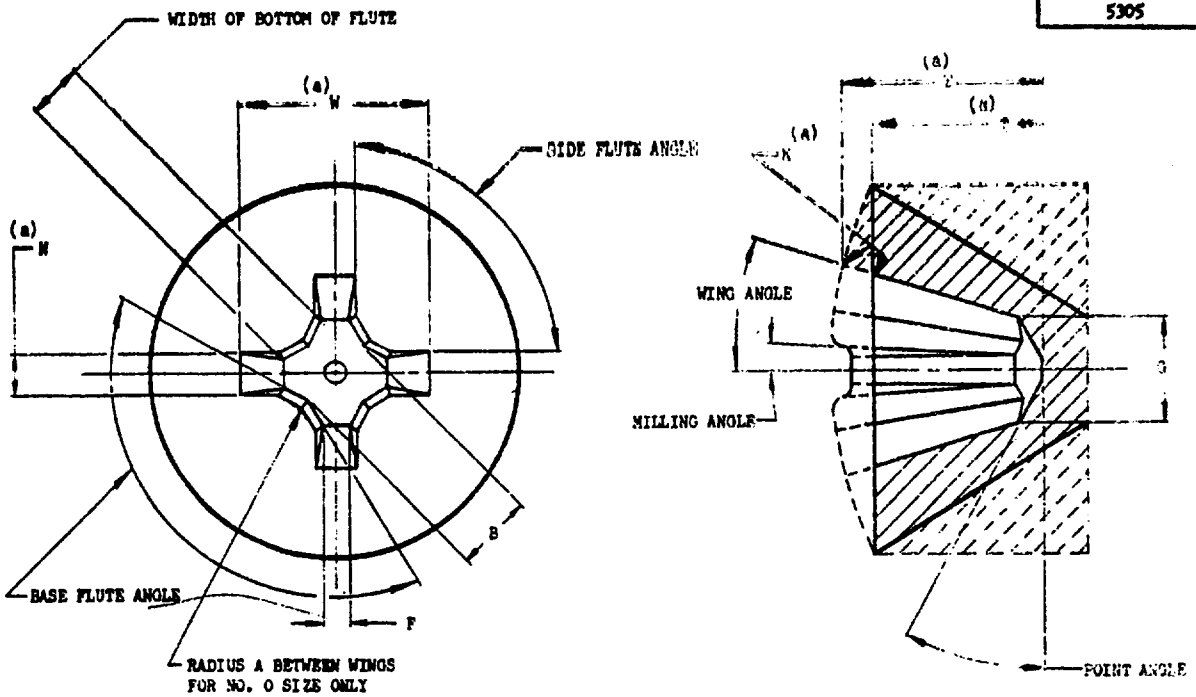

DIMENSIONS OF RECESSES

DIMENSIONS	RECESS NUMBER 0	1	2	3	4	5 ©
O +.002 -.000	.032	.050	.090	.150	.200	.314
B	.0250 ±.0010	.0380 +.0000 -.0010	.0578 ±.0010	.0950 ±.0010	.1370 ±.0010	.2270 ±.0010
MILLING ANGLE	7° +15' -0	7° +15' -0	5°45' +15' -0	5°45' +15' -0	7° +15' -0	7° +15' -0
POINT ANGLE	28° +0 -1°	28° +0 -1°	28° +0 -1°	28° +0 -1°	28° +0 -1°	28° +0 -1°
WING ANGLE +15' -0 ©	26°30'	26°30'	26°30'	26°30'	26°30'	26°30'
BASE FLUTE ANGLE +0 -15'	- - -	138°	140°	146°	153°	162°46'
SIDE FLUTE ANGLE	92° +0 -15'	92° +0 -15'	92° +0 -15'	92° +0 -15'	92° +0 -15'	92° +0 -15'
WIDTH OF BOTTOM OF FLUTE	.0140 .0104	.0180 .0160	.0330 .0310	.0800 .0780	.0960 .0940	.1640 .1590
WING THICKNESS F	.014 .012	.021 .019	.029 .026	.032 .029	.050 .047	.070 .067
A	.0101 .0075 ©	- - -	- - -	- - -	- - -	- - -

(a) UNLESS OTHERWISE SPECIFIED, USE SHEET 4 VALUES FOR DIMENSIONS W, T, N, K, AND DEPTH OF GAGE PENETRATIONS. IF THE SHEET 4 VALUES ARE NOT COMPATIBLE WITH THE HEAD CONFIGURATION AND PERFORMANCE REQUIREMENTS OF A PARTICULAR ITEM, THE VALUES WILL BE SPECIFIED ON THE ITEM STANDARD.

SHEETS 1 AND 2 OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD 17/30. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

THIS IS A DESIGN STANDARD, NOT TO BE USED AS A PART NUMBER. © FOR CHANGES SEE SHEETS 2, 3, 4.

APPROVED 1 Sept 57 REVISED (A) 13 Oct 61 (B) 24 Nov 61 (C) 20 Jan 63

P.A. USAF - ASD Other Cust Army - WC Navy - Ships	INTERNATIONAL INTEREST	TITLE: RECESSES - CROSS, LOW TORQUE DRIVE, DIMENSIONS AND GAGE DIMENSIONS FOR	MILITARY STANDARD MS9006
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: MS9001 THRU MS9005, MS33578 AND AND10477 ©	SHEET 1 OF 4


DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

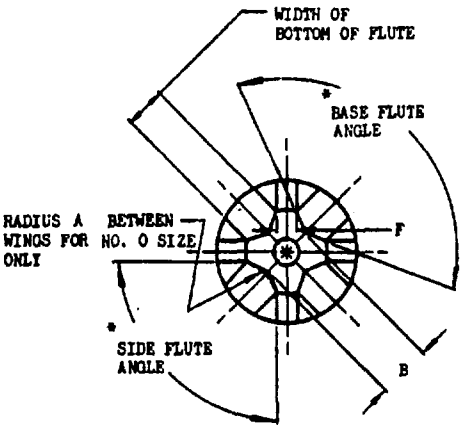

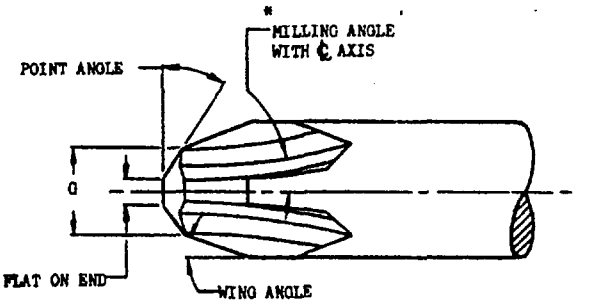

DIMENSIONS OF GAGE POINTS						
DIMENSIONS	RECESS NUMBER ©					
	0	1	2	3	4	5
G +.001 -.000	.032	.050	.090	.150	.200	.311
B +.0000 -.0010	.0240	.0394	.0606	.0983	.1407	.2310
MILLING ANGLE	7° +0 -15'	7° +0 -15'	5°45' +0 -15'	5°45' +0 -15'	7° +0 -15'	7° +0 -15'
POINT ANGLE	18° +1° -0	18° +1° -0	18° +1° -0	18° +1° -0	18° +1° -0	18° +1° -0
FLAT ON END	.015 .010	.020 .015	.020 .015	.020 .015	.020 .015	.025 .020
WING ANGLE +0 -15'	26°30'	26°30'	26°30'	26°30'	26°30'	26°30'
BASE FLUTE ANGLE +15' -0	- - -	138°	140°	146°	153°	162°46'
SIDE FLUTE ANGLE +15' -0	92°	92°	92°	92°	92°	92°
WIDTH OF BOTTOM OF FLUTE	.0151 .0125	.0202 .0192	.0434 .0424	.0826 .0816	.1078 .1068	.1730 .1720
WING THICKNESS F	.012 .010	.020 .018	.025 .023	.031 .029	.044 .042	.063 .061
A	.0109 .0090	- - -	- - -	- - -	- - -	- - -

NOTICE - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 1 Aug 57 REVISED © FOR CHANGES SEE SHEETS 1, 2,


P.A. USAF - ASD Other Cust Army - WC Navy - Weps	INTERNATIONAL INTEREST	TITLE RECESSES - CROSS, LOW TORQUE DRIVE, DIMENSIONS AND GAGE DIMENSIONS FOR	MILITARY STANDARD MS9006
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: MS9001 THRU MS9005, AS33578 AND AND10477 ©	SHEET 2

DD FORM 1 SEP 57 672-1 (Coordinated)


PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5305

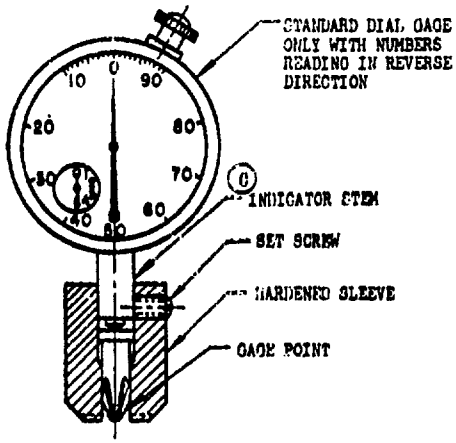

GAGE ASSEMBLY

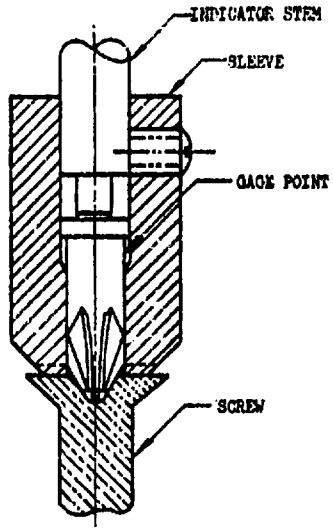


GAGE SHOWN IN GAGING POSITION

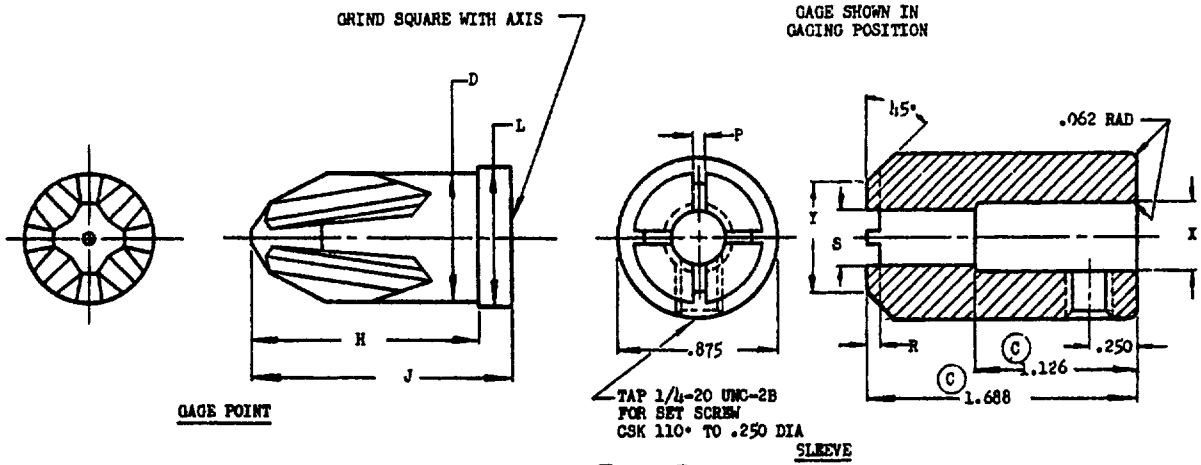

GAGE POINT

SLEEVE

RECESS NUMBER	GAGE POINT				SLEEVE				
	D ±.0002 SHANK DIA	H ±.005	J ±.005	L ±.005 DIA	P ±.002	R ±.003	S ±.0002 DIA	X +.002 -.000 DIA	Y ±.005 DIA
0	.0450	.656	.781	.094	.008	.015	.0460	.376	.562
1	.0870	.688	.812	.156	.012	.020	.0880		
2	.1410	.750	.875	.219	.018	.031	.1420		
3	.2090	.781	.906	.250	.022	.037	.2100		
4	.3120	.844	.969	.359	.031	.062	.3130		
5	.500	1.031	1.156	.531	.041	.094	.5010	.549	.750

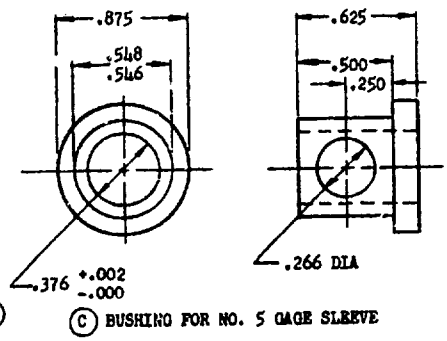

BUSHING FOR NO. 5 GAGE SLEEVE

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.016.
FOR DRIVER DATA, SEE GOG-S-121.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 1 Aug 57 REVISED © FOR CHANGES SEE SHEETS 1, 2, 3, 4.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. USAF-ASD Other Cust Army-MC Navy-Waps	INTERNATIONAL INTEREST	TITLE: RECESSES - CROSS, LOW TORQUE DRIVE, DIMENSIONS AND GAGE DIMENSIONS FOR	MILITARY STANDARD MS9006
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: MS9001 THRU MS9005, MS33578, AND AND10477 ©	SHEET 3

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5305

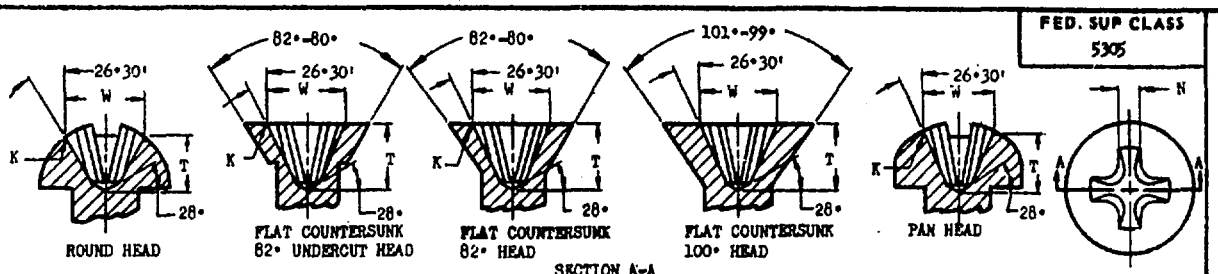

ROUND HEAD WOOD SCREWS

NOM SIZE	W DIAMETER OF RECESS MAX	W DIAMETER OF RECESS MIN	T DEPTH OF RECESS MAX	N WIDTH OF RECESS MIN	K RAD	DRIVER SIZE	DEPTH OF PENETRATION MAX	DEPTH OF PENETRATION MIN
0	.073	.060	.042	.014	.010	0	.035	.015
1	.082	.069	.052	.015	.010	0	.045	.026
2	.114	.101	.064	.018	.020	1	.057	.035
3	.122	.109	.073	.019	.020	1	.066	.045
4	.130	.117	.083	.019	.020	1	.076	.056
5	.154	.141	.074	.027	.025	2	.063	.035
6	.162	.149	.084	.027	.025	2	.073	.045
7	.170	.157	.092	.028	.025	2	.081	.055
8	.178	.165	.101	.030	.025	2	.090	.064
9	.186	.173	.110	.030	.025	2	.099	.073
10	.195	.182	.119	.031	.025	2	.108	.082
12	.249	.236	.125	.032	.030	3	.108	.082
14	.265	.252	.142	.034	.030	3	.125	.099
16	.281	.268	.159	.038	.030	3	.142	.119
18	.339	.326	.176	.057	.035	4	.156	.131
20	.356	.343	.194	.059	.035	4	.174	.148
24	.387	.374	.228	.064	.035	4	.208	.182

FLAT HEAD WOOD SCREWS

NOM SIZE	W DIAMETER OF RECESS MAX	W DIAMETER OF RECESS MIN	T DEPTH OF RECESS MAX	N WIDTH OF RECESS MIN	K RAD	DRIVER SIZE	DEPTH OF PENETRATION MAX	DEPTH OF PENETRATION MIN
0	.069	.056	.043	.014	.010	0	.036	.020
1	.077	.064	.051	.015	.010	0	.044	.028
2	.102	.089	.063	.017	.020	1	.056	.040
3	.107	.094	.068	.018	.020	1	.061	.045
4	.128	.115	.089	.018	.020	1	.082	.066
5	.154	.141	.086	.027	.025	2	.075	.052
6	.174	.161	.106	.029	.025	2	.095	.072
7	.189	.176	.121	.030 (C)	.025	2	.110	.087
8	.204	.191	.136	.032	.025	2	.125	.102
9	.214	.201	.146	.033	.025	2	.135	.112
10	.258	.245	.146	.034	.030	3	.129	.106
12	.283	.270	.171	.036	.030	3	.154	.131
14	.303	.290	.191	.039	.030	3	.174	.151
16	.327	.314	.216	.045	.030	3	.199	.176
18	.378	.365	.230	.062	.035	4	.210	.188
20	.393	.380	.245	.065	.035	4	.225	.203
24	.424	.411	.276	.069	.035	4	.256	.234

FLAT COUNTERSUNK 82° UNDERCUT HEAD MACHINE AND TAPPING SCREWS (EXCEPT TYPE "A" (b))

NOM SIZE	W DIAMETER OF RECESS MAX	W DIAMETER OF RECESS MIN	T DEPTH OF RECESS MAX	N WIDTH OF RECESS MIN	K RAD	DRIVER SIZE	DEPTH OF PENETRATION MAX	DEPTH OF PENETRATION MIN
0	.069	.056	.043	.014	.010	0	.036	.020
1	.077	.064	.051	.015	.010	0	.044	.028
2	.095	.082	.056	.017	.020	1	.049	.033
3	.102	.089	.063	.018	.020	1	.056	.040
4	.117	.104	.078	.018	.020	1	.071	.055
5	.128	.115	.089	.018	.020	1	.082	.066
6	.146	.133	.078	.025	.025	2	.067	.044
7	.154	.141	.086	.027	.025	2	.075	.052
8	.174	.161	.106	.029	.025	2	.095	.072
10	.189	.176	.121	.030 (C)	.025	2	.110	.087
12	.233	.220	.121	.030	.030	3	.104	.081
1/4	.250	.237	.136	.032	.030	3	.119	.096
5/16	.317	.304	.168	.053	.035	4	.148	.126
3/8	.365	.352	.216	.061	.035	4	.196	.174
7/16	.393	.380	.245	.065	.035	4	.225	.203
1/2	.409	.396	.261	.068	.035	4	.241	.219

FLAT COUNTERSUNK 82° HEAD MACHINE AND TAPPING SCREWS (EXCEPT TYPE "A" (b))

NOM SIZE	W DIAMETER OF RECESS MAX	W DIAMETER OF RECESS MIN	T DEPTH OF RECESS MAX	N WIDTH OF RECESS MIN	K RAD	DRIVER SIZE	DEPTH OF PENETRATION MAX	DEPTH OF PENETRATION MIN
0	.069	.056	.043	.014	.010	0	.036	.020
1	.077	.064	.051	.015	.010	0	.044	.028
2	.102	.089	.063	.017	.020	1	.056	.040
3	.107	.094	.068	.018	.020	1	.061	.045
4	.128	.115	.089	.018	.020	1	.082	.066
5	.154	.141	.086	.027	.025	2	.075	.052
6	.174	.161	.106	.029	.025	2	.095	.072
7	.182	.169	.114	.030	.025	2	.103	.080
8	.189	.176	.121	.030 (C)	.025	2	.110	.087
10	.204	.191	.136	.032	.025	2	.125	.102
12	.268	.255	.156	.035	.030	3	.139	.116
1/4	.283	.270	.171	.036	.030	3	.154	.131
5/16	.365	.352	.216	.061	.035	4	.196	.174
3/8	.393	.380	.245	.065	.035	4	.225	.203
7/16	.409	.396	.261	.068	.035	4	.241	.219
1/2	.424	.411	.276	.069	.035	4	.256	.234

PAN HEAD MACHINE AND TAPPING SCREWS (EXCEPT TYPE "A" (b))

NOM SIZE	W DIAMETER OF RECESS MAX	W DIAMETER OF RECESS MIN	T DEPTH OF RECESS MAX	N WIDTH OF RECESS MIN	K RAD	DRIVER SIZE	DEPTH OF PENETRATION MAX	DEPTH OF PENETRATION MIN
0	.067	.054	.039	.013	.010	0	.032	.014
1	.074	.061	.045	.014	.010	0	.040	.022
2	.104	.091	.059	.017	.020	1	.052	.034
3	.112	.099	.068	.019	.020	1	.061	.043
4	.122	.109	.078	.019	.020	1	.071	.053
5	.158	.145	.083	.028	.025	2	.072	.046
6	.166	.153	.091	.028	.025	2	.080	.055
7	.176	.163	.100	.029	.025	2	.089	.064
8	.182	.169	.108	.030	.025	2	.097	.071
10	.199	.186	.124	.031	.025	2	.113	.089
12	.259	.246	.141	.034	.030	3	.124	.098
1/4	.281	.268	.161	.036	.030	3	.144	.118
5/16	.390	.337	.193	.059	.035	4	.173	.149
3/8	.389	.376	.233	.065	.035	4	.213	.190
7/16	.413	.400	.259	.063	.035	4	.239	.214
1/2	.439	.422	.280	.071	.035	4	.260	.235

FLAT COUNTERSUNK 100° HEAD MACHINE SCREWS

NOM SIZE	W DIAMETER OF RECESS MAX	W DIAMETER OF RECESS MIN	T DEPTH OF RECESS MAX	N WIDTH OF RECESS MIN	K RAD	DRIVER SIZE	DEPTH OF PENETRATION MAX	DEPTH OF PENETRATION MIN
2	.095	.082	.056	.012	.020	1	.049	.033
3	.102	.089	.063	.014	.020	1	.056	.040
4	.116	.103	.078	.018	.020	1	.071	.055
6	.154	.141	.086	.027	.025	2	.075	.052
8	.169	.156	.101	.028	.025	2	.090	.067
10	.184	.171	.116	.030	.025	2	.105	.082
1/4	.247	.234	.135	.033	.030	3	.118	.095
5/16	.317	.304	.168	.053	.035	4	.148	.126
3/8	.342	.329	.193	.056	.035	4	.173	.151
7/16	.366	.353	.218	.060	.035	4	.198	.176
1/2	.393	.380	.245	.063	.035	4	.226	.204
9/16	.424	.411	.276	.068	.035	4	.256	.234
5/8	.511	.498	.278	.072	.035	5	.245	.219

(b) - A TAPPING OR COARSE-LEAD SCREW WITH A GIMLET POINT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 1 Aug 57 REVISED (A) 10 Oct 60 (C) FOR CHANGES SEE SHEETS 1, 2, 3, 4.

P.A. USAF - ASD Other Cust Army - WC Navy - Naps

INTERNATIONAL INTEREST

TITLE: RECESSES - CROSS, LOW TORQUE DRIVE, DIMENSIONS AND GAGE DIMENSIONS FOR

MILITARY STANDARD

MS9006

PROCUREMENT SPECIFICATION NONE

SUPERSEDES: MS9001 THRU MS9005 MS33578, AND AND10477 (C)

SHEET 4

DD FORM 672-1 (Coordinated)

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Preparing activity: Standard is approved by the Department of Defense and is mandatory for use by all services. Selection for all new engineering and design applications, and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

INCH–POUND

NOTICE
OF VALIDATION

MS9006C
NOTICE 1
3 October 1991

MILITARY STANDARD

RECESSES–CROSS, LOW TORQUE DRIVE, DIMENSIONS AND GAGE DIMENSIONS FOR

MS9006C, dated 20 June 1963, has been reviewed and determined to be valid for use in acquisition.

Custodians:
Army – AR
Navy – AS
Air Force – 99

Preparing activity:
Navy – AS

AMSC N/A

FSC 5305

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.