NOT MEASUREMENT SENSITIVE
A-A-59281B
05 January 2024
SUPERSEDING
A-A-59281A
8 August 2007

COMMERCIAL ITEM DESCRIPTION

CLEANING COMPOUND, SOLVENT MIXTURES

The General Services Administration has authorized the use of this commercial item description for all federal agencies.

1. SCOPE. This commercial item description (CID) covers two blends of mixed cleaning solvent for use in final cleaning of chemically treated aluminum alloy surfaces and solvent-resistant coatings prior to application of chemical treatments or integral fuel tank sealants.

2. CLASSIFICATION. The cleaning solvent mixtures shall be of the following types as specified (see 7.3):

Type I - Normal solvent blend
Type II - Non-photochemically reactive solvent blend

3. SALIENT CHARACTERISTICS

3.1 Solvent blend composition. The composition of the cleaning compound solvent blends for each type shall be in accordance with table I.

TABLE I. Chemical composition.

Component	Specification	Percent by volume	
		Type I	Type II
Aromatic naphtha	TT-N-97 type I, grade B	50.0 ± 2.0	None
Ethyl acetate	ASTM D4614, grade 85 or higher	20.0 ± 1.0	35.5 ± 1.0
Methyl ethyl ketone	ASTM D 740, type I	20.0 ± 1.0	36.0 ± 1.0
Isopropanol	ASTM D 770	10.0 ± 1.0	10.0 ± 1.0
Toluene	A-A-59107	None	18.5 ± 1.5

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data that may improve this document should be sent to DLA Aviation, VEB, 6090 Strathmore Rd, Richmond, VA 23237 or e-mailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

3.2 Chemical formulation requirements.

3.2.1 Type I. Aromatic content shall not exceed 50.0 ± 2.0 percent by volume when tested using an applicable gas chromatography or gas chromatography/mass spectrometry procedure. Alternative procedure for verification of requirement is ASTM D 1319, "Standard Test Method for Hydrocarbon Types in Liquid Petroleum Products by Fluorescent Indicator Adsorption".

3.2.2 Type II. Solvent mixture shall be a non-photochemically reactive solvent blend. A non-photochemically reactive solvent is any solvent with an aggregate of less than 20 percent of its total volume composed of the following percentage composition limitations, referred to as the total volume of solvent:

a. A combination of hydrocarbons, alcohols, aldehydes, esters, ethers, or ketones having an olefinic or cycloolefinic type of unsaturation: less than 5 percent.
b. A combination of aromatic compounds with 8 or more carbon atoms to the molecule except ethyl benzene: less than 8 percent.
c. A combination of ethyl benzene, ketones having branched structures, trichloroethylene or toluene: less than 20 percent.
d. Total (a) + (b) + (c): less than 20 percent.

3.3 Nonvolatile residue (both types). Nonvolatile residue shall not exceed 0.0010 percent by weight when tested in accordance with method A of ASTM D 2109, "Standard Test Methods for Nonvolatile Matter in Halogenated Organic Solvents and Their Admixtures".

4. REGULATORY REQUIREMENTS

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, as applicable.

4.2 Marking, packaging, and labeling. Material shall be labeled, packed, and marked in accordance with 49 Code of Federal Regulations (CFR) parts 100 - 185.

4.3 Safety data sheet (SDS). Manufacturers shall prepare and submit a SDS in accordance with FED-STD-313, "Material Safety Data, Transportation Data and Disposal Data for Hazardous Materials Furnished to Government Activities", and meeting the requirements of 29 Code of Federal Regulations § 1910.1200, "Occupational Safety and Health Standards: Hazard Communication".

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The government reserves the right to require proof of such conformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

5.2 Market acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING

6.1 Preservation, packing, and marking. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.3).

6.2 Special markings.


6.2.1 Type II product. On type II product only, all containers shall be labeled or marked, "Non-photochemically Reactive".

6.2.2 Container markings. The following information shall be marked on each container:

> Storage Life is Eighteen Months When Stored in Original Unopened Containers Below 36.7 °C. Material is Hydroscopic and Should be Stored in Dry, Covered, Storage Areas.

7. NOTES

7.1 Part or identification number (PIN). The following PIN procedure is for government purposes and does not constitute a requirement for the contractor.

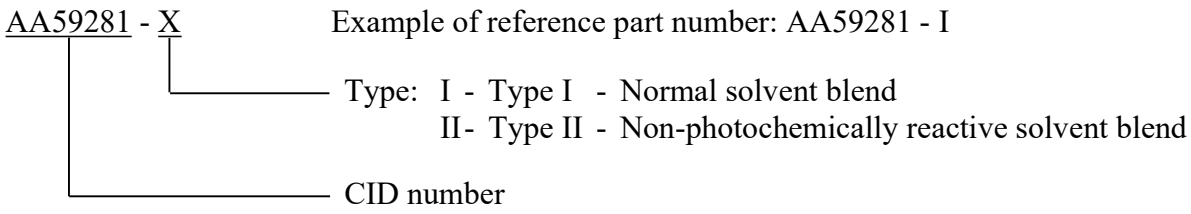

7.2 Sources of documents.

7.2.1 Electronic copies of CFR documents may be obtained from https://www.ecfr.gov.

7.2.2 Electronic copies of FAR documents may be obtained from https://www.acquisition.gov/browse/index/far.

7.2.3 Electronic copies of military specifications and standards may be obtained from https://quicksearch.dla.mil.

7.2.4 Electronic copies of ASTM documents may be obtained from https://www.astm.org.

7.3 Ordering data. The acquisition order should specify the following:

a. Title, CID document number, revision, and CID PIN.
b. Type of solvent required (see 2).
c. Packaging requirements (see 6).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.

d. Special markings, if required (see 6.2).

7.4 Shelf-life. This specification covers items where the assignment of a Federal shelf-life code is a consideration. Specific shelf-life requirements should be specified in the contract or purchase order, and should include, as a minimum, shelf-life code, shelf-life package markings in accordance with MIL-STD-129 or FED-STD-123, preparation of a materiel quality storage standard for type II (extendible) shelf-life items, and a minimum of 85 percent shelf-life remaining at time of receipt by the Government. These and other requirements, if necessary, are in DoDM 4140.27 Volumes 1 and 2. The shelf-life codes are in the Federal Logistics Information System Total Item Record. Additive information for shelf-life management may be obtained from DoDM 4140.27 Volumes 1 and 2, or the designated shelf-life Points of Contact (POC). The POC should be contacted in the following order: (1) the Inventory Control Points that manage the item and (2) the DoD Service and Agency administrators for the DoD Shelf-Life Program. Appropriate POCs for the DoD Shelf-Life Program can be contacted through the DoD Shelf-Life Management website: https://www.shelflife.dla.mil/.

7.5 Key Words.

aluminum
alloy
aromatic
coatings
ethyl acetate
fuel
methyl ethyl ketone
naphtha
non-photochemically reactive
sealants
tank

MILITARY INTEREST:

Custodian:
Air Force – 68
DLA – GS

CIVIL AGENCY
COORDINATING ACTIVITY:

GSA - FSS

Preparing Activity:
DLA - GS3

(Project 6850-2024-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:08Z
Check the source to verify that this is the current version before use.