INCH-POUND
A-A-60035A
23 December 2022
SUPERSEDING
A-A-60035
5 July 2022

COMMERCIAL ITEM DESCRIPTION

BOLTS, CADMIUM AND HEXAVALENT-CHROMIUM FREE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1 SCOPE. This commercial item description (CID) covers bolts which shall not contain cadmium or hexavalent-chromium in their finishes.

2 CLASSIFICATION

2.1 Types.

Type I	-	NAS1251 - Bolt, Ring, Swivel
Type II	-	NAS1297 - Bolt, Shoulder-Hexagon Head
Type III	-	NAS6603 THRU NAS6620 - Bolt, Tension, Hex Head, Close Tolerance, Alloy Steel, Long Thread, Reduced Major Dia., Self-Locking and nonlocking, 160 KSI Ftu
Type IV	-	NASM3 THRU NASM20 - Bolt, Machine, Aircraft
Type V	-	NASM21098 - Bolt, Self-Locking, Steel, 160 KSI Ftu, 250 °F, 12 Point, External Wrenching (Externally Wrenching Cap Screws)
Type VI	-	NASM21250 - Bolt, Tension, Steel, External Wrenching, Flanged, 12-Point, 180 KSI Ftu, 450 ºF
Type VII	-	NASM35751 - Bolt, Square Neck, Round Head (Carriage), Steel, Cadmium Or Zinc Plated, UNC-2A
Type VIII	-	NASM21134 - Bolt, Tension, Steel, 180 KSI Ftu, 450 °F External Wrenching, Spline Drive, Flanged

3 SALIENT CHARACTERISTICS.

3.1 Materials. Bolts shall be manufactured as specified in the Aerospace Industry Association (AIA) documents listed in 2.1 by type, except the plating/finishes shall not contain cadmium or hexavalent-chromium as specified herein (see 3.3).

Comments, suggestions, or questions on this document should be addressed to U.S. Army DEVCOM Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 5306

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.2 Dimensions. Dimensions for all designated types of bolts apply after plating/finishing. Refer to each individual NAS/NASM specification listed in Table 2.1 for detailed part geometry and tolerance requirements.

3.3 Hexavalent-chromium free Part or Identifying Number (PIN) codes and finish/plating options. PIN finish/plating codes for all designated types of bolts:

J = Aluminum alloy shall be chemically treated in accordance with MIL-DTL-5541, Type II, Class 1A or anodized in accordance with MIL-PRF-8625, Type IC, II or IIB, Class 1 or 2. Sealers (clear or any color) containing hexavalent chromium shall be prohibited.
P5 = CRES shall be cleaned, descaled and passivated in accordance with SAE AMS 2700 Method 1, Type 6, 7, or 8 or Method 2. Post treatment is prohibited.
QX = Carbon and Alloy steel shall be zinc-nickel plated in accordance with MIL-PRF-32647, Type K16.

3.4 Lubrication. Lubrication types (if any) for each type of bolt shall be specified in each AIA/NASM specification (see 2.1).

3.5 Interchangeability. When AIA/NASM specifications list interchangeability parts, do not interchange parts containing cadmium or hexavalent-chromium with the cadmium and hexavalent-chromium free parts listed herein without design authority approval.

4 REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or Federal Sustainability contained in EO 14057; as applicable.

5 PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for inspection. The contractor is responsible for the performance of all inspections.

5.3 Contractor certification. The contractor shall certify and maintain substantiating evidence the product offered meets the salient characteristics of this commercial item description and conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to perform or witness any of the inspections it deems necessary to ensure supplies and services conform to prescribed requirements.

6 PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7 NOTES

The following part or identification numbering (PIN) procedure is for government purposes and does not constitute a requirement for the contractor.


7.1 Tables. The following finish/plating PIN's are cadmium and hexavalent-chromium free for designated bolts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE I. Type I (-1), bolt, ring, swivel.

A-A-60035 Part Number	Reference Dash Number (from NAS1251)
AA60035-1-2QX	NAS1251-2
AA60035-1-5QX	NAS1251-5
AA60035-1-A10QX	NAS1251A10
AA60035-1-A25QX	NAS1251A25

PIN construction:

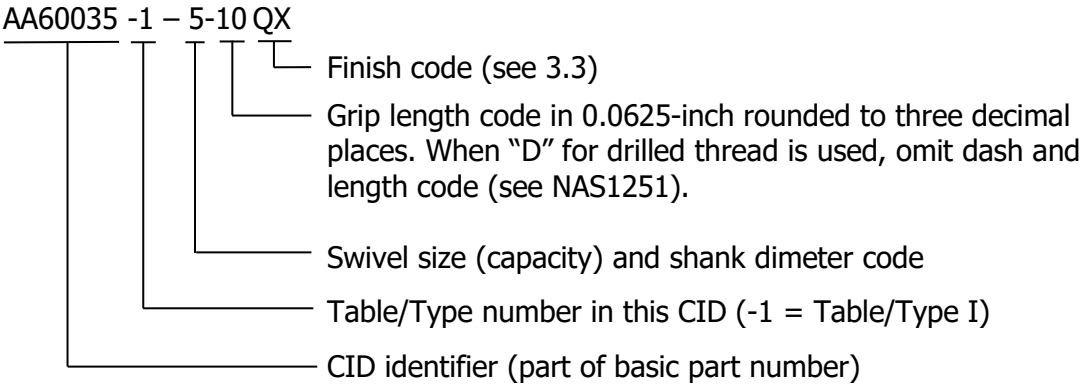

Examples of clean finish PIN's:

AA60035-1-A10-10QX = a NAS1251 - Bolt, ring, 10,000 LBF rated capacity, 0.625-inch grip length, zinc-nickel Type K16 plated.
AA60035-1-5DQX = a NAS1251 - Bolt, ring, 5,000 LBF rated capacity, drilled thread, zinc-nickel Type K16 plated.


TABLE II. Type II (-2), bolt, shoulder-hexagon head.

A-A-60035 Part Number	Reference Dash Number (from NAS1297)
AA60035-2-06*#QX	NAS1297-06*#
AA60035-2-3*#QX	NAS1297-3*#
AA60035-2-4*#QX	NAS1297-4*#
AA60035-2-5*#QX	NAS1297-5*#
AA60035-2-6*#QX	NAS1297-6*#
AA60035-2-7*#QX	NAS1297-7*#
AA60035-2-8*#QX	NAS1297-8*#
AA60035-2-10*#QX	NAS1297-10*#

(Notes continued on next page.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction

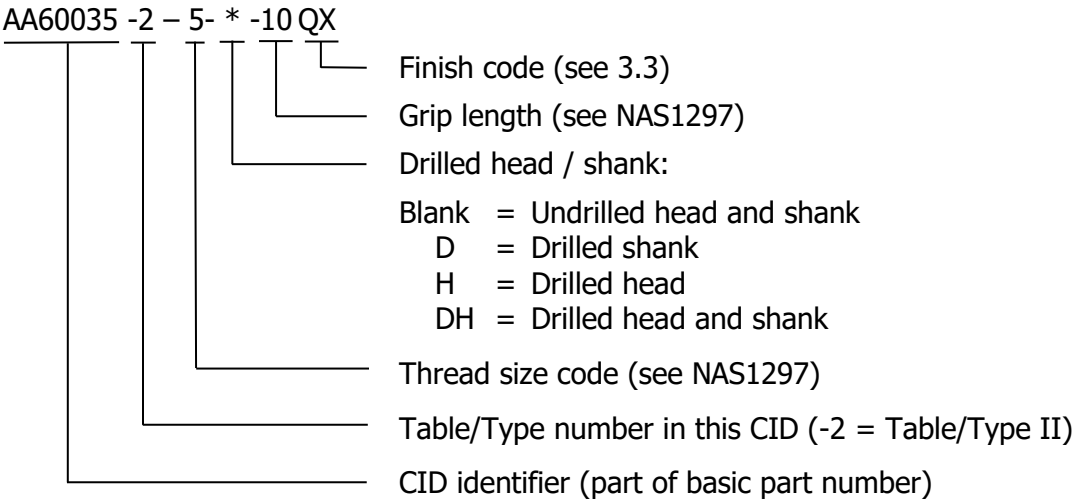

Examples of clean finish PIN's:

AA60035-2-06-4QX = a NAS1297 – Shoulder bolt with a hexagon head, alloy steel, 0.1380-32 UNJF-3A, undrilled, 0.260 grip length, zinc-nickel Type K16 plated.

AA60035-2-5D8QX = a NAS1297 – Shoulder bolt with a hexagon head, alloy steel, 0.3125-24 UNJF-3A, drilled shank, 0.510 grip length, zinc-nickel Type K16 plated.

AA60035-2-10DH10QX = a NAS1297 - Shoulder bolt with a hexagon head, alloy steel, 0.6250-18 UNJF-3A, drilled shank and head, 0.635 grip length, zinc-nickel Type K16 plated.

TABLE III. Type III (-3), bolt, tension, hex head, close tolerance, alloy steel, long thread, reduced major dia., self-locking and nonlocking, 160 KSI Ftu.

A-A-60035 Part Number	Reference Dash Number (from NAS6603 THRU NAS6620)
AA60035-3-03*QX	NAS6603*
AA60035-3-04*QX	NAS6604*
AA60035-3-05*QX	NAS6605*
AA60035-3-06*QX	NAS6606*
AA60035-3-07*QX	NAS6607*
AA60035-3-08*QX	NAS6608*
AA60035-3-09*QX	NAS6609*
AA60035-3-10*QX	NAS6610*
AA60035-3-12*QX	NAS6612*
AA60035-3-14*QX	NAS6614*
AA60035-3-16*QX	NAS6616*
AA60035-3-18*QX	NAS6618*
AA60035-3-20*QX	NAS6620*

(Notes continued on next page.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction

AA60035 -3 - 04 - 10 QX

- Finish code (see 3.3)
- Grip dash number (see NAS6603 THRU NAS6620)
- Feature codes, after CID identifier and Table/Type Number:
  - \- = Undrilled / nonlocking
  - D = Drilled thread (do not use with "L" or "P" code)
  - H = Drilled head
  - L = Self-locking bolt with locking element type optional (do not use "L" with "D" or "P" code)
  - P = Self-locking bolt with patch type locking element type (do not use "P" with "D" or "L" code)
- Thread size code (see NAS6603 THRU NAS6620)
  - 03 = NAS6603 0.1900-32
  - 04 = NAS6604 0.2500-28
  - 05 = NAS6605 0.3125-24
  - 06 = NAS6606 0.3750-24
  - 07 = NAS6607 0.4375-20
  - 08 = NAS6608 0.5000-20
  - 09 = NAS6609 0.5265-18
  - 10 = NAS6610 0.6250-18
  - 12 = NAS6612 0.7500-16
  - 14 = NAS6614 0.8750-14
  - 16 = NAS6616 1.0000-12
  - 18 = NAS6618 1.1250-12
  - 20 = NAS6620 1.2500-12
- Table/Type number in this CID (-3 = Table/Type III)
- CID identifier (part of basic part number)

Examples of clean finish PIN's:

(For oversized bolts, see requirements of NAS6603 THRU NAS6620.)

AA60035-3-04-10QX	=	a NAS6604 - Bolt, 0.2500-28 thread, 1.050 grip, undrilled / nonlocking, zinc-nickel Type K16 plated.
AA60035-3-04D10QX	=	a NAS6604 - Bolt, 0.2500-28 thread, 1.050 grip, drilled thread, undrilled head, nonlocking, 0.625 grip, zinc-nickel Type K16 plated.
AA60035-3-04DH10QX	=	a NAS6604 - Bolt, 0.2500-28 thread, 1.050 grip, drilled thread, drilled head, nonlocking, 0.625 grip, zinc-nickel Type K16 plated.
AA60035-3-04H10QX	=	a NAS6604 - Bolt, 0.2500-28 thread, 1.050 grip, undrilled thread, drilled head, nonlocking, 0.625 grip, zinc-nickel Type K16 plated.
AA60035-3-04L10QX	=	a NAS6604 - Bolt, 0.2500-28 thread, 1.050 grip, self-locking (locking type optional), 0.625 grip, zinc-nickel Type K16 plated.
AA60035-3-04P10QX	=	a NAS6604 - Bolt, 0.2500-28 thread, 1.050 grip, patch type locking element type, zinc-nickel Type K16 plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE IV. Type IV (-4) - bolt, machine, aircraft.

A-A-60035 Part Number	Reference Basic Part Number (from NASM3 THRU NASM20)
AA60035-4-3*	AN3
AA60035-4-4*	AN4
AA60035-4-5*	AN5
AA60035-4-6*	AA60035-4-6
AA60035-4-7*	AN7
AA60035-4-8*	AN8
AA60035-4-9*	AN9
AA60035-4-10*	AN10
AA60035-4-12*	AN12
AA60035-4-14*	AN14
AA60035-4-16*	AN16 (inactive for new design)
AA60035-4-17*	AN17
AA60035-4-18*	AN18
AA60035-4-20*	AN20

(AA60035-4-16* may be used for new design.)

PIN construction

AA60035 -4 -3 DD H 10 J

- J = Finish code (see 3.3)
- 10 = Length and grip code (see NASM3 THRU NASM20)
- H = Bolt head code:
  - H = Drilled head
  - No code = Undrilled head
- DD = Material:
  - C = CRES
  - DD = Aluminum Alloy
  - "-" = Steel
- -3 = Thread size code (UNF-3A unless othewise stated, see NASM3 THRU NASM20)
  - 3 = AN3 0.1900-32
  - 4 = AN4 0.2500-28
  - 5 = AN5 0.3125-24
  - 6 = AA60035-4-6 0.3750-24
  - 7 = AN7 0.4375-20
  - 8 = AN8 0.5000-20
  - 9 = AN9 0.5265-18
  - 10 = AN10 0.6250-18
  - 12 = AN12 0.7500-16
  - 14 = AN14 0.8750-14
  - 16 = AN16 1.0000-12, NF3A
  - 17 = AN17 1.0000-12
  - 18 = AN18 1.1250-12
  - 20 = AN20 1.2500-12
- -4 = Table/Type number in this CID (-4 = Table/Type IV)
- AA60035 = CID identifier (part of basic part number)

(Notes continued on next page.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.


Examples of clean finish PIN's:

AA60035-4-6-10QX = a NASM3 THRU NASM20 - Ø.3750 steel bolt 1.078 long, 0.438 grip with drilled threads only, zinc-nickel Type K16 plated.
AA60035-4-6C10P5 = a NASM3 THRU NASM20 - Ø.3750 CRES bolt 1.078 long, 0.438 grip with drilled threads only, passivated.
AA60035-4-6DD10J = a NASM3 THRU NASM20 - Ø.3750 aluminum alloy bolt 1.078 long, 0.438 grip with drilled threads only, chemically or anodized.
AA60035-4-6DD10AJ = a NASM3 THRU NASM20 - Ø.3750 aluminum alloy bolt 1.078 long, 0.438 grip, undrilled threads and head, chemically or anodized.
AA60035-4-6DDH10J = a NASM3 THRU NASM20 - Ø.3750 aluminum alloy bolt 1.078 long, 0.438 grip with drilled head and threads, chemically or anodized.
AA60035-4-6DDH10AJ = a NASM3 THRU NASM20 - Ø.3750 aluminum alloy bolt 1.078 long, 0.438 grip with drilled head only, chemically or anodized.

TABLE V. Type V (-5), bolt, self-locking, steel, 160 KSI Ftu, 250 °F, 12 point, external wrenching cap screws.

A-A-60035 Part Number	Length	Reference Dash Number from NASM21098 (MS21098-)					
		0.2500-28 UNF-3A	0.3125-24 UNF-3A	0.3750-24 UNF-3A	0.4375-20 UNF-3A	0.5000-20 UNF-3A	0.6250-18 UNF-3A
		DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
AA60035-5-*QX	0.375	17	18	---	---	---	---
AA60035-5-*QX	0.437	23	24	25	---	---	---
AA60035-5-*QX	0.500	30	31	32	---	---	---
AA60035-5-*QX	0.625	37	38	39	---	---	---
AA60035-5-*QX	0.750	44	45	46	---	---	---
AA60035-5-*QX	0.875	50	51	52	---	---	---
AA60035-5-*QX	1.000	56	57	58	59	60	61
AA60035-5-*QX	1.250	64	65	66	67	68	69
AA60035-5-*QX	1.500	72	73	74	75	76	77
AA60035-5-*QX	1.750	79	80	81	82	83	84
AA60035-5-*QX	2.000	85	86	87	88	89	90
AA60035-5-*QX	2.250	91	92	93	---	94	101
AA60035-5-*QX	2.500	---	95	96	---	97	98
AA60035-5-*QX	3.000	---	---	99	---	100	102

* Add reference NASM21098 dash number from Table V to indicate length and grip.
PIN construction

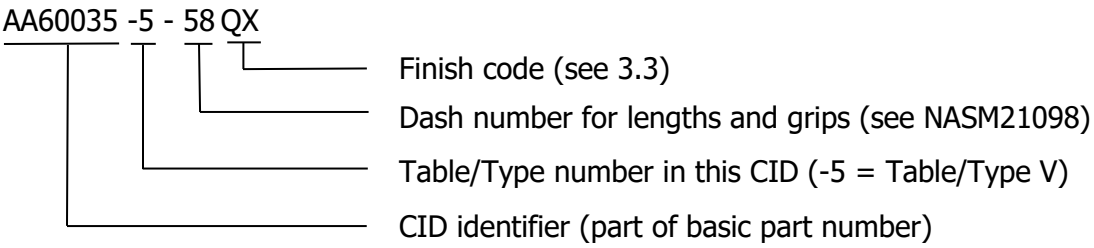

Examples of clean finish PIN's:

Example of part number:


AA60035-5-58QX = a NASM21098 – bolt, self-locking, 12 point steel, zinc-nickel plated, 0.3750-24 UNF-3A thread, 1 inch long.
AA60035-5-100QX = a NASM21098 – bolt, self-locking, 12 point steel, zinc-nickel plated, 0.5000-20 UNF-3A thread, 3 inch long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE VI. Type VI (-6), bolt, tension, steel, external wrenching, flanged, 12-Point, 180 KSI Ftu, 450 ºF.

A-A-60035 Part Number	Reference Dash Number (from NASM21250)
AA60035-6-02*QX	MS21250-02
AA60035-6-03*QX	MS21250-03
AA60035-6-04*QX	MS21250-04
AA60035-6-05*QX	MS21250-05
AA60035-6-06*QX	MS21250-06
AA60035-6-07*QX	MS21250-07
AA60035-6-08*QX	MS21250-08
AA60035-6-09*QX	MS21250-09
AA60035-6-10*QX	MS21250-10
AA60035-6-12*QX	MS21250-12
AA60035-6-14*QX	MS21250-14
AA60035-6-16*QX	MS21250-16
AA60035-6-18*QX	MS21250-18
AA60035-6-20*QX	MS21250-20
AA60035-6-22*QX	MS21250-22
AA60035-6-24*QX	MS21250-24

* Grip length in sixteenths from NASM21250.

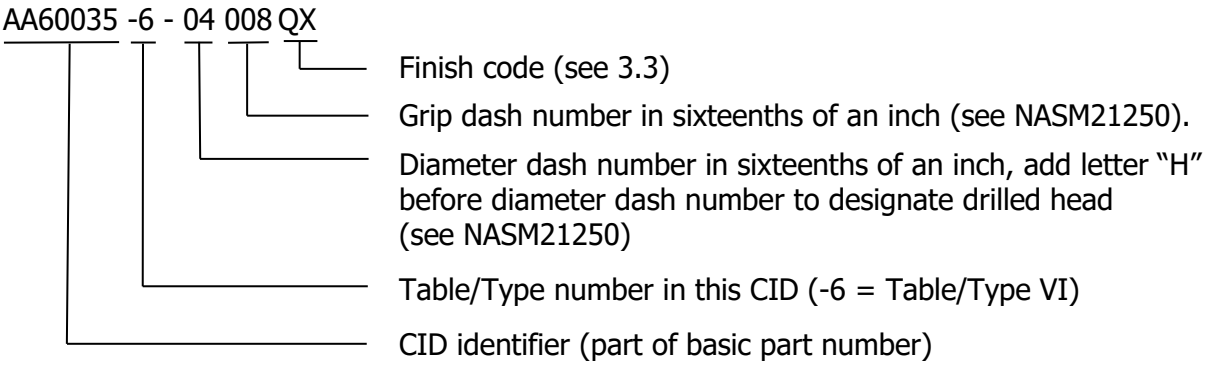

Examples of clean finish PIN's:

AA60035-6-04008QX = a NASM21250 – Bolt undrilled head, 0.2500-28 UNJF-3A, 0.500-inch grip length, zinc-nickel Type K16 plated.

AA60035-6-H04008QX = a NASM21250 – Bolt drilled head, 0.2500-28 UNJF-3A, 0.500 grip length, zinc-nickel Type K16 plated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE VII. Type VII (-7), bolt, square neck, round head (carriage), steel, zinc-nickel plated, UNC-2A

A-A-60035 Part Number	L Length	Reference Part Number from NASM35751						
		0.1900-24 UNC-2A	0.2500-20 UNC-2A	0.3125-18 UNC-2A	0.3750-16 UNC-2A	0.5000-13 UNC-2A	0.6250-11 UNC-2A	0.7500-10 UNC-2A
		Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
AA60035-7-*QX	0.750	MS35751-1	MS35751-15	MS35751-40	MS35751-68	---	---	---
AA60035-7-*QX	0.875	MS35751-211	---	---	---	---	---	---
AA60035-7-*QX	1.000	MS35751-2	MS35751-16	MS35751-41	MS35751-69	MS35751-123	---	---
AA60035-7-*QX	1.250	MS35751-3	MS35751-17	MS35751-42	MS35751-70	MS35751-124	---	---
AA60035-7-*QX	1.500	MS35751-4	MS35751-18	MS35751-43	MS35751-71	MS35751-125	MS35751-152	---
AA60035-7-*QX	1.750	MS35751-5	MS35751-19	MS35751-44	MS35751-72	MS35751-126	MS35751-153	---
AA60035-7-*QX	2.000	MS35751-6	MS35751-20	MS35751-45	MS35751-73	MS35751-127	MS35751-154	MS35751-181
AA60035-7-*QX	2.250	MS35751-7	MS35751-21	MS35751-46	MS35751-74	MS35751-128	---	MS35751-182
AA60035-7-*QX	2.500	MS35751-8	MS35751-22	MS35751-47	MS35751-75	MS35751-129	MS35751-156	MS35751-183
AA60035-7-*QX	2.750	MS35751-9	MS35751-23	MS35751-48	MS35751-76	MS35751-130	MS35751-157	---
AA60035-7-*QX	3.000	MS35751-10	MS35751-24	MS35751-49	MS35751-77	MS35751-131	MS35751-158	MS35751-185
AA60035-7-*QX	3.250	MS35751-11	MS35751-25	MS35751-50	MS35751-78	MS35751-132	MS35751-159	---
AA60035-7-*QX	3.500	MS35751-12	MS35751-26	MS35751-51	MS35751-79	MS35751-133	MS35751-160	MS35751-187
AA60035-7-*QX	3.750	MS35751-13	MS35751-27	MS35751-52	MS35751-80	MS35751-134	---	---
AA60035-7-*QX	4.000	MS35751-14	MS35751-28	MS35751-53	MS35751-81	MS35751-135	MS35751-162	MS35751-189
AA60035-7-*QX	4.250	---	MS35751-202	MS35751-213	MS35751-205	MS35751-209	---	---
AA60035-7-*QX	4.500	---	MS35751-29	MS35751-54	MS35751-82	MS35751-136	MS35751-163	MS35751-190
AA60035-7-*QX	4.750	---	MS35751-203	MS35751-204	MS35751-206	MS35751-210	---	---
AA60035-7-*QX	5.000	---	MS35751-30	MS35751-55	MS35751-83	MS35751-137	MS35751-164	MS35751-191
AA60035-7-*QX	5.500	---	MS35751-31	MS35751-56	MS35751-84	MS35751-138	MS35751-165	MS35751-192
AA60035-7-*QX	6.000	---	MS35751-32	MS35751-57	MS35751-85	MS35751-139	MS35751-166	MS35751-193
AA60035-7-*QX	6.500	---	---	---	MS35751-86	MS35751-140	MS35751-167	MS35751-194
AA60035-7-*QX	7.000	---	MS35751-33	MS35751-58	MS35751-87	MS35751-141	MS35751-168	MS35751-195
AA60035-7-*QX	7.500	---	MS35751-34	MS35751-59	MS35751-88	MS35751-142	MS35751-169	MS35751-196
AA60035-7-*QX	8.000	---	MS35751-35	MS35751-60	MS35751-89	MS35751-143	MS35751-170	MS35751-197
AA60035-7-*QX	8.500	---	MS35751-36	MS35751-61	MS35751-90	MS35751-144	---	MS35751-198
AA60035-7-*QX	9.000	---	MS35751-212	MS35751-63	MS35751-91	MS35751-145	MS35751-172	MS35751-199
AA60035-7-*QX	9.500	---	---	MS35751-64	MS35751-92	MS35751-146	---	---
AA60035-7-*QX	10.000	---	---	MS35751-65	MS35751-93	MS35751-147	MS35751-174	---
AA60035-7-*QX	11.000	---	---	---	MS35751-94	MS35751-148	MS35751-175	MS35751-201
AA60035-7-*QX	11.500	---	---	MS35751-214	---	---	---	---
AA60035-7-*QX	12.000	---	---	MS35751-215	MS35751-95	MS35751-149	MS35751-176	---
AA60035-7-*QX	13.000	---	---	MS35751-216	MS35751-217	---	---	---
AA60035-7-*QX	14.000	---	---	---	MS35751-218	---	---	---

* Add dash number to indicate length from NASM35751.

Examples of clean finish PIN's:

AA60035-7-1QX = a NASM35751 –Bolt, square neck, round head (carriage), steel, 0.1900-24 UNC-2A thread, 0.750 length, zinc-nickel Type K16 plated.

AA60035-7-81QX = a NASM35751 –Bolt, square neck, round head (carriage), steel, 0.3750-16 UNC-2A thread, 4.000 length, zinc-nickel Type K16 plated.

AA60035-7-198QX = a NASM35751 –Bolt, square neck, round head (carriage), steel, 0.7500-10 UNC-2A thread, 8.500 length, zinc-nickel Type K16 plated.

TABLE VIII. Type VIII (-8), bolt, tension, steel, 180 KSI Ftu, 450 °F external wrenching, spline drive, flanged.


A-A-60035 Part Number	Reference Part Number (From NASM21134)
AA60035-8-03(XXX)QX	MS21134-03(XXX)
AA60035-8-04(XXX)QX	MS21134-04(XXX)
AA60035-8-05(XXX)QX	MS21134-05(XXX)
AA60035-8-06(XXX)QX	MS21134-06(XXX)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE VIII. Type VIII (-8), bolt, tension, steel, 180 KSI Ftu, 450 °F external wrenching, spline drive, flanged – Continued.

AA60035-8-07(XXX)QX	MS21134-07(XXX)
AA60035-8-08(XXX)QX	MS21134-08(XXX)
AA60035-8-09(XXX)QX	MS21134-09(XXX)
AA60035-8-10(XXX)QX	MS21134-10(XXX)
AA60035-8-12(XXX)QX	MS21134-12(XXX)
AA60035-8-14(XXX)QX	MS21134-14(XXX)
AA60035-8-16(XXX)QX	MS21134-16(XXX)
AA60035-8-18(XXX)QX	MS21134-18(XXX)
AA60035-8-20(XXX)QX	MS21134-20(XXX)
AA60035-8-22(XXX)QX	MS21134-22(XXX)
AA60035-8-24(XXX)QX	MS21134-24(XXX)

PIN construction:

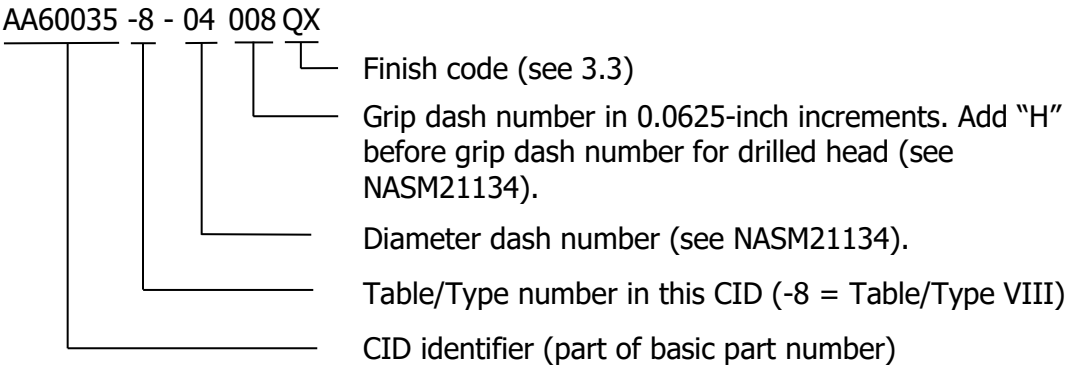

Examples of clean finish PIN's:

AA60035-1-04008QX = a NASM21134 - 0.2500-28 bolt, 0.970-inch long, 0.500-inch grip length, undrilled head, zinc-nickel Type K16 plated.
AA60035-1H04008QX = a NASM21134 - 0.2500-28 bolt, 0.970-inch long, 0.500-inch grip length, drilled head, zinc-nickel Type K16 plated.
AA60035-1-05012QX = a NASM21134 - 0.3125-24 bolt, 1.306-inch long, 0.750-inch grip length, undrilled head, zinc-nickel Type K16 plated.
AA60035-1H05012QX = a NASM21134 - 0.3125-24 bolt, 1.306-inch long, 0.750-inch grip length, drilled head, zinc-nickel Type K16 plated.

7.2 Source of Government documents.

7.2.1 FAR1. Copies of the Federal Acquisition Regulations are available online from https://www.acquisition.gov/browse/index/far.

7.2.2 Executive order (EO). Copies of EO 14057 are available online from https://www.fedcenter.gov/_kd/go.cfm?destination=ShowItem&Item_ID=38808.

7.2.3 Military specifications. Copies of military specifications are available online from https://quicksearch.dla.mil.

7.3 Sources for Non-Government documents.

7.3.1 AIA documents. Copies of Aerospace Industry Association are available online from https://www.aia-aerospace.org/standards/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.3.2 SAE documents. Copies of Society of Automotive Engineers documents are available online from https://www.sae.org.

7.4 Ordering data. The contract or order should specify the following:

a. CID document number, revision, and date.
b. National stock number, (if available).
c. Material (steel alloy, steel, or aluminum).
d. Part number (PIN).
e. Quantity.

7.5 Key words:

a. Finish
b. Passivate
c. Plating
d. Steel
e. 12 point

7.6 Changes from previous issue. Vertical lines are not used in this revision to identify changes with respect to the previous issue due to the extensive changes.

MILITARY INTERESTS:

Custodian:
Army – AT
Navy – AS
Air Force – 71
DLA – CC

Review activities:
Army – AR, AV, CR, MI
Navy – CG, SH, YD
Air Force – 11, 70
DLA – GS, GS4, GS7

CIVIL AGENCY COORDINATING ACTIVITY: GSA-FAS

Preparing Activity:
Army – AT

(Project 5306-2023-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.