INCH-POUND
A-A-60036A
14 April 2026
SUPERSEDING
A-A-60036
05 July 2022

COMMERCIAL ITEM DESCRIPTION

NUTS, CADMIUM AND HEXAVALENT CHROMIUM-FREE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1 SCOPE. This commercial item description (CID) covers nuts containing no cadmium or hexavalent-chromium in their finishes. This CID was developed to address steel fastener coatings without hazardous substances for use on military ground vehicles.

1.1 Intended use. Nuts contained herein are intended for ground vehicle applications. Nuts described in this CID shall not be used for aerospace applications without design authority approval.

1.2 Clean finish. See Section 7 (paragraph 7.3) for definition of clean finish when referenced on a table.

2 CLASSIFICATION

2.1 Types.

Type I	-	DELETED.
Type II	-	DELETED.
Type III	-	AIA/NAS1329 - Nut, Blind Rivet, Flat Head, Internal Thread, Non-Locking (Free-Running) and Self-Locking (Prevailing Torque)
Type IV	-	DELETED.
Type V	-	AIA/NASM17829 - Nut, Self-Locking, Hexagon, Regular Height, 250 °F, Non-Metallic Insert, Non-Cres Steel
Type VI	-	AIA/NASM21042 - Nut, Self-Locking, 450° F, Reduced Hexagon, Reduced Height, Ring Base, Non-Corrosion Resistant Steel
Type VII	-	AIA/NASM21044 - Nut, Self-Locking, Hexagon, Regular Height, 250 ºF, 125 KSI Ftu and 60 KSI Ftu
Type VIII	-	DELETED.
Type IX	-	AIA/NASM21083 - Nut, Self-Locking, Hexagon, Non-Metallic Insert, Low Height, 250 °F
Type X	-	DELETED.
Type XI	-	DELETED.
Type XII	-	AIA/NAS1330 - Nut, Blind Rivet, Countersunk Head, Internal Thread, Non-Locking (Free-Running) and Self-Locking (Prevailing Torque)
Type XIII	-	AIA/NASM21045 - Nut, Self-Locking, Hexagon, Regular Height, 450 ºF, 125 KSI Ftu

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: U.S. Army DEVCOM Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil.

FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3 SALIENT CHARACTERISTICS.

3.1 Materials. Unless otherwise specified herein, the nuts shall be manufactured as specified in the Aerospace Industry Association (AIA) documents listed above by type with the exception of, the plating/finishes shall be free of cadmium and hexavalent-chromium finishes as specified herein. The use of recovered materials made in compliance with regulatory requirements is acceptable provided all requirements of this CID are met.

3.2 Dimensions. Dimensions for all designated type of nuts apply after plating/finishing and prior to any application of lubricants (if any). Refer to each individual NAS/NASM specification listed in Section 2.1 for detailed part geometry and tolerance requirements.

3.3 Hexavalent chromium-free Part or Identifying Number (PIN) codes and finish/plating options. PIN finish/plating codes for all designated types of nuts:

QX	=	Carbon/alloy steel shall be zinc-nickel plated, Type K16 in accordance with MIL-PRF-32647.
QW	=	Carbon/alloy steel shall be zinc-nickel plated, Type K20 in accordance with MIL-PRF-32647.
E	=	Carbon/alloy steel shall be zinc-nickel plate in accordance with SAE AMS2461, Type II, Grade B, Class 2.

3.4 Lubrication. Lubrication types (if any) for each type of nut shall be specified in the referenced AIA/NASM specification (see 2.1).

3.5 Interchangeability. When AIA/NASM specifications list interchangeability parts, do not interchange parts containing cadmium or hexavalent chromium with the cadmium and hexavalent chromium-free parts listed herein without design authority approval.

4 REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR).

5 PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, conform to the producer’s own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market.

5.2 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

5.3 Contractor certification. The contractor shall certify and maintain substantiating evidence the product offered meets the salient characteristics of this commercial item description and conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to perform or witness any of the inspections it deems necessary to ensure supplies and services conform to prescribed requirements.

6 PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7 NOTES

The following part or identification numbering (PIN) procedure is for government purposes and does not constitute a requirement for the contractor.

7.1 Tables. The following finish/plating PIN's are cadmium and hexavalent chromium-free for designated nuts.

TABLE I. DELETED.

TABLE II. DELETED.


TABLE III. Type III (-3) – nut, blind rivet, flat head, internal thread, non-locking (free-running) and self-locking (prevailing torque).

A-A-60036 Part Number Carbon Steel Zinc-Nickel Type K16 Plated (Clean Finish)	NAS1329 Reference Dash Number Cadmium Plated DO NOT USE on Ground Vehicles	A-A-60036 Part Number Carbon Steel Zinc-Nickel Type K20 Plated (Clean Finish)	NAS1329 Reference Dash Number Zinc Plated DO NOT USE on Ground Vehicles
AA60036-3-04*^QX	NAS1329S04*^	AA60036-3-04*^QW	NAS1329Z04*^
AA60036-3-06*^QX	NAS1329S06*^	AA60036-3-06*^QW	NAS1329Z06*^
AA60036-3-08*^QX	NAS1329S08*^	AA60036-3-08*^QW	NAS1329Z08*^
AA60036-3-3E*^QX	NAS1329S3E*^	AA60036-3-3E*^QW	NAS1329Z3E*^
AA60036-3-3*^QX	NAS1329S3*^	AA60036-3-3*^QW	NAS1329Z3*^
AA60036-3-4E*^QX	NAS1329S4E*^	AA60036-3-4E*^QW	NAS1329Z4E*^
AA60036-3-4*^QX	NAS1329S4*^	AA60036-3-4*^QW	NAS1329Z4*^
AA60036-3-5E*^QX	NAS1329S5E*^	AA60036-3-5E*^QW	NAS1329Z5E*^
AA60036-3-5*^QX	NAS1329S5*^	AA60036-3-5*^QW	NAS1329Z5*^
AA60036-3-6E*^QX	NAS1329S6E*^	AA60036-3-6E*^QW	NAS1329Z6E*^
AA60036-3-6*^QX	NAS1329S6*^	AA60036-3-6*^QW	NAS1329Z6*^
AA60036-3-8E*^QX	NAS1329S8E*^	AA60036-3-8E*^QW	NAS1329Z8E*^
AA60036-3-8*^QX	NAS1329S8*^	AA60036-3-8*^QW	NAS1329Z8*^

* Indicates Type (four possibilities; see PIN Construction on next page)
^ Indicates second dash number (see NAS1329 for possibilities)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN Construction:

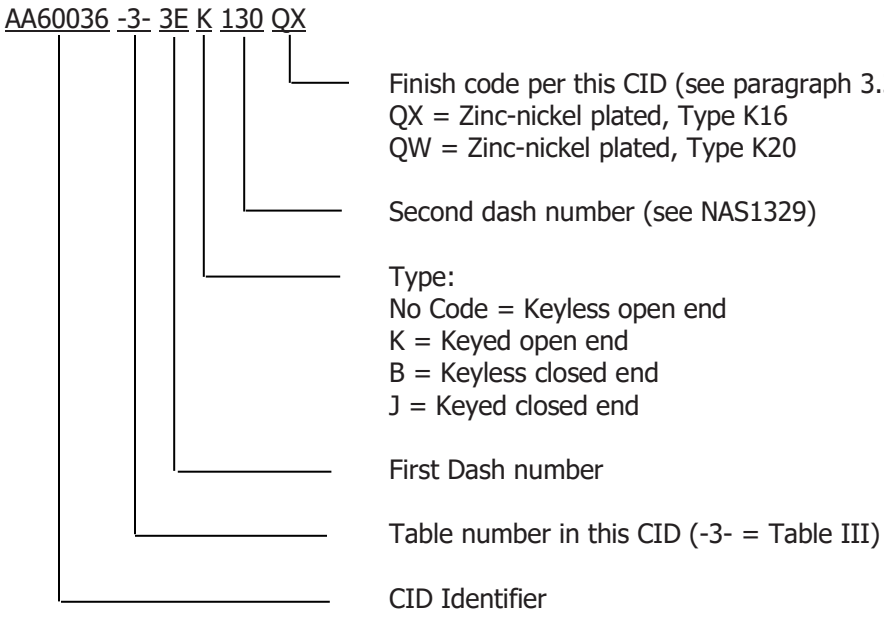

Example of clean finish PIN's:

AA60036-3-3EK130QX = Carbon steel, keyed open end, .1900-24 UNC-3B Thread, .080 to .130 grip range, zinc-nickel Type K16 plated.

AA60036-3-4E200QW = Carbon steel, keyless open end, .2500-20 UNC-3B Thread, .140 to .200 grip range, zinc-nickel Type K20 plated.

TABLE IV. DELETED.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE V. Type V (-5) - Nut, self-locking, hexagon, regular height, 250 °F, non-metallic insert, non-CRES steel.

A-A-60036 Part Number Zinc-Nickel Type K16 Plated (Clean Finish)	NASM17829 Reference Dash Number Cadmium Plated DO NOT USE on Ground Vehicles	A-A-60036 Part Number Zinc-Nickel Type K20 Plated (Clean Finish)	NASM17829 Reference Dash Number Zinc Plated DO NOT USE on Ground Vehicles
AA60036-5-3CQX	MS17829-3C	AA60036-5-3CQW	MS17829Z3C
AA60036-5-4CQX	MS17829-4C	AA60036-5-4CQW	MS17829Z4C
AA60036-5-4FQX	MS17829-4F	AA60036-5-4FQW	MS17829Z4F
AA60036-5-5CQX	MS17829-5C	AA60036-5-5CQW	MS17829Z5C
AA60036-5-5FQX	MS17829-5F	AA60036-5-5FQW	MS17829Z5F
AA60036-5-6CQX	MS17829-6C	AA60036-5-6CQW	MS17829Z6C
AA60036-5-6FQX	MS17829-6F	AA60036-5-6FQW	MS17829Z6F
AA60036-5-7CQX	MS17829-7C	AA60036-5-7CQW	MS17829Z7C
AA60036-5-7FQX	MS17829-7F	AA60036-5-7FQW	MS17829Z7F
AA60036-5-8CQX	MS17829-8C	AA60036-5-8CQW	MS17829Z8C
AA60036-5-8FQX	MS17829-8F	AA60036-5-8FQW	MS17829Z8F
AA60036-5-9CQX	MS17829-9C	AA60036-5-9CQW	MS17829Z9C
AA60036-5-9FQX	MS17829-9F	AA60036-5-9FQW	MS17829Z9F
AA60036-5-10CQX	MS17829-10C	AA60036-5-10CQW	MS17829Z10C
AA60036-5-10FQX	MS17829-10F	AA60036-5-10FQW	MS17829Z10F
AA60036-5-12CQX	MS17829-12C	AA60036-5-12CQW	MS17829Z12C
AA60036-5-12FQX	MS17829-12F	AA60036-5-12FQW	MS17829Z12F
AA60036-5-14CQX	MS17829-14C	AA60036-5-14CQW	MS17829Z14C
AA60036-5-14FQX	MS17829-14F	AA60036-5-14FQW	MS17829Z14F
AA60036-5-16CQX	MS17829-16C	AA60036-5-16CQW	MS17829Z16C
AA60036-5-16FQX	MS17829-16F	AA60036-5-16FQW	MS17829Z16F
AA60036-5-18CQX	MS17829-18C	AA60036-5-18CQW	MS17829Z18C
AA60036-5-18FQX	MS17829-18F	AA60036-5-18FQW	MS17829Z18F
AA60036-5-20CQX	MS17829-20C	AA60036-5-20CQW	MS17829Z20C
AA60036-5-20FQX	MS17829-20F	AA60036-5-20FQW	MS17829Z20F
AA60036-5-22CQX	MS17829-22C	AA60036-5-22CQW	MS17829Z22C
AA60036-5-22FQX	MS17829-22F	AA60036-5-22FQW	MS17829Z22F
AA60036-5-24CQX	MS17829-24C	AA60036-5-24CQW	MS17829Z24C
AA60036-5-24FQX	MS17829-24F	AA60036-5-24FQW	MS17829Z24F
AA60036-5-28CQX	MS17829-28C	AA60036-5-28CQW	MS17829Z28C
AA60036-5-32CQX	MS17829-32C	AA60036-5-32CQW	MS17829Z32C
AA60036-5-36CQX	MS17829-36C	AA60036-5-36CQW	MS17829Z36C
AA60036-5-40CQX	MS17829-40C	AA60036-5-40CQW	MS17829Z40C

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction:

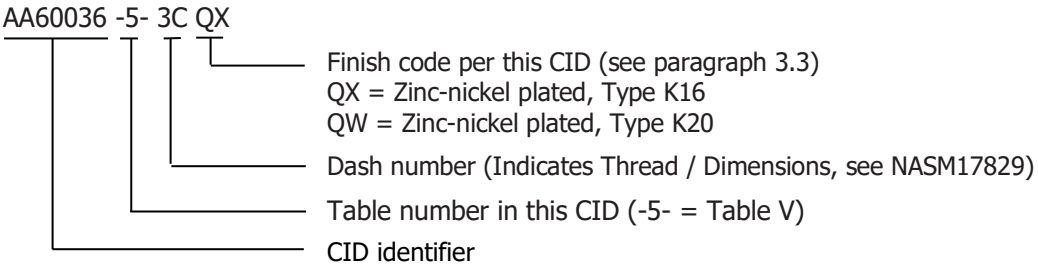

Examples of clean finish PIN's:

AA60036-5-3CQX = Steel nut, self-locking, hexagon, .1900-24 UNC-3B thread with a non-metallic insert, zinc-nickel Type K16 plated.

AA60036-5-3CQW = Steel nut, self-locking, hexagon, .1900-24 UNC-3B thread with a non-metallic insert, zinc-nickel Type K20 plated.

TABLE VI. Type VI (-6) - Nut, self-locking, 450° F, reduced hexagon, reduced height, ring base, non-corrosion resistant steel.


A-A-60036 Part Number Zinc-Nickel Type K16 Plated (no lubricant or soluble lubricant) (Clean Finish)	NASM21042 Reference Dash Number Cadmium Plated (no lubricant or soluble lubricant) DO NOT USE on Ground Vehicles	A-A-60036 Part Number Zinc-Nickel Type K16 Plated (with dry film lubricant) (Clean Finish)	NASM21042 Reference Dash Number Cadmium Plated (with dry film lubricant) DO NOT USE on Ground Vehicles
AA60036-6-02QX	MS21042-02	AA60036-6-02QXL	MS21042L02
AA60036-6-04QX	MS21042-04	AA60036-6-04QXL	MS21042L04
AA60036-6-06QX	MS21042-06	AA60036-6-06QXL	MS21042L06
AA60036-6-08QX	MS21042-08	AA60036-6-08QXL	MS21042L08
AA60036-6-3QX/1	MS21042-3/1	AA60036-6-3QXL/1	MS21042L3/1
AA60036-6-4QX/1	MS21042-4/1	AA60036-6-4QXL/1	MS21042L4/1
AA60036-6-5QX/1	MS21042-5/1	AA60036-6-5QXL/1	MS21042L5/1
AA60036-6-6QX/1	MS21042-6/1	AA60036-6-6QXL/1	MS21042L6/1

(/1 These part numbers are inactive for design after May 29, 2020.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction:

AA60036 -6- 03 QX L

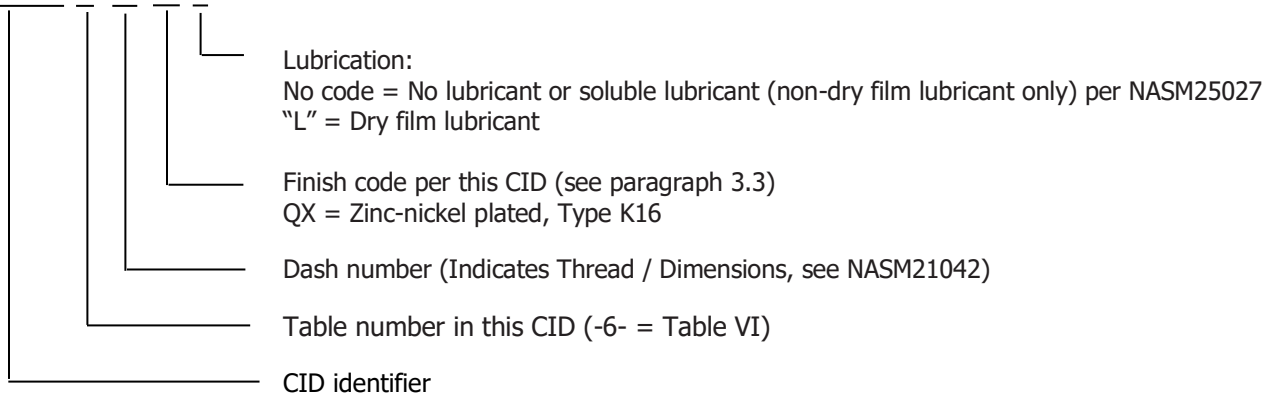

Examples of clean finish PIN's:

AA60036-6-04QX = Self-locking reduced height steel nut, no lubricant or soluble lubricant (non-dry film lubricant only), .1120-40 UNJC-3B thread, zinc-nickel Type K16 plated.

AA60036-6-04QXL = Self-locking reduced height steel nut, dry film lubricant, .1120-40 UNJC-3B thread, zinc-nickel Type K16 plated.

TABLE VII. Type VII (-7) - Nut, self-locking, hexagon, regular height, 250 ºF, 125 KSI Ftu and 60 KSI Ftu.

A-A-60036 Part Number Zinc-Nickel Type K16 Plated (Clean Finish)	NASM21044 Reference Dash Number Cadmium Plated DO NOT USE on Ground Vehicles	A-A-60036 Part Number Zinc-Nickel Type K16 Plated (Clean Finish)	NASM21044 Reference Dash Number Cadmium Plated DO NOT USE on Ground Vehicles
Steel		Brass	
AA60036-7-N02QX	MS21044N02	AA60036-7-B02QX	MS21044B02
AA60036-7-N04QX	MS21044N04	AA60036-7-B04QX	MS21044B04
AA60036-7-N06QX	MS21044N06	AA60036-7-B06QX	MS21044B06
AA60036-7-N08QX	MS21044N08	AA60036-7-B08QX	MS21044B08
AA60036-7-N3QX	MS21044N3	AA60036-7-B3QX	MS21044B3
AA60036-7-N4QX	MS21044N4	AA60036-7-B4QX	MS21044B4
AA60036-7-N5QX	MS21044N5	AA60036-7-B5QX	MS21044B5
AA60036-7-N6QX	MS21044N6	AA60036-7-B6QX	MS21044B6
AA60036-7-N7QX	MS21044N7	AA60036-7-B7QX	MS21044B7
AA60036-7-N8QX	MS21044N8	AA60036-7-B8QX	MS21044B8
AA60036-7-N9QX	MS21044N9	AA60036-7-B9QX	MS21044B9
AA60036-7-N10QX	MS21044N10	AA60036-7-B10QX	MS21044B10
AA60036-7-N12QX	MS21044N12	AA60036-7-B12QX	MS21044B12
AA60036-7-N14QX	MS21044N14	AA60036-7-B14QX	MS21044B14
AA60036-7-N16QX	MS21044N16	AA60036-7-B16QX	MS21044B16
AA60036-7-N18QX	MS21044N18	AA60036-7-B18QX	MS21044B18
AA60036-7-N20QX	MS21044N20	AA60036-7-B20QX	MS21044B20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction:

AA60036 -7- N 4 QX

- QX = Finish code per this CID (see paragraph 3.3): Zinc-nickel plated, Type K16
- 4 = Dash number (Indicates Thread / Dimensions, see NASM21044)
- N = Material codes (see NASM21044): Steel; B = Brass
- -7- = Table number in this CID (-7- = Table VII)
- AA60036 = CID identifier

Examples of clean finish PIN's:

AA60036-7-N8QX = Self-locking regular height steel nut, non-metallic insert, .5000-20 UNJF-3B thread, zinc-nickel Type K16 plated..

AA60036-7-B8QX = Self-locking regular height brass nut, non-metallic insert, .5000-20 UNJF-3B thread, zinc-nickel Type K16 plated.

TABLE VIII. DELETED.

TABLE IX. Type IX (-9) - Nut, self-locking, hexagon, non-metallic insert, low height, 250 °F.

A-A-60036 Part Number Zinc-Nickel Type K16 Plated (Clean Finish)	NASM21083 Reference Dash Number Cadmium Plated DO NOT USE on Ground Vehicles
Steel	
AA60036-9-N02QX	MS21083N02
AA60036-9-N04QX	MS21083N04
AA60036-9-N06QX	MS21083N06
AA60036-9-N08QX	MS21083N08
AA60036-9-N3QX	MS21083N3
AA60036-9-N4QX	MS21083N4
AA60036-9-N5QX	MS21083N5
AA60036-9-N6QX	MS21083N6
AA60036-9-N7QX	MS21083N7
AA60036-9-N8QX	MS21083N8
AA60036-9-N9QX	MS21083N9
AA60036-9-N10QX	MS21083N10
AA60036-9-N12QX	MS21083N12
AA60036-9-N14QX	MS21083N14
AA60036-9-N16QX	MS21083N16
AA60036-9-N18QX	MS21083N18
AA60036-9-N20QX	MS21083N20
AA60036-9-N22QX	MS21083N22
AA60036-9-N24QX	MS21083N24

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction:

AA60036 -9- N 4 QX

- QX — Finish code per this CID (see paragraph 3.3): QX = Zinc-nickel plated, Type K16
- 4 — Dash number (Indicates Thread / Dimensions, see NASM21083)
- N — Material code (see NASM21083): N = Steel
- -9- — Table number in this CID (-9- = Table IX)
- AA60036 — CID identifier

Examples of clean finish PIN's:

AA60036-9-N4QX = Steel nut, self-locking, hexagon, non-metallic insert, .2500-28 UNJF-3B thread, non-metallic insert, zinc-nickel Type K16 plated.

TABLE X. DELETED.

TABLE XI. DELETED.

TABLE XII. Type XII (-12) - Nut, blind rivet, countersunk head, internal thread, non-locking (free running) and self-locking (prevailing torque).


A-A-60036 Part Number Carbon Steel Zinc-Nickel Type K20 Plated (Clean Finish)	NAS1330 Reference Dash Number Zinc Plated DO NOT USE on Ground Vehicles
AA60036-12-04*^QW	NAS1330Z04*^
AA60036-12-06*^QW	NAS1330Z06*^
AA60036-12-08*^QW	NAS1330Z08*^
AA60036-12-3E*^QW	NAS1330Z3E*^
AA60036-12-3*^QW	NAS1330Z3*^
AA60036-12-4E*^QW	NAS1330Z4E*^
AA60036-12-4*^QW	NAS1330Z4*^
AA60036-12-5E*^QW	NAS1330Z5E*^
AA60036-12-5*^QW	NAS1330Z5*^
AA60036-12-6E*^QW	NAS1330Z6E*^
AA60036-12-6*^QW	NAS1330Z6*^
AA60036-12-8E*^QW	NAS1330Z8E*^
AA60036-12-8*^QW	NAS1330Z8*^

* indicates Type (four possibilities; see PIN Construction below)
^ indicates second dash number (see NAS1330 for possibilities)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN Construction:

AA60036 -12- 3E K 216 QW

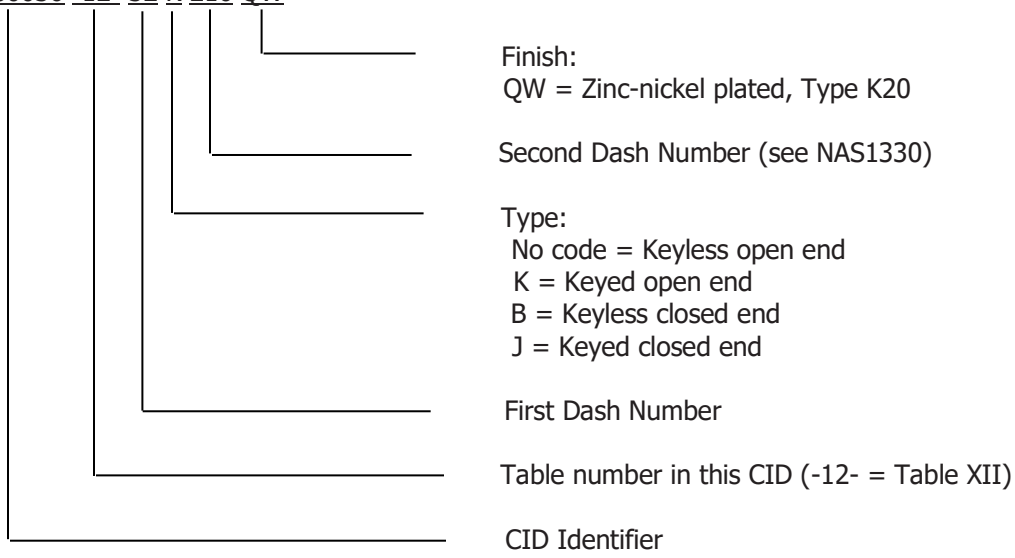

Example of clean finish PIN's:


AA60036-12-3EK216QW = Carbon steel, keyed open end, .1900-24 UNC-3B thread, .166 to .216 grip range, zinc-nickel Type K20 plated.

TABLE XIII. Type XIII (-13) - Nut, self-locking, hexagon, regular height, 450 °F, 125 KSI Ftu.

A-A-60036 Part Number Zinc-Nickel Plated (Non Dry Lube) (Clean Finish)	NASM21045 Reference Dash Number Cadmium Plated (Non Dry Lube) DO NOT USE on Ground Vehicles	A-A-60036 Part Number Zinc-Nickel Plated (Dry Lube) (Clean Finish)	NASM21045 Reference Dash Number Cadmium Plated (Dry Lube) DO NOT USE on Ground Vehicles
Steel			
AA60036-13-04E	MS21045-04	AA60036-13-04EL	MS21045L04
AA60036-13-06E	MS21045-06	AA60036-13-06EL	MS21045L06
AA60036-13-08E	MS21045-08	AA60036-13-08EL	MS21045L08
AA60036-13-3E	MS21045-3	AA60036-13-3EL	MS21045L3
AA60036-13-4E	MS21045-4	AA60036-13-4EL	MS21045L4
AA60036-13-5E	MS21045-5	AA60036-13-5EL	MS21045L5
AA60036-13-6E	MS21045-6	AA60036-13-6EL	MS21045L6
AA60036-13-7E	MS21045-7	AA60036-13-7EL	MS21045L7
AA60036-13-8E	MS21045-8	AA60036-13-8EL	MS21045L8
AA60036-13-9E	MS21045-9	AA60036-13-9EL	MS21045L9
AA60036-13-10E	MS21045-10	AA60036-13-10EL	MS21045L10
AA60036-13-12E	MS21045-12	AA60036-13-12EL	MS21045L12
AA60036-13-14E	MS21045-14	AA60036-13-14EL	MS21045L14
AA60036-13-16E	MS21045-16	AA60036-13-16EL	MS21045L16
AA60036-13-18E	MS21045-18	AA60036-13-18EL	MS21045L18
AA60036-13-20E	MS21045-20	AA60036-13-20EL	MS21045L20

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction:

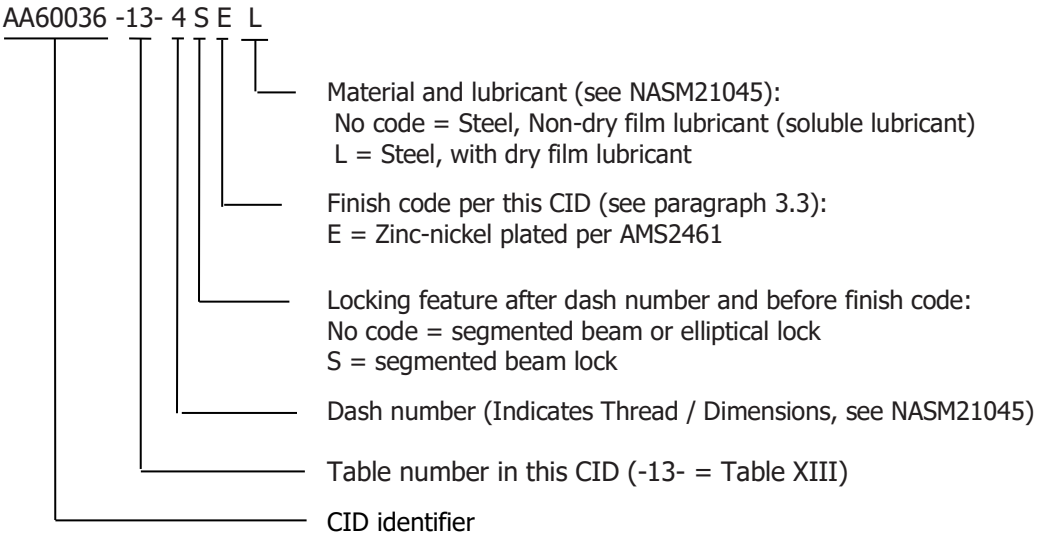

Examples of clean finish PIN's:

AA60036-13-4E = Steel nut, .2500-28 UNJF-3B thread, soluble lubricant, segmented beam lock or elliptical lock, zinc-nickel plated.

AA60036-13-4EL = Steel nut, .2500-28 UNJF-3B thread, dry film lubricant, segmented beam lock or elliptical lock, zinc-nickel plated.

7.2 Source of documents.

7.2.1 FAR: Copies of the Federal Acquisition Regulations are available online from https://www.acquisition.gov/browse/index/far.

7.2.2 Military specifications. Copies of military specifications are available online from https://quicksearch.dla.mil.

7.2.3 AIA documents: Copies of Aerospace Industries Association documents are available online from https://www.aia-aerospace.org/standards/.

7.2.4 SAE documents: Copies of SAE International documents are available online from https://www.sae.org.

7.3 Clean finish definition. On the tables, where it says clean finish, that is defined as treatments that do not include more than 0.1 percent by weight Cadmium or Hexavalent Chromium in any homogenous layer.

7.4 Ordering data. The contract or order should specify the following:

a. Title, number and date of this CID.
b. National stock number, (if available).
c. Material.
d. Part number per this CID.
e. Quantity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.5 Key words:

a. CRES
b. Finish
c. Passivate
d. Plating
e. Steel

7.6 Changes from previous issue. The margins of this CID are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

MILITARY INTERESTS:

Custodians:
Army – AT
Navy – AS
Air Force – 71
DLA – CC

Review activities:
Army – AR, AV, MI
Navy – AS, CG, MC, YD
Air Force – 03, 11, 70
DLA – GS4, GS7

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FAS

Preparing Activity:
Army – AT

(Project 5310-2026-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.