INCH-POUND

A-A-60038
August 8, 2024

COMMERCIAL ITEM DESCRIPTION

GLOVES, MEN'S AND WOMEN'S, CLOTH, DRESS, WHITE

The General Services Administration has authorized the use of this commercial item description as a replacement for A-A-55236 and A-A-59495 for all federal agencies.

1. SCOPE. This commercial item description (CID) covers the requirements for men's and women's dress gloves.

2. CLASSIFICATION. The gloves shall be of one (1) Type in the following Sizes:

6
6-1/2
7
7-1/2
8
8-1/2
9
9-1/2
10

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: AFLCMC/EZSS, 2145 Monahan Way, Area B, Bldg 28, Wright-Patterson AFB, OH 45433 or email engineering.standards@us.af.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

FSC 8440

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 Description. The dress gloves shall be a slip-on type, with full inseam, Bolton thumb, and closed wrist design with elastic webbing. The gloves shall be made with a knitted cotton fabric.

3.2 Materials.

3.2.1 Basic material. The basic material shall be 100% cotton simplex. The simplex knit shall be a 48-line Atlas pattern that is produced when the warp end continues to move the same direction for 24 consecutive courses, after which, the direction of the guide bar movement is reversed, and the warp ends traverse 24 courses in the opposite direction. A faint horizontal line occurs at each half repeat where the guide bars change direction. This represents one (1) full repeat of the pattern. The cloth shall be knit with nonravelling edges, sueded on both sides, and shall have a suppleness equal to or better than the standard sample. The yarn shall be made from cotton which has been carded, combed, and spun into singles yarn. The finished cloth shall be bleached and shall be supplemented with an optical brightener to enhance the appearance. The cloth shall conform to the requirements specified in Table I.

TABLE I. Physical requirements, basic material.

Characteristic	Requirement	Test Method
Fabric identification	Cotton	AATCC 20A
Weight, oz./sq. yd. (min.)	9.5	ASTM D3776/D3776M, Opt. C
Yarns per inch (min.) Wales Courses	 60 42	ASTM D3887
Bursting strength, pounds (min.)	132	ASTM D3787
Dimensional stability, percent (max.) Length Width	 12 3	 AATCC 96, Opt. VIc Or AATCC 135, (3)(V)(Aiii)
Colorfastness, grade: (min.) Laundering (3 cycles) Perspiration Crocking	 3 3 3	 AATCC 61, Test 1A 1/ AATCC 15 2/ AATCC 8
Nonfibrous material, percent (max.)	5	AATCC 20A
pH	5.0 – 8.5	AATCC 81
Stretch test	3.2.4	3.2.4
Color	3.2.2	AATCC EP9, Opt. C, 3.2.2.1

1/ The specimen shall be dried after each of the three (3) laundering cycles.
2/ The test for colorfastness to acid and alkaline solution shall apply in accordance with AATCC 15.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.2.2 Color. The color shall be White shade number 3028. The finished dress gloves shall match the standard sample for shade and appearance and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 7.5).

3.2.2.1 Visual shade matching. The color and appearance of the material shall match the standard sample when viewed using the AATCC EP9, Evaluation Procedure for Visual Assessment of Color Difference of Textiles, Option C (see 7.1.5), with sources simulating artificial daylight D_{75} illuminant with a color temperature of 7500 (± 200) K illumination of 100 (± 20) foot candles, and shall be a good match to the standard sample under incandescent lamplight at 2856 (± 200) K.

3.2.3 Labile sulfur. The use of dyes and compounds containing sulfur capable of oxidation to sulfuric acid is prohibited. The basic cloth shall be "Free" of labile sulfur when tested as specified in 3.2.3.1.

3.2.3.1 Presence of labile sulfur test. Two (2) 1.50 (± 0.01) gram samples from each sample unit shall be tested. Each of the two (2) samples shall be cut into very small pieces and placed into separate test tubes. Prepare an acidic tin(II) chloride (stannous chloride) solution by dissolving 100 g $SnCl_2$ (ACS grade) in 100 mL of 35% hydrochloric acid (ACS grade) and adding the mixture to 50 mL of distilled water. Prepare a lead acetate solution by dissolving 5.0 g of lead acetate (CP reagent grade) in a small amount of distilled water and diluting to a total of 100 mL. If the solution is not clear, add a few drops (one at a time) of glacial acetic acid until the solution is clear. The samples shall be submersed the acidic tin(II) chloride solution. A filter paper wet out with the lead acetate solution shall be placed over the top of the test tube. The test tube containing the textile sample, tin(II) chloride and wet filter paper shall be heated over a low flame until the solution is boiling. The solution should not be heated for more than 15 seconds. A brown to black stain on the filter paper should be evaluated as follows:

Free - The filter paper shows no discoloration or staining of any kind.
Slight - The filter paper shows a light tan to light brown discoloration stain.
Moderate - The filter paper shows a dark brown discoloration stain.
Severe - The filter paper shows a black color stain.

The rating shall be recorded. The results shall be recorded as "pass" or "fail".

3.2.4 Stretch Test. One specimen each from the length (wales) and width (courses) direction shall be tested from each sample unit. Each specimen shall be a rectangle 4 inches but not less than 5 inches. The long dimension shall be parallel to the length (wales) of the cloth for length tests, and parallel to the width (courses) for width tests. The test specimens shall be taken no nearer the selvage than 1/10 the width of the cloth. Two parallel lines, 3 inches apart, shall be drawn at right angles to the long dimension of the specimen. In addition, a line shall be drawn parallel to the long dimension of the specimen, 1-inch in from either edge for proper alignment of the specimen in the jaws of the testing apparatus.

3.2.4.1 Test Apparatus. The test device shall be an apparatus wherein the specimen is held between two (2) clamps. The design of the upper clamp shall be such that one gripping surface or jaw shall be an integral part of the rigid frame of the clamp. The face of the movable jaw shall measure 1-inch by 1-inch, and the face of the fixed jaw shall measure 1-inch by 1-1/2 or more

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

inches with the long dimension perpendicular to the direction of application of the load. The lower clamp shall have similar jaws and, when weight is attached, shall weigh a total of 6 pounds. The jaws shall have smooth gripping surfaces, sufficiently flat and parallel to prevent slipping of the specimen during the test.

3.2.4.2 Procedure. The specimen shall be placed symmetrically in the clamps of the apparatus with the long dimension parallel and the short dimension at right angles to the direction of the application of the load. Using the specified guidelines, the specimen shall be aligned with one (1) outside edge of the front jaws of each clamp. The proper weight shall be added to ensure a total of 6 pounds (including the weight of the lower jaws). The load shall be applied for 15 seconds and the distance between jaws measured by a pair of dividers or other suitable instrument. The elongation at the required load shall be expressed as the percentage increase in the length of the specimen between the jaws. The percent stretch shall be calculated as follows:

$$\text{percent stretch} = \frac{\text{stretch dimension} - \text{original dimension (3 inches)}}{\text{original dimension (3 inches)}} \text{ x } 100$$

The results obtained shall be reported separately to the nearest 1.0 percent.

3.3 Thread. The thread for seaming and stitching shall be cotton-covered polyester-core thread conforming to Type I, A-A-50199, Tex 36-45, 2 ply. The color shall be white.

3.3.1 Seams and Stitching. Seams on fingers and thumb of the gloves shall be superimposed and sewn while the gloves are inside out. Stitches per inch for seaming the fingers, thumb, fourchette, and inseam shall be 10-14, and the stitches per inch for the hem shall be 6-8. All stitching shall be backtacked if not crossed by another line of stitching.

3.4 Elastic webbing. The elastic webbing shall be braided, two (2) over and two (2) under, unbleached, and 7/16-inch wide. A 2-inch length of elastic webbing shall be stretched to 3 inches. While holding under tension and using a 1/4-inch gage, zigzag stitch the length of the elastic to inside of palm at wrist 1/4 to 1/2 inch below base of thumb. After stitching, the relaxed elastic webbing shall measure 2 (±1/4) inches in length and shall be tacked at both ends of the webbing to prevent ravelling. The webbing shall conform to the requirements specified in Table II.

TABLE II. Physical requirements, elastic webbing.

Characteristic	Requirement	Test Method
Rubber gauge	42	Visual count
Weight, oz./yd. (min.)	0.20	ASTM D3776/D3776M, Opt. C
Yarns per inch (min.) Filling	 68	 ASTM D3775
Yarns, full width (min.) Elastic strands Carriers	 12 25	 ASTM D3775
Cotton yarn size (±2 counts/ply)	20/2	ASTM D1907/D1907M

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.5 Hem. The finished dress glove hem shall measure 3/8-inch (+1/8, -0). The hemming operation must be performed after closing the glove.

3.6 Labels.

3.6.1 Combination size and identification label. Each pair of gloves shall have a commercial type cloth label containing the contractor's name, contract number, size, fiber content, and National Stock Number (NSN). The label shall be caught in the hem stitching of each right hand glove.

3.6.2 Laundering instruction label. A printed slip of thin paper no more than 5-1/2 by 2-1/2 inches containing the following laundering instructions shall be inserted in each right-hand glove:

LAUNDERING INSTRUCTIONS:

Wash gloves in lukewarm water and soap.
Rinse thoroughly.
Do not twist or wring when pressing out water.
Stretch into shape and wrap in towel to dry.

3.6.3 Bar code label. Each paired item shall be individually bar-coded with a label for personal clothing items. The label shall have a finish suitable for thermal transfer and direct printing without feather or spreading and shall be affixed to the paired gloves' heat sealed polyethylene bag so it remains securely in position. The bar code element shall be a thirteen (13) digit national stock number (NSN) along with the Human Readable Interpretation (HRI). There shall be a twelve (12) digit Universal Product Code (UPC) assigned for all NSNs by the Government. The initials "UPC" shall appear beneath code. The bar codes for NSN and UPC shall be a medium to high density, clearly legible and readable by scanner, durable and nonfading and sufficient to withstand normal exposure to environmental and handling conditions. The label shall adhere to the requirements of MIL-STD-129.

3.7 Patterns. The contractor is responsible for generating patterns for all sizes. The commercial patterns shall conform to the cited design and finished measurements.

3.8 Sizes and finished measurements. The finished dress gloves shall conform to measurements as specified in Table III.

TABLE III. Sizes and finished measurements (inches).

Sizes	A – Width of Palm 1/	B – Overall Length 2/	C – Length from base of thumb to top edge of dress glove 3/
6	3	10	2-1/2
6-1/2	3-1/8	10-3/16	2-1/2
7	3-1/4	10-3/8	2-1/2
7-1/2	3-3/8	10-9/16	2-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE III. Sizes and finished measurements (inches) – Continued

Sizes	A – Width of Palm 1/	B – Overall Length 2/	C – Length from base of thumb to top edge of dress glove 3/
8	3-1/2	10-3/4	2-1/2
8-1/2	3-5/8	10-15/16	2-1/2
9	3-3/4	11-1/8	2-1/2
9-1/2	3-7/8	11-5/16	2-1/2
10	4	11-1/2	2-1/2
Tolerance	±1/8	±3/16	±1/8

1/ Measurement taken across palm, approximately 1/4-inch below the crotch of the fourth (little) finger. See Figure 1.
2/ Measurement taken from tip of middle finger to top edge of dress glove. See Figure 1.
3/ Measurement taken from the base of the thumb to top edge of dress glove. See Figure 1.

3.9 Toxicity. Unless otherwise specified in the contract or procurement documents, the finished dress gloves shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.9.1.

3.9.1 Toxicity test. When the toxicity requirement (see 3.9) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.5). If dermal toxicity testing is required, it shall be conducted in accordance with Title 40 of the Code of Federal Regulations, current editions and applicable sections.

3.10 Workmanship. The finished dress gloves shall conform to the quality of the product established in this document. The dress gloves shall be free from defects which would affect its serviceability, appearance, uniformity, and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable. (see 7.1.3).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The dress gloves shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished dress gloves offered must have been sold to the Government or commercial market.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.1.7).

5.4 Visual examination. Each finished dress glove shall be examined for the defects listed in Table IV as defined in ASTM D3990. The lot size shall be expressed in units of dress gloves. The sample unit shall be one (1) pair of dress gloves.

TABLE IV. Visual examination defects.

Material defects: Any hole, cut, tear, floats, knots extending above the surface of the cloth, slub, smash, weak or soft spot, abrasion mark, run, dropped stitch, snag, or pull in knit cloth. Edges frayed, slack, cut, torn, or poorly constructed; any crease or wrinkle (embedded). Knitting tension too tight or too loose. Any spot or stain on outside, discoloration or color not as specified, any outwardly visible part shaded, any serious material defects or objectionable odor.
Stitches, seams and stitching: Raw edges on outside of the dress gloves, open seams, thread ends not removed, or loose tension resulting in loose seams.
Workmanship: Curved tops of fingers; fingers twisted or distorted. Wales not in length direction of dress gloves. Any distorted parts or poor workmanship; any component part omitted; dimensions not as specified. Failure to meet product conformance; serviceability, reliability and quality of materials as defined by this document.
Labels: Label(s) missing, incorrect, or illegible. Bar code or UPC code label omitted or not readable by scanner. Human-readable interpretation (HRI) omitted or illegible. Bar code not visible on folded, packaged item. Bar code label causes damage to the item.
Packaging: Dress gloves not matched, paired, and tacked together. Not packaged in accordance with the contract or procurement documents (up to three (3) needle holes are acceptable).

5.5 Dimensional examination. The finished gloves shall conform to the dimensions specified in Table III when measured as stated. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one (1) pair of gloves. The inspection level, expressed in terms of defects per hundred units, shall be as specified in the contract or purchase order.

5.6 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents (see 7.6).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or order (see 7.6).

7. NOTES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.1 Source of documents.

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 EO 13693 information is available online at https://www.epa.gov.

7.1.3 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.4 The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC, 20402 at https://www.GPO.gov.

7.1.5 AATCC Test Methods are available for purchase online at https://aatcc.org or AATCC, PO box 12215, Research Triangle Park, NC , 27709-2215.

7.1.6 ASTM Standards are available from https://www.astm.org or ASTM International, 100 Barr Harbor Dr., W. Conshohocken, PA, 19428-2959.

7.1.7 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://asq.org.

7.2 Intended use. The dress gloves are intended to be used by male and female Military police and ceremonial activities personnel of the Department of Defense (DoD).

7.3 Standard samples. For access to standard shade samples of cloth, address the contracting activity issuing the invitation for bids or request for proposal.

7.3.1 Visual shade matching. In 2017, Option A of AATCC EP9 was changed to Option C. NOTE: In case of confusion, the viewing geometry should be "The specimen plane and illumination source will be parallel to each other and aligned so that the light flux is incident at the center of the specimen plane, which is set at a 35 (± 5º) angle relative to the horizontal. The observer will view the specimens at a 90º angle, relative to the plane of the specimens".

7.4 Certificate of compliance. The contracting activity may select to accept a certificate of compliance for a stated requirement.

7.5 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this commercial item description
b. Type and size required (see 2)
c. Color required (see 3.2.2)
d. When toxicity testing is required (see 3.9)
e. Product conformance (see 5.1)
f. Acceptance criteria (see 5.6)
g. Packaging requirements (see 6)

7.6 National Stock Number (NSNs). The following is a list of NSNs assigned that correspond to this CID. This list may not be indicative of all possible NSNs associated with the CID and are provided for reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

NSN	Size
8445-00-310-1151	6
8445-00-310-1152	6-1/2
8445-00-310-1153	7
8445-00-310-1166	7-1/2
8445-00-310-1172	8
8445-00-310-1177	8-1/2
8445-00-310-1179	9

7.7 Key words.

Simplex knit
Cotton
Military Police
Ceremonial

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

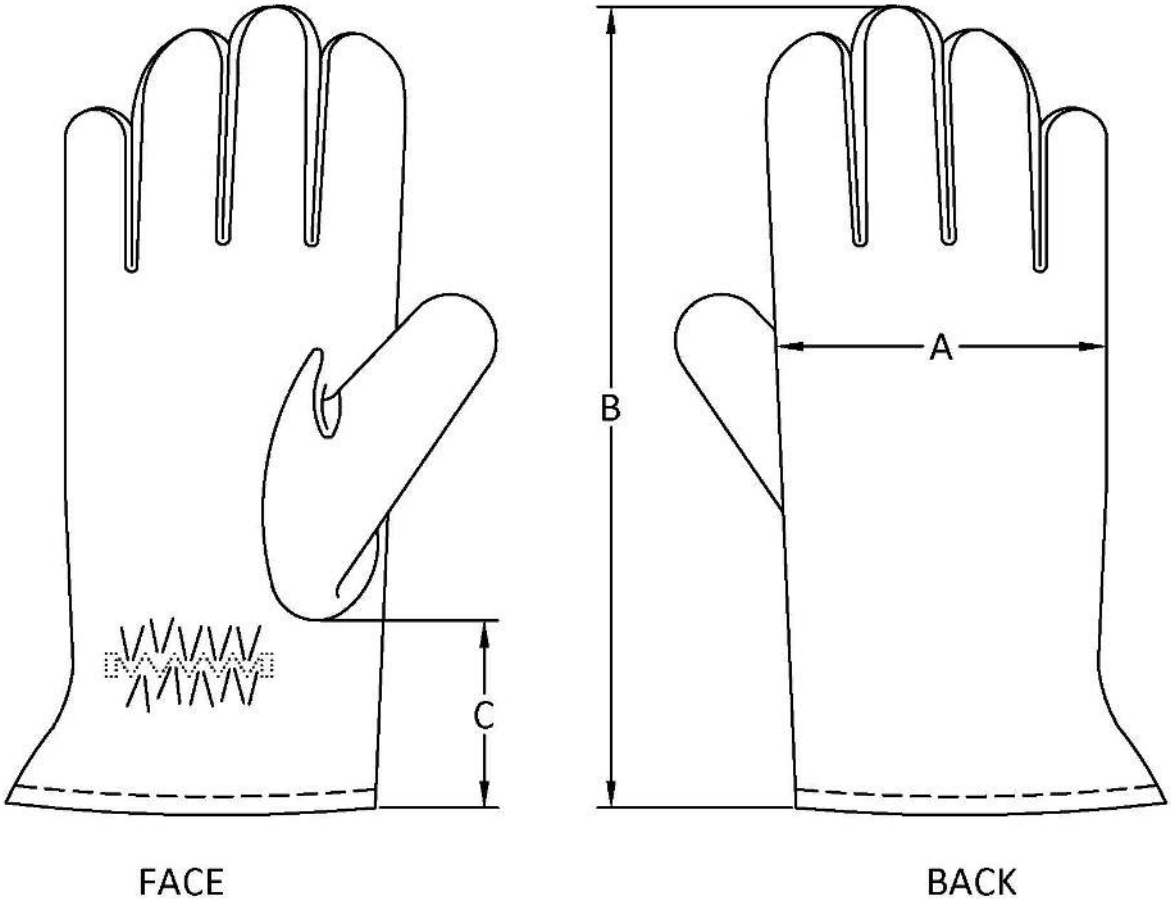


FIGURE 1. Gloves, men's and women's, cloth, dress, white.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Custodians:
Air Force - 11

Preparing Activity:
DLA – CT

(Project 8440-2022-004)

Review activities:
Army – GL, MD
Navy – NU, CG, MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.