INCH-POUND

A-A-60039

14 September 2022

COMMERCIAL ITEM DESCRIPTION

PINS, CADMIUM AND HEXAVALENT-CHROMIUM FREE

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1 SCOPE. This commercial item description (CID) covers pins which shall not contain cadmium or hexavalent-chromium in their finishes.

2 CLASSIFICATION

2.1 Types.

Type I	-	NASM16555 - Pin, Straight, Headless, Dowel, 0.0002 Over Nominal Size
Type II	-	NASM16562 - Pin, Spring, Tubular, Slotted
Type III	-	NASM17986 - Pin, quick release, self-retaining, positive locking, single acting, "L" handle
Type IV	-	NASM24665 - Pin, Cotter (Split)
Type V	-	NASM35671 - Pin, Grooved, Headless, Longitudinal Taper Groove, Carbon Steel

3 SALIENT CHARACTERISTICS.

3.1 Materials. Pins shall be manufactured as specified in the Aerospace Industry Association (AIA) documents listed in 2.1 by Type, except the plating/finishes do not contain cadmium and hexavalent-chromium as specified herein.

3.2 Dimensions. Dimensions for all designated types of pins apply after plating/finishing. Refer to each individual NAS/NASM specification listed in Section 2.1 for detailed part geometry and tolerance requirements.

Comments, suggestions, or questions on this document should be addressed to U.S. Army DEVCOM Ground Vehicle Systems Center, ATTN: Standardization, FCDD-GVS-SAT, MS #268, 6501 E. 11 Mile Road, Warren, MI 48397-5000 or emailed to usarmy.detroit.devcom-gvsc.mbx.standardization@army.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.3 Materials/finish/plating. Materials/finish/plating options for the pins shall be designated in the contract or order and are listed below:

QW = Carbon and Alloy steel – shall be Zinc-Nickel plated in accordance with MIL-PRF-32647, Type K20 or ASTM F1941/F1941M Fe/Zn-Ni 8BNS.
P5 = CRES – shall be cleaned, descaled and passivated in accordance with SAE AMS2700 Method 1, Type 6 or 7, or Method 2, passivation treatments containing dichromate are prohibited. Post-cleaning treatment is prohibited.
B = Passivate per SAE AMS2700, Method 2, Class 4. No post treatment.
M = Passivate per SAE AMS2700, Method 1, Type 8, Class 4. No post treatment.

4 REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation (FAR), or the sustainable acquisition of EO 13834; as applicable.

5 PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this Commercial Item Description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Responsibility for inspection. The contractor is responsible for the performance of all inspections.

5.3 Contractor certification. The contractor shall certify and maintain substantiating evidence the product offered meets the salient characteristics of this commercial item description and conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to perform or witness any of the inspections it deems necessary to ensure supplies and services conform to prescribed requirements.

6 PACKAGING. Preservation, packing, and marking shall be as specified in the contract or order.

7 NOTES

The following part or identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

7.1 Table. The following Tables indicate new finish/plating PIN's which are Cadmium and hexavalent-chromium free for the designated pins.

TABLE I – Type I (-1) - Pin, straight, headless, dowel, 0.0002 over nominal size. *

* The NASM16555 listed Black Oxide and Phosphate finish options do not apply in this CID.

CRES			
A-A-60039 Basic Part Number (CRES)	Reference Dash Number (NASM16555)	A-A-60039 Basic Part Number (CRES)	Reference Dash Number (NASM16555)
AA60039-1-601P5	MS16555-601	AA60039-1-617P5	MS16555-617
AA60039-1-602P5	MS16555-602	AA60039-1-618P5	MS16555-618
AA60039-1-603P5	MS16555-603	AA60039-1-619P5	MS16555-619
AA60039-1-604P5	MS16555-604	AA60039-1-620P5	MS16555-620
AA60039-1-605P5	MS16555-605	AA60039-1-621P5	MS16555-621
AA60039-1-606P5	MS16555-606	AA60039-1-622P5	MS16555-622
AA60039-1-607P5	MS16555-607	AA60039-1-623P5	MS16555-623

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE I – Type I (-1) - Pin, straight, headless, dowel, 0.0002 over nominal size – Continued.


AA60039-1-608P5	MS16555-608	AA60039-1-624P5	MS16555-624
AA60039-1-625P5	MS16555-625	AA60039-1-670P5	MS16555-670
AA60039-1-626P5	MS16555-626	AA60039-1-671P5	MS16555-671
AA60039-1-627P5	MS16555-627	AA60039-1-672P5	MS16555-672
AA60039-1-628P5	MS16555-628	AA60039-1-673P5	MS16555-673
AA60039-1-629P5	MS16555-629	AA60039-1-674P5	MS16555-674
AA60039-1-630P5	MS16555-630	AA60039-1-677P5	MS16555-677
AA60039-1-631P5	MS16555-631	AA60039-1-678P5	MS16555-678
AA60039-1-632P5	MS16555-632	AA60039-1-679P5	MS16555-679
AA60039-1-633P5	MS16555-633	AA60039-1-680P5	MS16555-680
AA60039-1-640P5	MS16555-640	AA60039-1-681P5	MS16555-681
AA60039-1-641P5	MS16555-641	AA60039-1-682P5	MS16555-682
AA60039-1-642P5	MS16555-642	AA60039-1-683P5	MS16555-683
AA60039-1-643P5	MS16555-643	AA60039-1-684P5	MS16555-684
AA60039-1-644P5	MS16555-644	AA60039-1-685P5	MS16555-685
AA60039-1-645P5	MS16555-645	AA60039-1-686P5	MS16555-686
AA60039-1-646P5	MS16555-646	AA60039-1-687P5	MS16555-687
AA60039-1-647P5	MS16555-647	AA60039-1-688P5	MS16555-688
AA60039-1-648P5	MS16555-648	AA60039-1-689P5	MS16555-689
AA60039-1-649P5	MS16555-649	AA60039-1-690P5	MS16555-690
AA60039-1-650P5	MS16555-650	AA60039-1-691P5	MS16555-691
AA60039-1-651P5	MS16555-651	AA60039-1-692P5	MS16555-692
AA60039-1-652P5	MS16555-652	AA60039-1-693P5	MS16555-693
AA60039-1-653P5	MS16555-653	AA60039-1-694P5	MS16555-694
AA60039-1-654P5	MS16555-654	AA60039-1-695P5	MS16555-695
AA60039-1-655P5	MS16555-655	AA60039-1-696P5	MS16555-696
AA60039-1-656P5	MS16555-656	AA60039-1-698P5	MS16555-698
AA60039-1-657P5	MS16555-657	AA60039-1-700P5	MS16555-700
AA60039-1-658P5	MS16555-658	AA60039-1-701P5	MS16555-701
AA60039-1-659P5	MS16555-659	AA60039-1-702P5	MS16555-702
AA60039-1-660P5	MS16555-660	AA60039-1-703P5	MS16555-703
AA60039-1-661P5	MS16555-661	AA60039-1-704P5	MS16555-704
AA60039-1-662P5	MS16555-662	AA60039-1-705P5	MS16555-705
AA60039-1-663P5	MS16555-663	AA60039-1-706P5	MS16555-706
AA60039-1-664P5	MS16555-664	AA60039-1-707P5	MS16555-707
AA60039-1-665P5	MS16555-665	AA60039-1-708P5	MS16555-708
AA60039-1-666P5	MS16555-666	AA60039-1-710P5	MS16555-710
AA60039-1-667P5	MS16555-667	AA60039-1-712P5	MS16555-712
AA60039-1-668P5	MS16555-668	AA60039-1-716P5	MS16555-716
AA60039-1-669P5	MS16555-669	AA60039-1-717P5	MS16555-717
AA60039-1-718P5	MS16555-718	AA60039-1-732P5	MS16555-732
AA60039-1-719P5	MS16555-719	AA60039-1-733P5	MS16555-733
AA60039-1-720P5	MS16555-720	AA60039-1-734P5	MS16555-734
AA60039-1-721P5	MS16555-721	AA60039-1-735P5	MS16555-735
AA60039-1-722P5	MS16555-722	AA60039-1-736P5	MS16555-736
AA60039-1-724P5	MS16555-724	AA60039-1-738P5	MS16555-738
AA60039-1-726P5	MS16555-726	AA60039-1-740P5	MS16555-740
AA60039-1-730P5	MS16555-730	AA60039-1-744P5	MS16555-744

NOTES

(see notes on next page)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction

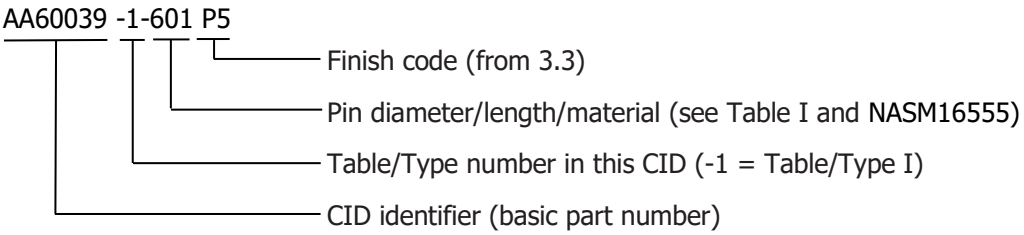

Examples of part number:

AA60039-1-601P5 = a NASM16555 - Pin, 0.0625 dia., 0.188 length, CRES, passivated.
AA60039-1-717P5 = a NASM16555 - Pin, 0.8750 dia., 2.750 length, CRES, passivated.

TABLE II – Type II (-2) - Pin, spring, tubular, slotted. *

* The NASM16562 listed carbon steel finish options do not apply in this CID.

A-A-60039* Basic Part Number (Carbon Steel)	Reference Dash Number (NASM16562) (Carbon Steel)
0.062 NOMINAL SIZE	
AA60039-2-1QW	MS16562-1
AA60039-2-2QW	MS16562-2
AA60039-2-3QW	MS16562-3
AA60039-2-4QW	MS16562-4
AA60039-2-5QW	MS16562-5
AA60039-2-6QW	MS16562-6
AA60039-2-7QW	MS16562-7
AA60039-2-8QW	MS16562-8
AA60039-2-9QW	MS16562-9
AA60039-2-10QW	MS16562-10
0.078 NOMINAL SIZE	
AA60039-2-11QW	MS16562-11
AA60039-2-12QW	MS16562-12
AA60039-2-13QW	MS16562-13
AA60039-2-14QW	MS16562-14
AA60039-2-15QW	MS16562-15
AA60039-2-16QW	MS16562-16
AA60039-2-17QW	MS16562-17
AA60039-2-18QW	MS16562-18
AA60039-2-19QW	MS16562-19
AA60039-2-20QW	MS16562-20
0.094 NOMINAL SIZE	
AA60039-2-21QW	MS16562-21
AA60039-2-22QW	MS16562-22
AA60039-2-23QW	MS16562-23
AA60039-2-24QW	MS16562-24
AA60039-2-25QW	MS16562-25
AA60039-2-26QW	MS16562-26
AA60039-2-27QW	MS16562-27
AA60039-2-28QW	MS16562-28

A-A-60039 Basic Part Number (CRES)	Reference Dash Number (NASM16562) (CRES)
0.062 NOMINAL SIZE	
AA60039-2-189P5	MS16562-189
AA60039-2-190P5	MS16562-190
AA60039-2-191P5	MS16562-191
AA60039-2-192P5	MS16562-192
AA60039-2-193P5	MS16562-193
AA60039-2-194P5	MS16562-194
AA60039-2-195P5	MS16562-195
AA60039-2-196P5	MS16562-196
AA60039-2-197P5	MS16562-197
AA60039-2-198P5	MS16562-198
0.078 NOMINAL SIZE	
AA60039-2-199P5	MS16562-199
AA60039-2-200P5	MS16562-200
AA60039-2-201P5	MS16562-201
AA60039-2-202P5	MS16562-202
AA60039-2-203P5	MS16562-203
AA60039-2-204P5	MS16562-204
AA60039-2-205P5	MS16562-205
AA60039-2-206P5	MS16562-206
AA60039-2-207P5	MS16562-207
AA60039-2-208P5	MS16562-208
0.094 NOMINAL SIZE	
AA60039-2-209P5	MS16562-209
AA60039-2-210P5	MS16562-210
AA60039-2-211P5	MS16562-211
AA60039-2-212P5	MS16562-212
AA60039-2-213P5	MS16562-213
AA60039-2-214P5	MS16562-214
AA60039-2-215P5	MS16562-215
AA60039-2-216P5	MS16562-216

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE II – Type II (-2) - Pin, spring, tubular, slotted – Continued.

AA60039-2-29QW	MS16562-29
AA60039-2-30QW	MS16562-30
0.125 NOMINAL SIZE	
AA60039-2-31QW	MS16562-31
AA60039-2-32QW	MS16562-32
AA60039-2-33QW	MS16562-33
AA60039-2-34QW	MS16562-34
AA60039-2-35QW	MS16562-35
AA60039-2-36QW	MS16562-36
AA60039-2-37QW	MS16562-37
AA60039-2-38QW	MS16562-38
AA60039-2-39QW	MS16562-39
0.156 NOMINAL SIZE	
AA60039-2-40QW	MS16562-40
AA60039-2-41QW	MS16562-41
AA60039-2-42QW	MS16562-42
AA60039-2-43QW	MS16562-43
AA60039-2-44QW	MS16562-44
AA60039-2-45QW	MS16562-45
0.188 NOMINAL SIZE	
AA60039-2-46QW	MS16562-46
AA60039-2-47QW	MS16562-47
AA60039-2-48QW	MS16562-48
AA60039-2-49QW	MS16562-49
AA60039-2-50QW	MS16562-50
AA60039-2-51QW	MS16562-51
AA60039-2-52QW	MS16562-52
AA60039-2-53QW	MS16562-53
0.219 NOMINAL SIZE	
AA60039-2-54QW	MS16562-54
AA60039-2-55QW	MS16562-55
AA60039-2-56QW	MS16562-56
AA60039-2-57QW	MS16562-57
AA60039-2-58QW	MS16562-58
AA60039-2-59QW	MS16562-59
AA60039-2-60QW	MS16562-60
AA60039-2-61QW	MS16562-61
0.250 NOMINAL SIZE	
AA60039-2-62QW	MS16562-62
AA60039-2-63QW	MS16562-63
AA60039-2-64QW	MS16562-64
AA60039-2-65QW	MS16562-65
AA60039-2-66QW	MS16562-66
AA60039-2-67QW	MS16562-67
AA60039-2-68QW	MS16562-68
AA60039-2-69QW	MS16562-69
0.312 NOMINAL SIZE	
AA60039-2-70QW	MS16562-70
AA60039-2-71QW	MS16562-71
AA60039-2-72QW	MS16562-72
AA60039-2-73QW	MS16562-73
AA60039-2-74QW	MS16562-74
AA60039-2-75QW	MS16562-75
AA60039-2-76QW	MS16562-76

AA60039-2-217P5	MS16562-217
AA60039-2-218P5	MS16562-218
0.125 NOMINAL SIZE	
AA60039-2-219P5	MS16562-219
AA60039-2-220P5	MS16562-220
AA60039-2-221P5	MS16562-221
AA60039-2-222P5	MS16562-222
AA60039-2-223P5	MS16562-223
AA60039-2-224P5	MS16562-224
AA60039-2-225P5	MS16562-225
AA60039-2-226P5	MS16562-226
AA60039-2-227P5	MS16562-227
0.156 NOMINAL SIZE	
AA60039-2-228P5	MS16562-228
AA60039-2-229P5	MS16562-229
AA60039-2-230P5	MS16562-230
AA60039-2-231P5	MS16562-231
AA60039-2-232P5	MS16562-232
AA60039-2-233P5	MS16562-233
0.188 NOMINAL SIZE	
AA60039-2-234P5	MS16562-234
AA60039-2-235P5	MS16562-235
AA60039-2-236P5	MS16562-236
AA60039-2-237P5	MS16562-237
AA60039-2-238P5	MS16562-238
AA60039-2-239P5	MS16562-239
AA60039-2-240P5	MS16562-240
AA60039-2-241P5	MS16562-241
0.219 NOMINAL SIZE	
AA60039-2-242P5	MS16562-242
AA60039-2-243P5	MS16562-243
AA60039-2-244P5	MS16562-244
AA60039-2-245P5	MS16562-245
AA60039-2-246P5	MS16562-246
AA60039-2-247P5	MS16562-247
AA60039-2-248P5	MS16562-248
AA60039-2-249P5	MS16562-249
0.250 NOMINAL SIZE	
AA60039-2-250P5	MS16562-250
AA60039-2-251P5	MS16562-251
AA60039-2-252P5	MS16562-252
AA60039-2-253P5	MS16562-253
AA60039-2-254P5	MS16562-254
AA60039-2-255P5	MS16562-255
AA60039-2-256P5	MS16562-256
AA60039-2-257P5	MS16562-257
0.312 NOMINAL SIZE	
AA60039-2-258P5	MS16562-258
AA60039-2-259P5	MS16562-259
AA60039-2-260P5	MS16562-260
AA60039-2-261P5	MS16562-261
AA60039-2-262P5	MS16562-262
AA60039-2-263P5	MS16562-263
AA60039-2-264P5	MS16562-264

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.


TABLE II – Type II (-2) - Pin, spring, tubular, slotted – Continued.

0.375 NOMINAL SIZE	
AA60039-2-77QW	MS16562-77
AA60039-2-78QW	MS16562-78
AA60039-2-79QW	MS16562-79
AA60039-2-80QW	MS16562-80
AA60039-2-81QW	MS16562-81
AA60039-2-82QW	MS16562-82
AA60039-2-83QW	MS16562-83
0.438 NOMINAL SIZE	
AA60039-2-84QW	MS16562-84
AA60039-2-85QW	MS16562-85
AA60039-2-86QW	MS16562-86
AA60039-2-87QW	MS16562-87
AA60039-2-88QW	MS16562-88
AA60039-2-89QW	MS16562-89
0.500 NOMINAL SIZE	
AA60039-2-90QW	MS16562-90
AA60039-2-91QW	MS16562-91
AA60039-2-92QW	MS16562-92
AA60039-2-93QW	MS16562-93
AA60039-2-94QW	MS16562-94

0.375 NOMINAL SIZE	
AA60039-2-265P5	MS16562-265
AA60039-2-266P5	MS16562-266
AA60039-2-267P5	MS16562-267
AA60039-2-268P5	MS16562-268
AA60039-2-269P5	MS16562-269
AA60039-2-270P5	MS16562-270
AA60039-2-271P5	MS16562-271
0.438 NOMINAL SIZE	
AA60039-2-272P5	MS16562-272
AA60039-2-273P5	MS16562-273
AA60039-2-274P5	MS16562-274
AA60039-2-275P5	MS16562-275
AA60039-2-276P5	MS16562-276
AA60039-2-277P5	MS16562-277
0.500 NOMINAL SIZE	
AA60039-2-278P5	MS16562-278
AA60039-2-279P5	MS16562-279
AA60039-2-280P5	MS16562-280
AA60039-2-281P5	MS16562-281
AA60039-2-282P5	MS16562-282

NOTES

PIN construction

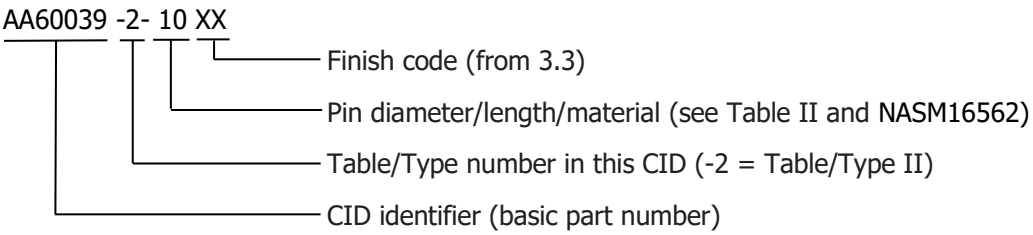

Examples of part number:

AA60039-2-10QW = a NAS16562 - Carbon steel slotted pin, 0.062 nominal dia., 0.750 long, Zinc-Nickel Type K20 plated or ASTM F1941/F1941M Fe/Zn-Ni 8BNS.

AA60039-2-238P5 = a NAS16562 - CRES slotted pin, 0.188 nominal dia., 1.000 long, passivated.

TABLE III – Type III (-3) - Pin, quick release, self-retaining, positive locking, single acting, "L" handle. *

* NASM17986 aluminum alloy parts - anodize per MIL-PRF-8625, Type II. Sealers (clear or any color) containing hexavalent chromium shall be prohibited. Handles must be black.

CID A-A-60039 DASH NUMBERS						
GRIP LENGTH	NOMINAL DIAMETER					
	3/16	1/4	5/16	3/8	7/16	1/2
0.300	C303	C403	C503	---	---	---
0.400	C304	C404	C504	---	---	---
0.500	C305	C405	C505	C605	C705	---
0.600	C306	C406	C506	C606	C706	---
0.700	C307	C407	C507	C607	C707	C807
0.800	C308	C408	C508	C608	C708	C808
0.900	C309	C409	C509	C609	C709	C809
1.000	C310	C410	C510	C610	C710	C810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE III – Type III (-3) - Pin, quick release, self-retaining, positive locking, single acting, "L" handle – Continued

1.100	C311	C411	C511	C611	C711	C811
1.200	C312	C412	C512	C612	C712	C812
1.300	C313	C413	C513	C613	C713	C813
1.400	C314	C414	C514	C614	C714	C814
1.500	C315	C415	C515	C615	C715	C815
1.600	C316	C416	C516	C616	C716	C816
1.700	C317	C417	C517	C617	C717	C817
1.800	C318	C418	C518	C618	C718	C818
1.900	C319	C419	C519	C619	C719	C819
2.000	C320	C420	C520	C620	C720	C820
2.100	C321	C421	C521	C621	C721	C821
2.200	C322	C422	C522	C622	C722	C822
2.300	C323	C423	C523	C623	C723	C823
2.400	C324	C424	C524	C624	C724	C824
2.500	C325	C425	C525	C625	C725	C825
2.600	C326	C426	C526	C626	C726	C826
2.700	C327	C427	C527	C627	C727	C827
2.800	C328	C428	C528	C628	C728	C828
2.900	C329	C429	C529	C629	C729	C829
3.000	C330	C430	C530	C630	C730	C830
3.100	C331	C431	C531	C631	C731	C831
3.200	C332	C432	C532	C632	C732	C832
3.300	C333	C433	C533	C633	C733	C833
3.400	C334	C434	C534	C634	C734	C834
3.500	C335	C435	C535	C635	C735	C835
3.600	C336	C436	C536	C636	C736	C836
3.700	C337	C437	C537	C637	C737	C837
3.800	C338	C438	C538	C638	C738	C838
3.900	C339	C439	C539	C639	C739	C839
4.000	C340	C440	C540	C640	C740	C840
4.100	C341	C441	C541	C641	C741	C841
4.200	C342	C442	C542	C642	C742	C842
4.300	C343	C443	C543	C643	C743	C843
4.400	C344	C444	C544	C644	C744	C844
4.500	C345	C445	C545	C645	C745	C845
4.600	C346	C446	C546	C646	C746	C846
4.700	C347	C447	C547	C647	C747	C847
4.800	C348	C448	C548	C648	C748	C848
4.900	C349	C449	C549	C649	C749	C849
5.000	C350	C450	C550	C650	C750	C850
5.100	C351	C451	C551	C651	C751	C851
5.200	C352	C452	C552	C652	C752	C852
5.300	C353	C453	C553	C653	C753	C853
5.400	C354	C454	C554	C654	C754	C854
5.500	C355	C455	C555	C655	C755	C855
5.600	C356	C456	C556	C656	C756	C856
5.700	C357	C457	C557	C657	C757	C857
5.800	C358	C458	C558	C658	C758	C858
5.900	C359	C459	C559	C659	C759	C859
6.000	C360	C460	C560	C660	C760	C860
6.100	C361	C461	C561	C661	C761	C861

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE III – Type III (-3) - Pin, quick release, self-retaining, positive locking, single acting, "L" handle – Continued


6.200	C362	C462	C562	C662	C762	C862
6.300	C363	C463	C563	C663	C763	C863
6.400	C364	C464	C564	C664	C764	C864
6.500	C365	C465	C565	C665	C765	C865
6.600	C366	C466	C566	C666	C766	C866
6.700	C367	C467	C567	C667	C767	C867
6.800	C368	C468	C568	C668	C768	C868
6.900	C369	C469	C569	C669	C769	C869
7.000	C370	C470	C570	C670	C770	C870
7.100	C371	C471	C571	C671	C771	C871
7.200	C372	C472	C572	C672	C772	C872
7.300	C373	C473	C573	C673	C773	C873
7.400	C374	C474	C574	C674	C774	C874
7.500	C375	C475	C575	C675	C775	C875
7.600	C376	C476	C576	C676	C776	C876
7.700	C377	C477	C577	C677	C777	C877
7.800	C378	C478	C578	C678	C778	C878
7.900	C379	C479	C579	C679	C779	C879
8.000	C380	C480	C580	C680	C780	C880
8.100	C381	C481	C581	C681	C781	C881
8.200	C382	C482	C582	C682	C782	C882
8.300	C383	C483	C583	C683	C783	C883
8.400	C384	C484	C584	C684	C784	C884
8.500	C385	C485	C585	C685	C785	C885
8.600	C386	C486	C586	C686	C786	C886
8.700	C387	C487	C587	C687	C787	C887
8.800	C388	C488	C588	C688	C788	C888
8.900	C389	C489	C589	C689	C789	C889
9.000	C390	C490	C590	C690	C790	C890
9.100	C391	C491	C591	C691	C791	C891
9.200	C392	C492	C592	C692	C792	C892
9.300	C393	C493	C593	C693	C793	C893
9.400	C394	C494	C594	C694	C794	C894
9.500	C395	C495	C595	C695	C795	C895
9.600	C396	C496	C596	C696	C796	C896
9.700	C397	C497	C597	C697	C797	C897
9.800	C398	C498	C598	C698	C798	C898
9.900	C399	C499	C599	C699	C799	C899

NOTES

(Notes continued on next page)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction

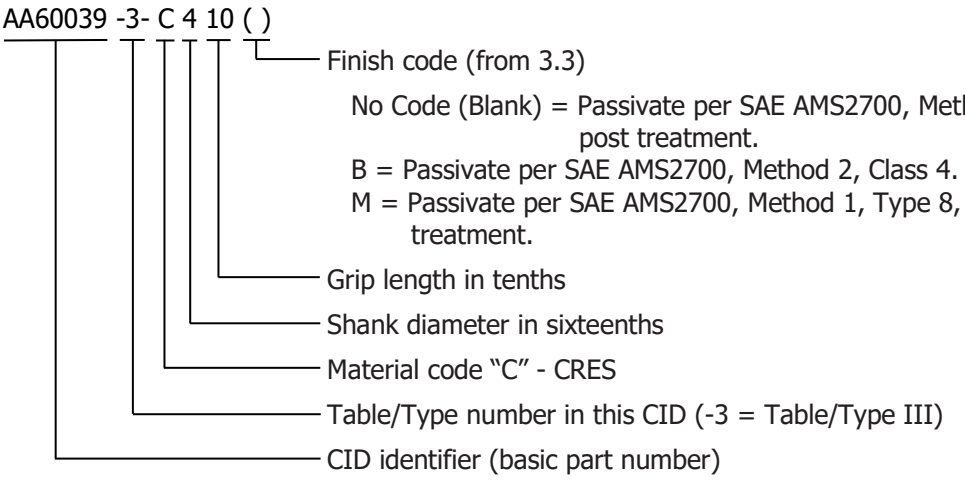

Examples of part number:

AA60039-3-C410 = a NASM17986 – CRES quick release pin, 1/4 -inch diameter, 1.000-inch grip length, passivated SAE AMS2700, Method 1, Class 4. No post treatment.

AA60039-3-C410B = a NASM17986 - CRES quick release pin, 1/4 -inch diameter, 1.000-inch grip length, passivated SAE AMS2700, Method 2, Class 4. No post treatment.

AA60039-3-C410M = a NASM17986 - CRES quick release pin, 1/4 -inch diameter, 1.000-inch grip length, passivated SAE AMS2700, Method 1, Type 8, Class 4. No post treatment.

TABLE IV – Type IV (-4) - Pin, cotter (split). *

* The NASM24665 listed options for Phosphated coated Steel, CRES and Brass are not included in this CID because they do not contain hexavalent chromium. The NASM24665 listed Cadmium plating option is replaced by Zinc-Nickel plating in this CID.


L LENGTH	Nominal Diameter – Steel, Zinc-Nickel Plated															
	0.031	0.047	0.063	0.078[1/]	0.094	0.125	0.156	0.188	0.219[1/]	0.250	0.313	0.375	0.438[1/]	0.500	0.625	0.750[1/]
	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
0.250	1	65														
0.500	5	69	132	208[1/]	281	349										
0.750	7	71	134	210[1/]	283	351	418	490								
1.000	9	73	136	212[1/]	285	353	419	491	561[1/]	621	681					
1.250	10	74	138	214[1/]	287	355	421	493	562[1/]	622	682					
1.500	11	75	140	216[1/]	289	357	423	495	563[1/]	623	683	747				
1.750	12	76	142	218[1/]	291	359	425	497	564[1/]	624	684	748	840[1/]			
2.000	13	77	143	219[1/]	292	360	426	498	565[1/]	625	685	749	841[1/]	899		
2.250					293	361	427	499	566[1/]	626	686	750	842[1/]	900		
2.500	14	78	144	220[1/]	294	362	428	500	567[1/]	627	687	751	843[1/]	901		
2.750							429	501								
3.000	15	79	145	221[1/]	295	363	430	502	568[1/]	628	688	752	845[1/]	903	947	977[1/]
3.500							431	503	569[1/]	629	689	753	846[1/]	904	948	978[1/]
4.000							432	504	570[1/]	630	690	754	847[1/]	905	949	979[1/]
4.500[1/]										631[1/]	691[1/]	755[1/]	848[1/]	906[1/]	950[1/]	980[1/]
5.000										632	692	756	849[1/]	907	951	981[1/]
6.000										633	694	758	850[1/]	908	952	982[1/]

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

1/ Not a preferred size. Do not use for new design.

NOTES

PIN construction

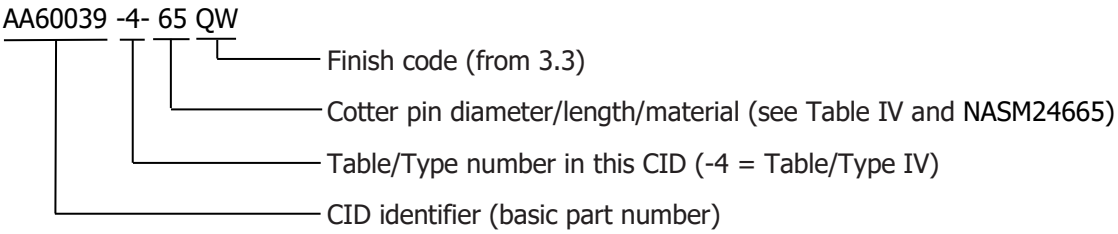

Examples of part number:

AA60039-4-65QW = a NASM24665 – Cotter pin, 0.047 dia., 0.250 length, carbon steel per ASME B18.8.1, Zinc-Nickel Type K20 plated or ASTM F1941/F1941M Fe/Zn-Ni 8BNS.

AA60039-4-903QW = a NASM24665 - Cotter pin, 0.500 dia., 3.000 length, carbon steel per ASME B18.8.1, Zinc-Nickel Type K20 plated or ASTM F1941/F1941M Fe/Zn-Ni 8BNS.

TABLE IV – Type V (-5) - Pin, grooved, headless, longitudinal taper groove, carbon steel.

* The NASM35671 listed Cadmium plating option is replaced by Zinc-Nickel plating in this CID.


L LENGTH	DASH NUMBER	ØB ±0.001	DASH NUMBER	ØB ±0.001	DASH NUMBER	ØB ±0.001	DASH NUMBER	ØB ±0.001	DASH NUMBER	ØB ±0.002
0.1875	1	0.051		0.068		0.084		0.101		0.134
0.2500	2		6		11					
0.3750	3		7		12		16		21	
0.5000	4		8		13		17		22	
0.6250	5		9		14		18		23	
0.7500	---		10		15		19		24	
1.0000	---						20		25	0.133
1.2500	---								26	0.0132
1.5000									27	
0.5000	28	0.166	34	0.198	---					
0.6250	29		35				52			
0.7500	30		36		43	0.230	53	0.263	62	0.394
1.0000	31	0.165	37		44		54		63	
1.2500	32	0.164	38	0.197	45		55		64	
1.5000	33		39		46	0.229	56	0.262	65	
1.7500	---		40		47		57		66	0.393
2.0000			41	0.196	48		58		67	
2.2500			42		49		59		68	
2.5000	---				50	0.228	60	0.261	69	
2.7500					51		61		70	

NOTES

(Notes continued on next page)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

PIN construction

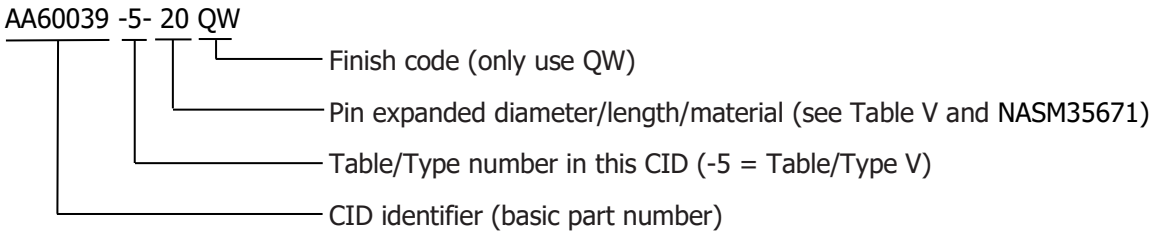

Examples of part number:

AA60039-5-20QW = a NASM35671 - Grooved pin, 0.101 expanded dia., 1.0000 length, carbon steel, cold-drawn, B1112 (UNS G11120) or C1212 (UNS G12120), Zinc-Nickel Type K20 plated or ASTM F1941/F1941M Fe/Zn-Ni 8BNS.
AA60039-5-40QW = a NASM35671 - Grooved pin, 0.196 expanded dia., 1.7500 length, carbon steel, cold-drawn, B1112 (UNS G11120) or C1212 (UNS G12120), Zinc-Nickel Type K20 plated or ASTM F1941/F1941M Fe/Zn-Ni 8BNS.

7.2 Source of documents.

7.2.1 FAR: Copies of the Federal Acquisition Regulations are available online from https://www.acquisition.gov/browse/index/far.

7.2.2 Executive order (EO). Copies of the EO documents are available online from https://www.epa.gov/greeningepa/executive-order-13834.

7.2.3 Military specifications: Copies of military specifications are available online from https://quicksearch.dla.mil.

7.2.4 Non-Government specifications: Copies of Aerospace Industry Association (AIA) publications are available online from https://www.aia-aerospace.org/standards/. Copies of American Society of Mechanical Engineers (ASME) publications available online from https://www.asme.org/. Copies of American Society for Testing and Materials (ASTM) are available online from https://www.astm.org/. Copies of Society of Automotive Engineers (SAE) are available online from https://www.sae.org/standards/.

7.3 Ordering data. The contract or order should specify the following:

a. Title, number and date of this CID.
b. National stock number, (if available).
c. Material (steel alloy, steel, or aluminum).
d. Hexavalent-chromium and cadmium free part number (PIN) from this CID.
e. Quantity.

7.4 Key words:

a. Alloy steel
b. Carbon steel
c. CRES
d. Passivate
e. Plate
f. Plating
g. Steel
h. Zinc-nickel

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodian:
Army – AT
Navy – AS
Air Force – 71
DLA – CC

Review activities:
Army – AR, AV, CR, MI
Navy – CG, MC, SH, YD
Air Force – 11, 70
DLA – GS, GS4, GS7

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FAS

Preparing Activity:
Army – AT

(Project 5315-2022-002)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.