[INCH-POUND]
A-A-60058
12 December 2023

COMMERCIAL ITEM DESCRIPTION

SAW, BAND, METAL CUTTING, VERTICAL, CONTOUR

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This commercial item description (CID) covers vertical contour metal cutting bandsaws with nonpower-feeding worktables. Vertical contour bandsaws are used for metal contour cutting operations and internal cutting operations whereby the saw blade is cut, inserted into the workpiece pilot hole, and then welded back together to complete the sawing operation. The bandsaws covered by this CID are intended for use in Aircraft Metals Technology Shops across the Air Force. The equipment identified herein should be manufactured in the United States of America.

2. CLASSIFICATION. The vertical bandsaw provided shall be of the following sizes. Size refers to the maximum distance from the cutting point of the saw blade to the bandsaw column (throat depth) and the maximum distance from the table to the blade guides (throat height). The size and capacity to be furnished shall be of the options detailed in Table I.

TABLE I Vertical bandsaw capacity requirements.

Type	Throat Depth	Throat Height
1	20 in.	13-16 in.
2	36 in.	12-13 in.

Note 1: Bandsaw capacities shall not be less than, nor exceed 10 percent greater than, the requirements stated in Table I.

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any data that may improve this document should be sent to: AFLCMC/EZSS, 2145 Monahan Way, Area B, Bldg 28 Wright-Patterson AFB, OH 45433 or email to engineering.standards@us.af.mil. Since contact information can change, you should verify the currency of this information using the ASSIST Online database at https://assist.dla.mil

AMSC N/A FSC 3405

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3. SALIENT CHARACTERISTICS.

3.1 General requirements. The bandsaw shall be new and one of the manufacturer's current models capable of operation in accordance with the requirements herein. All parts subject to wear, breakage, or distortion shall be accessible for adjustment, replacement, and repair. Mechanisms requiring periodic manual lubrication shall be readily accessible for servicing.

3.2 Components. The bandsaw shall include, as a minimum, the following components:

3.2.1 Base and column. The base shall support all components of the contour vertical bandsaw and shall be constructed with the strength and rigidity necessary to meet the performance requirements shown in 3.5. The base shall provide means for leveling and securely anchoring the machine. Access doors or covers shall be provided for blade changes, adjustments, and servicing.

3.2.2 Worktable. A tilting worktable that can be pivoted and securely locked at any angle ranging from 45 degrees negative to 5-10 degrees positive shall be provided.

3.2.3 Drive and idle wheels. The bandsaw blade speed range shall be variable and shall meet the requirements detailed in Table II. The bandsaw shall be equipped with an indicator that displays the blade speed. The bandsaw shall provide manual or automatic blade tensioning and shall be equipped with a blade tension indicator.

TABLE II: Blade drive system requirements.

Type	Minimum Speed	Maximum Speed	Blade Motor
1	45-550 fpm	3000-5500 fpm	3-5 hp
2	50-500 fpm	4925-5500 fpm	3-5 hp

3.2.4 Band welder. The bandsaw shall be equipped with a band welder, band clamp, shears, and grinder. The band welder shall be mounted in or on the column of the bandsaw and shall accommodate the maximum blade width of the bandsaw.

3.2.5 Guidepost. A blade guidepost shall be provided and shall contain the upper blade guides. The guidepost shall be vertically adjustable to accommodate the maximum workpiece thickness required. The throat height shall correspond to the applicable size shown in Table I. The blade guides shall consist of roller bearings, at a minimum, and shall be constructed with the strength and rigidity to meet the cutting requirements shown in Table IV.

3.2.6 Blade cleaner. Blade brushes shall be provided in the saw frame to remove metal chips from the saw blade and prevent buildup on the blade and wheels.

3.2.7 Safety devices. An emergency stop switch/button shall be provided that when pressed will instantly stop all motion of the machine and drive motor. Access doors shall be interlocked to prevent operation of the bandsaw when opened.

3.2.8 Controls. The bandsaw controls shall include, as a minimum, the following functions:

a. Emergency stop.

b. Power on/off.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

c. Blade speed.

d. Blade tension.

3.2.9 Lubrication system. Machine components requiring continuous lubrication shall be permanently lubricated or lubricated by automatic means. Machine components requiring periodic manual lubrication shall be readily accessible.

3.2.10 Chip blower system. The bandsaw shall be equipped with a chip blower system. The chip blower system shall provide a connection for compressed air. A valve shall be included to control the amount of airflow delivered to the air nozzle(s). The air nozzle(s) shall be adjustable to allow airflow to be directed to the cutting area.

3.2.11 Electrical system. The electrical system shall conform to the National Fire Protection Association (NFPA) 79 standard. The machine shall be wired for 230-volt, 3-phase, 60-hertz circuit capability. The electrical circuitry shall provide low voltage and overload protection.

3.2.12 Electric motors. The vertical bandsaw drive motor shall have sealed and permanently lubricated ball or roller bearings, shall be energy efficient, and shall conform to the National Electrical Manufacturers Association (NEMA) MG-1 standard. The motor shall have an open drip proof enclosure. The bandsaw drive motor shall have a 30-minute duty cycle horsepower rating minimum.

3.2.13 Tooling, attachments, and accessories. All tooling, attachments, accessories, and hardware required to render the machine usable shall be included, as a minimum:

a. Bi-metal blade. A minimum of one bi-metal blade compatible with the bandsaw shall be provided with the machine. The blade shall be of the type, size, pitch, and tooth count suitable for cutting a wide range of metal types and profiles.
b. Work light. A work light of adequate brightness to illuminate the bandsaw cut area shall be wired and installed on the bandsaw. The work light position shall be adjustable and shall include a button or switch for on/off control.

3.3 Warranty. A minimum one-year warranty shall be provided to protect against defects, breaks, or component failures during normal operations. The warranty shall include the replacement and installation of components/assemblies at the installation location by an OEM-certified technician. The warranty does not cover tooling identified in 3.2.13. For equipment located in austere operating environments, an OEM-certified technician may oversee the repair by a Government representative; however, replacement components shall still be provided as part of the warranty.

3.4 Support. Technical support for the equipment shall be provided for a period of three years after the date of purchase. Technical support shall be accessible, at a minimum, via phone and email.

3.5 Performance. The vertical bandsaw shall be capable of producing cuts in SAE 1018 steel that comply with the requirements shown in Table IV when tested in accordance with sections 5.3.1 through 5.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE IV: Vertical bandsaw performance requirements.

Type	Cutting Rate	Perpendicularity (inch per inch of thickness)
1	8 $in.^2$/min.	0.005
2	12 $in.^2$/min.	0.005

3.6 Safety and health requirements. The machine shall be designed and manufactured in accordance with ANSI B11.10. The manufacturer shall ensure that the machine and all equipment and accessories used on the machine shall comply with Occupational Safety and Health Administration (OSHA) 29 CFR PART 1910. If a conflict arises between the ANSI B11.10 and OSHA standards, the OSHA standards shall apply.

3.7 System of units. The U.S. Customary System of Units (US) or the International System of Units (SI) shall be used to graduate measuring and indicating devices.

3.8 Nameplate. A nameplate shall be securely attached to the machine and shall contain the following information:

a. Nomenclature.

b. Manufacturer's name.

c. Serial number.

d. Machine model designation.

e. Power input (volts, total amperes, phase, and frequency).

f. Short-circuit/over-current rating.

g. Contract number or order number.

h. National stock number.

i. Date of manufacture.

3.9 Lubrication plate or chart. A lubrication plate or chart shall be attached to the machine. The information provided on the plate or chart shall include:

a. Points of lubricant application.

b. Servicing interval.

c. Type of lubricant(s) with SAE number or lubricant identifier.

4. REGULATORY REQUIREMENTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

4.1 Recovered materials. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

4.2 Environmental protection. The item shall meet all applicable Environmental Protection Agency (EPA) restrictions in effect on the date of the contract. These regulations apply to the emission of materials hazardous to the environment or the user's health and shall be adhered to during the manufacturing, service, transportation, storage, and operation/use of the item.

5. PRODUCT CONFORMANCE.

5.1 Product conformance. The products shall meet the salient characteristics (section 3) of this commercial item description; conform to the manufacturer's own drawings, specifications, standards, and quality assurance practices; and be the same system offered for sale in the commercial market. The Government reserves the right to require proof of such conformance.

5.2 Inspection. The vertical bandsaw shall be inspected to determine compliance with all requirements specified in this CID.

5.3 Testing. The vertical bandsaw shall be tested in accordance with sections 5.3.1 through 5.3.3. Should a malfunction or a failure occur during any test, the problem shall be corrected, and the test shall be rerun from the beginning.

5.3.1 Setup and conditions. The manufacturer shall be responsible for supplying all tooling and materials and shall conduct all tests required by the Government. The manufacturer shall provide test instruments and equipment with calibration traceable to the National Institute of Standards and Technology (NIST) and shall provide certification of calibration. The machine shall be tested in the environmental conditions considered by the manufacturer as standard for machine performance verification.

5.3.2 Operational test. The contour vertical bandsaw shall be operated in accordance with the manufacturer's standard operating procedures. The contour vertical bandsaw shall be operated at no load for not less than 15 minutes. Proper operation of all controls and features shall be verified during the trial period. For the tests described herein, the choice of saw blade and blade speed shall be the option of the supplier.

5.3.3 Performance tests. The bandsaw shall undergo a straight cut test. The worktable shall be clamped in the zero-tilt position. The test workpiece shall be SAE 1018 steel and shall have a 1 by 4inch cross section. The cutting speed and perpendicularity of the cut shall be in accordance with Table IV. Three test cuts shall be made. The choice of saw blade and blade speed shall be the option of the supplier.

5.4 Acceptance. Preliminary and final acceptance tests shall be conducted at the manufacturer's site. The results of the performance tests shall be compared with the performance requirements shown in 5.3.3. Failure of the bandsaw to meet the performance requirements shown in 5.3.3 shall be cause for rejection.

6. PACKAGING.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

6.1 Preservation, packing, and marking. The products shall be preserved, packed, and marked as specified in the contract or purchase order.

7. NOTES.

7.1 Part identification number (PIN). The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

A-A-XXXXX-XX

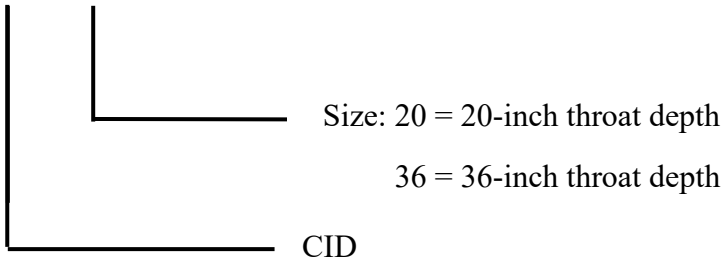

7.2 Sources of referenced documents.

7.2.1 American National Standards Institute (ANSI). Copies of ANSI documents may be obtained at https://www.ansi.org/.

7.2.2 Environmental Protection Agency (EPA). Copies of EPA documents may be obtained at https://www.epa.gov/.

7.2.3 National Electrical Manufacturers Association (NEMA). Copies of NEMA standards may be obtained at https://www.nema.org/.

7.2.4 National Fire Protection Association (NFPA). NFPA documents may be obtained at https://www.nfpa.org/.

7.2.5 Occupational Safety and Health Administration (OSHA). Copies of OSHA documents may be obtained at https://www.osha.gov.

7.2.6 Federal Acquisition Regulation (FAR). Copies can be obtained at https://www.acquisition.gov.

7.2.7 Society of Automotive Engineers (SAE). Copies of SAE standards are available online at https://www.sae.org/.

7.2.8 Code of Federal Regulations (CFR). Electronic copies of the eCFRs are available at https://www.ecfr.gov.

7.3 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this document.

b. Type of bandsaw required (see section 2).

c. Preservation, packing, and marking requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.4 Key words.
Cutting.
Contour.

MILITARY INTERESTS:

Custodian:
Air Force – 184
Reviewer:
DLA-GS

Preparing Activity:
Air Force – 184
Agent:
Air Force – 110
(Project 3405-2024-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.