INCH-POUND

A-A-60074
May 27, 2025

COMMERCIAL ITEM DESCRIPTION

CAP, WELDING, FLAME RESISTANT (FR)

The General Services Administration has authorized the use of this Commercial Item Description (CID) by all federal agencies.

1. SCOPE. This CID covers the requirements for the Welding Cap that is Flame Resistant (FR) and is part of the Welding Individual Protective Safety (WIPS) ensemble.

2. CLASSIFICATION.

2.1 Size. The welding cap shall be in the following.

SIZE SCHEDULES

6 5/8, 6 3/4, 6 7/8, 7, 7 1/8, 7 1/4, 7 3/8, 7 1/2, 7 5/8, 7 3/4, 7 7/8

3. SALIENT CHARACTERISTICS.

3.1 Description. The FR welding cap (see Figure 1) shall be a six (6) panel design that has a crown, and a long beak to protect the operator's ear and neck. The cap shall have a 1-3/8-inch wide fabric band around the circumference of the cap to provide additional reinforcement when measured with a scientific ruler.

3.2 Basic material. The materials for the welding cap shall be in accordance with NFPA 2112 requirements as well as the test methods specified in Table I.

3.2.1 Color. The color shall be as specified in the contract or purchase order. No color shall be reflective, metallic, or neon.

Comments, suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.3 Requirements. The finished welding cap shall conform to the physical requirements specified in Table I and conform to the dimensional requirements provided in 3.6.

TABLE I. Physical requirements and test methods.

Characteristic	Minimum Requirement	Test Method
Molten metals 1/ Class (minimum.)	Class 1 PPE 2/	ISO 9150 3/

1/ Required only for First Article Testing. If material has been previously tested this can be waived.
2/ Requirement derived from ISO 11611.
3/ 10 samples.

3.4 Components.

3.4.1 Thread. The thread used shall be a para-aramid or meta-aramid commercially acceptable thread.

3.4.2 Identification label. All components shall have a commercial identification label sewn in. The label shall be in accordance with MIL-DTL-32075, Type VI or Type X, Class 1. The commercial label shall contain the following information:

NSN: XXXX-XX-XXX-XXXX
ITEM NAME:
CONTRACT NUMBER:
CONTRACTOR'S NAME:
FIBER CONTENT:
PART NUMBER:

3.5 Construction.

3.5.1 Stitches, seams and stitching. Double stitching or zig zag stitching shall be used throughout the item with the exception that the bill/visor shall have a triple stitching on the outer edge.

3.6 Finished measurements. The finished welding cap shall conform to measurements as specified in Table II.

THIS SPACE LEFT INTENTIONALLY BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE II. Sizes and finished measurements, FR welding cap (inches).

Size	Circumference 1/
6-5/8	21-5/8
6-3/4	22
6-7/8	22-3/8
7	22-3/4
7-1/8	23-1/8
7-1/4	23-1/2
7-3/8	23-7/8
7-1/2	24-1/4
7-5/8	24-5/8
7-3/4	25
7-7/8	25-3/8
Tolerance (inch)	±1/4

1/ When taking the inside cap circumference begin at the center back seam measuring along the inside band at the bottom.

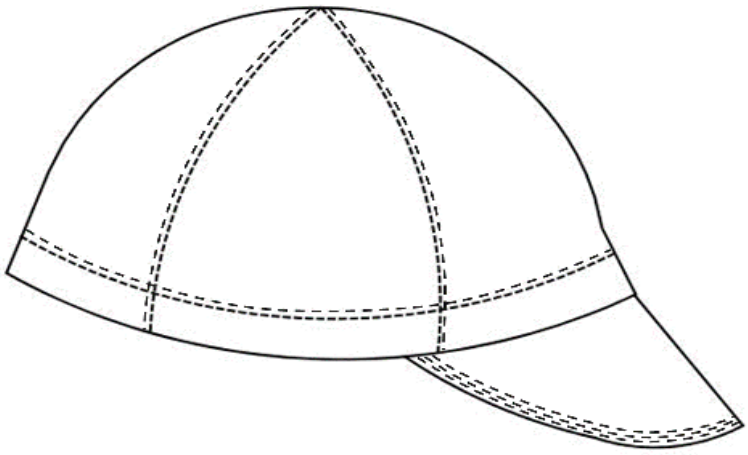


FIGURE 1. Front of Welding Cap. Figure 1 is furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.7 Toxicity. Unless otherwise specified in the contract or procurement documents (see 7.4), the finished welding cap shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.7.1.

3.7.1 Toxicity test. When the toxicity requirement (see 3.7) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.4).

3.8 Workmanship. The finished welding cap shall conform to the quality of the product established in this document. The welding cap shall be free from defects which would affect serviceability, appearance, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable. (See 7.1.2 and 7.1.4).

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The welding cap shall meet the salient characteristics of this CID conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished welding cap offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and tables for Inspection of Attributes (see 7.2.1).

5.4 Visual examination. Each finished welding cap shall be examined for the defects listed in Table III as defined in ASTM D3990. Defects shall not exceed the acceptance criteria (see 5.5).

TABLE III. Visual examination defects.

Material defects: Any hole, cut, tear, permanent fold, pleat, or crease; any spot or stain on outside, discoloration or color not as specified, any serious material defects or objectionable odor.
Stitches, seams and stitching: Loose or tight stitching tension, broken or skipped stitches, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; distorted, open, pulled or snagged stitches, twisted, ragged or inconsistent edge.
Labels: Label(s) missing, incorrect, or illegible.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents (see 7.4).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or order (see 7.4).

7. NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.3 Toxicity testing is outlined in the following references:
Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).
Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).

7.1.4 EPA and EO 13834 information is available online at https://www.epa.gov and https://www.fedcenter.gov/programs/eo13693/.

7.2 Source of non-Government documents.

7.2.1 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://asq.org.

7.2.2 ASTM Standards are available for purchase online at https://www.astm.org.

7.2.3 ISO Standards are available for purchase online at https://www.iso.org.

7.2.4 NFPA Standards are available for purchase online at https://www.nfpa.org.

7.3 Intended use. The welding cap is intended to be used by male and female welders across the Department of Defense. Components within the ensemble are intended to be configured for shop environment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.4 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this CD.
b. Component sizes required (see 2.1).
c. Color required (see 3.2.1).
d. When toxicity testing is required (see 3.7).
e. Product conformance (see 5).
f. Acceptance criteria (see 5.5).
g. Packaging requirements (see 6.).

7.5 Key words.

Combat environment
Hat
Protection
Shop environment

7.6 National Stock Number (NSN) The following NSN and part number have been assigned that correspond to this welding cap CID. This list may not be indicative of all possible NSNs associated with the CID and are provided for reference only.

NSN #	Size	Part #
8415-01-724-0513	6-5/8	FRWC658
8415-01-722-0027	6-3/4	FRWC634
8415-01-722-0040	6-7/8	FRWC678
8415-01-722-0041	7	FRWC700
8415-01-722-0049	7-1/8	FRWC718
8415-01-722-0051	7-1/4	FRWC714
8415-01-722-0055	7-3/8	FRWC738
8415-01-722-0058	7-1/2	FRWC712
8415-01-722-0060	7-5/8	FRWC758
8415-01-722-0071	7-3/4	FRWC734
8415-01-724-0521	7-7/8	FRWC778

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Custodians:
Army - GL

Preparing Activity
DLA-CT

(Project 8415-2025-012)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.