INCH-POUND

A-A-60076
April 16, 2025

COMMERCIAL ITEM DESCRIPTION

SWEATBAND, UNIVERSAL

The General Services Administration has authorized the use of this Commercial Item Description (CID) by all federal agencies.

1. SCOPE. This CID covers the requirements for the sweatband, universal that attaches to the helmet's front headband and is part of the Welding Individual Protective Safety (WIPS) ensemble.

2. CLASSIFICATION.

2.1 Size. The sweatband shall be one size (OS) fits all.

3. SALIENT CHARACTERISTICS.

3.1 Description. The sweatband (see figure 1) is made of an absorptive material in a universal design that attaches to the welding helmet's front headband (when standard headgear is installed) to provide added comfort and perspiration absorbency for the welder. The item folds lengthwise into a cylindrical shape and attaches to the helmet's front headband by three (3) pairs of equally spaced hook and loop strips. The color of the hook and loop fastener tape approximately matches the shade of the basic material. See figure 1 for hook and loop placement.

3.1.2 Figure. Figure 1 is furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

3.2 Basic material. The material shall be an absorptive material to provide added comfort and perspiration absorbency for the welder. The material shall be a Napped French Terry 8.5 oz wool.

3.2.1 Color. The color shall be as specified in the contract or purchase order and vary based on availability of fabrics. No color shall be reflective, metallic, or neon.

Comments, suggestions, or questions on this document should be sent to trpsptctstandardiz@dla.mil. Since contact information can change, verify the currency of the address information using Acquisition Streamlining and Standardization Information System ASSIST online database https://assist.dla.mil.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.3 Requirements. The finished sweatband shall be a Napped French Terry 8.5 oz wool. The finished sweatband shall conform to measurements as specified in Table I when measured in accordance with Table II.

3.4 Components.

3.4.1 Thread. The thread used shall be a para-aramid or meta-aramid commercially acceptable thread.

3.4.1.2 Hook fastener tape. The hook tape shall conform to Class 5 of A-A-55126. Unless otherwise specified (see 7.4.1), the color shall be a good match to the basic material.

3.4.2 Identification label. All components shall have a commercial identification label sewn in. The label shall be in accordance with MIL-DTL-32075, Type VI Class 1. The commercial label shall contain the following information:

NSN: XXXX-XX-XXX-XXXX
ITEM NAME:
CONTRACT NUMBER:
CONTRACTOR'S NAME:
FIBER CONTENT:
PART NUMBER:

3.5 Construction.

3.5.1 Stitches, seams and stitching. The item shall be stitched securely throughout, with consistent stitch lengths.

3.6 Finished measurements. The finished sweatband shall conform to measurements as specified in Table I when measured in accordance with Table II.

TABLE I. Finished measurements, sweatband (inches). (See Figure 1).

Size OS	Length 1/	Width 2/	Distance between Curvatures 3/
	10.00	4.00	1.75
Tolerance (inch)	±1/2	±1/2	±1/4

1/ Length
2/ Width
3/ Distance between curvatures

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

TABLE II. Sweatband, universal methods of measurement 1/.

Measurement Name	Measurement Description
Length	Lay sweatband flat and measure the longest edge (with hook and loop strips).
Width	Lay sweatband flat and measure along the shortest edge.
Distance between	Lay sweatband flat and measure across the two closest corners of each curvature.

1/ See Figure 1 for corresponding points of measurements. (See Tables I and II).

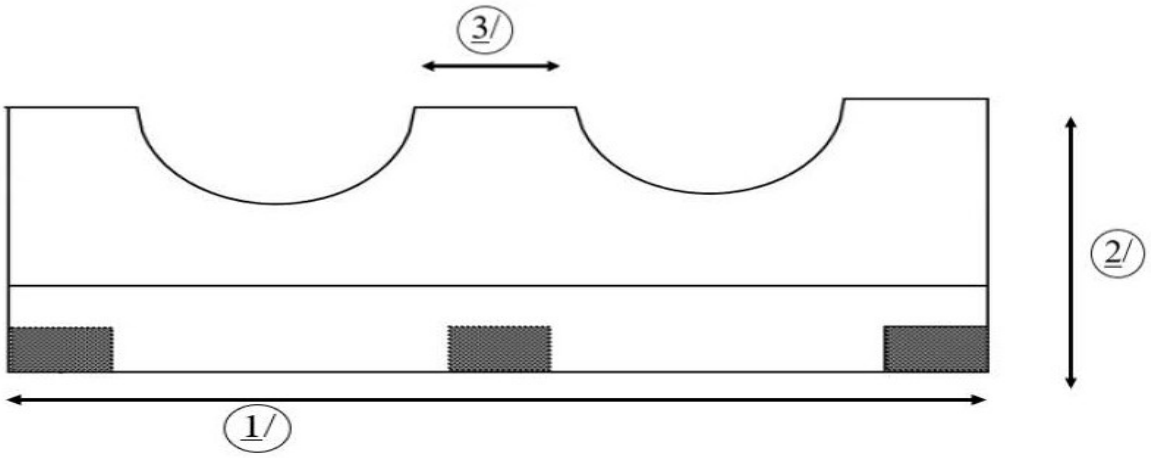


FIGURE 1. Front of Sweatband, universal, for measuring points.

3.7 Toxicity. Unless otherwise specified in the contract or procurement documents (see 7.4), the finished sweatband shall not present a health hazard and shall show compatibility with prolonged, direct skin contact when tested as specified in 3.7.1.

3.7.1 Toxicity test. When the toxicity requirement (see 3.7) can be demonstrated with historical use data, on the finishing treatments used, toxicity testing may not be required (see 7.4).

3.8 Workmanship. The finished sweatband shall conform to the quality of the product established in this document. The sweatband shall be free from defects which would affect serviceability, appearance, useability, uniformity and quality assurance standards defined by the technical data in the procurement documents.

4. REGULATORY REQUIREMENTS. Unless otherwise specified, the offeror/contractor is encouraged to use recovered, recycled, bio based, and environmentally preferable materials to the maximum extent practicable, in accordance with paragraph 23.403, 23.404(b) of the Federal Acquisition Regulation FAR, or the sustainable acquisition of EO 13693; as applicable. (See 7.1.2 or 7.1.4).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE PROVISIONS.

5.1 Product conformance. The sweatband shall meet the salient characteristics of this CID conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial marketplace. The Government reserves the right to require proof of such conformance.

5.2 Market acceptability. The finished sweatband offered must have been sold to the government or commercial market.

5.3 End item inspection procedures. Sampling for inspection shall be conducted in accordance with ASQ/ANSI Z1.4 - Sampling Procedures and Tables for Inspection of Attributes (see 7.2.3).

5.4 Visual examination. Each finished sweatband shall be examined for the defects listed in Table III as defined in ASTM D3990. Defects shall not exceed the acceptance criteria (see 5.5).

TABLE III. Visual examination defects.

Material defects: Any hole, cut, tear, permanent fold, pleat, or crease; any spot or stain on outside, discoloration or color not as specified, any serious material defects or objectionable odor.
Closures: Non-functioning or improperly cut in the hook and loop tape.
Stitches, seams and stitching: Loose or tight stitching tension, broken or skipped stitches, needle chew, any part caught in an unrelated operation or stitching, raw edge, thread ends not removed, any seam slippage, re-stitching, pleating or puckering; distorted, open, pulled or snagged stitches, twisted, ragged or inconsistent edge.
Labels: Label(s) missing, incorrect, or illegible.

5.5 Acceptance criteria. Acceptance criteria shall be as specified in the contract or procurement documents (see 7.4).

6. PACKAGING. The preservation, packing and marking shall be as specified in the contract or order (see 7.4).

7. NOTES.

7.1 Source of Government documents:

7.1.1 Copies of Government documents are available online at https://quicksearch.dla.mil.

7.1.2 Federal Acquisition Regulations (FAR) are available online at https://acquisition.gov.

7.1.3 Toxicity testing is outlined in the following references:
Skin Sensitization 406 and Dermal Irritation 404 (https://www.oecd-ilibrary.org/environment/oecd-guidelines-for-the-testing-of-chemicals-section-4-health-effects_20745788?page=1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

Dermal Sensitization (https://www.law.cornell.edu/cfr/text/40/798.4100).
Dermal Toxicity (https://www.law.cornell.edu/cfr/text/40/798.2250).

7.1.4 EPA and EO 13693 information is available online at https://www.epa.gov.

7.2 Source of non-Government documents.

7.2.1 AATCC Test Methods are available for purchase online at https://aatcc.org.

7.2.2 ASQ/ANSI Z1.4 – Sampling Procedures are available online at https://asq.org.

7.2.3 ASTM Standards are available for purchase online at https://www.astm.org.

7.3 Intended use. The sweatband, universal is designed specifically for welders and is intended to be used with the welding helmet that is part of the WIPS ensemble and used by military male and female welders.

7.4 Ordering data. Acquisition documents should specify the following.

a. Title, number, and date of this CID.
b. Component sizes required (see 2.1).
c. Color required (see 3.2.2).
d. When toxicity testing is required (see 3.7).
e. Product conformance (see 5).
f. Acceptance criteria (see 5.5).
g. Packaging requirements (see 6).

7.5 Key words.

Cap
Helmet
Hook
Welding

7.6 National Stock Number (NSN) The following NSN and part number have been assigned that correspond to this sweatband CID. This list may not be indicative of all possible NSN associated with the CID and are provided for reference only.

NSN #	Size
8405-01-722-0014	OS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

MILITARY INTEREST

CIVIL AGENCY COORDINATING ACTVITY:
GSA-FAS

Custodians:
Army - GL

Preparing Activity
DLA-CT

(Project 8405-2025-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.