INCH-POUND
A-A-60080
27 June 2025
SUPERSEDING
A-A-3104
27 June 1997
A-A-55063B
2 November 2020

COMMERCIAL ITEM DESCRIPTION

APRON, COATED

The General Services Administration has authorized the use of this commercial item description by all federal agencies.

1. SCOPE. This commercial item description (CID) covers a coated apron to protect the clothing of workers from liquid splashes in heavy duty applications.

2. CLASSIFICATION. The apron is available in one color, type, and size.

3. SALIENT CHARACTERISTICS

3.1 Design. The apron's design is as listed below. See Figure 1.

a. Bib type
b. One neck strap tie
c. Two waist strap ties
d. Four grommets with washers
e. One reinforcement patch underneath grommet/washer (total four)
f. Two-sided coated fabric
g. Front – heavily coated – See 3.2.3
h. Back – single thickness coating – See 3.2.3

3.1.1 Figure. Figure 1 is furnished for informational purposes only. To the extent of any inconsistencies between the written document and the figure, the written document shall govern.

Beneficial comments, recommendations, additions, deletions, clarifications, and any other data that may improve this document should be sent to: trpsptctstandardiz@dla.mil.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release: distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.2 Materials.

3.2.1 Base cloth. The physical characteristics of the base cloth shall be as specified in Table I.

TABLE I. Base cloth performance requirements.

Characteristic	Requirement	Verification method
Fiber content Cotton Polyester	50% ± 2% Remainder	AATCC TM20A
Weave	Plain	Visual
Weight, oz/yd^2 (min.)	2.8	ASTM D3776/D3776M, Opt. C
Breaking strength, pounds (min.) Warp Filling	 48 30	ASTM D5034

3.2.2 Coating compound. The coating compound shall be butadiene-acrylonitrile copolymers or chloroprene rubber suitably compounded, plasticized with phthalate or phosphate ester plasticizers, and pigmented black when tested as specified in ASTM D297.

3.2.3 Coated cloth. The coating compound shall be applied to both sides of the cloth. The coated cloth shall be fully vulcanized and shall conform to the physical requirements specified in Table II.

TABLE II. Coated cloth performance requirements.

Characteristic	Requirement	Verification method
Weight, oz/yd^2 Front coating (min.) Back coating (min.) Overall (min.)	 6.0 1.0 11.5	ASTM D3776/D3776M, Opt. C
Breaking strength, pounds (min.) Initial Warp Filling After acid resistance test Warp Filling	 58 40 52 35	 ASTM D5034 ASTM D5034, 3.2.3.1
Coating adhesion, pounds (min.)	4.5	ASTM D751 1/
Resistance to aging	3.2.3.2	ASTM D572, 3.2.3.2

1/ Speed of pulling clamp speed shall be 12 ± 0.5 in./min. The adhesion shall be the average of five highest peaks of force. Three specimens shall be tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.2.3.1 Acid resistance test. A pocket shall be formed from the apron material with the heavier coated side (front of apron) up. This pocket shall be filled with diluted sulfuric acid (specific gravity 1.28 to 1.30) and remain filled with the acid for a period of 8 hours. At the end of this period, the specimen shall be thoroughly washed in cold water and dried at room temperature for a minimum of two hours. There shall be no appreciable stiffening and brittleness or softness and tackiness and there shall be no sign of acid penetration. Appreciable shall mean a change that is immediately noticeable in comparing the tested specimen with the untested coated cloth.

3.2.3.2 Resistance to aging. The coated fabric shall be tested for resistance to aging in accordance with ASTM D572 except that the time of exposure shall be 10 days. The specimens shall show no signs of becoming stiff and brittle or soft and tacky.

3.3 Grommets. The grommets shall be in accordance with NASM16491, Type II, Class 3, Size 8–10 millimeters (3/8-inch) inner diameter nominal. The color of the Class 3 grommets shall be black or silver. The apron shall have four grommets, which shall be located at the bib and waist corners (see Figure 1). As an alternate, the material for the grommets may be brass, nickel plated, aluminum natural finish (anodized) or stainless steel.

3.4 Label. The inside of each apron shall conform to MIL-DTL-32075, Type IV with the following information using 1/4-inch minimum height indelible white characters:

ITEM NOMENCLATURE
CONTRACTOR'S NAME
CONTRACT NUMBER
NATIONAL STOCK NUMBER (NSN)
DATE OF MANUFACTURE
LOT NUMBER
CARE INSTRUCTIONS

3.4.1 Label, barcode. Each apron shall be individually bar-coded in accordance with MIL-DTL-32075, Type VIII, Class 17. The tags shall have a hole and shall be attached to each apron by a fastener. The bar-coding element shall be legible and readable by scanner. The bar code element shall be a 13-digit national stock number (NSN). There shall be a 12-digit Universal Product Code (UPC) assigned for all NSNs by the government. The initial "UPC" shall appear beneath the code. The bar codes for the NSN and UPC shall be medium to high density and shall be located so that they are completely visible on the item when it is folded and/or packaged as specified. The label shall not cause any holes or damage to the apron due to the location on the apron.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.5 Reinforcement patches. The material for the reinforcement patches shall be the same material as the apron in 3.2.3. The apron shall have four reinforcement patches located on the inside at the bib and waist corners where the grommets are positioned (see Figure 1). The patches maybe round or shaped to the corner of bib and waist and caught in seams. The reinforcement patches shall extend at least 3/16-inch minimum from the edge of the grommet.

3.6 Thread, sewing. The thread shall conform to A-A-59963, Type I, twisted soft multiple cord or Type II, twisted bonded multiple cord, Class 1, Subclass B (non-wicking finish), Tex size 45. The color of the thread shall be black. Any lubricant or finish shall not stain the end item.

3.7 Strap tapes. The straps shall be made of tape or webbing. The tape or webbing for the straps shall be 3/4 (–1/32, +1/16) inch wide, and sufficiently lightweight and flexible for tying when the apron is donned. Both ends of the straps shall be seared. The tape or webbing shall meet the requirements in Table III.

TABLE III. Tape/webbing performance requirements.

Characteristic	Requirement	Verification method
Fiber content	100% Polyester or Nylon	AATCC TM20A
Water repellency Dynamic absorption, percent Initial only (max.)	40	AATCC TM70
pH	5.5 – 8.5	AATCC TM81
Color	Black or white	Visual

3.8 Construction. The apron shall have two tapes/webbings for the waist straps and one tape/webbing for the neck strap. The apron shall be sewn on all four sides. Each waist strap shall be knotted through the grommet at one end. The neck strap shall be knotted through the grommet at one end on the right side as worn. See Figure 1.

3.8.1 Patterns. Commercial patterns shall be used. They shall conform to the design requirements of 3.1.

3.8.2 Stitches, seams, and stitching. Unless otherwise specified, ASTM D6193 stitch and seam types shall be used in the construction of the apron. The seam type shall be EFa-1, the stitches per inch shall be 8 to 10 stitches per inch and the Stitch Type shall be 301. The seam allowance shall be 1/2 (± 1/16) inch.

SPACE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

3.9 Finished dimensions. The finished dimensions of the apron shall be as specified in Table IV and Figure 1.

TABLE IV. Dimensions (inches).

Location or designated component	Dimension	Tolerance
A) Bottom width, edge to edge	35	Minimum
B) Side length, waist to bottom edge	35	Minimum
C) Length, neck edge to bottom edge	48	Minimum
D) Bib width, edge to edge	11	Minimum
E) Sweep width, neck to edge to waist edge	12	Minimum
F) Grommet placement	1-inch from all designated corners	±1/8
G) Ties, Waist strap	24	Minimum
H) Ties, Neck strap	30	Minimum

3.10 Finishing, apron. Prior to packaging the apron may be dusted with a suitable mineral powder to prevent adhesion to itself.

3.11 Workmanship. The aprons shall be clean, wrinkle free (except for folding), and of best commercial quality. The aprons shall have no defects which affect appearance, serviceability, or durability as cited under this document in 5.3 and 5.4.

4. REGULATORY REQUIREMENTS

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. PRODUCT CONFORMANCE PROVISIONS

5.1 Product conformance. The apron provided shall meet the salient characteristics of this CID, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Product demonstration model. When required, offerors shall submit samples of their intended production. The product demonstration model shall consist of units independently developed. Product demonstration models shall be analyzed by the government. Evaluation criteria and basis for award are contained in the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

5.3 Visual examination. Each apron shall be examined for the defects listed in Table V when defined as in MIL-STD-1487. Sampling procedures shall be as defined in ASQ/ANSI Z1.4. The lot size shall be expressed in units of aprons. The sample unit shall be one apron.

TABLE V. Visual examination defects.

Classification	Defect	Major	Minor
Material, coated cloth only	Any hole, cut, abraded area, tear, or rip, any peeling, cracking, sticking, flaking or excess coating compound, any blisters, pits abrasions or tackiness.	101	
All other materials	Any hole, cut, abraded area, tear, or rip		201
All materials including coated cloth	Any spot, stain or foreign matter		202
	Color not as specified or not uniform due to discoloration, any shaded part		204
	Any objectionable odor.		205
Seams and stitching	Loose or tight stitching tension, broken or missing thread or stitch, needle chew or improper stitching. Any open seams; any part caught in an unrelated operation or stitching,		206
	Raw edge, thread breaks, pulled or snagged stitches.		207
	Thread ends not removed		208
Construction	Any component part omitted	102	
	Finished dimensions not as specified	103	
	Design not as specified, strap ends not seared, Strap ends not tied in grommets as specified	104	
Label, Bar code label	Label missing, incorrect, or illegible. Bar code or UPC code label omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; bar code not visible on folded packaged item	105	
Bar Code label only	Label causes damage to the item.	106	

5.4 Dimensional examination. Each finished apron selected for dimensional examination shall be examined for the finished dimensions specified in 3.9.2, Table IV and Figure 1. Figure 1 specified the dimensions for A through F. Dimensions G and H are not specified under Figure 1. Each finished apron shall be laid on a flat surface when dimensions are taken. The any finished dimension out of tolerance shall be scored as stated in Table V. The measurement for the waist strap ties and the neck strap tie shall be taken from the edge of the apron to the end of the seared tie. This shall exclude the strap tie length needed to knot the tie through the grommet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

6. PACKAGING

6.1 Packaging, packing and marking. The packaging, packing, and marking shall be as specified in the contract or order.

7. NOTES

7.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

a. Title, number, and date of this purchase description, including any amendments.
b. National stock number
c. When PDM/first article inspection is required (see 5.2)
d. Number of PDM/first article inspection samples (see 5.2)
e. Name and address of the first inspection facility; and the name and address of the Government activity responsible for conducting the first article inspection program
f. Inspection conditions
g. Conformance inspection and acceptance quality limits
h. Packaging, packing, quantity desired and marking desired

7.2 Source of documents.

7.2.1 Source of Government documents. Copies of Government documents are available online at https://quicksearch.dla.mil.

A-A-59963	– Thread, Polyester
MIL-DTL-32075	– Label: For Clothing, Equipage, And Tentage, (General Use)
MIL-STD-1487	– Department of Defense Military Standard Glossary of Cloth Coating Imperfections

7.2.2 Source of Federal Acquisition Regulations. Copies of Federal Acquisition Regulations are available online at https://acquisition.gov/far/index.html.

7.2.3 Source of non-government documents.

7.2.3.1 AATCC standards. Copies of AATCC documents are available online at https://www.aatcc.org.

AATCC TM20A	– Test Method for Fiber Analysis: Quantitative
AATCC TM70	– Water Repellency: Tumble Jar Dynamic Absorption
AATCC TM81	– pH of the Water-Extract from Wet Processed Textiles

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

7.2.3.2 AIA/NAS Standards. Copies of AIA/NAS documents are available online at https://www.aia-aerospace.org.

NASM16491 – Grommet, Metallic, Plain, With Toothed Washer (Type II)

7.2.3.3 ASQ Standards. Copies of ASQ documents are available online at https://www.asq.org.

ASQ/ANSI Z1.4 – Sampling Procedures and Tables for Inspection by Attributes

7.2.3.4 ASTM Standards. Copies of ASTM documents are available online at https://www.astm.org.

ASTM D297 – Standard Test Methods for Rubber Products—Chemical Analysis
ASTM D572 – Standard Test Method for Rubber—Deterioration by Heat and Oxygen
ASTM D751 – Standard Test Methods for Coated Fabrics
ASTM D3776/3776M – Standard Test Methods for Mass Per Unit Area (Weight) of Fabric
ASTM D5034 – Standard Test Method for Breaking Strength and Elongation of Textile Fabrics (Grab Test)
ASTM D6193 – Standard Practice for Stiches and Seams

7.3 Information requests. For access to information such as patterns, drawings, standard shade samples of cloth, etc. go to Defense Logistics Agency Troop Support, Clothing and Textiles website for their Specification/Pattern/Drawing Request form, https://www.dla.mil/TroopSupport/Clothing-and-Textiles/Industry-Support/Spec-Request/.

Complete the request form and then submit form. Requests to use equivalent materials and/or components or to make changes to the pattern should be sent to the contracting officer for approval by the military services.

7.4 National Stock Numbers. Previous document A-A-3104 used NSN 8415-01-463-3233 and document A-A-55063B used NSN 8415-00-082-6108.

7.5 Key words.

Splashes, liquid
Coating
Rubber
Acid resistance

SPACE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians:
Army – GL
Navy – NU
Air Force – 11
DLA – CT

Review Activity:
Navy – MC

CIVIL AGENCY COORDINATING ACTIVITIES:

Source America

Preparing Activity:
DLA – CT
(Project 8415-2024-011)

NOTE: The activities listed above were interested in the document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online Database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

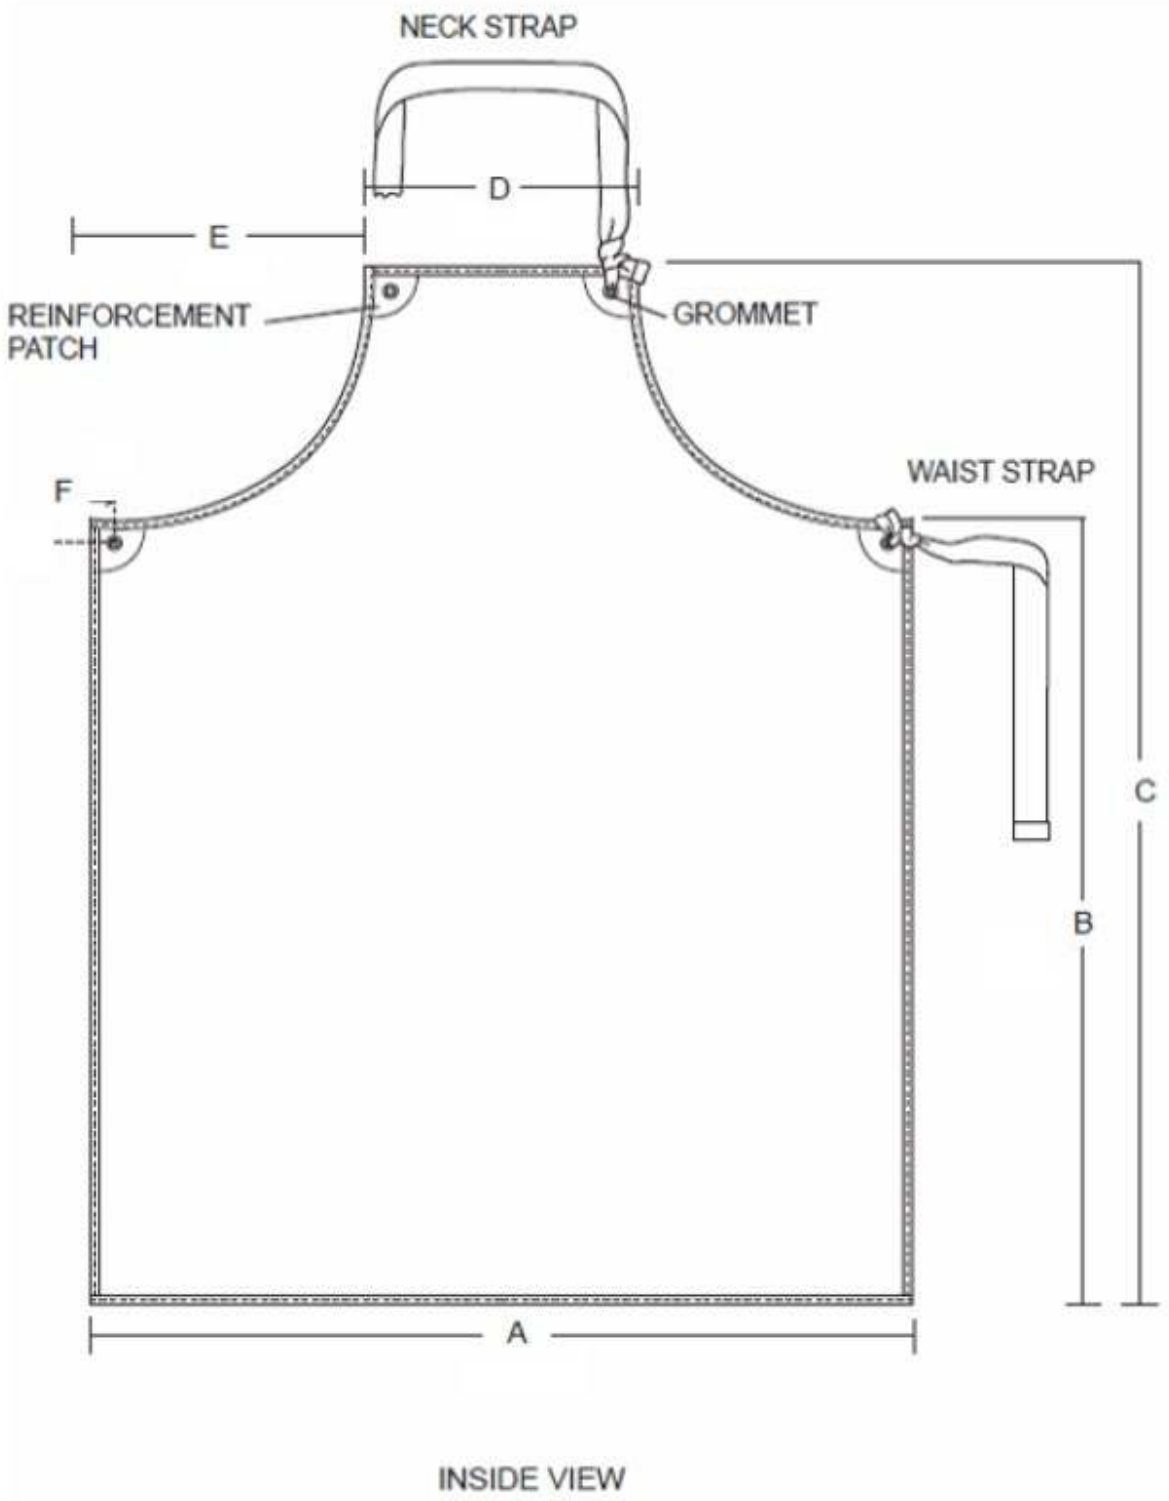


FIGURE 1. Apron, inside view.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.