A-A-82587
31 AUGUST 1988

COMMERCIAL ITEM DESCRIPTION

TRAP, FLYING INSECTS, ELECTROCUTING

The General Services Administration has authorized the use of this commercial item description.

Abstract. This commercial item description describes industrial type, heavy duty electrocuting devices used for surveillance and control of indoor flying insects.

Major Command pest management professional consultant approval is required for purchase.

TYPE I	Wall Mount
Class A	Large (80 Watt)
Class B	Small (40 Watt)
TYPE II	Ceiling Mount
Class A	Large (80 Watt)
Class B	Small (40 Watt)
TYPE III	Corner Mount
Class A	Large (80 Watt)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. , and any data which may improve this document should be sent to: Defense Construction Supply Center P.O. Box 3990, ATTN: DCSC-SSM, Columbus, Ohio 43216-5000.

I

AMSC N/A

FSC 3740

DISTRIBUTION STATEMENT A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

Salient characteristics.

Electrical The trap shall operate from a 115 volt, 60 hertz, A.C. power source or from an optional 220 volt, 50 hertz A.C. power source (see notes). The amperage draw shall be -no greater than 5 amps . The grid voltage shall not exceed 5000 volts or 10 milli-amperes. The power cord shall be not less than 6 feet in length and shall be of 3 wire grounded construction.

Attractant lamps. The attractant lamps shall consist of 2 standard 4-foot, 40 watt or 2 standard, 2-foot, 20 watt unfiltered ultraviolet lamps. Maximum energy emitted by the bulbs shall be in the range of 330 to 370 nanometers.*

* Sylvania F40/350BL, Sylvania F20/350BL or equal.

Construction. The trap shall be made of aluminum or alumi-nized steel and shall be rectangular in shape. A high voltage, low amperage electrical grid shall be incorporated to kill insects attracted to the lamps. The edge-to-edge distance between the electric grid wires shall not be greater than 10 millimeters and the wires shall be no smaller in diameter than 14 gauge, alloy steel wire. Bulbs shall be of the hi-pin, straight-line type. The mounting brackets shall be located on the rear or top of the trap to facilitate installation. The tray used for collection and removal of dead insects shall be located at the bottom of the trap. The width of the tray on wall and ceiling mounted traps with horizontal lamps shall be at least 1/3 of the height of the -electrocuting grid. All trays shall be at least 2.5 centimeters deep. The width and depth constraint does not apply to the corner mounted trap. The protective grid cover shall be hinged or other-wise designed for the purpose of trap maintenance, lamp replace-ment , and cleaning. Deactivating switches for the electrical grid shall be incorporated in the hinge or latch mechanism of the pro-tective cover.

Weight. The trap shall weigh no more than 50 pounds (22.7 kilograms).

Conformance. The trap shall conform to the requirements of Underwriters Laboratories (UL), Inc., Standard 1559.

Workmanship. The trap shall be free from burrs and sharp edges or projections or other defects which detract from its appearance, impair its performance’ or serviceability, and which may create an electrical or safety hazard.

Source: https://assist.dla.mil -- Downloaded: 202610-26T10:33Z
Check the source to verify that this is the current version before use.

Warranty. The trap shall have as a minimum requirement, a three (3) year manufacturer's warranty covering all of the trap's parts, except the lamps.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Metric Products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within specified tolerances using conversion tables contained in the latest revision of Federal Standard No. 376, and all other requirements of this Commercial Item Description are met.

If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch/pound units , a request should be made to the contracting officer to determine if the product is acceptable.

The contracting officer has the option of accepting or rejecting the product.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable, so long as the requirements of this description are met.

The offeror/contractor shall comply, and be responsible for compliance by their subcontractors/suppliers , with the requirements of the Federal Food, Drug and Cosmetic Act; Occupational Safety and Health Act; and all other applicable Federal, State, and local statutes , ordinances , and regulations.

Preservation packaging, packing, labeling, and marking. Unless otherwise specified, one each trap shall be packaged into a single fiberboard box with adequate cushioning, blocking and bracing. Preservation , packaging and packing shall afford protection to preclude damage to containers and or contents under normal shipping, handling and storage, and shall conform to applicable carrier's rules and regulations. Intermediate and exterior containers shall be labeled and marked as specified in the contract or purchase order.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

CID based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor:

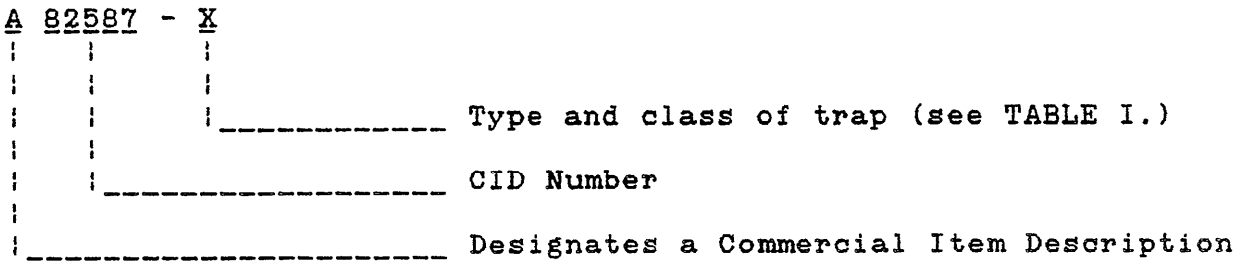

TABLE I. Type and class code number.

Type and class	Code number
Type I Class A	1
Type I Class B	2
Type II Class A	3
Type II Class B	4
Type III Class A	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T10:33Z
Check the source to verify that this is the current version before use.

Notes .

Purchaser should obtain Major Command pest management professional consultant approval before purchase.

Purchaser should specify type and class of trap required (see TABLE I.) .

Purchaser should specify if optional power source is required.

Purchaser should specify intermediate and exterior labeling and marking requirements.

Purchaser should specify the requirement for a commercial off-the-shelf manual with parts list.

UL Standard 1559 is available from Underwriters Laboratories, Inc., 333 Pfingsten Road, Northbrook, Illinois 60062.

MILITARY INTERESTS:

Custodians

Air Force - 99
Army - MD

Review Activity

AFPMB - PM
Air Force - 50
Army - GL

User Activities

Army - AV
Navy - MS

CIVIL COORDINATING ACTIVITIES:

GSA - FSS
USDA - ARS
USDA - FGI
VA - 0SS

Preparing Activity:

Agent: DLA-CS

(project 3740-0127)

Source: https://assist.dla.mil -- Downloaded: 202610-26T10:33Z
Check the source to verify that this is the current version before use.