MILITARY SPECIFICATION

CHECKLISTS: FLIGHT CREW; PREPARATION OF

This specification has been approved by the Naval Air Systems Command, Department of the Navy

1. SCOPE AND CLASSIFICATION

1.1. Scope. This specification establishes the requirements for preparation of flight crew checklists for naval aircraft.

1.2. Classification.

1.2.1 Types. This specification covers the preparation of four types of flight crew checklists. The types of checklists to be prepared shall be designated by the procuring activity and are as follows:

TYPE I - Pocket Checklists (see para 3.8).

TYPE II - Card Checklist (see para 3.9).

TYPE III - Scroll Checklist (see para 3.10).

TYPE IV - Functional Checkflight Checklist (see para 3.11).

2. APPLICABLE DOCUMENTS

2.1. Government Documents. The following documents, of the issue in effect on the date of invitation for bids or a request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-M-38784	Manuals, Technical: General Requirements for Preparation of
MIL-P-38790	Printing Production of Technical Manuals: General Requirements for .

PUBLICATIONS

Department of Defense

DOD 5220.22-M	Industrial Security Manual for Safeguarding Classified Information

Department of the Navy

OPNAVINST 4790.2	The Naval Aircraft Maintenance Program

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

2.2 Copies of documents, other than specifications and standards, required by contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer. Specifications and standards are available from the U.S. Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, Pa. 19120.

3. REQUIREMENTS

3.1 Conflict Between Specifications. Where the requirements of other specifications conflict with the general style and format or technical content requirements specified herein, the requirements of this specification shall apply.

3.2 Copyrights and Advertising. Copyrighted material shall not be incorporated into any publication without the written permission of the copyright owner, unless authorized by the contract under which the publication is prepared. Publication material prepared in accordance with this specification shall contain no advertising matter.

3.3 General Format.

3.3.1 Material for Flight Crew Checklists shall be furnished in the form specified in the contract. All material, including reproducible (camera) copy, board art, and negatives, prepared in accordance with this specification shall be Government property.

3.3.2 Source of Data. The information contained in the flight crew checklists shall be drawn directly from the applicable NATOPS Flight Manual. Information included in the checklist that is not included in the NATOPS Flight Manuals shall first be approved by NTDA (see para 3.3.4). Information shall be as brief as possible consistent with comprehension by the user.

3.3.3 Conformance with Parent Publication. All numbered steps and/or substeps listed in the flight crew checklist procedures shall have the same number and be in the same sequence as those listed in the applicable NATOPS Flight Manual. For example, a 20 step procedure in the NFM shall have 20 steps (written in an abbreviated form) in the flight crew checklist.

3.3.4 Deviations. Authority to vary from certain provisions of this specification is granted to the U.S. Navy Tactical Doctrine Activity (NTDA). These variations may be authorized by the NTDA representative at the NATOPS Flight Manual review conference. This prerogative may be exercised only for those provisions of this specification wherein specific authority to do so is granted.

3.3.5 Abbreviations. Abbreviations may be used to conserve space; however, their use shall be held to a minimum and shall be in consonance with applicable source data or existing weapons system technical manuals. Where abbreviations must be used, they shall be in common usage in the aircraft community or otherwise readily understandable by the expected user of the checklists.

3.4 Printing. The printing quality of material procured shall be that of the best commercial work and in accordance with MIL-P-38790. The photo-offset printing process using black ink shall be employed on all Type I, II, and IV checklists. See paragraph 3.10.4 for Type III checklists.

3.5 Security Classification. The requirements established by DOD 5220.22-M shall govern the marking and handling of classified material. When classified material is included, the checklist shall bear a classification equivalent to the highest classification of information contained therein.

3.6 Security During Production. The contractor must have an appropriate Department of Defense facility security clearance. Production and furnishing of classified material called for by this specification shall be in accordance with DOD 5220.22-M, the provisions of which are hereby incorporated in this specific action by reference.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

3.6.1 The contractor shall include a provision, identical in essence to paragraph 3.6. in his subcontracts which call for the furnishing of classified material under this specification.

3.7 Approval of Documentation Changes. Changes to existing documentation or addition of new data shall be approved, prior to incorporation in Flight Crew Checklists, by the Chief of Naval Operations NATOPS Coordinator assigned to the Navy Tactical Doctrine Activity (NTDA).

3.8 TYPE I - Pocket Checklist.

3.8.1. Description. The Pocket Checklist shall consist of, and be arranged as follows:

Combined Front Cover and Index

Title Page

List of Effective Pages ("A" page)

Interim Change Summary ("B" page)

Section I Emergency Procedures and Performance Data

Section II Normal Procedures

Section III Special Procedures

Section IV Reference Data

Back Cover

3.8.1.1 Trim Size. Trim sizes are as follows:

Front cover and front matter pages – 5-1/8 by 8-1/4 inches

Section I Emergency Procedures and Performance Data pages – 5-1/8 by 8-1/4 inches before tab cuts are made

Section II, III, and IV pages – 4-5/8 by 7-7/8 inches

Divider Pages – 4-5/8 by 8-1/4 inches before tab cuts are made

Back Cover – 4-5/8 by 9 inches

3.8.1.2. Combined Front Cover and Index. (See figure 1). The front cover shall contain an index to the checklist contents with emphasis on emergency procedures. Locator bars, bearing the appropriate identification, shall form a visual index to Section I. Locator bars at the top edge of the cover in conjunction with tabs at the top of the section divider page for each section shall locate the Normal Procedures, Special Procedures, and Reference Data sections. The tab location of specific performance data shall also be given under a heading entitled "PERFORMANCE DATA INDEX". The cover shall be arranged as depicted in figure 1. The number of tabs and the emergency procedures and performance data titles will vary with aircraft models and crew positions but shall never exceed a total of 11 tabs. The basic or revision date shall be shown at the lower left corner of the cover. Change dates shall not be shown. The inside front cover shall be blank.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

3.8.1.3 Title Page. The title page shall be arranged as shown in figure 2. It shall be the same size as the cover and contain the NAVAIR publication number, title, aircraft model, supersedure notice, authorization notice, basic or revision date, and change strip and change date if required.

3.8.1.4 List of Effective Pages ("A" page). The "A" page shall back up the title page and be arranged as shown in figure 3. It shall incorporate standard "A" page information and shall be the same size as the front cover.

3.8.1.5 Interim Change Summary ("B" page). The "B" page shall be arranged as shown in figure 4. It shall be the same size as the cover and "A" page and will form the tab for the first emergency procedure locator bar. The backup page for the "B" page will be paginated "C" and will normally be the first page of performance data.

3.8.1.6 Section I - Emergency Procedures and Performance Data. Emergency procedures shall be tabbed to match the locator bars on the front cover. These tabs shall be formed by making cuts of 1/2-inch depth and 10-degree slope in the right hand edge of the page. The tabs shall be cut so that the user can select a specific procedure placing a finger tip under the desired locator bar on the front cover thereby engaging the proper tab to expose the desired procedure when the pages are flipped open. Figure 5 shows the relationship of the emergency procedure locator bars to the page tabs. The first tab cut shall be approximately 1 inch from the top of the page with the balance of the tabs divided into 10 equal spaces so that the maximum number of tabs used will not exceed eleven. A pocket checklist requiring less than eleven tabs shall use the same tab cuts. For example, a checklist requiring only four tabs could use the 1st, 4th, 7th, and 10th tabs. Standardization of tabs will enable the printer to use one set of cutting dies for all pocket checklists. All emergency procedure pages shall contain the publication number and diagonal stripes at the top as shown in figure 6. Procedures in a tabbed emergency section shall commence at the top of the first right hand page in that section. When a section must be continued beyond the first page, the procedures shall be continued only on right hand pages unless permission is granted by NTDA to use right and left hand pages for emergency procedures. When more than one page is used in a tabbed section, the page in that section shall be die cut generally as depicted in figure 8 with the first page in the section having the shortest tab and the last page forming the lift-tab for the next tabbed section. These tabs within a section shall have either a 1/8" diameter dot or an emergency procedure title (as it appears on the cover) as shown in figure 8. The only time an emergency procedure title shall appear on a tab will be when those procedures do not begin on the first page of the tabbed section.

3.8.1.7. Section I - Performance Data. Performance data (figure 7) shall be placed on the left hand pages facing the first page of the emergency procedure sections beginning with the "C" page (reverse of the "B" page). If more performance data is desired than can be presented on the left hand pages of the emergency procedures section, it may be included in Section IV, Reference Data. In this situation, emergency performance data or other desired emergency information such as emergency landing pattern should be presented on the performance data pages, and the less critical data included in Section IV.

3.8.1.8. Other Sections. The Normal Procedures, Special Procedures, and Reference Data sections shall be separated from each other and from Section I with section divider pages as shown in figures 9 through 12. The last page of the Emergency Procedures section shall serve as the locator for Normal Procedures, the last page of the Normal Procedures section shall serve as the locator for Special Procedures, and the last page of the Special procedures section shall serve as the locator for Reference Data.

3.8.1.9. Tables of Contents. A separate table of contents shall be provided for Sections II, III, and IV, and shall be located on the right hand page immediately following the tabbed section divider pages. These tables of contents shall contain a complete outline of the information presented in that section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.8.1.10 Back Cover. The back cover shall be 4-5/8 by 9 inches. The additional height of the cover extends beyond the top of the checklist to provide a gripping surface for the pilot kneeboard type spring clip holders. The back cover shall be notched as shown in figure 14 to assist the user in opening the checklist.

3.8.2 Content. Information contained in the Pocket Checklist shall be drawn from the NATOPS Flight Manual and presented in condensed form.

3.8.2.1 Section I - Emergency Procedures. This section shall contain the procedures for all emergencies likely to be encountered which are discussed in the NATOPS Flight Manual. These procedures shall be in complete conformance with the procedures in the parent publication as discussed in paragraph 3.3.3. The emergency procedures shall be presented in checklist form, abbreviated from the amplified checklist or procedures in the NATOPS Flight Manual. This abbreviation is to be accomplished by omitting explanatory material and reducing the check item to the minimum necessary to describe the required action. For example, the step "Reduce airspeed to 130 knots IAS for best glide" can be abbreviated "Airspeed - 130 KIAS Glide". In rare cases but only with the approval of NTDA, explanatory information such as cautions or warnings may be included in this section. See figure 6 for typical checklist subject matter presentation.

3.8.2.2 Section I - Performance Data. The material covered may include but is not limited to aircraft performance data, operating limitations, equipment trouble shooting procedures, inflight maintenance procedures, or other information appropriate to the crew position(s) for which the checklist is being designed. When performance data are presented, tabular depiction similar to that in figure 7 shall be used unless specified otherwise by NTDA.

3.8.2.3 Section II - Normal Procedures. This section (see figures 10 and 13) may include, but is not limited to, information on the following:

a. Preflight inspections

b. Prestart checklist

c. Engine starting procedures

d. Aircraft ground operation

e. Ground test procedures

f. Auxiliary equipment preflight check

g. Pretakeoff checklist

h. Post takeoff checklist

i. Descent procedures

j. Approach procedures

k. Landing checklist

l. Waveoff procedures

m. Postflight procedures

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.8.2.3.1. Further information for crewmen may include equipment turn on/off procedures, equipment alignment information, mission procedures, and other procedures appropriate to the crew position(s) for which the checklist is designed. When information for more than one crewmember is included, a 4-5/8 by 7-7/8 inch pressboard (same stock as covers) divider page shall be provided to separate each crewman's procedures from the pilot's procedures. The title of the crewmember and a table of contents shall be printed on the front of each divider. When this type of information becomes too voluminous to be contained in one pocket checklist, it may be contained in a separate Operator's or Crewman's Pocket Checklist. This decision shall be made by the procuring activity.

3.8.2.4 Section III - Special Procedures. This section (see figures 11 and 13) shall include information on special procedures as applicable to the subject aircraft. Information may include but is not limited to:

a. Air refueling operation

b. Equipment preflight alignment

c. Practice weapons delivery patterns

d. Practice instrument patterns

e. Operating procedures for special equipment such as computers, etc.

A section title other than "SPECIAL PROCEDURES" may be used when the substituted title will more accurately describe the content of Section III, providing such substitution in first approved by the NTDA representative in accordance with paragraph 3.3.4.

3.8.2.5. Section IV - Reference Data. This section (see figures 12 and 13) may include but is not limited to:

a. General information on aircraft, engine, gross weight, maneuvering, and equipment limitations

b. Weight factors including stores

c. Servicing information such as:

Fuels

Hydraulic fluid

Engine oils

Constant speed drive lubricants

Ground power units (including connecting procedures, if complex)

Tire pressure

Oxygen servicing

Pneumatic servicing

Tie-down points

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

Towing points

Jacking points

A section title other than "REFERENCE DATA" may be used when the substituted title will more accurately describe the content of Section IV, providing such substitution is first approved by the NTDA representative in accordance with paragraph 3.3.4.

3.8.3 Binding.

3.8.3.1 Basic and Revised Checklists. These checklists shall be prepared for left hand binding in accordance with figure 1. After the checklist has been collated, it shall be inserted into the packaging envelope (paragraph 3.8.8) along with four individual metal binder rings. The ring diameter shall be determined by the number of leaves making up the checklist in accordance with the table below.

NUMBER OF LEAVES (INCLUDING COVERS)	RING INSIDE DIAMETER (INCHES)
30 or less	1/2
30 to 60	3/4
60 to 90	1
90 to 120	1-1/4

These rings shall provide a positive closure and open readily for inserting additional pages.

3.8.3.2 Changes. Changed pages shall be prepared for left hand binding in accordance with figure 1, insuring that hole layout matches the basic checklist pages. Collate the pages with the title page as the first page so that the change notice at the top of the page is visible. Small changes shall be stitched with one wire staple at the left binding edge. Large changes shall be bound with a 3-inch (approximately) Kraft (or equivalent) paper band in lieu of stapling. Packaging envelopes and rings are not required for changes.

3.8.4. Illustrations. The preparation and assembly of illustrations shall be in accordance with specification MIL-M-38784. Illustrations shall normally be of the line type. Cartoons and use of color is not permitted. The subjects of illustrations shall be approved by NTDA prior to production.

3.8.5. Type Sizes and Faces. The type sizes and faces described below may be varied when improved definition of information can be obtained by use of alternates. Such variations must have the prior approval of NTDA.

3.8.5.1. Emergency Procedures. See figure 6 for typical emergency procedure page presentation. The type sizes and faces for presentation of emergency procedures shall be as follows:

a. Primary heading (all caps) - 14 pt. Futura Bold, Varityper Headliner V1454, or equivalent.

b. Secondary heading (all caps) - 14 pt. Futura Demi-Bold, Varityper Headliner V1454, or equivalent reversed (white lettering on black background).

c. Tertiary heading (all caps) - 14 pt. Futura Demi-Bold, Varityper Headliner V1454, or equivalent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

d. Procedural sub-headings - 12 pt. Futura Demi-Bold Italic, IBM Composer Univers 11 pt. Medium Italic, or equivalent.

e. Text - 12 pt. Futura Demi-Bold, IBM Composer Univers 11 pt. Bold, or equivalent.

f. Procedural steps - 12 pt. Futura Demi-Bold, IBM Composer Univers 11 pt. Bold, or equivalent.

g. Procedural responses and/or actions - 12 pt. Futura Demi-Bold, IBM Composer Univers 11 pt. Bold, or equivalent.

3.8.5.2. Performance Data. Type used in charts, notes, etc., shall be of sufficient size and boldness to achieve desired definition. See figure 7 for typical performance data presentation.

3.8.5.3. Other Sections. Type for normal and special procedures and reference data shall be 10 point Garamond Bold, IBM Composer Century 10 pt. Medium, or equivalent.

3.8.6. Material. The paper described below shall be used as indicated. In all cases, the same kind of paper shall be used for all text pages in the checklist.

3.8.6.1. The front and back covers shall be gray or green press board with a weight 891 pounds per 1000 sheets (basis 22-1/2 by 28-1/2 inches) or equivalent.

3.8.6.2. All pages shall be of white index paper of a weight of 220 pounds per 1000 sheets (basis 25-1/2 by 30-1/2 inches) or equivalent.

3.8.7. Negatives. Negatives furnished in accordance with the contract shall be a minimum of 5-3/4 by 8-3/4 inches, squarely trimmed, and shall be four to five one-thousands of an inch thick (standard base film).

3.8.8. Packaging for Shipment and Stocking. Each Type I basic or revised pocket checklist shall be packed in a packaging envelope with four assembling rings. The envelope should be strong enough to allow for moderate handling during distribution and stocking and be identified in accordance with figure 15. Changes shall be prepared for shipment and stocking in accordance with paragraph 3.8.3.2.

3.9. TYPE II - Card Checklist/Emergency Data Card.

3.9.1. Description. Card Checklists are single laminated cards printed on each side with the aircraft normal operating NATOPS checklists, and in some cases, the more commonly used emergency checklists. The checklist is intended to fit on either the pilot's kneeboard or on a standard sized clipboard depending on size. Emergency Data Cards are single laminated cards printed on each side with passenger emergency data and are stored in the pocket on the backs of the passenger seats.

3.9.1.1. Size. Two sizes of card checklists and emergency data cards may be called for under this specification as follows:

Size A - 5 by 8 inches

Size B - 8 1/2 by 11 inches

These checklists will be referred to as Type IIA or Type IIB.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.9.1.2. Card Checklist Layout. The card checklist shall be arranged in a manner similar to that depicted in figure 16. The top of the card checklist shall show the publication (NAVAIR) number, followed by the aircraft designations covered, "NATOPS CHECKLIST", and supersedure notice. Separate headings shall identify "NORMAL PROCEDURES" and "EMERGENCY PROCEDURES". Size B emergency card checklists shall have black diagonal border markings bleeding off all four edges after trimming. Size A card checklists shall have all emergency procedures enclosed with heavy black lines. Individual checklists will be separated and identified by the checklist title that describes the evolution for which it is to be used (e.g., "TAKEOFF", "LANDING", etc.). Individual checklists shall not be continued from one side of the card to the other.

3.9.1.3 Emergency Data Card Layout. The emergency data card shall be arranged in a manner similar to the sample shown in figure 17. Information shall be simplified as much as possible to prevent ambiguity, so that a passenger may readily understand the information when it is quickly read under emergency conditions.

3.9.2 Content.

3.9.2.1 Card Checklist. The card checklist shall contain the normal aircraft checklists and such emergency checklists as specified by the review conference. The individual check items are derived by abbreviating the amplified checklists appearing in the NATOPS Flight Manual. This abbreviation is accomplished by omitting all explanatory material, including warnings, cautions, notes, and substeps, and retaining only the minimum Challenge-Response/Action check item. For example, "Propeller control lever – adjust to 2100 RPM" can be abbreviated "PROP – 2100 RPM". Individual checklists must contain the same number of steps and be in the same sequence as the checklists appearing in the parent NATOPS Flight Manual.

3.9.2.2 Emergency Data Card. The emergency data card shall contain passenger emergency data such as location of emergency equipment and emergency escape exits, procedures for using oxygen equipment, ditching information, and emergency escape procedures. This information can be extracted from the NATOPS Flight Manual and simplified and condensed where necessary.

3.9.3. Type Sizes and Faces. The type sizes and faces described below may be varied when improved definition or clarity can be achieved by use of alternates. Such variations must have the prior approval of NTDA.

a. Checklist title (all caps)

Size A - 16 pt Futura Demi-Bold or Varityper Headliner V1652

Size B - 24 pt Futura Demi-Bold or Varityper Headliner V2452

b. Individual checklist titles (all caps)

Size A - 10 pt Futura Demi-Bold (caps) or IBM Composer UN-11B (may be boxed for emphasis)

Size B - 12 pt Futura Demi-Bold or Varityper Headliner V1252

c. Check items (all caps)

Size A - 8 pt Futura Demi-Bold or IBM Composer UN-8B

Size B - 10 pt Futura Demi-Bold or IBM Composer UN-10B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

d. NAVAIR publication number and supersedure notice.

Size A - 8 pt Futura Demi-Bold or IBM Composer UN-8B

Size B - 10 pt Futura Demi-Bold or IBM Composer UN-10B

e. Publication date (all caps)

Size A - 12 pt Futura Demi-Bold or Varityper Headliner V1252

Size B - 12 pt Futura Demi-Bold or Varityper Headliner V1252

3.9.4. Material. The card checklists shall be printed on white index paper with a weight of 340 pounds per 1000 sheets (basis 25-1/2 by 30-1/2 inches) or equivalent.

3.9.4.1. The checklist shall be laminated on both sides with .005 acetate or a suitable equivalent.

3.9.5. Negatives. Negatives delivered for A size card checklists shall be in accordance with para. 3.8.7 of this specification. Negatives for B size checklists shall be 8-1/2 by 11 inches. Negatives for Size B emergency card checklists shall be somewhat larger to accommodate the diagonal border markings which bleed off the edge of the page after trimming.

3.9.6. Miscellaneous Provisions. Since the checklist is a single page, no binding is required. Card Checklists shall not contain illustrations or classified information.

3.10. Type III - Scroll Checklist.

3.10.1. Description. The Scroll Checklist is a film strip designed for use in the cockpit of an aircraft. The checklist shall duplicate only the normal or emergency cockpit checklists in abbreviated form that are contained in applicable NATOPS Flight Manual. The normal cockpit checklists shall contain only the procedures from "PRESTART" through "SECURING THE AIRCRAFT."

3.10.1.1. Size. The Scroll Checklist shall be 2-13/16 inches wide. This dimension shall be closely controlled so that the scroll will fit the Cockpit Coordinator. Scroll length will vary with the content of the checklist and should not exceed 96 inches which is the maximum capacity of the coordinator spools. An extension of 2-1/2 inches shall be allowed at each end of the checklist for attachment to the spools.

3.10.1.2. Layout. The scroll shall be arranged in a manner similar to that depicted in figure 18. The title of the scroll shall begin with the publication NAVAIR number, followed by the checklist revision date and the aircraft designation covered, e.g., "C-131F NATOPS NORMAL/EMERGENCY CHECKLIST". Preceding the NAVAIR number shall be printed "STOP TURNING" and following the last item on the scroll shall be printed "END OF CHECKLIST - STOP TURNING" to prevent the checklist from being wound off the spools.

3.10.2. Content. The Scroll Checklist shall contain only the normal or emergency checklists specified and approved by the NATOPS review conference. The individual check items are derived by abbreviating the amplified checklists appearing in the NATOPS Flight Manual. This abbreviation is accomplished by omitting all explanatory material, including warnings, cautions, notes, and substeps, and retaining only the minimum Challenge-Response/Action check item. For example, "Propeller control lever-adjust to 2100 RPM" can be abbreviated "PROP - 2100 RPM". Individual checklists must contain the same number of steps and be in the same sequence as the checklists appearing in the parent NATOPS Flight Manual.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.10.3. Type Sizes and Faces. The type sizes and faces specified below may be varied when improved definition or clarity can be achieved by use of alternates. These variations are subject to the approval of NTDA.

a. Titles and primary side heads (all caps) - 12 pt Futura Demi-Bold or IBM Composer UN-11B

b. Subordinate side heads (all caps) - 10 pt Futura Demi-Bold or IBM Composer UN-10B

c. All line items (upper and lower case) - 10 pt Futura Demi-Bold or IBM Composer UN-10B

3.10.4 Material. The Scroll Checklist shall be reproduced on 70mm .004 diazo film.

3.10.5. Preparation for Packaging. The Scroll Checklist shall be rolled for packaging. At no times should the scroll be folded.

3.11 Type IV - Functional Checkflight Checklist (FCFC).

3.11.1 Manner of Preparation.

3.11.1.1 Printing and Binding. Printing shall be in accordance with MIL-P-38790. Except for front matter, the FCFC shall be printed on one side only on 64 pound white ledger paper (JCP J10) or equivalent. The FCFC shall be stitched with one staple at the upper left corner parallel to the top edge as shown in figure 19.

3.11.1.2 Trim Size. Trim size shall be 5 by 8 inches.

3.11.1.3 Image Area. The image area (figure 19) of an FCFC page shall be 4-1/2 by 7 inches, excluding marginal copy. The image area shall be positioned on the trimmed page as follows: approximately 3/8 inch from the left border, 1/8 inch from the right border, 3/8 inch from the bottom edge, and 5/8 inch from the top edge.

3.11.1.4 Marginal Copy. The marginal copy (figure 19) shall consist of the publication number, page number, and when applicable, the security classification. The publication number shall be centered approximately 1/4 inch above the image area. The page number shall be centered approximately 1/4 inch below the image area. When required, the security classification shall be centered above the publication number and the page number.

3.11.1.5 Type Size. FCFC title page type size shall be in accordance with figure 20. All other text and marginal copy shall be ten to eleven points type size as shown in figures 21 through 25. A sans serif, bold face type shall be used in the preparation of checklist pages as shown in figure 23.

3.11.1.6 Page Layout. To facilitate recording detailed comments during the checkflight, a minimum of 1/2 inch (3 picas) spacing between numbered steps shall be allowed. In addition, page composition should avoid crowding of a page and the separation of related substeps under a numbered step from one page to another. When unrelated substeps under a numbered step are continued on a subsequent page, the step title shall be repeated followed by "(CONT)". Where the foregoing limits on page composition result in less material than that required to fill the image area, the space between numbered steps shall be equally divided with at least 1/2 inch space following the last line of a step.

3.11.1.6.1 Indentation and Spacing of Checkflight Items. The first line of each check shall be indented 1/2 pica for single digit numbered checks and flush for double digit numbered checks. The first line of each subordinate check shall be indented 2 picas. The first line of each sub-subordinate check shall be indented 3-1/2 picas. The second and subsequent lines of main, subordinate, and sub-subordinate checks shall be aligned with the first word or number of text shown in the line above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.11.1.7 Numbering.

3.11.1.7.1 Front Matter. (Figures 20 and 21.) The front cover/title page shall be unumbered. The publication number shall be assigned by the procuring agency. The List of Effective Pages and the Interim Change Summary shall be identified with the letter "A". The page identification shall be centered at the bottom of the page. Pages shall be added if additional space is required and shall be identified with the letters "B", "C", etc. The publication date (basic issue of the checklist) shall be placed in the lower right corner of the title page. The change number and date shall be placed below the publication date, when applicable. The revision date shall be placed in the lower right corner of the page, in lieu of the basic issue date, when applicable. The security classification shall be centered on the top and bottom of the title and "A" page.

3.11.1.7.2. Technical Content. The pages of the FCFC shall be numbered in Arabic numerals, beginning with the number "1". If the FCFC is sectionalized, the page number shall be preceded by the section number; for example, "1-1", "2-1", "3-1".

3.11.1.7.3 Illustrations. Illustrations shall be numbered consecutively in Arabic numerals, as required, beginning with the number "1". If the FCFC is sectionalized, these numbers shall be preceded by the section number. Illustrations collocated in a step or substep shall not be identified by figure number.

3.11.1.8 Nomenclature. Nomenclature shall be consistent with that used in the applicable NATOPS Flight Manual.

3.11.1.9 Designations. Text in FCFC's shall be limited to that pertaining to the model(s) of aircraft designated on title page. To facilitate later incorporation of additional series (type, model, BUNO effectivity), reference to type or model designation shall be held to a minimum consistent with clarity. These references shall be expressed in definite terms, such as type or model, BUNO applicability, or similar means.

3.11.1.10 Warnings, Cautions and Notes. Warnings, cautions, and notes from the parent NATOPS manual(s) shall be omitted unless their inclusion is considered essential and is specifically authorized by the CNO NATOPS Coordinator (NTDA) in accordance with paragraph 3.3.4.

3.11.1.11 Illustrations. Use of illustrations shall be held to a minimum. Where illustrations are required, they shall be extracted and reduced from the parent NATOPS manual(s), if feasible, and located on the same page as the part of the step (or sub-step) which requires its use. Where collocating step and illustration on the same page is not possible, the illustration shall be on the following page and the statement "See figure___on following page" added to the step.

3.11.2 Arrangement and Content.

3.11.2.1 Arrangement. The FCFC shall be arranged as follows:

Combined Front Cover and Title Page

Combined List of Effective Pages and Interim Change Summary ("A" Page)

Technical Content

3.11.2.1.1 Combined Front Cover and Title Page. The front cover shall also be the title page and shall contain the applicable information shown in figure 20.

3.11.2.1.2 Combined List of Effective Pages and Interim Change Summary ("A" page.) The "A" page shall back up the cover/title page and shall conform to the layout shown in figure 21 and reflect current data applicable to the checklist being delivered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.11.2.2 Technical Content. The first page of the FCFC shall include the aircraft serial number, pilot's signature block, date, aircraft model, line drawing of all flight profiles, a brief description of individual flight profiles, and additional information as shown in figure 22.

3.11.2.2.1 Profile. The profile shall be a combined graphic presentation of the various flight profiles required for each condition necessitating a checkflight as required by OPNAVINST 4790.2 series. Currently, these conditions are:

a. At the completion of aircraft rework.

b. At the completion of all calendar inspections (intermediate/major for HIR system of documentation).

c. After the installation or reinstallation of an engine, a propeller governor, major fuel system components, or any components which cannot be checked in ground operation.

d. When fixed flight surfaces have been installed or reinstalled. This excludes removal and reinstallation of quick-disconnect aft sections of gas turbine engine aircraft when no work which requires a checkflight is performed on the removable section.

e. When movable flight surfaces have been installed, reinstalled, or rerigged.

f. When flight control system components have been adjusted or replaced and improper adjustment or replacement of such components could cause an unsafe operating condition.

For most aircraft, the above conditions usually can be combined in profile groups where checkflight procedures for the specified conditions are identical. Normally, this will result in three profiles:

A for conditions a,b.

B for condition c.

C for conditions d,e,f.

Additional profiles and check requirements to meet unique aircraft system requirements should be established in the NATOPS flight manual and reflected in the FCFC documentation. Individual profiles shall be designated by a capital letter. The profile specified shall provide the most efficient sequence for safely completing the requirements beginning at Pretakeoff and ending with Postlanding, and depicting the altitude at which applicable checks must be accomplished. The appropriate profile designator letter shall precede each numbered check item throughout the FCFC.

3.11.2.2.2 Checklist Organization. (Figures 23 through 25.) Second and subsequent pages shall provide pilot data, and crewmember data where required. If all involved crewmembers are located in the cockpit, a single integrated checklist shall be provided. When required, an appropriate code (e.g., FE-Flight Engineer, T-TACCO) indicating the crewmember(s) responsible for performing each check shall be used. Where crewmember(s) involved are not all located in the cockpit, either a single integrated checklist or a sectionalized checklist shall be provided dependent upon the number and location of crewmember involved and the complexity and scope of checks to be performed. In sectionalized checklists, the pilot's section shall contain the complete number-sequenced steps, and the other sections shall contain only the steps required by the applicable crewmember with enough additional information to permit intelligent integration into the check sequence. (See figure 24).

3.11.2.2.3 Profile Column. All typical pages shall contain a profile column on the left image area with the profile designator letter(s) preceding all applicable numbered checks.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

3.11.2.2.4 Numbered Checks. The numbered checks shall be organized sequentially as performed commencing with Pretakeoff checks and ending with Postlanding checks. In sectionalized checklists, numbered checks shall be numbered identically to the master list in the pilot's section.

3.11.2.2.5 Recording Performance. A square or line following each check item shall be provided for pilot notations. A 5/32-inch square is provided where a simple notation of satisfactory (✓) or unsatisfactory (X) performance is all that is required. Where a specific value or pressure is to be recorded, a line at least 5/8 inch long shall be provided for each data element to be recorded. In instances where multiple parameters are to be recorded, the use of a chart to organize the data required, similar to figure 25, is recommended.

3.11.2.2.6 Profile Segments. The numbered checks shall normally be grouped under the following headings:

PRETAKEOFF
TAKEOFF
CLIMB
LEVEL
DESCENT
LANDING
POSTLANDING

Segments not applicable may be omitted. Additional segments may be added where required.

3.11.2.2.7 Conformance with Parent Publication. Each numbered step and/or substep listed in the FCFC shall have the identical number as that listed in the Functional Checkflight Procedures in the applicable NATOPS Flight Manual(s). The individual check items are derived by abbreviating the amplified functional checkflight procedures appearing in the NFM. This abbreviation is normally accomplished by omitting all explanatory material, including warnings, cautions, notes, and substeps, and retaining only the basic check item. For example, a 50-step procedure in the NFM shall have 50 identically numbered abbreviated steps in the FCFC.

3.11.2.2.8 Back Cover. No special back cover will be provided. The last page shall be used as the back cover.

4. QUALITY ASSURANCE PROVISIONS

4.1 Quality assurance provisions shall be in accordance with MIL-M-38784 and MIL-P-38790 except as specified herein.

4.2 Review and Verification. The final reproducible copy for the checklists shall be reviewed for completeness, accuracy, and agreement with the checklists items contained in the parent NATOPS Flight Manual(s) prior to delivery for printing. The review shall be arranged by notifying NTDA, not less than 5 working days prior to reproducible copy availability, of the desired time and place of inspection and point of contact.

4.2.1 Reviewing Activity. The reviewing activity for the government shall be the applicable NATOPS model manager representative(s) or other activity as designated by the CNO NATOPS Coordinator (Navy Tactical Doctrine Activity).

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with MIL-M-38784 and MIL-P-38790.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended Use.

6.1.1 Type I, II, and III checklists covered by this specification are intended for use by pilots, navigators, flight engineers, or other crew positions for single or multiple positions, as specified by the procuring activity. These checklists shall provide aircraft operational information in pocket, card or scroll checklist form consistent with the requirements of the flight crew position(s).

6.1.2 Type IV checklists covered by this specification are intended for use by checkflight crewmembers in assuring the operational readiness of an aircraft and its components and as a record of completion of Functional Checkflights required by OPNAVINST 4790.2.

6.2 Update of Data.

6.2.1 Changes. A change is any alteration of a checklist already in existence, accomplished by replacement, addition, or deletion of pages, but not in sufficient number to require a complete revision of the checklist. A Change shall be prepared when one or more of the pages of the checklist has been affected by approved documentation changes for reasons of safety of flight, production service changes, new flight techniques or requirements, or to correct significant errors. The requirements for preparation of a Change shall be determined by the procuring agency. Normally, changes to Type IV (FCFC) Checklists will not be approved by the procuring agency because of their limited page count; however, this option is allowed to cover such contingencies as addition of a minor amount of new pages covering a new flight profile and the associated check requirements to meet unique aircraft weapon systems requirements.

6.2.2 Revisions. A revision shall be prepared when a sufficient amount of the pages of the checklist have been affected by approved documentation changes. The requirement for preparation of a Revision shall be determined by the procuring agency. Normally a revision shall be prepared when 60 percent of the checklist requires reprinting.

6.3 Ordering Data.

6.3.1 Procurement documents should specify:

a. Title, number, and date of this specification.

b. Whether a manuscript copy only, manuscript copy (or draft) for review, reproducible copy, or negatives are to be furnished.

c. Whether approved checklist will be used as preliminary issue.

d. Aircraft model(s) for which checklist is required.

e. Requirement for a copyright release (paragraph 3.2).

f. The publication NAVAIR number.

6.4 Definitions.

6.4.1 Profile. A profile is an outline of a specific flight which provides the most efficient sequence for safely completing the required functional checks resulting from preventive or corrective maintenance performed on the aircraft.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

6.4.2 Functional Check Item. Functional check items are aircraft components or equipment which require an airborne operational check or evaluation by a pilot or crewman to determine its operational status.

6.4.3 Preliminary Checklist. Preliminary checklists are checklists of relaxed format or content provided with concurrent delivery of other NATOPS publications. Such checklists are prepared, as far as possible, to provide for ready conversion to formal checklists.

TMSS NO84

Custodian:
Navy. – AS
(NAVAIR - 04A4)

Preparing activity:
Navy. – AS
(NAVTACDOCACT)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

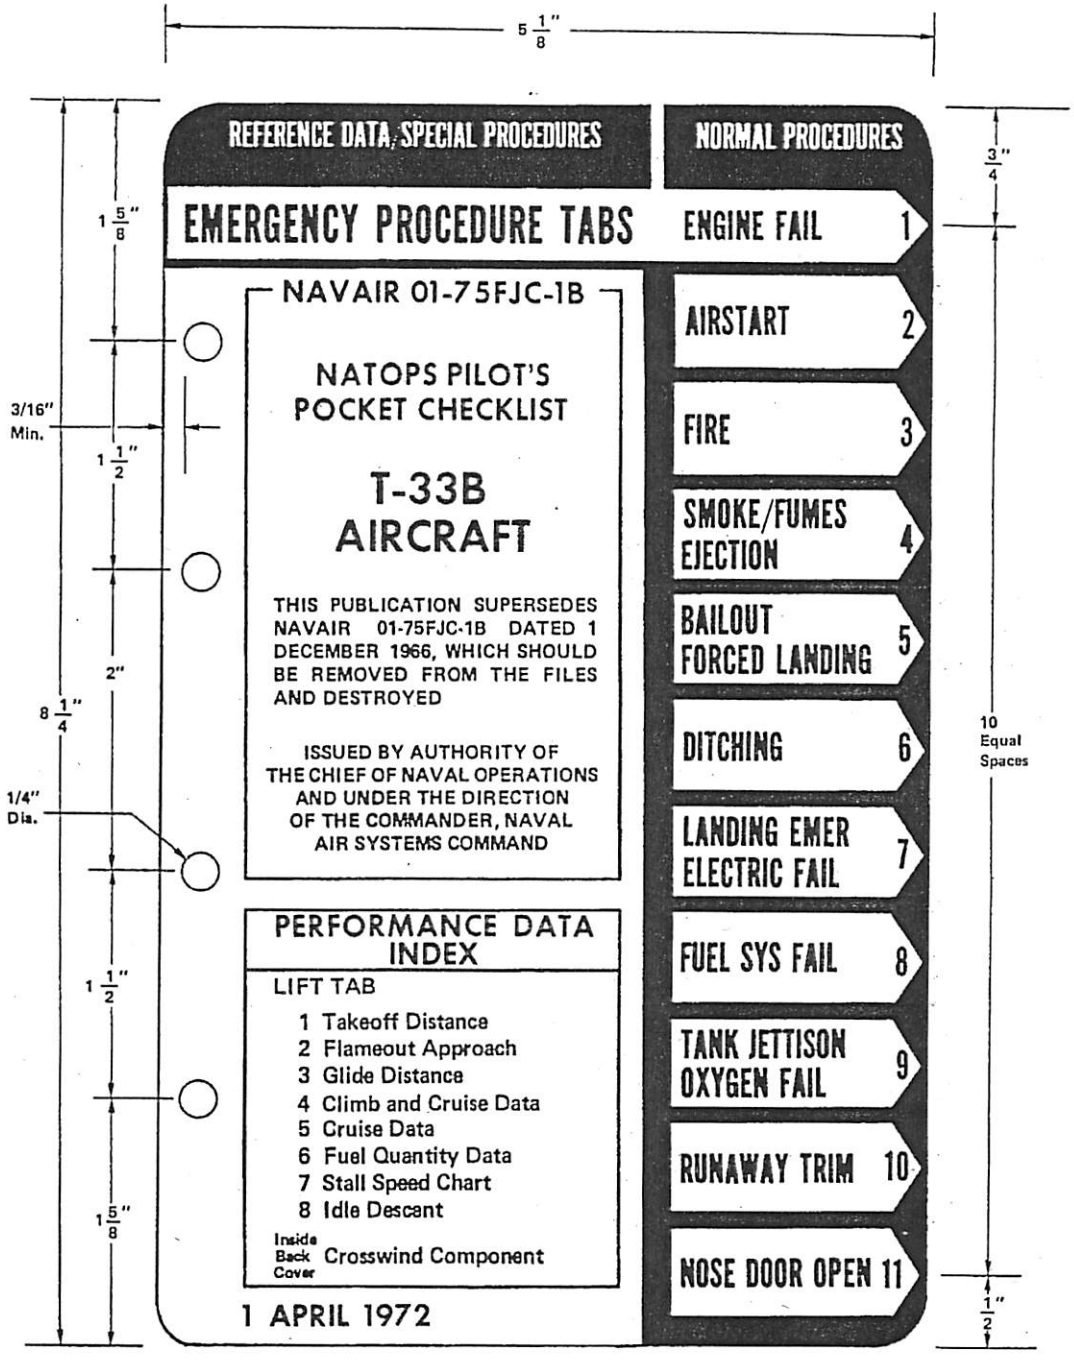


Figure 1. Pocket Checklist Front Cover and Index

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:34Z
Check the source to verify that this is the current version before use.

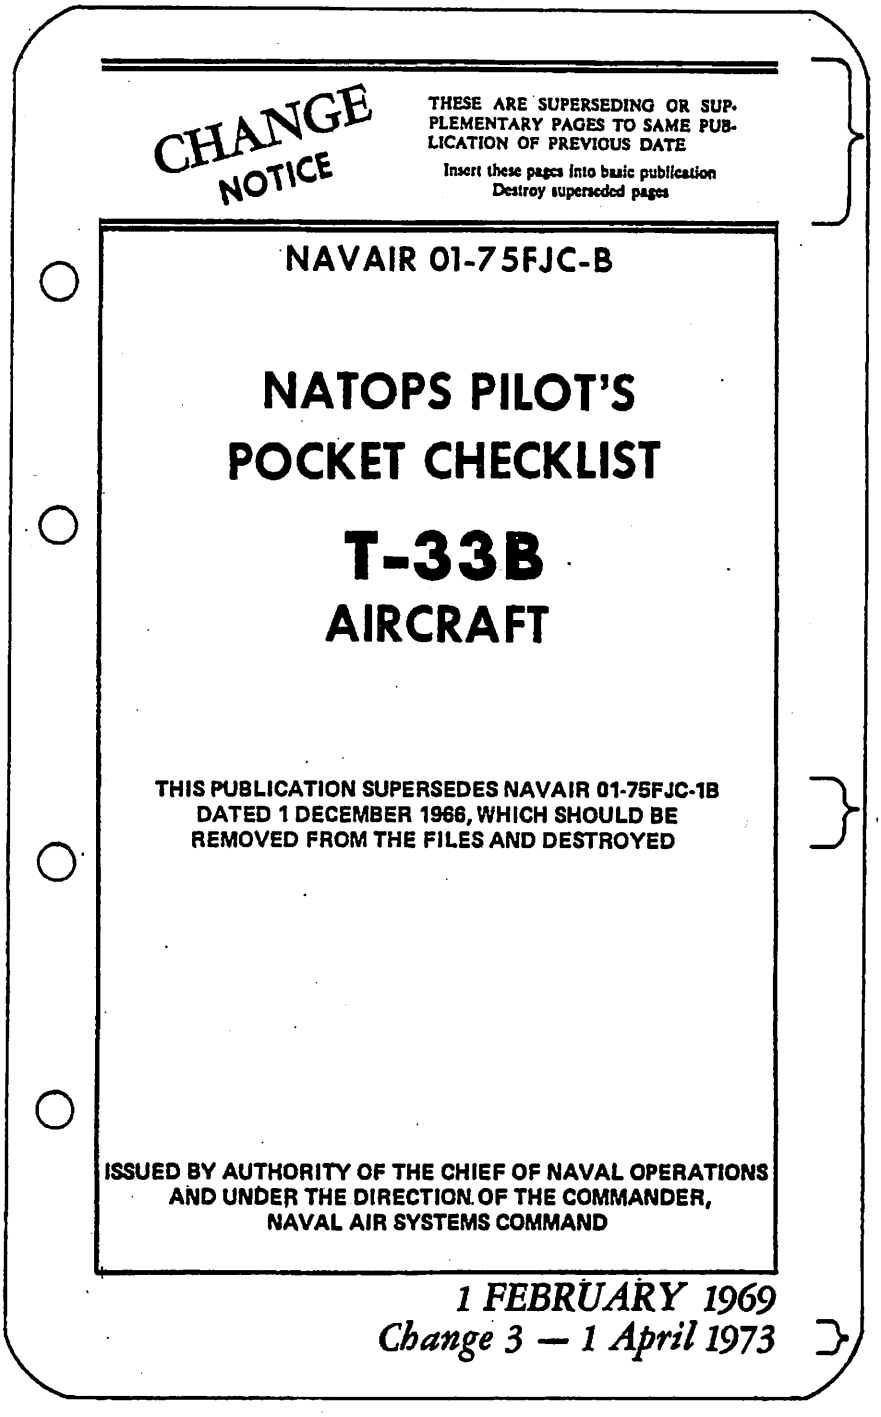


Figure 2. Pocket Checklist Title Page

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-XXXXX-1B

Reproduction for nonmilitary use of the information or illustrations contained in this publication is not permitted without specific approval of the Commander, Naval Air Systems Command. The policy for use of classified publications is established for the Navy and Marine Corps in OPNAVINST 5510.1 series.

LIST OF EFFECTIVE PAGES

Note: Text affected by current change indicated by vertical line in outer margin.

DATES OF ISSUE FOR ORIGINAL AND CHANGED PAGES ARE:

Original ..... 0 ..... 1 May 1971
Change ..... 1 ..... 15 Oct 1971
Change ..... 2 ..... 1 Feb 1972
Change ..... 3 ..... 15 Mar 1973

TOTAL NUMBER OF PAGES IN THIS PUBLICATION IS 164, CONSISTING OF THE FOLLOWING:

Page No.	*# Issue*
*Title	3
*A	3
*B	3
C	0
1/(2 blank)	0
3 – 4	2
*5/(6 blank)	3
7/(8 blank)	0
9 – 14	1
15/(16 blank)	0
17 – 26	0
26A/(26B blank)	2
*27 – 36	3
37/(38 blank)	0
*39/(40 blank) deleted	3
41 – 46	2
47 – 60	0
61 – 68	1
69 – 101	0
101 – 103	2
*104	3
105 – 125	0
126	1
*127 deleted	3
128 – 145	0
146 – 150	2
151 – 160	0

Zero in this column indicates an original page.
* Asterisk indicates pages changed, added, or deleted by the current change.

ADDITIONAL COPIES:
Additional copies of this manual and changes thereto may be procured by submitting Form DD 1348 to NPFC Philadelphia in accordance with NAVSUP Publication 2002, Section VIII, Part C.

A

Change 3 – 15 March 1973

Figure 3. Pocket Checklist List of Effective Pages ("A" Page)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-XXXXX-1B

INTERIM CHANGE SUMMARY

The following Interim Changes have been canceled or previously incorporated in this manual:

INTERIM CHANGE NUMBER(S)	REMARKS/PURPOSE
1 thru 6	Previously incorporated

The following Interim Changes have been incorporated in this Change /Revision

INTERIM CHANGE NUMBER	REMARKS/PURPOSE
7	Position error change
8	Aircraft servicing information change
9	Change in weight distribution

Interim Changes Outstanding—To be maintained by the custodian of this manual

INTERIM CHANGE NUMBER	ORIGINATOR/DATE (or DATE/TIME GROUP)	PAGES AFFECTED	REMARKS/PURPOSE

B

Figure 4. Pocket Checklist Interim Change Summary ("B" Page)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.


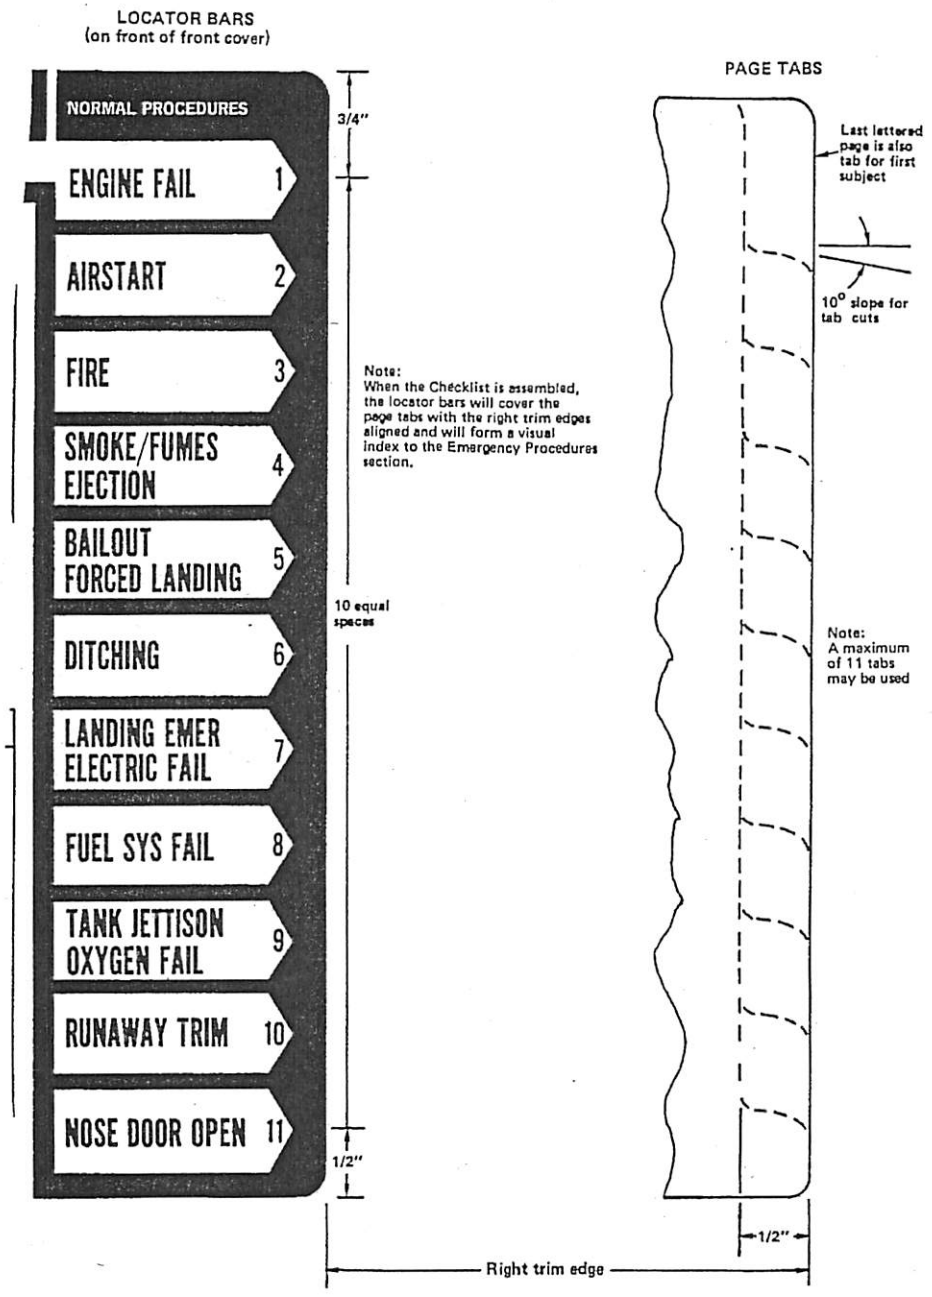


Figure 5. Pocket Checklist Tab Locator and Tab Layout

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

MIL-C-81222C(AS)

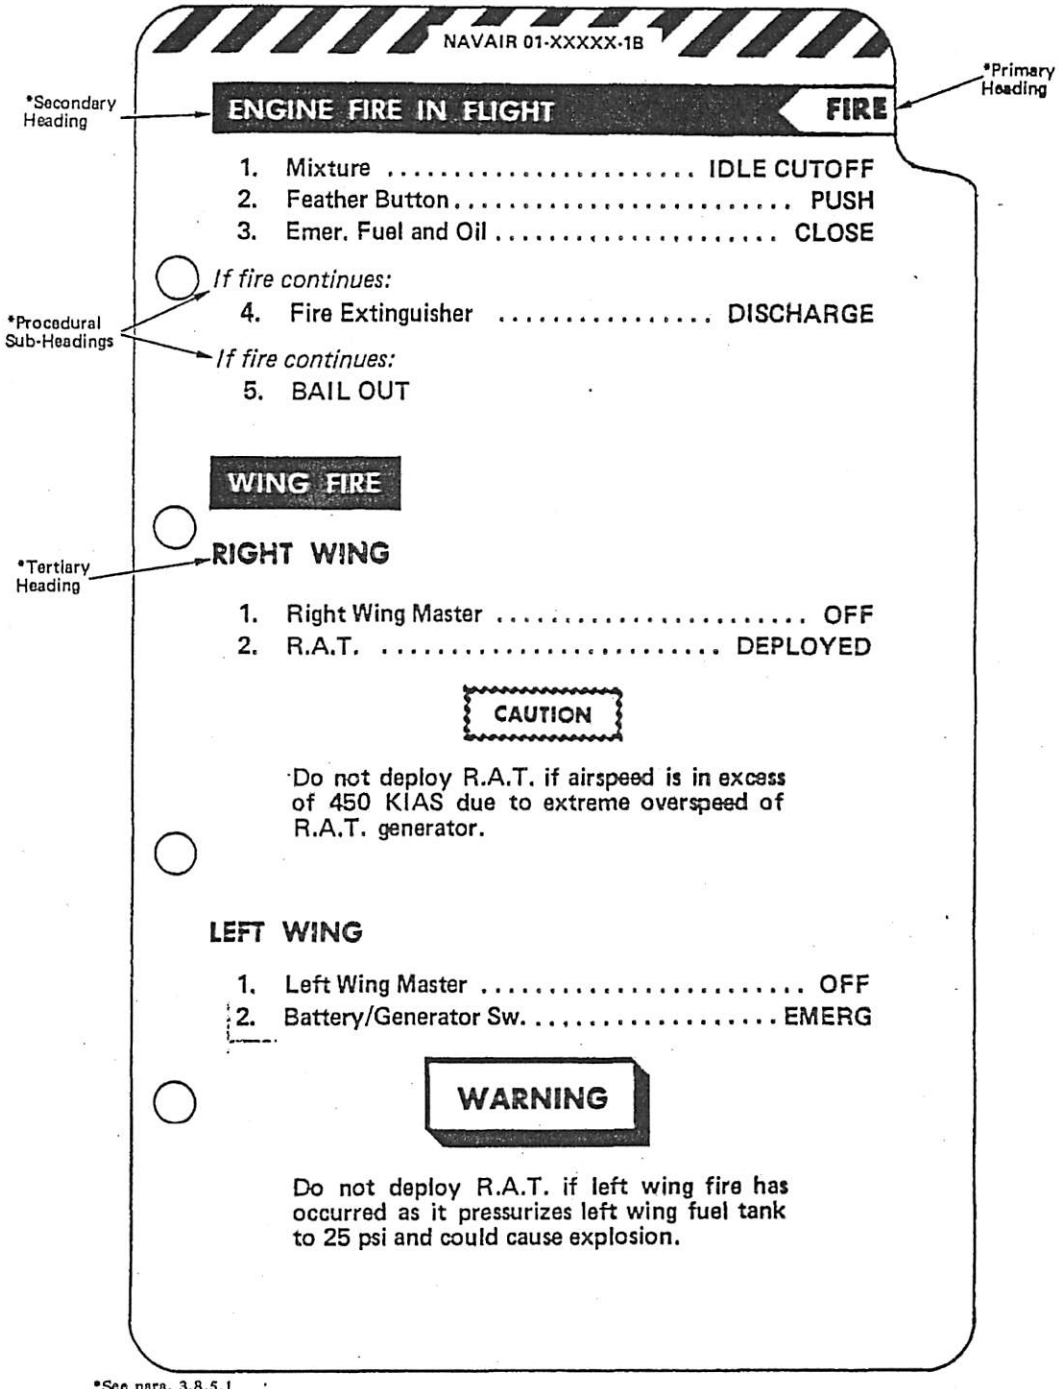

*See para. 3.8.5.1

Figure 6. Typical Pocket Checklist Emergency Procedure Page

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-XXXXX-1B

JATO TAKEOFF DISTANCE

HALF FLAPS — TWO JATO UNITS

24,000 LB • TAKEOFF NOT RECOMMENDED

TEMPERATURE—°C	SEA LEVEL	1000	2000	3000	4000	5000	ALTITUDE (FEET)
0	4900	5300	5600	6100	6800	7500	0-KNOT WIND
20	6100	6500	7500	•	•	•	
40	•	•	•	•	•	•	
0	3600	4100	4400	4800	5300	5800	20-KNOT WIND
20	4800	5100	5600	•	•	•	
40	•	•	•	•	•	•	
0	3400	3700	3900	4300	4800	5100	30-KNOT WIND
20	4100	4400	5000	•	•	•	
40	•	•	•	•	•	•	

22,000 LB

TEMPERATURE—°C	SEA LEVEL	1000	2000	3000	4000	5000	ALTITUDE (FEET)
0	3900	4300	4500	4800	5100	5600	0-KNOT WIND
20	4800	5100	5400	6100	6800	7700	
40	6100	6600	•	•	•	•	
0	3200	3400	3700	3800	3900	4300	20-KNOT WIND
20	3700	3900	4300	4800	5400	5900	
40	4800	5300	•	•	•	•	
0	2700	2900	3200	3400	3500	3800	30-KNOT WIND
20	3200	3500	3800	4100	4800	5300	
40	4100	4500	•	•	•	•	

20,000 LB

TEMPERATURE—°C	SEA LEVEL	1000	2000	3000	4000	5000	ALTITUDE (FEET)
0	3200	3400	3500	3700	3900	4300	0-KNOT WIND
20	3700	3800	4300	4500	5100	5400	
40	4800	5100	5400	•	•	•	
0	2600	2700	2900	3000	3200	3400	20-KNOT WIND
20	2900	3006	3400	3700	3900	4300	
40	3700	3900	4300	•	•	•	
0	2300	2400	2600	2700	2900	3000	30-KNOT WIND
20	2800	2700	2900	3200	3500	3600	
40	3200	3500	3600	•	•	•	

All Configurations
Total Distance to Clear 50-Foot Obstacle

14

Figure 7. Typical Pocket Checklist Performance Data Page

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

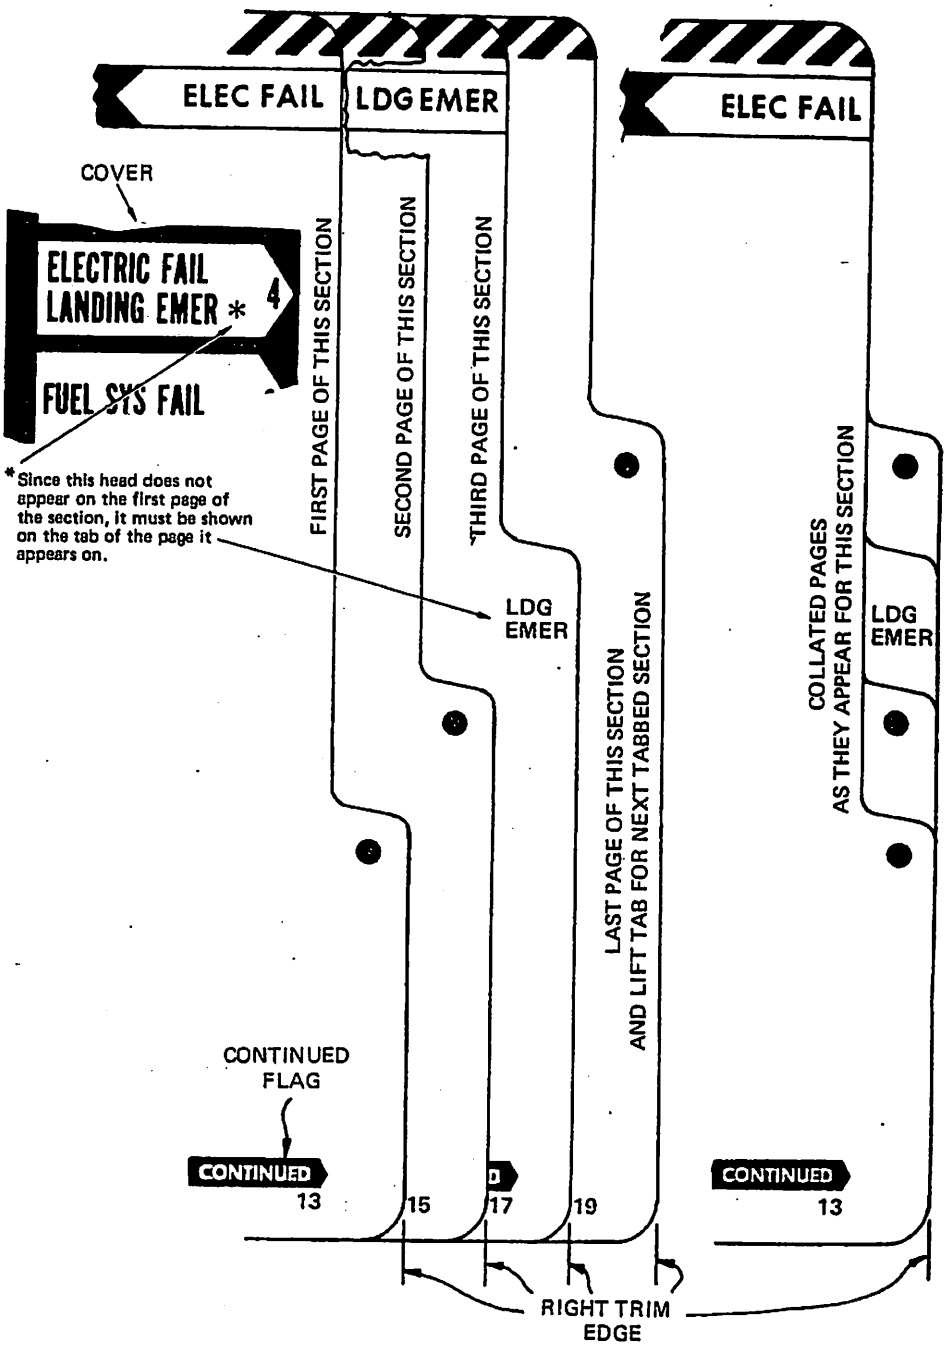


Figure 8. Pocket Checklist Tabbed Emergency Procedure Section of More Than One Page of Procedures

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

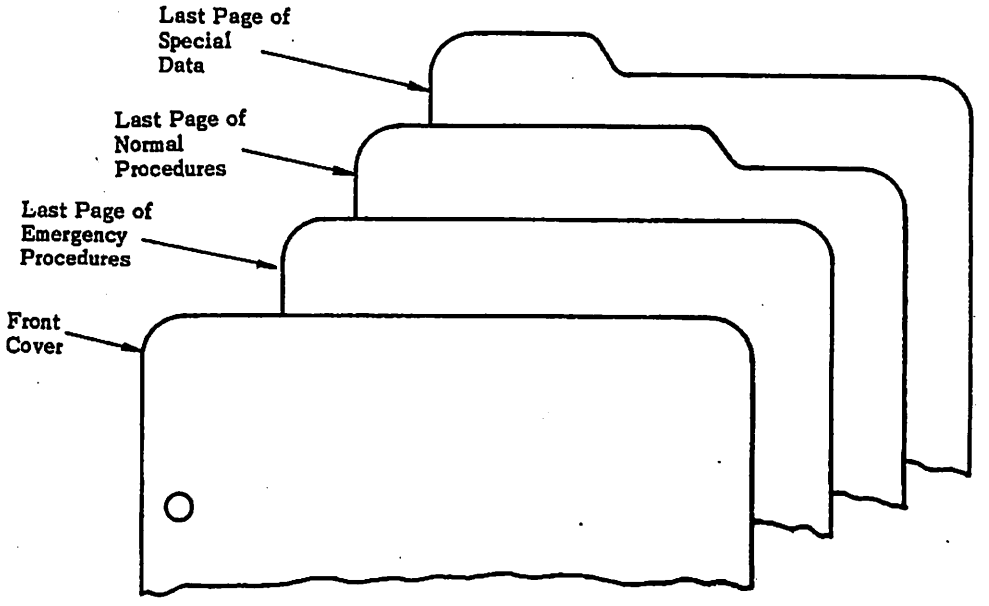


Figure 9. Pocket Checklist General Arrangement - Section Divider Pages

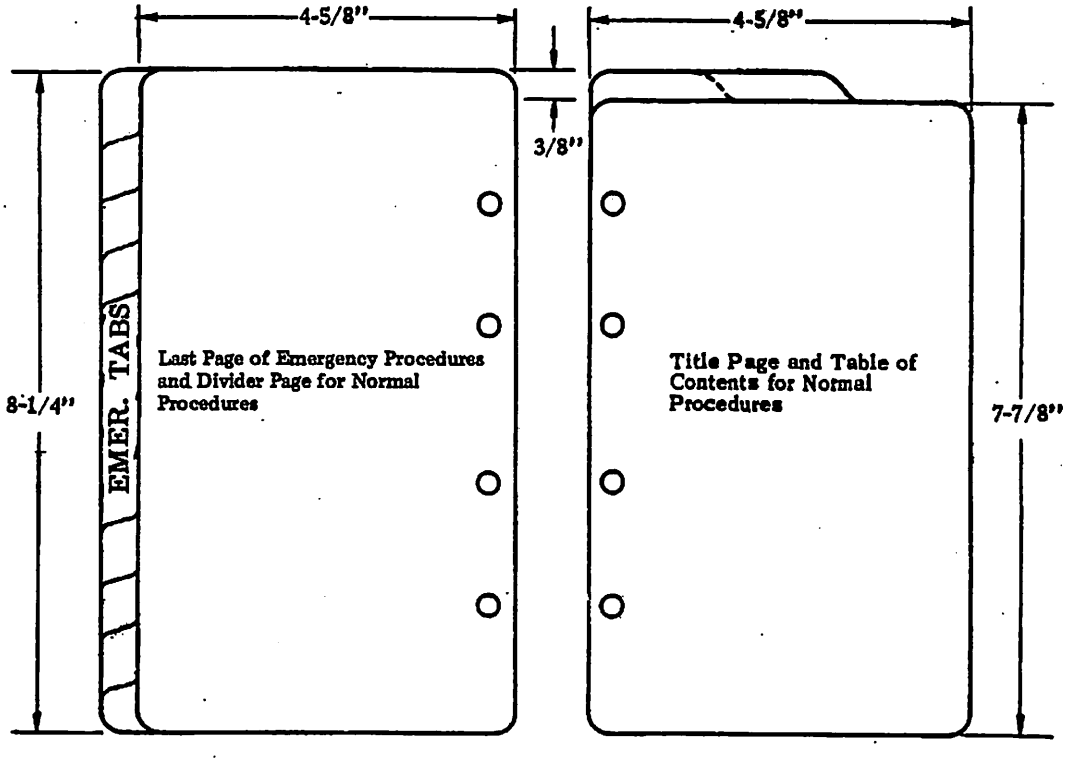


Figure 10. Pocket Checklist Divider Page and Table of Contents Page for Normal Procedures

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-26T04:34Z
Check the source to verify that this is the currentversion before use.

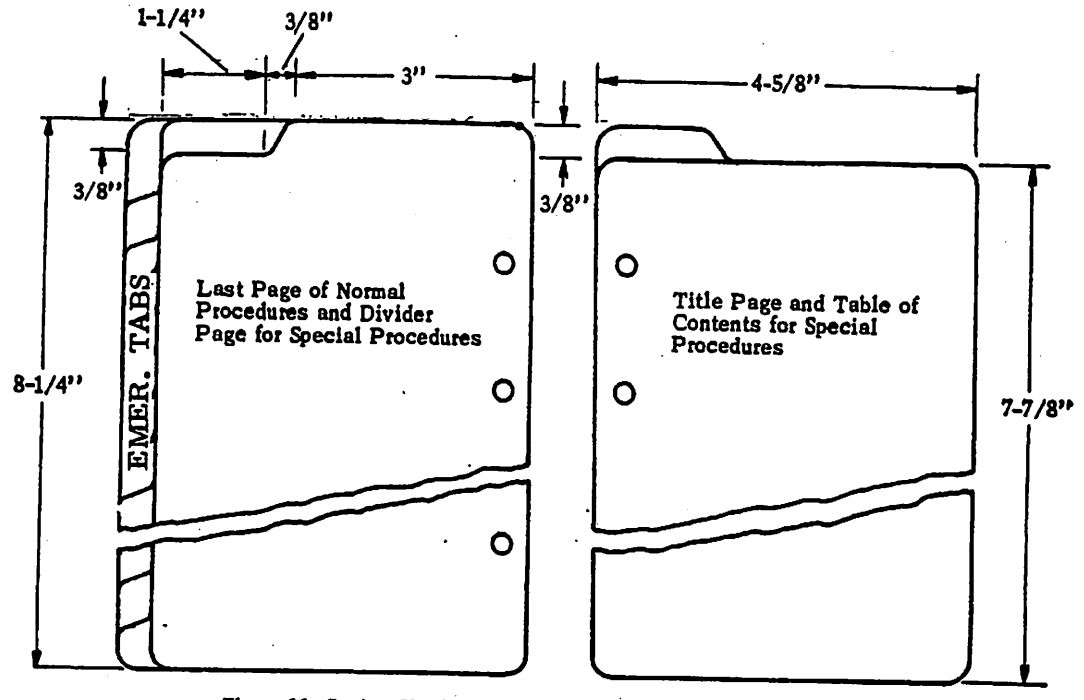


Figure 11. Pocket Checklist Divider Page and Table of Contents Page for Special Procedures

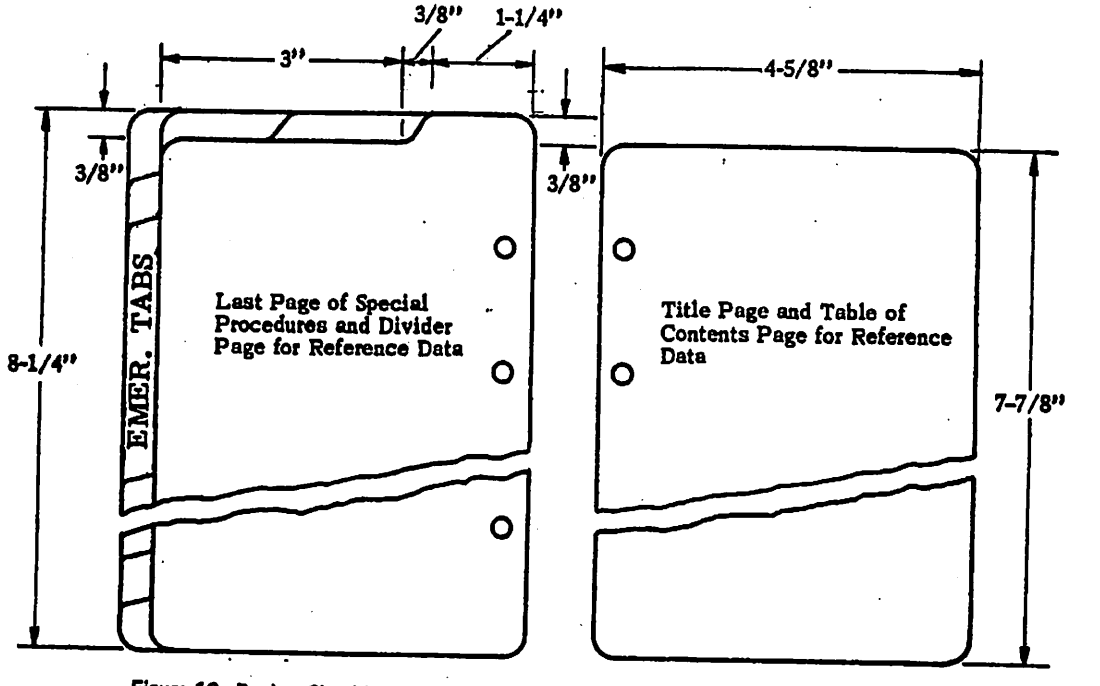


Figure 12. Pocket Checklist Divider Page and Table of Contents Page for Reference Data

NAVAIR 01-XXXXX-1B

PRESTART CHECKLIST—TYPES I AND II TANKERS

1. Preflight ..... COMPLETE
2. Escape chute circuit ..... TESTED
3. Hydraulic solenoid overrides ..... NORMAL
4. Hydraulic reservoirs ..... FULL/CLOSED
5. Companionway/cabin circuit breakers/fuses ..... CHECKED/IN
6. Dc generators ..... ON
7. ECM/checklist ..... COMPLETE
8. VGI/STBY gyro horizon/LH or RH fuel boost circuit breakers ..... OUT
9. Radar/IFF ..... OFF/SET/OFF
10. Radio master ..... ON
11. Fuel control ..... OFF
12. Reel control ..... OFF
13. Guillotine switch ..... OFF (SAFETIED)
14. Tanker light switch ..... DAY/NIGHT
15. Fuel counter ..... SET
16. Emergency fuel trans switch ..... NORMAL
17. ATM's/AFCS ..... OFF/OFF
18. Air conditioning/anti-icing/ pressurization ..... OFF/OFF/NORMAL
19. Interior lights ..... AS DESIRED
20. Compass ..... FREE/SLAVED
21. Exterior lights, anticollision ..... AS DESIRED
22. Radios/Navaids ..... OFF
23. Fuel panel:
    a. Crossfeed ..... CLOSED
    b. Air refueling switch ..... NORMAL
    c. Aux tank transfer switch ..... OFF
    d. Forward tank transfer switch ..... NORMAL
    e. Wing tanks transfer switch ..... OFF
    f. Fuel dump ..... OFF
24. Radios/ICS/antennas ..... SET
25. FWD to AUX transfer ..... OFF
26. Bleed air switches ..... ALL OPEN/ON
27. Tanker transfer switch ..... NORMAL

Figure 13. Pocket Checklist Typical Pages for Sections II, III, and IV (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

LIMITATIONS

1. Aircraft

a. Gear and flaps down ..... 225 KIAS
b. Max asymmetrical load for field landing ... 1200 lb
(See wing moment [loading] nomogram, page 26)
c. Emergency generator extension ..... 500 KIAS or 0.91
d. A/R Store ..... 500 KIAS or 0.80
Max speed for operation ..... 250 KIAS
e. 300-gal tanks ..... 500 KIAS or 0.90

2. Engine — J52

(1) Starting	455°C	———	———
(2) Acceleration	650°C	101.5%	2 min
(3) Military	610°C	101.5%	30 min
(4) Normal	590°C	———	———
(5) Idle*	340°C	53-59%	———
(6) Oil pressure	40-50 PSI in flight 35-50 IDLE on deck		

*Idle temperature of 340°C is not a limit but is given as a guide to indicate temperature which, if exceeded, may signify engine malfunction.

3. Gross Weights

Field takeoff 24,500
Field landing 16,000
Catapulting 24,500
Arrested, T&G, and FMLP 14,500
Barricade engagement 12,000

Figure 15. Pocket Checklist Typical Pages for Sections II, III, and IV (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the currentversion before use.

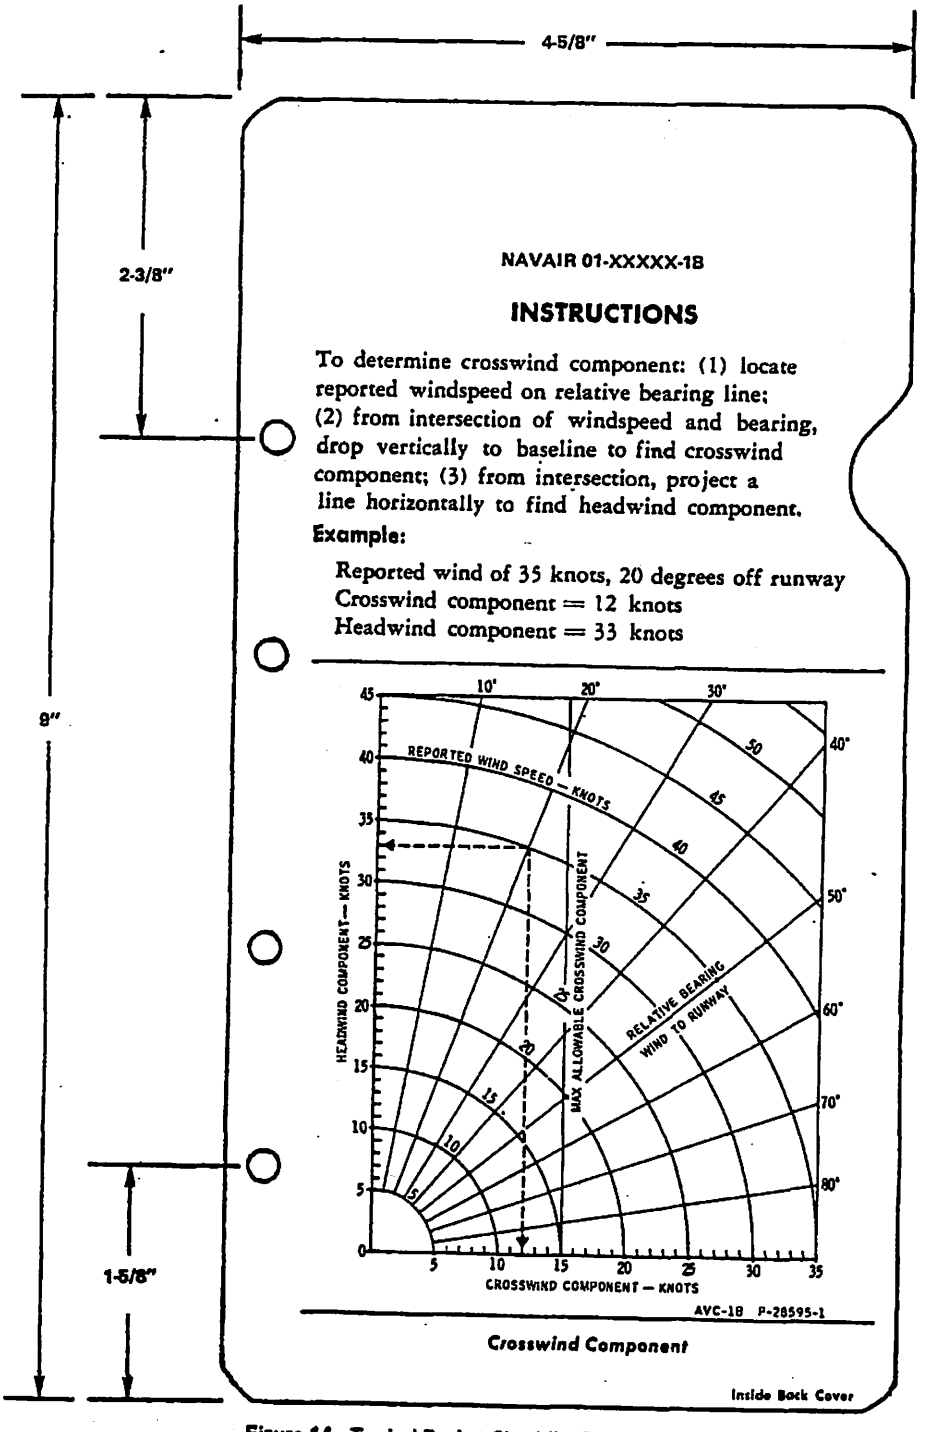


Figure 14. Typical Pocket Checklist Back Cover

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:34Z
Check the source to verify that this is the currentversion before use.


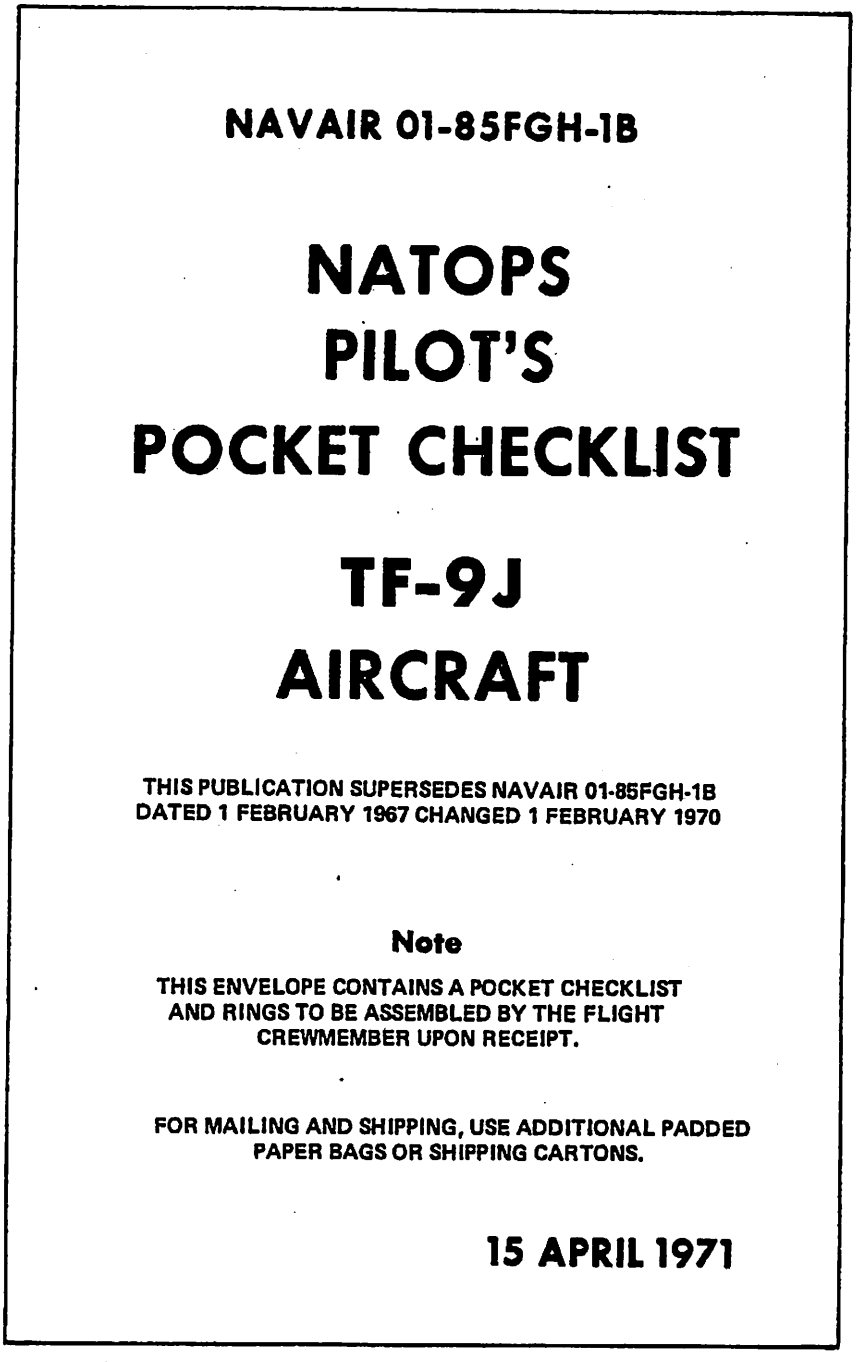


Figure 15. Typical Pocket Checklist Packaging Envelope Identification

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

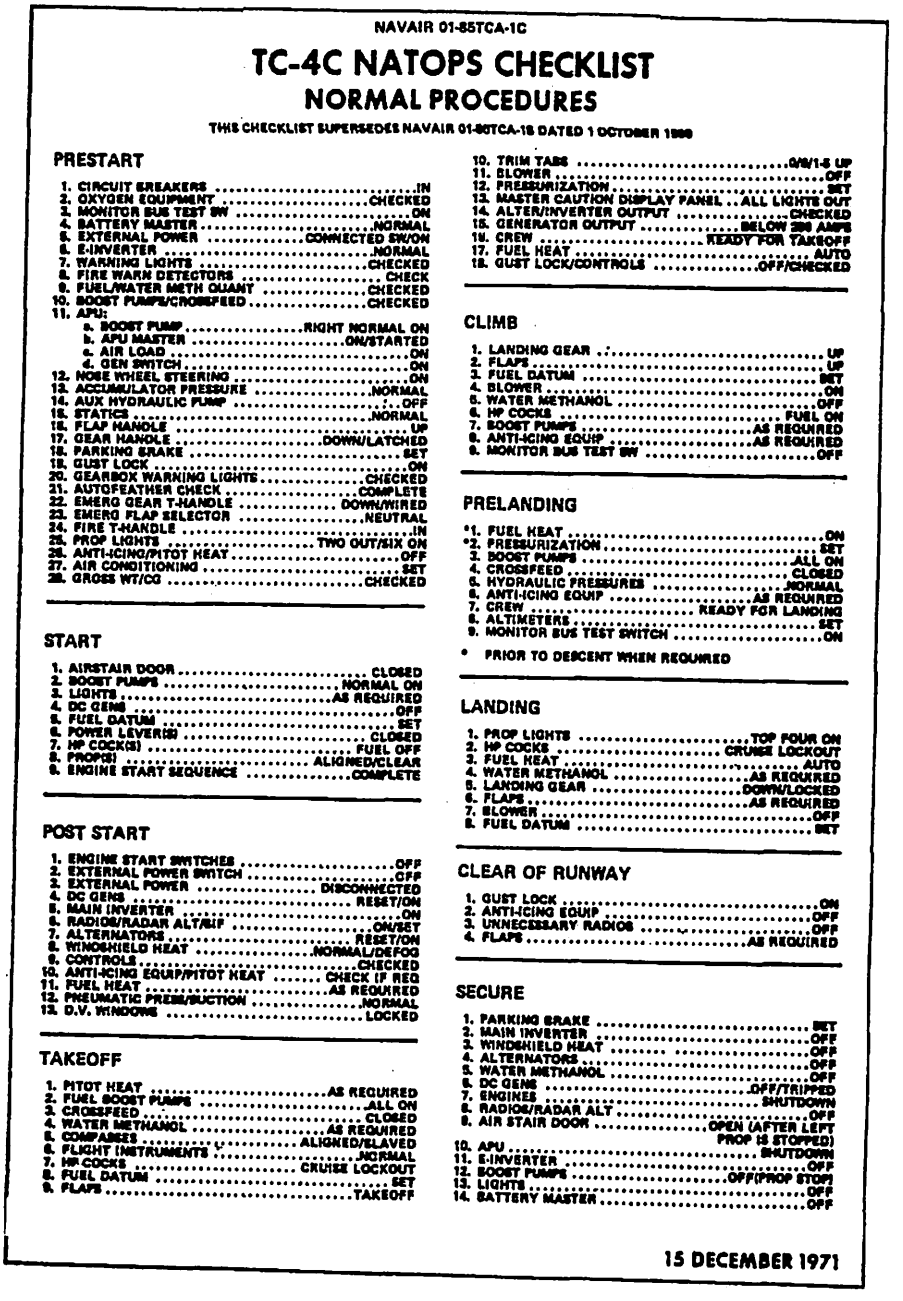

NAVAIR 01-85TCA-1C

TC-4C NATOPS CHECKLIST

NORMAL PROCEDURES

THIS CHECKLIST SUPERSEDES NAVAIR 01-85TCA-1B DATED 1 OCTOBER 1969

PRESTART

1. CIRCUIT BREAKERS ..... IN
2. OXYGEN EQUIPMENT ..... CHECKED
3. MONITOR BUS TEST SW ..... ON
4. BATTERY MASTER ..... NORMAL
5. EXTERNAL POWER ..... CONNECTED SW/ON
6. E-INVERTER ..... NORMAL
7. WARNING LIGHTS ..... CHECKED
8. FIRE WARN DETECTORS ..... CHECK
9. FUEL/WATER METH QUANT ..... CHECKED
10. BOOST PUMPS/CROSSFEED ..... CHECKED
11. APU:
    a. BOOST PUMP ..... RIGHT NORMAL ON
    b. APU MASTER ..... ON/STARTED
    c. AIR LOAD ..... ON
    d. GEN SWITCH ..... ON
12. NOSE WHEEL STEERING ..... ON
13. ACCUMULATOR PRESSURE ..... NORMAL
14. AUX HYDRAULIC PUMP ..... OFF
15. STATICS ..... NORMAL
16. FLAP HANDLE ..... UP
17. GEAR HANDLE ..... DOWN/LATCHED
18. PARKING BRAKE ..... SET
19. GUST LOCK ..... ON
20. GEARBOX WARNING LIGHTS ..... CHECKED
21. AUTOFEATHER CHECK ..... COMPLETE
22. EMERG GEAR T-HANDLE ..... DOWN/WIRED
23. EMERG FLAP SELECTOR ..... NEUTRAL
24. FIRE T-HANDLE ..... IN
25. PROP LIGHTS ..... TWO OUT/SIX ON
26. ANTI-ICING/PITOT HEAT ..... OFF
27. AIR CONDITIONING ..... SET
28. GROSS WT/CG ..... CHECKED

START

1. AIRSTAIR DOOR ..... CLOSED
2. BOOST PUMPS ..... NORMAL ON
3. LIGHTS ..... AS REQUIRED
4. DC GENS ..... OFF
5. FUEL DATUM ..... SET
6. POWER LEVERS ..... CLOSED
7. HP COCK(S) ..... FUEL OFF
8. PROP(S) ..... ALIGNED/CLEAR
9. ENGINE START SEQUENCE ..... COMPLETE

POST START

1. ENGINE START SWITCHES ..... OFF
2. EXTERNAL POWER SWITCH ..... OFF
3. EXTERNAL POWER ..... DISCONNECTED
4. DC GENS ..... RESET/ON
5. MAIN INVERTER ..... ON
6. RADIOS/RADAR ALT/ELF ..... ON/SET
7. ALTERNATORS ..... RESET/ON
8. WINDSHIELD HEAT ..... NORMAL/DEFOG
9. CONTROLS ..... CHECKED
10. ANTI-ICING EQUIP/PITOT HEAT ..... CHECK IF REQ
11. FUEL HEAT ..... AS REQUIRED
12. PNEUMATIC PRESS/SUCTION ..... NORMAL
13. D.V. WINDOWS ..... LOCKED

TAKEOFF

1. PITOT HEAT ..... AS REQUIRED
2. FUEL BOOST PUMPS ..... ALL ON
3. CROSSFEED ..... CLOSED
4. WATER METHANOL ..... AS REQUIRED
5. COMPASSES ..... ALIGNED/SLAVED
6. FLIGHT INSTRUMENTS ..... NORMAL
7. HP COCKS ..... CRUISE LOCKOUT
8. FUEL DATUM ..... SET
9. FLAPS ..... TAKEOFF
10. TRIM TABS ..... 0/8/1-5 UP
11. BLOWER ..... OFF
12. PRESSURIZATION ..... SET
13. MASTER CAUTION DISPLAY PANEL ..... ALL LIGHTS OUT
14. ALTER/INVERTER OUTPUT ..... CHECKED
15. GENERATOR OUTPUT ..... BELOW 300 AMPS
16. CREW ..... READY FOR TAKEOFF
17. FUEL HEAT ..... AUTO
18. GUST LOCK/CONTROLS ..... OFF/CHECKED

CLIMB

1. LANDING GEAR ..... UP
2. FLAPS ..... UP
3. FUEL DATUM ..... SET
4. BLOWER ..... ON
5. WATER METHANOL ..... OFF
6. HP COCKS ..... FUEL ON
7. BOOST PUMPS ..... AS REQUIRED
8. ANTI-ICING EQUIP ..... AS REQUIRED
9. MONITOR BUS TEST SW ..... OFF

PRELANDING

*1. FUEL HEAT ..... ON
*2. PRESSURIZATION ..... SET
3. BOOST PUMPS ..... ALL ON
4. CROSSFEED ..... CLOSED
5. HYDRAULIC PRESSURES ..... NORMAL
6. ANTI-ICING EQUIP ..... AS REQUIRED
7. CREW ..... READY FOR LANDING
8. ALTIMETERS ..... SET
9. MONITOR BUS TEST SWITCH ..... ON

* PRIOR TO DESCENT WHEN REQUIRED

LANDING

1. PROP LIGHTS ..... TOP FOUR ON
2. HP COCKS ..... CRUISE LOCKOUT
3. FUEL HEAT ..... AUTO
4. WATER METHANOL ..... AS REQUIRED
5. LANDING GEAR ..... DOWN/LOCKED
6. FLAPS ..... AS REQUIRED
7. BLOWER ..... OFF
8. FUEL DATUM ..... SET

CLEAR OF RUNWAY

1. GUST LOCK ..... ON
2. ANTI-ICING EQUIP ..... OFF
3. UNNECESSARY RADIOS ..... OFF
4. FLAPS ..... AS REQUIRED


SECURE

1. PARKING BRAKE ..... SET
2. MAIN INVERTER ..... OFF
3. WINDSHIELD HEAT ..... OFF
4. ALTERNATORS ..... OFF
5. WATER METHANOL ..... OFF
6. DC GENS ..... OFF/TRIPPED
7. ENGINES ..... SHUTDOWN
8. RADIOS/RADAR ALT ..... OFF
9. AIR STAIR DOOR ..... OPEN (AFTER LEFT PROP IS STOPPED)
10. APU ..... SHUTDOWN
11. E-INVERTER ..... OFF
12. BOOST PUMPS ..... OFF(PROP STOP)
13. LIGHTS ..... OFF
14. BATTERY MASTER ..... OFF

15 DECEMBER 1971

Figure 16. Sample Card Checklist (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

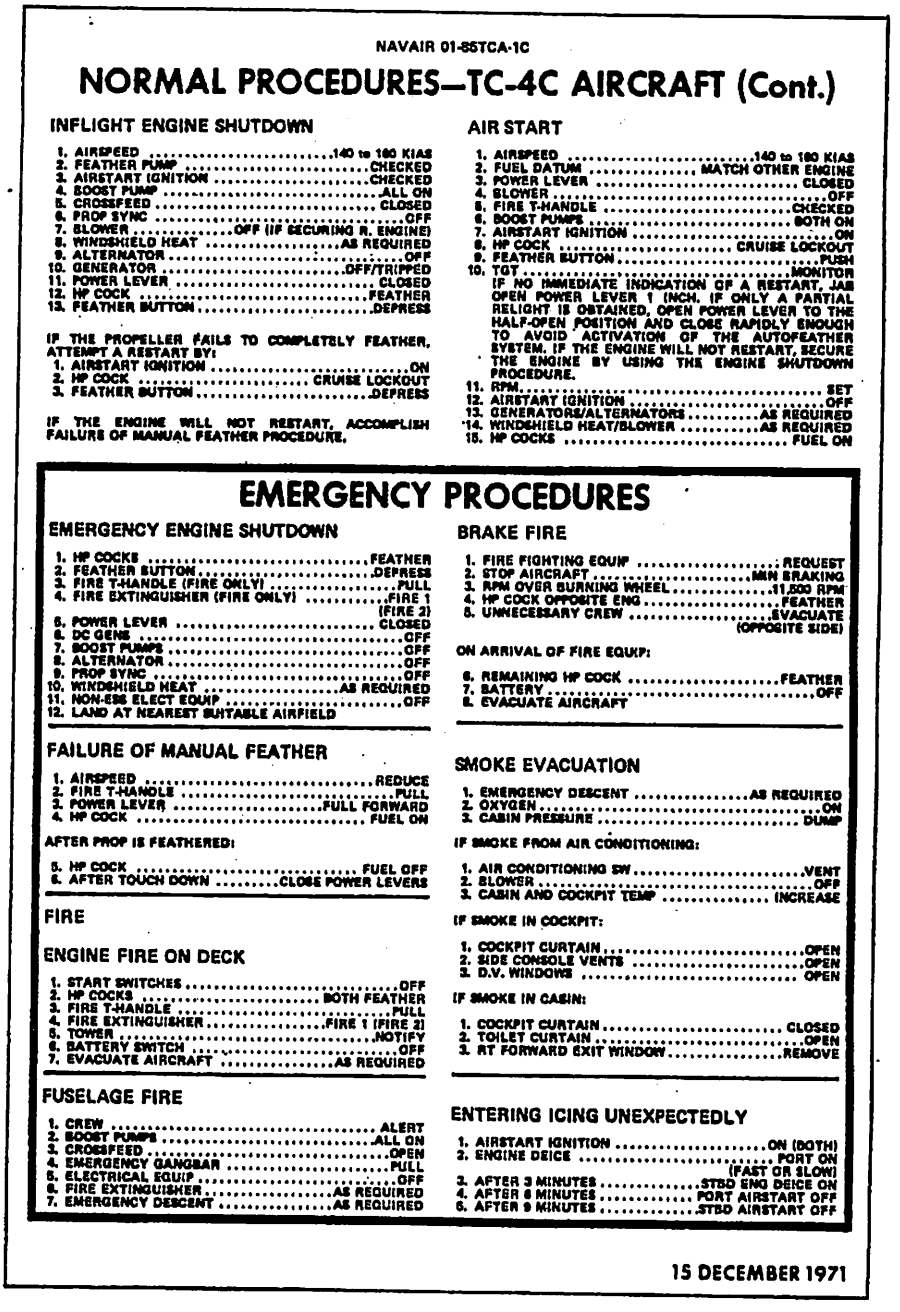

NAVAIR 01-85TCA-1C

NORMAL PROCEDURES—TC-4C AIRCRAFT (Cont.)

INFLIGHT ENGINE SHUTDOWN

1. AIRSPEED ..... 140 to 180 KIAS
2. FEATHER PUMP ..... CHECKED
3. AIRSTART IGNITION ..... CHECKED
4. BOOST PUMP ..... ALL ON
5. CROSSFEED ..... CLOSED
6. PROP SYNC ..... OFF
7. BLOWER ..... OFF (IF SECURING R. ENGINE)
8. WINDSHIELD HEAT ..... AS REQUIRED
9. ALTERNATOR ..... OFF
10. GENERATOR ..... OFF/TRIPPED
11. POWER LEVER ..... CLOSED
12. HP COCK ..... FEATHER
13. FEATHER BUTTON ..... DEPRESS

IF THE PROPELLER FAILS TO COMPLETELY FEATHER, ATTEMPT A RESTART BY:

1. AIRSTART IGNITION ..... ON
2. HP COCK ..... CRUISE LOCKOUT
3. FEATHER BUTTON ..... DEPRESS

IF THE ENGINE WILL NOT RESTART, ACCOMPLISH FAILURE OF MANUAL FEATHER PROCEDURE.

AIR START

1. AIRSPEED ..... 140 to 180 KIAS
2. FUEL DATUM ..... MATCH OTHER ENGINE
3. POWER LEVER ..... CLOSED
4. BLOWER ..... OFF
5. FIRE T-HANDLE ..... CHECKED
6. BOOST PUMPS ..... BOTH ON
7. AIRSTART IGNITION ..... ON
8. HP COCK ..... CRUISE LOCKOUT
9. FEATHER BUTTON ..... PUSH
10. TGT ..... MONITOR
    IF NO IMMEDIATE INDICATION OF A RESTART, JAB OPEN POWER LEVER 1 INCH. IF ONLY A PARTIAL RELIGHT IS OBTAINED, OPEN POWER LEVER TO THE HALF-OPEN POSITION AND CLOSE RAPIDLY ENOUGH TO AVOID ACTIVATION OF THE AUTOFEATHER SYSTEM. IF THE ENGINE WILL NOT RESTART, SECURE THE ENGINE BY USING THE ENGINE SHUTDOWN PROCEDURE.
11. RPM ..... SET
12. AIRSTART IGNITION ..... OFF
13. GENERATORS/ALTERNATORS ..... AS REQUIRED
14. WINDSHIELD HEAT/BLOWER ..... AS REQUIRED
15. HP COCKS ..... FUEL ON

EMERGENCY PROCEDURES

EMERGENCY ENGINE SHUTDOWN

1. HP COCKS ..... FEATHER
2. FEATHER BUTTON ..... DEPRESS
3. FIRE T-HANDLE (FIRE ONLY) ..... PULL
4. FIRE EXTINGUISHER (FIRE ONLY) ..... FIRE 1 (FIRE 2)
5. POWER LEVER ..... CLOSED
6. DC GENS ..... OFF
7. BOOST PUMPS ..... OFF
8. ALTERNATOR ..... OFF
9. PROP SYNC ..... OFF
10. WINDSHIELD HEAT ..... AS REQUIRED
11. NON-ESS ELECT EQUIP ..... OFF
12. LAND AT NEAREST SUITABLE AIRFIELD

FAILURE OF MANUAL FEATHER

1. AIRSPEED ..... REDUCE
2. FIRE T-HANDLE ..... PULL
3. POWER LEVER ..... FULL FORWARD
4. HP COCK ..... FUEL ON

AFTER PROP IS FEATHERED:

5. HP COCK ..... FUEL OFF
6. AFTER TOUCH DOWN ..... CLOSE POWER LEVERS

FIRE

ENGINE FIRE ON DECK

1. START SWITCHES ..... OFF
2. HP COCKS ..... BOTH FEATHER
3. FIRE T-HANDLE ..... PULL
4. FIRE EXTINGUISHER ..... FIRE 1 (FIRE 2)
5. TOWER ..... NOTIFY
6. BATTERY SWITCH ..... OFF
7. EVACUATE AIRCRAFT ..... AS REQUIRED

FUSELAGE FIRE

1. CREW ..... ALERT
2. BOOST PUMPS ..... ALL ON
3. CROSSFEED ..... OPEN
4. EMERGENCY GANGBAR ..... PULL
5. ELECTRICAL EQUIP ..... OFF
6. FIRE EXTINGUISHER ..... AS REQUIRED
7. EMERGENCY DESCENT ..... AS REQUIRED

BRAKE FIRE

1. FIRE FIGHTING EQUIP ..... REQUEST
2. STOP AIRCRAFT ..... MIN BRAKING
3. RPM OVER BURNING WHEEL ..... 11,500 RPM
4. HP COCK OPPOSITE ENG ..... FEATHER
5. UNNECESSARY CREW ..... EVACUATE (OPPOSITE SIDE)

ON ARRIVAL OF FIRE EQUIP:

6. REMAINING HP COCK ..... FEATHER
7. BATTERY ..... OFF
8. EVACUATE AIRCRAFT

SMOKE EVACUATION

1. EMERGENCY DESCENT ..... AS REQUIRED
2. OXYGEN ..... ON
3. CABIN PRESSURE ..... DUMP

IF SMOKE FROM AIR CONDITIONING:

1. AIR CONDITIONING SW ..... VENT
2. BLOWER ..... OFF
3. CABIN AND COCKPIT TEMP ..... INCREASE

IF SMOKE IN COCKPIT:

1. COCKPIT CURTAIN ..... OPEN
2. SIDE CONSOLE VENTS ..... OPEN
3. D.V. WINDOWS ..... OPEN

IF SMOKE IN CABIN:

1. COCKPIT CURTAIN ..... CLOSED
2. TOILET CURTAIN ..... OPEN
3. AT FORWARD EXIT WINDOW ..... REMOVE

ENTERING ICING UNEXPECTEDLY

1. AIRSTART IGNITION ..... ON (BOTH)
2. ENGINE DEICE ..... PORT ON (FAST OR SLOW)
3. AFTER 3 MINUTES ..... STBD ENG DEICE ON
4. AFTER 6 MINUTES ..... PORT AIRSTART OFF
5. AFTER 9 MINUTES ..... STBD AIRSTART OFF

15 DECEMBER 1971

Figure 16. Sample Card Checklist (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-5MRB-1E

U.S. NAVY C-131 AIRCRAFT PASSENGER INFORMATION

SEAT BELTS

PLEASE KEEP YOUR SEAT BELT FASTENED WHEN THE SEAT BELT SIGN IS ON. WHEN THE SEAT BELT SIGN IS OFF, YOU MAY MOVE AROUND IN THE CABIN. HOWEVER, YOUR SEAT BELT SHOULD BE FASTENED AT ALL TIMES WHILE IN YOUR SEAT.


PORTABLE ELECTRONIC EQUIPMENT

AM, FM, AND TV RECEIVERS SHALL NOT BE OPERATED DURING THE FLIGHT. THESE DEVICES MAY INTERFERE WITH THE NAVIGATIONAL AIDS OF THE AIRCRAFT.

BRACE POSITIONS

IN AN EMERGENCY SITUATION YOU SHOULD ASSUME ONE OF THE BRACING POSITIONS SHOWN.


FRONT FACING



1. LEAN FORWARD AND AS FAR DOWN AS POSSIBLE.
2. CLASP HANDS FIRMLY UNDER LEGS.

1. REMOVE EYEGLASSES AND SHARP ARTICLES FROM POCKETS.
2. FASTEN SEAT BELT TIGHT AND LOW ACROSS HIPS.
3. SEAT BACK UPRIGHT.

REAR FACING



1. RAISE ARMS OVER SHOULDER.
2. GRIP THE TOP OF THE HEADREST, ELBOWS FIRMLY AGAINST HEAD.

DITCHING INFORMATION

EMERGENCY RAFTS AND RADIO ARE PROVIDED ON OVERWATER FLIGHTS. EMERGENCY EQUIPMENT LOCATION IS INDICATED BY ASTERISKS(*) ON THE AIRCRAFT EXIT DIAGRAM (OPPOSITE PAGE).

LIFE VESTS ARE PROVIDED IN THE POCKET ON THE SEAT. DO NOT INFLATE THE LIFE VEST UNTIL YOU ARE OUTSIDE THE AIRCRAFT.

DESIGNATED PASSENGERS WILL BE ASSIGNED TO ASSIST THE FLIGHT CREW IN MOVING AND PLACING EMERGENCY EQUIPMENT.

WHEN THE AIRCRAFT HAS STOPPED (TWO OR MORE IMPACTS MAY OCCUR), ALL PASSENGERS REMAIN CALM AND LEAVE THE AIRCRAFT AS INSTRUCTED BY THE FLIGHT CREW.

ALWAYS SLIDE OFF THE WING, DO NOT JUMP.

IF THERE ARE ANY QUESTIONS, PLEASE ASK A MEMBER OF THE CREW.

PLEASE DO NOT REMOVE THIS CARD FROM AIRCRAFT

1 APRIL 1973

(OVER)

Figure 17. Sample Passenger Emergency Data Card (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

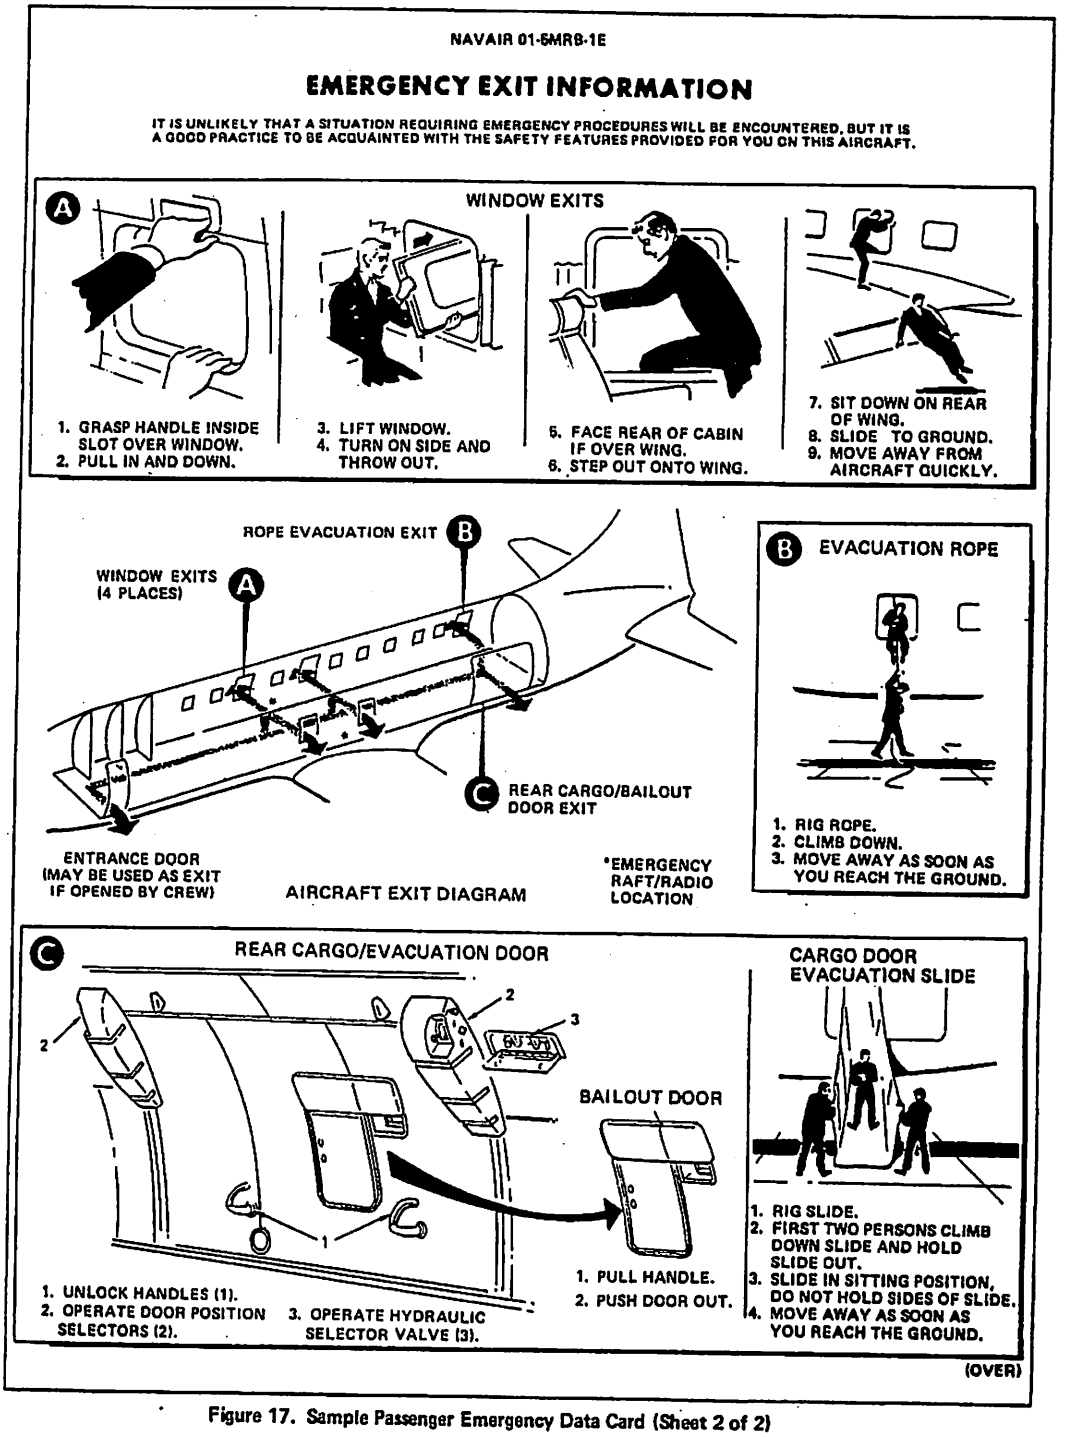


Figure 17. Sample Passenger Emergency Data Card (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:34Z
Check the source to verify that this is the current version before use.


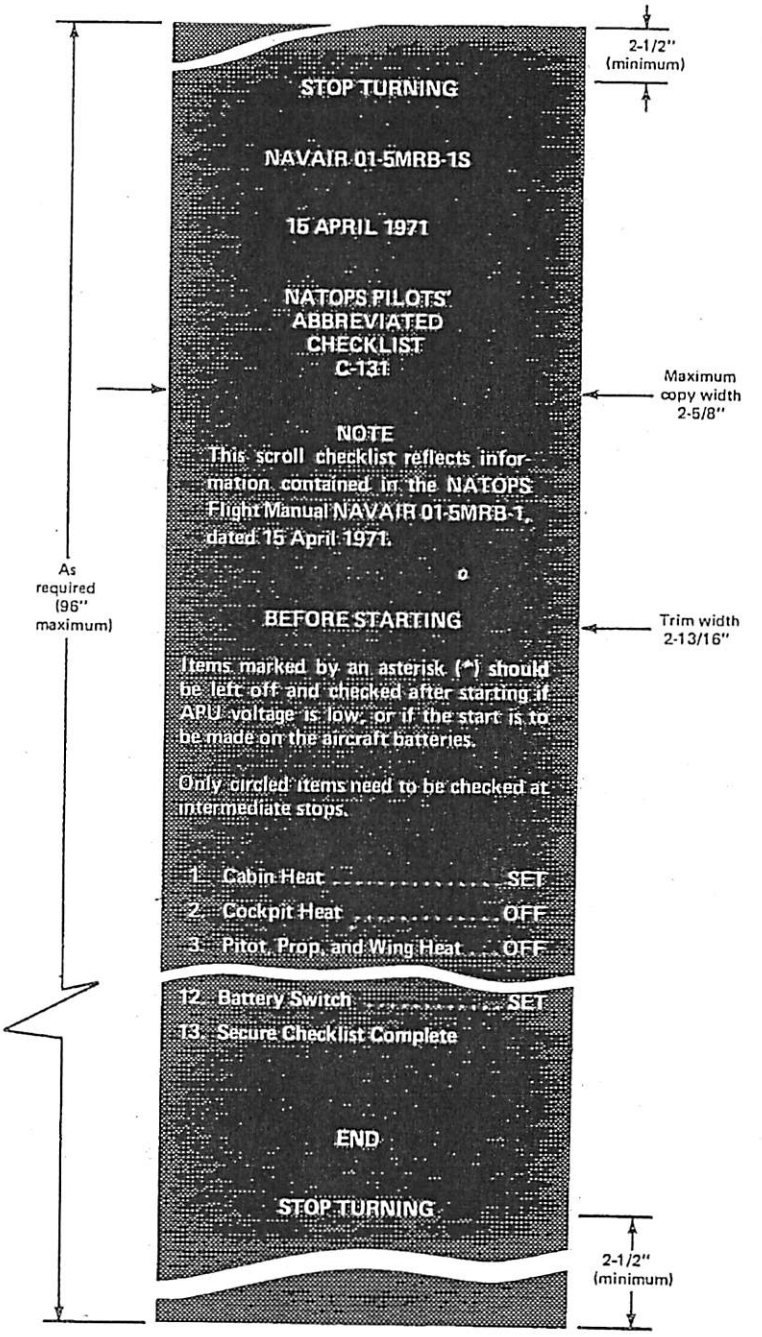


Figure 18. Sample Scroll Checklist

Source: https://assist.dla.mil -- Downloaded: 202640-26T04:34Z
Check the source to verify that this is the current version before use.

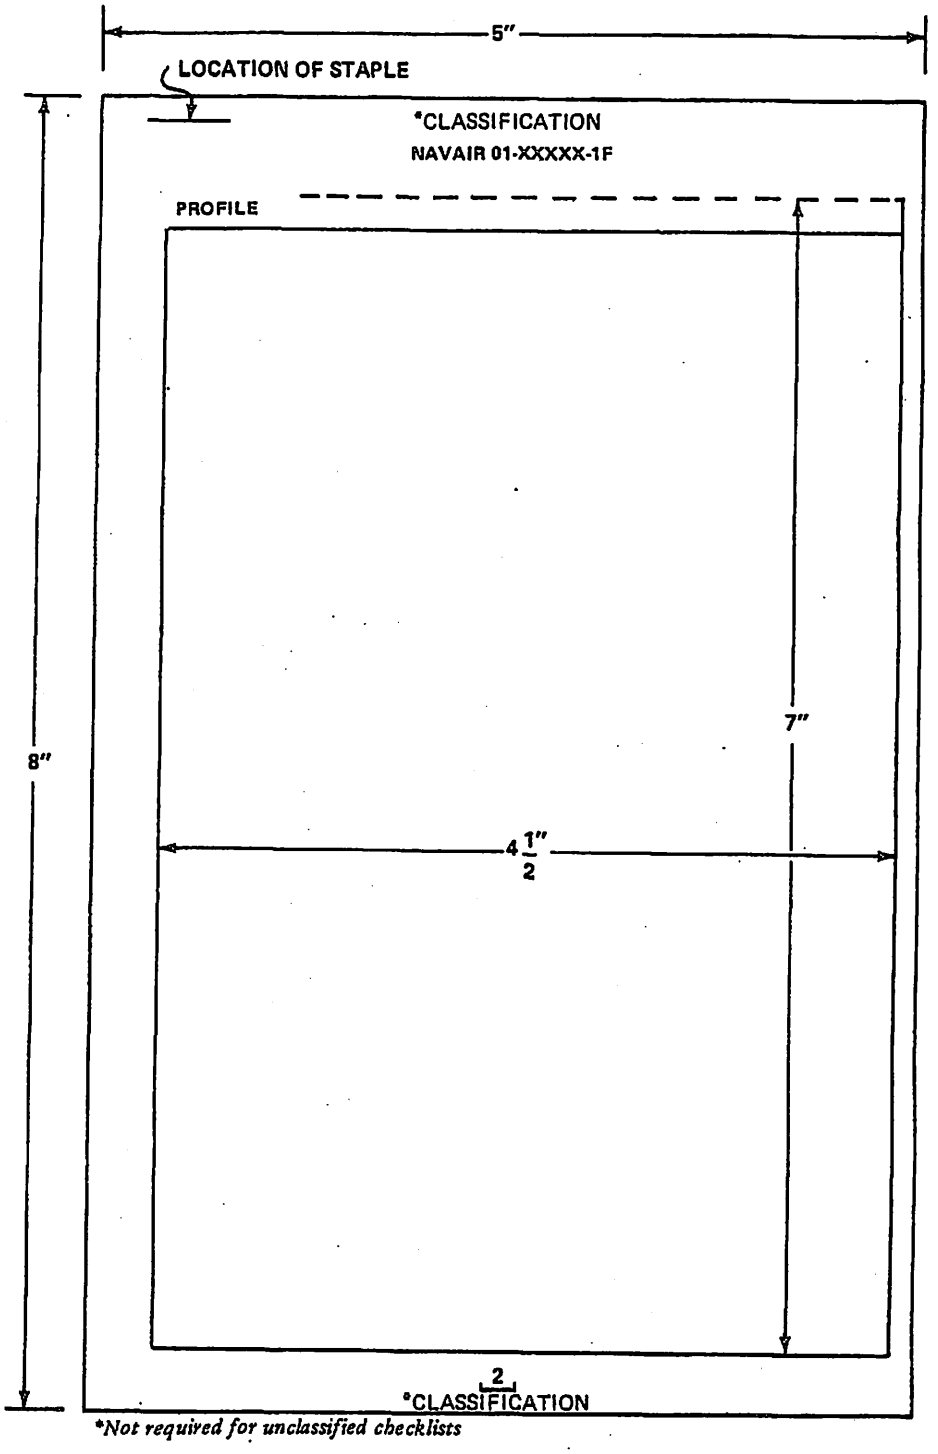

*Not required for unclassified checklists

Figure 19. FCFC Page Mechanics

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

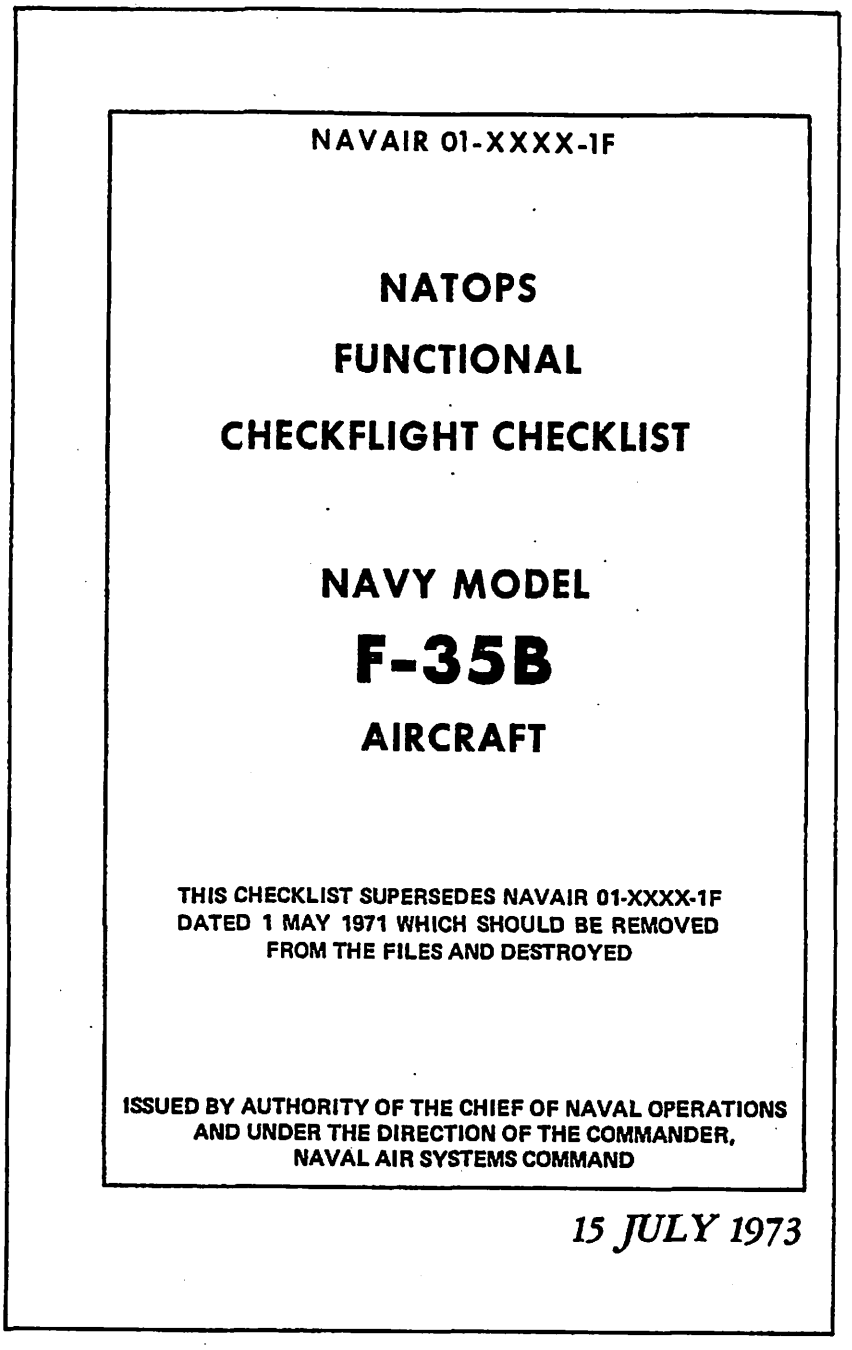


Figure 20. FCFC Front Cover and Title Page

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-XXXXX-1F

Reproduction for nonmilitary use of the information or illustrations contained in this checklist is not permitted without specific approval of the Commander, Naval Air Systems Command.

LIST OF EFFECTIVE PAGES

TOTAL NUMBER OF PAGES IN THIS PUBLICATION IS 13 CONSISTING OF THE FOLLOWING:

Page No.	*Issue*
Title	Original
A	Original
1 thru 11	Original

INTERIM CHANGE SUMMARY

The following Interim Changes have been canceled or previously incorporated in this manual:

INTERIM CHANGE NUMBER(S)	REMARKS/PURPOSE

The following Interim Changes have been incorporated in this Change /Revision

INTERIM CHANGE NUMBER	REMARKS/PURPOSE
1	Prop sync and prop feather

Interim Changes Outstanding—To be maintained by the custodian of this manual

INTERIM CHANGE NUMBER	ORIGINATOR/DATE (or DATE/TIME GROUP)	PAGES AFFECTED	REMARKS/PURPOSE

A

Figure 21. FCFC "A" Page and Interim Change Summary

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-XXXXX-1F

NATOPS
FUNCTIONAL CHECKFLIGHT CHECKLIST


NAVY MODEL
P-XXB
AIRCRAFT
PART 1 – PILOT

Sectionalized Checklists Only

BUNO_____

Check Pilot Signature Date of Flight

Record time, temperature or pressure where indicated by a line ____. Where a box ☐ is shown, use a ☑ for satisfactory or an ☒ for unsatisfactory.

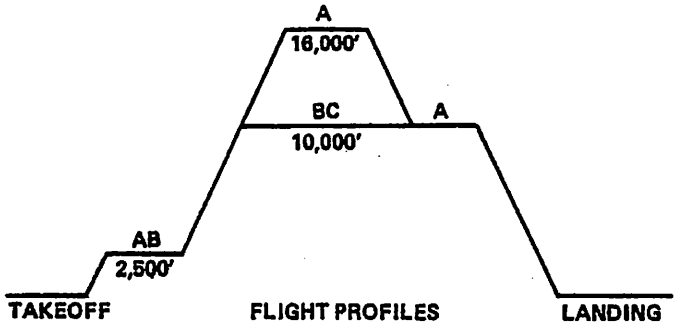

Perform applicable flight profile and associated checks in accordance with the following checkflight conditions:

A. At the completion of aircraft rework and all calendar inspections. Minimum checks required are prefixed by letter A.

B. After the installation of an engine, propeller, or engine fuel control, or any components which cannot be checked in ground operation. Minimum checks required are prefixed by letter B.

C. When fixed or movable flight surfaces, or flight control system components have been installed, reinstalled, adjusted or rerigged and improper adjustment or replacement of such components could cause an unsafe operating condition. Minimum checks required are prefixed by letter C.

1-1

Sectionalized checklists only (use "1" for non-sectionalized checklists).

Figure 22. First Page of FCFC

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

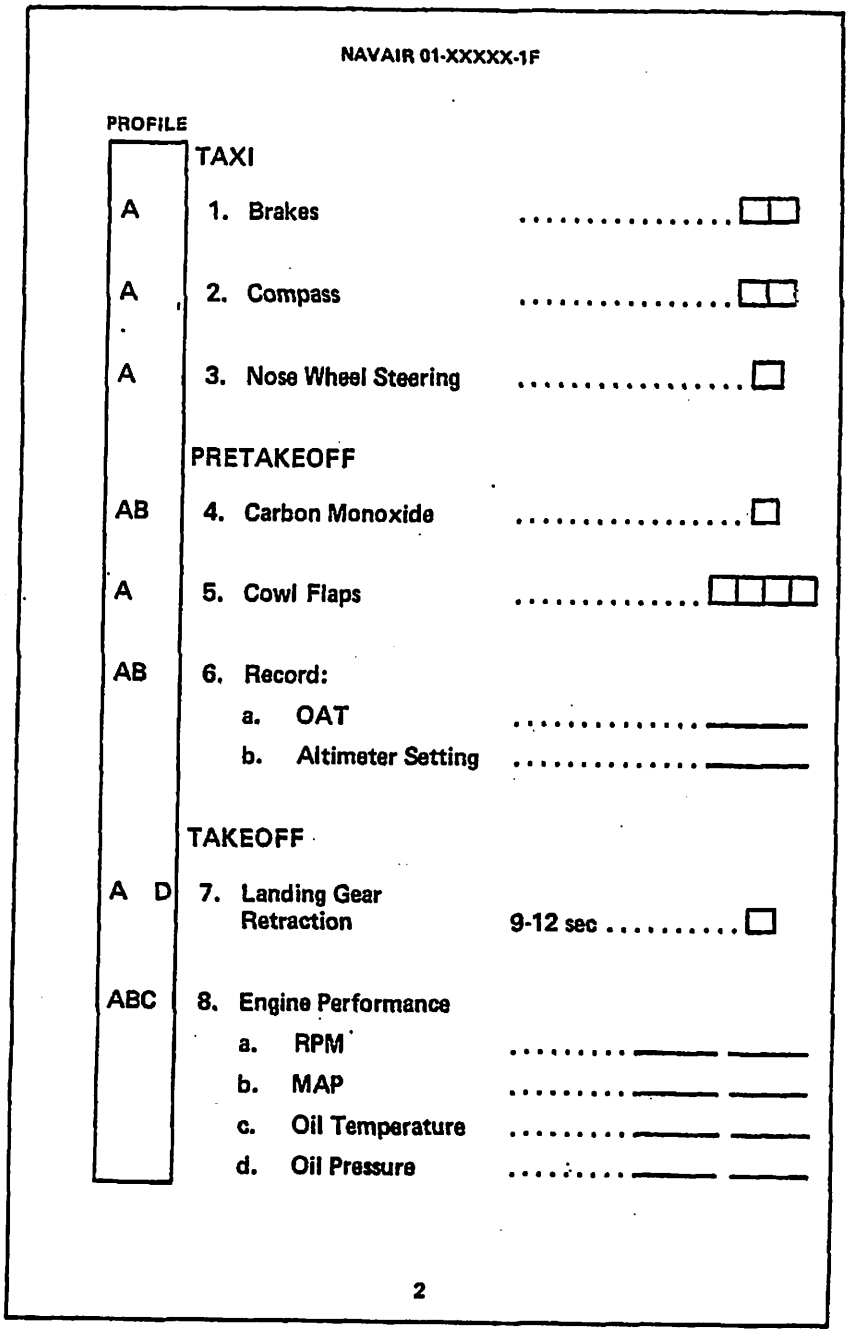


Figure 23. Typical FCFC Page (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.


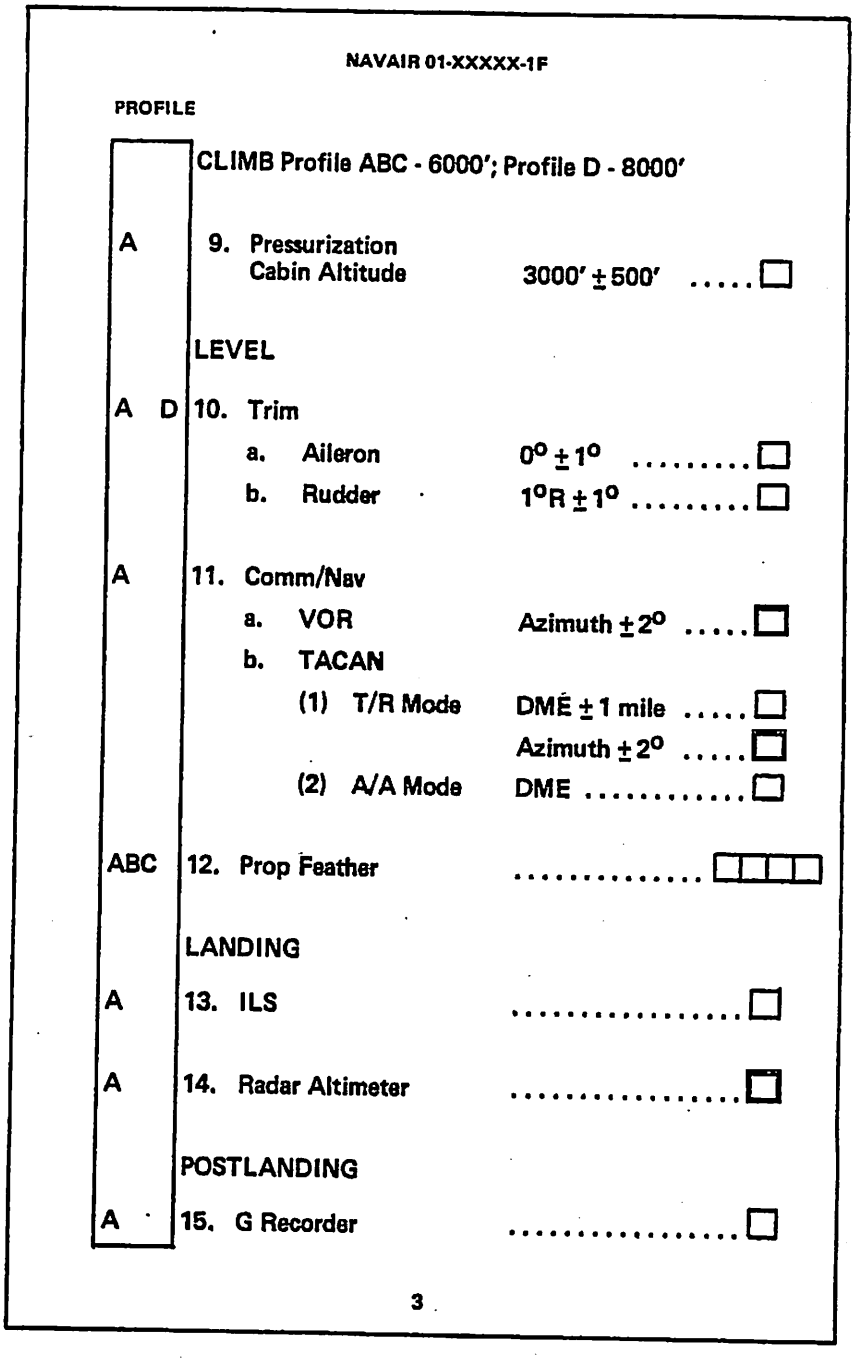


Figure 23. Typical FCFC Page (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

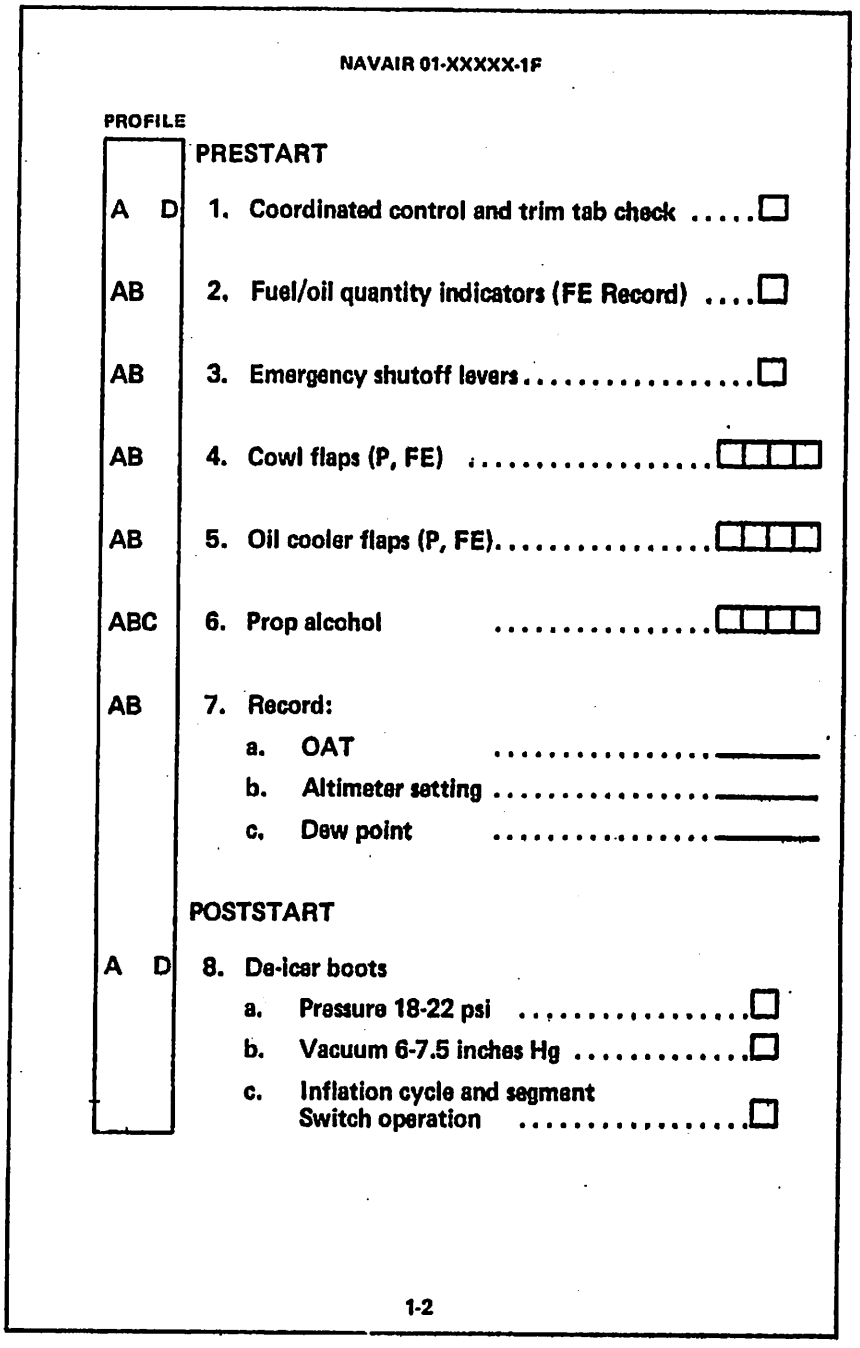

NAVAIR 01-XXXXX-1F

PROFILE

PRESTART

A D	1. Coordinated control and trim tab check ..... ☐
AB	2. Fuel/oil quantity indicators (FE Record) .... ☐
AB	3. Emergency shutoff levers ..... ☐
AB	4. Cowl flaps (P, FE) ..... ☐☐☐☐
AB	5. Oil cooler flaps (P, FE) ..... ☐☐☐☐
ABC	6. Prop alcohol ..... ☐☐☐☐
AB	7. Record:
	a. OAT ..... ____
	b. Altimeter setting ..... ____
	c. Dew point ..... ____

POSTSTART

A D	8. De-icer boots
	a. Pressure 18-22 psi ..... ☐
	b. Vacuum 6-7.5 inches Hg ..... ☐
	c. Inflation cycle and segment Switch operation ..... ☐

1-2

Figure 24. Typical Page for Sectionalized FCFC (Sheet 1 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-XXXXX-1F

NATOPS
FUNCTIONAL CHECKFLIGHT CHECKLIST

NAVY MODEL
P-XXB SERIES AIRCRAFT
PART II – FLIGHT ENGINEER

BUNO _____

Crewmember Signature _____ Date of Flight _____

Record time, temperature or pressure when applicable. Use a ☑ for satisfactory or an ☒ for unsatisfactory when applicable.

PROFILE

PRESTART

AB 2. Fuel/oil quantity

Fuel	Dip Stick	Gage
2B		
2A		
1		
2		
3		
4		
5		
6		
Total		
Oil	**Dip Stick**	**Gage**
1		
2		
3		
4		
L. Res.		
R. Res.		
Total		

AB 4. Cowl flaps (visual vs gage) ..... ☐☐☐☐

AB 5. Oil cooler flaps (visual vs gage) ..... ☐☐☐☐

2-1

Figure 24. Typical Page for Sectionalized FCFC (Sheet 2 of 2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

NAVAIR 01-XXXXX-1F

PROFILE

AB 14. Primary Fuel System Acceleration — Idle to 100% in 9 to 14 seconds (max TPT 800°C for 5 seconds) ..... ☐

AB 15. TPT (780°C max) ..... ☐

AB 16. RPM (98 to 100%) ..... ☐

AB 17. Oil Pressure (30 to 45 psi) ..... ☐

AB 18. Fuel Flow (6000 to 8000 psi) ..... ☐

TAKEOFF AND CLIMB

AB 19. Record the following:

ENGINE PERFORMANCE AND CABIN ALTITUDE DATA

ALTITUDE (FEET)	TPT	RPM	OIL PRESS	FUEL FLOW	CABIN ALT (FT) ACTUAL	CABIN ALT (FT) DESIRED
TAKEOFF						
10,000						5,000
20,000						10,000
30,000						16,800
35,000						20,500
35,000 @ 80% RPM						20,500
35,000 @ IDLE						20,500

Notes: Max allowable engine operating limits are:
1. MIL for 5 minutes: 780°C @ 100% rpm.
2. MIL for 30 minutes: 755°C @ 100% rpm.
3. Max continuous: 705°C @ 94.5% rpm.

5

Figure 25. Organizing FCFC Chart Data

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

ALPHABETICAL INDEX

A

Abbreviations 3.3.5
Advertising, copyrights and 3.2
Applicable documents 2
Approval of documentation changes 3.7
Arrangement and content, functional checkflight checklist 3.11.2
Arrangement of pocket checklist 3.8.1

B

Back cover, pocket checklist 3.8.1.10
Binding 3.8.3
Binding basic and revised pocket checklists 3.8.3.1
Binding pocket checklist changes 3.8.3.2
Binding ring size for pocket checklists 3.8.3.1

C

Card checklist/Emergency data card 3.9
Changes 6.2.1
Conflict between specifications 3.1
Conformance with parent publication 3.3.3
Conformance with parent publication, functional checkflight checklist 3.11.2.2.7
Content, card checklist 3.9.2.1
Content, emergency data card 3.9.2.2
Content, pocket checklist 3.8.2
Content, scroll checklist 3.10.2
Copyrights and advertising 3.2

D

Data source 3.3.2
Definitions 6.4.1
Description, card checklist/emergency data card 3.9.1
Description of pocket checklist 3.8.1
Description, scroll checklist 3.10.1
Deviations 3.3.4
Documentation changes, approval of 3.7

E

Emergency data card/Card checklist 3.9
Emergency data card content 3.9.2.2
Emergency procedures, pocket checklist ..... 3.8.1.6; 3.8.2.1; 3.8.5.

F

Format, general 3.3
Front cover and index, combined 3.8.1.2
Front cover and title page, functional checkflight checklist 3.11.2.1.1
Functional checkflight checklist 3.11
Functional checkflight checklist organization 3.11.2.2.2
Functional check item 6.4.2

G

Government documents 2.1
General format 3.3

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

ALPHABETICAL INDEX (Cont'd.)

I

Illustrations 3.8.4
Illustrations, functional checkflight checklist 3.11.1.11
Image area, functional checkflight checklist 3.11.1.3
Intended use (of checklists) 6.1
Interim change summary ("B" page), pocket checklist 3.8.1.5
Interim change summary page, functional checkflight checklist 3.11.2.1.2

L

Layout, card checklist 3.9.1.2
Layout, emergency data card 3.9.1.3
Layout, scroll checklist 3.10.1.2
List of effective pages ("A" page), pocket checklist 3.8.1.4
List of effective pages, functional checkflight checklist 3.11.2.1.2

M

Manner of preparation, functional checkflight checklist 3.11.1
Marginal copy, functional checkflight checklist 3.11.1.4
Material, card checklists 3.9.4
Material, pocket checklist 3.8.6
Material, scroll checklist 3.10.4

N

Negatives, pocket checklist 3.8.7; 3.9.5
Normal procedures, pocket checklist 3.8.1.8; 3.8.2.3
Notes 6
Numbering, functional checkflight checklist 3.11.1.7

O

Ordering data 6.3

P

Packaging for shipment and stocking, pocket checklist 3.8.8
Page layout, functional checkflight checklist 3.11.1.6
Performance data, pocket checklist 3.8.1.6; 3.8.1.7; 3.8.2.2; 3.8.5.2
Pocket checklist 3.8
Preliminary checklist 6.4.3
Preparation for delivery 5
Preparation for packaging, scroll checklist 3.10.5
Printing 3.4
Printing and binding, functional checkflight checklist 3.11.1.1
Profile, functional checkflight checklist 3.11.2.2.1
Profile segments, functional checkflight checklist 3.11.2.2.6

Q

Quality assurance provisions 4

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:34Z
Check the source to verify that this is the current version before use.

ALPHABETICAL INDEX (Cont'd.)

R

Recording performance, functional checkflight checklist 3.11.2.2.5
Reference data, pocket checklist 3.8.1.8; 3.8.2.5
Requirements 3
Review and verification 4.2
Reviewing activity 4.2.1
Revisions 6.2.2

S

Scope 1
Scroll checklist 3.10
Security classification 3.5
Security during production 3.6
Size, scroll checklist 3.10.1.1
Source of data 3.3.2
Special procedures, pocket checklist 3.8.1.8; 3.8.2.4

T

Tabbed pages, pocket checklist 3.8.1.6
Tables of contents, pocket checklist 3.8.1.9
Technical content, functional checkflight checklist 3.11.2.2
Title page, pocket checklist 3.8.1.3
Trim size, functional checkflight checklist 3.11.1.2
Trim size of pocket checklist 3.8.1.1
Types (of checklist) 1.2.1
Types I - Pocket Checklist 3.8
Type II - Card Checklist/Emergency Data Card 3.9
Type III - Scroll Checklist 3.10
Type IV - Functional Checkflight Checklist (FCFC) 3.11
Type sizes and faces, card checklist 3.9.3
Type sizes and faces, pocket checklist 3.8.5
Type sizes and faces, scroll checklist 3.10.3
Type sizes, functional checkflight checklist 3.11.1.5

U

Update of data 6.2

V

Verification 4.2

W

Warnings, cautions and notes 3.11.1.10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.