# MILITARY SPECIFICATION

## COMPASS SET, GYROSCOPE REFERENCE,

## NAVIGATIONAL AN/ASN-75 (*)

This specification has been approved by the
Bureau of Naval Weapons, Department of the Navy.

## 1. SCOPE

1.1 Scope - The equipment covered by this Specification is a 5.5 degree per hour, magnetic slaved, directional gyro stabilized compass set for use in military aircraft.

1.2 Classification - There are two configurations of the Compass Set. The Type I configuration includes the ML-2 transmitter with an integral mechanical-magnetic compensator. The Type II configuration includes the ML-1 transmitter without the above compensator and with the Compensator, Electronic, Magnetic Compass CN-1142/ASN-75. (See 6.8)

1.3 Design Data - No data is required by this Specification (other than reports accompanying samples submitted for testing) or by applicable documents, unless specified in the contract or order. (See 6.7)

## 2. APPLICABLE DOCUMENTS

2.1 General - The documents listed in 6.10 of the issue in effect on the date of invitation for bids, form a part of this Specification to the extent specified herein:

## 3. REQUIREMENTS

3.1 Preproduction - This Specification makes provision for preproduction testing.

3.2 Parts and Materials - In the selection of parts and materials, fulfillment of major design objectives shall be the prime consideration. In so doing the following shall govern:

(1) Parts and materials requirements shall conform to Specification MIL-E-5400.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

(2) Nonrepairable subassemblies, as outlined in specification MIL-E-5400, shall be used when practicable. The general size of the subassembly and the amount of circuitry to be included therein shall be approved by the procuring activity. Nonrepairable subassemblies must be reliable. (See 6.4)

(3) When previously produced models of this equipment did not use nonrepairable subassemblies, the design shall not be changed to employ non-repairable assemblies without the approval of the procuring activity.

3.2.1 Nonstandard Parts and Materials Approval - Approval for the use of nonstandard parts and materials shall be obtained as outlined in Specification MIL-E-5400.

3.2.2 Electron Devices - Electron tubes, transistors and diodes shall be chosen and applied as outlined in Specification MIL-F-4682.

3.2.3 Modules, Maintenance - The electronic portions of the equipment shall be divided into maintenance modules (see Specification MIL-S-23003). Maintenance modules shall normally be considered repairable.

3.3 Design and Construction - The equipment shall conform with all the applicable requirements of Specification MIL-E-5400 for design, construction and workmanship, except as otherwise specified herein.

3.3.1 Total Weight - The total weight of the set excluding cables, shall be a minimum consistent with good design and shall not exceed the following:

TYPE I

| Item | | Wt. (lbs.) |
|---|---|---|
| (1) | Gyroscope | 3.9 |
| (2) | Amplifier-Power Supply | 1.8 |
| (3) | Control | 2.25 |
| (4) | ML-1 Transmitter, Compass (with Compensator) | 1.3 |
| | TOTAL | 9.25 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

TYPE II

| Item | | Wt. (lbs.) |
|---|---|---|
| (1) | Gyroscope | 3.9 |
| (2) | Amplifier-Power Supply | 1.8 |
| (3) | Control | 2.25 |
| (4) | ML-1 Transmitter, Compass (without Compensator) | 1.2 |
| (5) | Compensator Electronic Magnetic Compass | 1.3 |
| | TOTAL | 10.45 |

3.3.2 Reliability

3.3.2.1 Operational Stability - The equipment shall operate with satisfactory performance, continuously or intermittently for a period of at least 800 hours without the necessity for readjustment of controls which are inaccessible to the operator during normal use.

3.3.2.2 Operating Life - The equipment shall have total operating life of 5000 hours with reasonable servicing and replacement of parts. Parts requiring scheduled replacement shall be specified by the contractor.

3.3.2.3 Reliability in Mean Time Between Failures (MTBF) - The equipment shall have 800 hours of mean (operating) time between failures when tested and accepted as outlined under the requirements of 4.4.3.

3.3.2.4 Time Totalizing Meter - The Gyroscope and the Amplifier-Power Supply shall contain time totalizing meters in accordance with Specification MIL-M-7793 and MS17311 except that the mounting flange will be as required to fit the equipment.

3.3.3 Cabling and Connections

3.3.3.1 Cables and Connectors - The equipment shall provide for the use of cables and connectors in accordance with Specification MIL-C-5400.

3.3.3.2 Interconnection Cabling - The equipment shall be capable of satisfactory operation using external wiring in accordance with the applicable requirements of Specification MIL-W-5088. The external wiring shall be unshielded, except that a minimum number of the individual wires may be shielded when demonstrated as necessary to meet interference control requirements and provided the assembly of the cable to its plugs may be easily accomplished. External cables and that portion of the connectors attached to the cables shall not be supplied as part of the equipment. (See Figure 1.)



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.3.4 Control Panels - All rack or console mounted control panels shall conform to the applicable requirements of Specification MIL-C-6781. The configuration of all control panels must be approved by the procuring activity prior to preproduction testing.

3.3.5 Interchangeability of Reordered Equipment - For reordered equipment interchangeability shall exist between units and all replaceable assemblies, subassemblies, and parts of a designated model of any previously manufactured equipment, supplied or designated by the procuring activity.

3.3.6 Interference Control - The generator of radio interference by the equipment and the vulnerability of the equipment to radio interference shall be controlled within the limits of Specification MIL-I-6181.

3.3.7 Maintenance Provisions and Field Testing - Provisions for maintenance shall be as specified in Specification MIL-E-5400. Specific test points and test facilities shall be provided to the greatest extent practicable for ease of field testing and maintenance.

3.3.8. Nomenclature and Nameplates - Nomenclature assignment and nameplate approval for equipment identification shall be in accordance with Specification MIL-N-18307.

3.3.9 Standard Conditions - The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests.

| | |
|---|---|
| Temperature | Room ambient (25°C ±5°C) |
| Altitude | Normal ground |
| Vibration | None |
| Humidity | Room ambient up to 90% Relative Humidity |
| Input power voltage | 115 ±1.0 VAC and 27.5 ±0.5 VDC |
| Scorsby (unless otherwise specified) | ±2.5 and ±7.5 excursion in Yaw, Pitch, and Roll, 5-7 oscillations/min., reversing |

3.3.9.1 Magnetic Reference - Unless otherwise specified all slaved mode (MAG) tests required by this Specification shall be conducted using the output from an ML-1 compass transmitter in accordance with MIL-T-19576 located in an area where the earth's magnetic field is approximately 0.18 oersted horizontal, and 0.54 oersted vertical. This field shall be maintained at a constant magnitude and direction during the tests. A simulated compass transmitter source may be used in place of the ML-1 Compass Transmitter provided the simulator output is similar in phase, gradient and harmonic content and approved by the procurement activity.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.3.10 Test Conditions - The equipment shall operate satisfactorily under any of the environmental conditions or reasonable combination of these conditions as specified below:

| Item | Gyroscope Displacement | Amplifier Power Supply | Control | Compensator Electronic |
|---|---|---|---|---|
| Vibration | 4.4.1.11 | 4.4.1.11 | 4.4.1.11 | 4.4.1.11 |
| Temp.-Altitude | 4.4.1.10 | 4.4.1.10 | 4.4.1.10 | 4.4.1.10 |
| Shock | 4.4.1.15 | 4.4.1.15 | 4.4.1.15 | 4.4.1.15 |
| Humidity | 4.4.1.12 | 4.4.1.12 | 4.4.1.12 | 4.4.1.12 |
| Salt Spray | 4.4.1.13 | 4.4.1.13 | 4.4.1.13 | 4.4.1.13 |
| Explosion Proof | No Test | 4.4.1.14 | 4.4.1.14 | 4.4.1.14 |
| Sand and Dust | 4.4.1.16 | 4.4.1.16 | 4.4.1.16 | 4.4.1.16 |
| Fungus | 4.4.1.17 | 4.4.1.17 | 4.4.1.17 | 4.4.1.17 |

3.3.11 Warm-Up Time - The time required for the equipment to warm up prior to operation shall be kept to a minimum and shall not exceed 2 minutes under standard conditions and 4 minutes at extreme test conditions.

3.3.12 Primary Input Power Requirements - The equipment shall meet all applicable requirements of MIL-STD-704 and shall give specified performance from the following power sources with characteristics as defined in MIL-STD-704 having limits as specified therein. The power required shall not exceed the specified amounts.

(1) AC Power (Single Phase) 115V, Cagegory "B", 100 VA

(2) DC Power 28V, Category "B" 1 watt (Lighting)

3.3.12.1 Degraded Performance - Degraded performance will be permitted for voltage transients not exceeding 0.5 second during normal electric system operation. Operation shall return to normal with no resulting damage to the equipment.

3.4 Performance - Unless otherwise specified, values set forth to establish the requirements for satisfactory performance apply to performance under both standard and extreme conditions. When reduced performance under the extreme conditions is acceptable, tolerances or values setting forth acceptable variations from the performance under the standard conditions will be specified. The Compass Set shall perform satisfactory when subjected to all the tests specified in Section 4 of this Specification.

3.4.1 Operation - The Compass Set, Gyroscope Reference, Navigational AN/ASN-75 consists of a Gyroscope, Directional Displacement CN 1141/ASN-75; Amplifier-Power Supply AM-4606/ASN-75; Compensator, Electronic Magnetic Compass CN-1142/ASN-75 (optional); Control, Compass Set C-8021/ASN-75 and Transmitter, Remote Compass Type ML-1 (without compensator, optional). The Compass Set AN/ASN-75(*) shall provide



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

accurate stabilized signals of the heading of an aircraft through 360 degrees in azimuth. The control azimuth signal shall be presented by precision transmitting synchros as outputs for indicators, navigational and accessory equipments. Gyro stabilized reference signal intelligence for an automatic pilot is available from the synchro transmitter in the directional gyro. The operation of the compass set shall be such that it shall function as a magnetically slaved compass controlled directional gyro in a "Slaved" mode or as a"Free' directional gyro with latitude connection for the effect of the earth's rotation in a "Free" gyro mode. The random drift of the compass set AN/ASN-75(*) shall not exceed 5.5 degrees per hour when operated as a free gyro compass with latitude correction. Means shall be provided on the Control C-8021(*) for synchronizing the compass. The synchronization shall be a synchronizing indicator on the Control which will provide visual indication of misalignment between the compass and the directional gyro intelligence. It is required that the compass set be flexible enough to incorporate a compass signal deviation compensator or equivalent in the transmitter-gyro section of the set. The compass set AN/ASN-75(*) shall conform with all the specified requirements of Figure 1.

3.4.2 Compass Set Accuracy

TYPE I

| Test | Standard Conditions | Envir. Extremes |
|---|---|---|
| Slaved Accuracy* | 0.75 | 1.0° |
| Gyro Drift | 5.5°/hr. | 9.5°/hr. |
| Slaving Rate | 2.5°±1.25°/min. | 3.0°±2.0°/min. |

TYPE II

| Test | Standard Conditions | Envir. Extremes |
|---|---|---|
| Slaved Accuracy* | 0.25° | 0.750° |
| Gyro Drift | 5.5°/hr. | 9.5°/hr. |
| Slaving Rate | 2.5°±1.25°/min. | 3.0°±2.0°/min. |

* After index errors are removed.

3.5 Detailed Requirements

3.5.1 Gyroscope, Directional Displacement - The Gyroscope, Directional Displacement CN-1141(*)/ASN-75 shall be electrically driven and shall be of the non-tumbling type. It shall contain an erection device and synchro transmitters. The gyro shall provide the directional reference to the compass set on the synchro transmitters.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.5.1.1 Size - The gyroscope dimensions shall be in accordance with Figure 5.

3.5.1.2 Weight - The weight of the directional gyro shall not exceed 3.9 pounds.

3.5.1.3 Erection Device - The erection device shall be capable of maintaining the gyro in its erected position with a leveling rate of 2 to 4 degrees per minute.

3.5.1.4 Mounting - The equipment shall be mounted upon vibration isolators as indicated in Figures 5 and 8.

3.5.2 Amplifier-Power Supply - The Amplifier-Power Supply AM1606(*)/ASN-75 shall include the electronic amplifiers required for the operation of the gyroscope.

3.5.2.1 Size - The Amplifier-Power Supply dimensions shall be in accordance with Figure 6.

3.5.2.2 Weight - The weight of the Amplifier-Power Supply shall not exceed 1.8 pounds.

3.5.2.3 Controls - The Amplifier-Power Supply shall have the following controls.

3.5.2.3.1 Latitude Control - The Amplifier-Power Supply shall include a manual latitude control to set in the appropriate north or south latitude to permit an increase or decrease of the output signals acting to counteract the effect of the earth's rotation when the compass set is operated in the "Free Gyro" mode.

3.5.2.3.2 Hemisphere Selective Switch - The Amplifier-Power Supply shall have a hemisphere switch to permit setting the appropriate north or south hemisphere for the area of the compass set operation.

3.5.2.4 Mounting - The equipment shall be mounted as indicated in Figures 6 and 8.

3.5.3 Control, Compass Set - The Control C-8021(*)/ASN-75 shall include the controls and indicating devices of the Compass Set AN/ASN-75(*) conforming to the requirements of Specifications MIL-C-6781 and MIL-F-25173. The control shall provide means to select either of the following types of system operation; compass controlled directional gyro, or free directional gyro with correction for the effect of earth's rotation. The control shall also provide a manual setting of the set to any heading and a synchronizing indicator.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.5.3.1 Size - The dimensions of the Control shall be in accordance with Figure 7.

3.5.3.2 Weight - The weight of the Control shall not exceed 2.25 pounds.

3.5.3.3 Controls - The Control shall have the following controls:

3.5.3.3.1 Synchronizing Indicator - The arrangement of the synchronizing indicator shall be such that when the gyro output signal is less than the compass transmitter signal, the pointer of the synchronizing indicator shall be to the left of its center (synchronized) position. When the pointer is to the right of its center position, the gyro output signal shall be greater than the compass transmitter signal. Maximum deflection of the pointer shall correspond to a signal difference of ±7 degrees. Perceptible indicator motion shall occur at a maximum current of 15 microamperes. Maximum deflection shall occur at a maximum of 200 microamperes.

3.5.3.3.2 Synchronizing Knob - The Control shall include a synchronizing knob which shall change the output signal at a rate of 720 degrees per minute. Clockwise rotation or deflection to the right shall cause an increase of the output signal. The synchronizing knob shall be a "PUSH TO SET", such that the output signal cannot be inadvertently changed.

3.5.3.3.3 Mode Selector Switch - The Control shall include a manually operated two position switch (toggle) for the selection of "Free" or "Slaved" gyro modes of operation.

3.5.3.3.4 Lighting - The compass control panel shall incorporate lighting in accordance with Specification MIL-P-7788.

3.5.3.3.5 Output Transmitting Synchros - The electrical characteristics of the output synchros:

> The synchro shall be capable of controlling three (3) synchro receivers Type 2V-11 TRAC of MIL-S0020705/103. The output resistance shall be one ohm or less. The sensitivity shall be 206 millivolts per degree and 11.8 volt leg to leg.

3.5.3.3.6 Mounting - The Control shall be mounted as indicated in Figure 7, containing a mounting plate in accordance with MIL-C-6781 and mounting plate fasteners in accordance with MIL-F-25173.

3.5.4 Compass Transmitter - The Compass Transmitter shall conform to Specification MIL-T-19576. The use of the magnetic or the electronic compensator shall be specified in accordance with 6.8 and Figure 9 or 10.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

3.5.5 Compensator, Electronic, Magnetic Compass - The Compensator CN-1142(*)/ASN-75 shall electronically compensate the directional signals of the Remote Compass Transmitter when corrections for one and two cycle errors are required. The corrective action shall eliminate errors caused by magnetism, north-south and east-west, and compass set assembly transmission.

3.5.5.1 Size - The dimensions of the Compensator shall be in accordance with Figure 11.

3.5.5.2 Weight - The weight of the Compensator shall not exceed 1.3 pounds.

3.5.5.3 Mounting - The Compensator shall be mounted as indicated in Figure 11 and contain mounting plate fasteners in accordance with MIL-F-25173.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Classification of Tests - Items covered by this specification shall be subjected to the following tests to determine compliance with all applicable requirements:

(1) Preproduction Tests
(2) Initial Production Tests
(3) Acceptance Tests
(4) Life Tests

4.2 Preproduction Tests - Preproduction tests shall be made on an equipment representative of the production equipments to be supplied under the contract. Preproduction tests shall be accomplished under the responsibility of the contractor and shall be conducted in accordance with the approved test procedure of 4.6. The government inspector and the procuring activity shall be advised when tests are to be conducted so that a representative may be designated to witness or supervise the tests when so desired. Contractors not having adequate facilities to conduct all required tests shall obtain the services of a commercial testing laboratory acceptable to the Government.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.2.1 Preproduction Test Data - The contractor shall submit all data collected in conducting these tests to the procuring agency for review and approval. On first production contracts this data shall include a list of all electrical and electronic parts giving their specified voltage, current and temperature rating and the applied circuit voltage, current and ambient and surface temperatures. The ambient and surface temperature shall be obtained under the extreme high temperature operation condition.

4.2.2 Scope of Tests - Preproduction tests shall include all tests deemed necessary by the procuring activity to determine that the equipment meets the requirements of this specification and the contract. Preproduction tests shall include interference tests in accordance with Specification MIL-I-6181 and all the tests of this specification.

4.2.3 Preproduction Approval - Approval of the preproduction sample shall be by the procuring activity upon satisfactory completion of all tests. No production equipments shall be delivered prior to the approval of the preproduction sample. Prefabrication of production equipment prior to the approval of the preproduction sample is at the contractor's own risk. The approved preproduction shample shall be retained by the contractor for his use in the fabrication and testing of equipment to be submitted for acceptance. The preproduction sample shall not be considered as one of the equipments under the contract.

4.2.4 Production Equipments - Equipments supplied under the contract shall in all respects, including design, construction, workmanship, performance and quality, be equivalent to the approved preproduction sample. Each equipment shall be capable of successfully passing the same tests as imposed on the preproduction sample. Evidence of non-compliance with the above shall constitute cause for rejection and for equipment already accepted by the Government, it shall be the obligation of the contractor to make necessary corrections as approved by the procuring activity.

4.3 Initial Production Tests - One of the first 10 production equipments shall be selected and sent at the contractor's expense to a designated Government laboratory for tests. This equipment shall be selected by the procuring activity after the equipment has successfully passed all individual tests. The preproduction sample shall not be selected for this test.

4.3.1 Scope of Tests - This equipment may be subjected to any and all tests the procuring activity deems necessary to assure that the production equipment is equivalent to the previously approved preproduction sample in design, construction, workmanship, performance and quality and that it meets all applicable requirements.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.3.2 Accessory Material - In addition to the complete equipment submitted for Initial Production Tests the contractor shall also submit such accessory material and data necessary to test the equipment.

4.3.3 Initial Production Sample Approval - Approval of the Initial Production sample shall be by the procuring activity upon satisfactory completion of all tests. Any design, material or performance defect made evident during this test shall be corrected by the contractor to the satisfaction of the procuring activity. Failure of the Initial Production sample to pass any of the tests shall be cause for deliveries of equipment under the contract to cease until proper correction action is approved and accomplished. Corrective action shall also be accomplished on equipment previously accepted when requested by the procuring activity.

4.3.4 Reconditioning of Initial Production Test Sample - On completion of the initial production test the equipment shall be reworked by the contractor by replacing all wear or damaged items. After reworking, the contractor shall resubmit the equipment for acceptance.

4.4 Acceptance Tests - The contractor shall furnish all samples and shall be responsible for accomplishing the acceptance tests. All inspection and testing shall be under the supervision of the government inspector. Contractors not having testing facilities satisfactory to the procuring activity shall engage the service of a commercial testing laboratory acceptable to the procuring activity. The contractor shall furnish test reports showing quantitative results for all acceptance tests. Such reports shall be signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Acceptance tests shall consist of the following:

(1) Individual Tests
(2) Sampling Tests
(3) Reliability Assurance Tests
(4) Special Tests

4.4.1 Individual Tests - Each compass set submitted for acceptance shall be subjected to the individual tests. These tests shall be adequate to determine compliance with the requirements of material, workmanship, and operational adequacy. As a minimum, each equipment accepted shall have passed the following tests:

| | |
|---|---|
| Examination of Product | 4.4.1.1 |
| Power Consumption | 4.4.1.2 |
| Synchronization | 4.4.1.3 |
| Slaving Rate | 4.4.1.4 |
| Slaved Accuracy | 4.4.1.5 |
| Gyro Drift | 4.4.1.6 |
| Manufacturing Run In Test | 4.4.1.18 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.4.1.1 Examination of Product - Each component of the compass system shall be examined carefully to determine that the material and workmanship requirements have been met.

4.4.1.2 Power Consumption - The total power required for any of the alternate systems shall not exceed 100 VA starring and 60 VA running. The running power shall be measured after a minimum of five minutes.

4.4.1.3 Synchronization - With the Remote Compass Transmitter set to north (0°) heading, the sync knob on the controller shall be rotated in the direction indicated on the knob until the annunciator on the controller is centered (neither + or . visible). The heading output from the controller shall indicate approximately 0°. Rotation of the transmitter 10° clockwise from the synchronized position shall cause the annunciator to be fully deflected, indicating a cross(+). Rotation of the sync knob in the direction indicated shall center the annunciator, removing the cross (+) indication. The heading output from the Controller shall indicate approximately 10°. The transmitter shall be repositioned to a north (0°) heading and the system synchronized. Rotation of the transmitter 10° counterclockwise from the synchronized position shall cause the annunciator to be fully deflected, indicating a dot (:). Rotation of the sync knob in the direction indicated shall center the annunciator, removing the dot (:) indication. The heading output from the Controller shall indicate approximately 350°.

4.4.1.4 Slaving Rate - With the system first synchronized on a north (0°) heading, rotation of the induction compass transmitter to a 30° heading shall cause the gyro to precess toward the new transmitter heading. The precession rate shall be 2.5±1.25 degrees per minute when measured over a 10° heading change from 5° to 15°. The system shall be re-synchronized to a north (0°) transmitter heading. Rotation of the transmitter to a 330° heading shall cause the gyro to precess toward the new transmitter heading at a rate of 2.5°±1.25° per minute measured over a 10° heading change from 355° to 345°.

4.4.1.5 Slaved Accuracy

4.4.1.5.1 Static Settling - With the remote compass transmitter positioned to a north (0°) heading, the sync knob on the Controller shall be rotated to produce a reading of 10° on the indicator. Allow the system to slave to null and after 10 minutes note the heading indication. Repeat the above, except the sync knob shall be rotated to produce a reading of 350° on the angle position indicator. The two heading indications after settling shall not differ by more than 0.75°.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.4.1.5.2 Scale Error - The scorsby shall be turned off during this test. Record the error between the remote compass transmitter heading and the angle position indicator reading at 30° heading increments starting at 0°. The system shall be re-synchronized on each heading by rotating the sync knob on the controller. Maximum error on any heading (after removal of index errors) shall be 1.5°.

4.4.1.6 Gyro Drift - All gyro drift tests shall be conducted with the slaved free switch in the free position.

4.4.1.6.1 Test Site Latitude Drift - The latitude dial on the base of the Directional Gyro shall be set to the latitude of the location at which the test is being conducted. The N-S hemisphere switch shall be set to the hemisphere of the test location. After operating the system for a minimum of 30 minutes the gyro drift shall be determined by recording the heading indication on the angle position indicator, waiting 30 minutes and again recording the heading indication on the angle position indicator. The gyro drift shall be equal to:

$$I - 7.5 (\sin L' - \sin L)$$

and shall not exceed plus or minus 2.75 degrees where:
I is the change of indication of the angle position indicator.
L' is the latitude set on the latitude dial.
L is the actual latitude of the test location.

4.4.1.6.2 N 90° Latitude Drift - Conduct the test following the same procedure as stated in 4.4.1.6.1 except set the latitude dial to 90° and the hemisphere switch to N. The same tolerance shall apply.

4.4.1.6.3 S 90° Latitude Drift - Conduct the test following the same procedure as stated in 4.4.1.6.1 except set the latitude dial to 90° and the hemisphere switch to S. The same tolerance shall apply.

4.4.1.7 Voltage and Frequency Variation - At voltage and frequency variations as specified in MIL-STD-704, Category "B", the system shall meet the requirements of paragraphs 4.4.1.4 and 4.4.1.6.1 of this specification except the tolerance of 4.4.1.6.1 shall be 3.25 degrees.

4.4.1.8 Dynamic Accuracy - The ML-1 transmitter or equivalent shall be subjected to dynamic conditions to produce an oscillatory output signal having a peak amplitude equivalent to ±7.5 degrees error and a frequency of 2 to 5 cycles per second. With the compass transmitter subjected to the above conditions the test of paragraph 4.4.1.5.1 shall be conducted except the tolerances shall be 1.0°.

4.4.1.10 Temperature and Altitude Tests



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.4.1.10.1 High Temperature - While at the environmental conditions listed below the system shall meet the requirements of 4.4.1.5.1 and 4.4.1.6.1 of this specification. The tolerances stated in 4.4.1.5.1 shall be 1.0° and for 4.4.1.6.1 shall be 4.75 degrees. The system, less ML-1 transmitter, shall be subjected to +85°C for 4 hours. The chamber temperature shall then be lowered to +71°C. After the system has stabilized for 4 hours, power shall be applied and the system shall meet the requirements indicated above.

4.4.1.10.2 Low Temperature - High Altitude - While at the environmental conditions listed below the system shall meet the requirements of 4.4.1.5.1 and 4.4.1.6.1 of this specification. The tolerances for 4.4.1.5.1 shall be 1.0° and for 4.4.1.6.1 shall be 4.75 degrees. The system, less ML-1 transmitter, shall be subjected to -62°C for 4 hours. The chamber temperature shall then be raised to -54°C and the pressure set for 70,000 ft. altitude. After the system has stabilized for 4 hours, power shall be applied and the system shall meet the requirements indicated above.

4.4.1.11 Vibration - The set, less ML-1 transmitter, shall be tested in accordance with the vibration requirements of Specification MIL-T-5422. Vibration envelopes shall be used as identified in 3.3.10 (Figures 2 through 4). At the conclusion of the vibration testing the system shall meet the requirements of 4.4.1.5 and 4.4.1.6.1.

4.4.1.12 Humidity - The system shall be tested in accordance with the humidity requirements of Specification MIL-T-5422. After the completion of the tests the system shall meet the requirements of 4.4.1.5 and 4.4.1.6.1 of this specification.

4.4.1.13 Salt Spray - The system shall be tested in accordance with the salt spray requirements of Specification MIL-T-5422. After the completion of the tests the system shall meet the requirements of 4.4.1.5 and 4.4.1.6.1 of this specification.

4.4.1.14 Explosion-Proof Test - The system shall be tested in accordance with the explosion-proof test requirements of Specification MIL-T-5422.

4.4.1.15 Shock - The system shall be tested in accordance with the shock requirements of Specification MIL-T-5422, except the acceleration shall be limited to 10g for the gyro and the amplifier-power supply. After the completion of the tests the system shall meet the requirements of paragraph 4.4.1.5 and 4.4.1.6.1 of this specification.

4.4.1.16 Sand and Dust - The system shall be tested in accordance with the shock requirements of Specification MIL-T-5422. After completion of the tests the system shall meet the requirements of 4.4.1.5 and 4.4.1.6.1 of this specification.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.4.1.17 Fungus - The system shall be tested in accordance with the fungus requirements of Specification MIL-T-5422. Satisfactory completion of this test will be determined by the system have satisfactorily passed the test requirements of 4.4.1.5 and 4.4.1.6.1 of this specification.

4.4.1.18 Manufacturing Run In Test - Each equipment shall be operated under the conditions specified herein for a period of 6 hours without failure. A failure shall be defined as anything which causes malfunctioning of the equipment. Only those adjustments will be permitted which can be made by using such controls and adjustments that are accessible to the operator during the normal use of the equipment.

| | |
|---|---|
| Temperature | Ambient room |
| Humidity | Ambient room |
| Vibration | Any selected frequency within the range of 20 to 30 cps (excluding resonant points) and a minimum amplitude of ±3 g's |

The equipment shall be vibrated (without vibration isolators) for a period of 10 minutes prior to the beginning of the 6-hour period of operation. Where feasible, the equipment shall be operated during this vibration period for the purpose of detecting flaws and imperfect workmanship. Operation within the specified limits of satisfactory performance is not necessarily required during the vibration period. The direction of vibration should be vertical to the normal mounting plane for 5 minutes and lateral to the plane for 5 minutes. Where it is not feasible to vibrate the equipment in 2 directions the vertical direction shall be used. During the 6-hour period of operation following the 10-minute vibration period, the equipment shall be mechanically cycled periodically through its various phases of operation. Should a failure occur, it should be repaired and the test started over, except that the 10-minute vibration period need not be repeated when it is certain the failure was not a result of the vibration. Should repetitive failures occur, corrective action shall be taken to eliminate this defect from future equipment. A record shall be kept of all failures. The 6-hour period specified above may be composed of two 3-hour periods to conform with standard working hours.

4.4.2 Sampling Tests - Sets selected for sampling tests shall first have passed the individual tests. Equipments shall be selected for sampling tests by the government inspector in accordance with the following:

| Quantity of Equipments Offered for Acceptance | Quantity to be Selected For Sampling Test |
|---|---|
| First 10 | 0* |
| Next 50 | 1 |
| Next 75 | 1 |
| Next 100 | 1 |
| 1 for each additional 200 or fraction thereof | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.4.2.1 Scope of Tests - As a minimum, each set selected for sampling tests shall be subjected to the following tests:

| | |
|---|---|
| Individual Tests | 4.4.1 |
| Voltage and Frequency Variation | 4.4.1.7 |
| Dynamic Accuracy | 4.4.1.8 |
| High Temperature | 4.4.1.10.1 |
| Low Temperature - High Altitude | 4.4.1.10.2 |
| Vibration | 4.4.1.11 |
| Manufacturing Run In (test specified in paragraph 4.4.1.18 except that the test duration shall be 120 hours with no restriction on the number of failures. However, each failure shall be analyzed as to cause and remedial action necessary to reduce the possibility of its recurrence in future equipment.) | 4.4.1.16 |

4.4.3 Reliability Assurance Tests - Reliability Assurance Tests shall be conducted using MIL-STD-781. A Qualification Phase and Sampling Phase Tests shall be conducted.

4.4.3.1 Qualification Phase - Prior to the acceptance of equipments under the contract or order, a minimum of three (3) equipments shall be tested as outlined in MIL-STD-781, under the section entitled "Qualification Phase of Production Reliability Tests". The maximum number of equipments to be used shall be those listed in Table 5 of MIL-STD-781. For the Qualification Phase Test Level E shall be used. The Accept-Reject Criteria for Test Plan II shall be used.

4.4.3.2 Reliability Sampling Phase Tests - Samples of the equipment shall be tested as outlined in MIL-STD-781, under the Section entitled "Sampling Phase of Production Reliability Tests". For the Sampling Phase Test Level E shall be used. The Accept-Reject criteria for Test Plan VI shall be used to determine the length of the tests (until an accept or reject decision is reached).

4.4.3.2.1 Lot Size for Sampling Phase - The entire contract quantity (with the exception of those equipments used in the Qualification Phase) shall be considered one lot. The test program shall start the first month after the Qualification Phase has been completed. Samples shall be selected and placed on test in the same manner as though one month's production was a lot. The samples shall be tested until an accept or reject decision is reached. In the mantime other equipments constructed shall be shipped. The test results shall be summarized monthly for the procuring activity. The procuring activity reserves the right to stop the acceptance of equipment at any time after one or more reject decisions have been reached, pending a review of the contractor's efforts to improve



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

the equipment, the equipment parts, the equipment quality control, etc., so that the entire contract quality will show an accept decision.

4.4.3.3 Test Details - The test details such as the length of the test cycle, the length of the heat portion of the cycle, the performance characteristics to be measured, special failure criteria, preventive maintenance to be allowed during the test, etc., shall be part of the test procedures to be submitted and approved by the procuring activity prior to the beginning of the Qualification Test Phase of the Reliability Assurance Tests.

4.4.4 Special Tests - Special tests shall be conducted on a quantity of equipments for the purpose of checking the effect of any design or material change on the performance of the equipment and to assure adequate quality control. The equipment selected for special tests may be selected from equipments previously subjected to the sampling or reliability assurance tests.

4.4.4.1 Special Test Schedule - Selection of equipments for special tests shall be made as follows:

(1) On an early equipment after an engineering or material change.
(2) Whenever failure reports or other information indicate additional tests are required. (This will be determined by the procuring activity.)

4.4.4.2 Scope of Tests - Special tests shall consist of such tests as approved by the procuring activity. Test procedures previously approved for the preproduction tests shall be used where applicable. When not applicable, the contractor shall prepare a test procedure and submit it to the procuring activity for approval prior to conducting the tests.

4.4.5 Equipment Failure - Should a failure occur during either the sampling, reliability assurance or special tests, the following action shall be taken:

(1) Determine the cause of failure.
(2) Determine if the failure is an isolated case or design defect.
(3) Submit to the procuring activity for approval, proposed corrective action intended to reduce the possibility of the same failure(s) occuring in future tests.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

(4) Where practical, include a test in the individual test to check all equipment for this requirement until reasonable assurance is obtained that the defect has been satisfactorily corrected.

4.5 Life Test - The contractor shall furnish all samples and shall be responsible for accomplishing the life test. The test shall be of 300-hours duration and shall be conducted on equipments that have passed the individual test. The life test shall be performed under the conditions specified in 4.5.1. The life test sample shall be selected by the government inspector in accordance with the following. When reliability tests are conducted, the life test may be omitted if, during the reliability tests, a quantity of equipments equal to, or more than, that listed below receive at least 300 hours each of test time.

| Quantity of Equipments Offered for Acceptance | Quantity to be Selected for Life Test |
|---|---|
| First 25 | 1 |
| Next 175 | 1 |
| Next 300 | 1 |
| | 1 for each additional 500 or fraction thereof |

4.5.1 Test Conditions - The life test shall be conducted under the following simulated service conditions:

| | |
|---|---|
| Temperature | Normal room |
| Altitude | Normal ground (0 - 5000 ft.) |
| Humidity | Room ambient |
| A.C. Voltage | 115 ±5 volts (at lowest applicable frequency) |
| D.C. Voltage | 27.0 ±2.0 volts |

4.5.2 Test Periods - The test may be run continuously or intermittently. Any period of operation shall be of sufficient duration to permit the equipment temperature to stabilize. Periodically, the equipment shall be turned on and off several times and put through its various phases of operation.

4.5.3 Performance Check - At approximately 24-hour intervals during the test, a limited performance check shall be made. The performance check proposed by the contractor shall be subject to approval by the procuring activity.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.5.4 Test Data - The contractor shall keep a daily record of the performance of the equipment, making particular note of any deficiencies or failures. In the event of part failures, the defective part shall be replaced and the operation resumed for the balance of the test period. A record shall be kept of all failures throughout the test, including all tube failures. This record shall indicate the following:

(1) Part type number
(2) The circuit reference symbol number
(3) The part function
(4) Name of the manufacturer
(5) Nature of the failure
(6) The number of hours which the part operated prior to failure.

4.5.4.1 Failure Report - In the event of a failure, the government inspector shall be notified immediately. A report shall be submitted to the procuring activity upon completion of the test. In the report, the contractor shall propose suitable and adequate design or material corrections for all failures which occurred. The procuring activity will review such proposals and determine whether they are acceptable.

4.5.5 Reconditioning of Life Test Samples - An equipment which has been subjected to the life test shall be reconditioned as follows:

(1) On completion of the life test, the equipment shall be reworked by the contractor by replacing all "wear" items. The "wear" items shall be determined by agreement between the contractor and the procuring activity.
(2) After reworking, the contractor shall resubmit the equipment for acceptance.

4.6 Test Procedures - The procedures used for conducting preproduction tests, initial production tests, acceptance tests and life tests shall be prepared by the contractor and submitted to the procuring activity for review and approval. The procedures shall also include any tests described herein. The right is reserved by the procuring activity or the government inspector to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of this specification or the contract. Specification MIL-R-18303 shall be used as a guide for preparation of test procedures. When approved test procedures are available from previous contracts such procedures will be provided and may be used when their use is approved by the procuring activity. However, the right is reserved by the procuring activity to require modification of such procedures, including additional tests, when deemed necessary.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

4.7 Reconditioning of Tested Equipment - Equipment which has been subjected to acceptance and life tests shall be reconditioned by the contractor by replacing all wear or damaged items. After reworking the contractor shall re-submit the equipment for acceptance.

4.8 Presubmission Testing - No item, part or complete equipment shall be submitted by the contractor until it has been previously tested and inspected by the contractor and found to comply, to the best of his knowledge and belief, with all applicable requirements.

4.9 Rejection and Retest - Equipment which has been rejected may be reworked or have parts replaced to correct the defects and resubmitted for acceptance. Before re-submitting, full particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished the government inspector.

5. PREPARATION FOR DELIVERY

5.1 General - All major units and parts of the equipment shall be preserved, packaged, packed and marked for the level of shipment specified in the contract or order in accordance with Specification MIL-E-17555.

6. NOTES

6.1 Intended Use - The Compass Set, Gyroscope Reference Navigational AN/ASN-75(V) is intended for use in transport, reconnaissance, surveillance, target acquisition, troop mobility, specialized support and cargo type aircraft whose range of operation will be world wide in aircraft requiring medium precision heading reference stabilization. This system will provide directional information to remote indicators, radar and navigational equipment and furnish directional control for autopilots, and other auxiliary systems.

6.2 Test Values - Normal and limiting values of performance data shall be determined at input voltages of 27.5 ±0.5 VDC and 115 ±1.0 VAC as applicable. These data are to be used in testing the equipment at installation points for compliance with minimum acceptance standard of performance.

6.3 Performance Objectives - Minimum size and weight, simplicity of operation, ease of maintenance, and an improvement in the performance and reliability of the specific functions beyond the requirements of this specification are objectives which shall be considered in the production of this equipment. Where it appears a substantial reduction in size and weight or improvement in simplicity of design, performance, ease of maintenance or reliability will result from the use of materials, parts and processes other than those specified in Specification MIL-E-5400, it is desired their use be investigated. When investigation shows



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

advantages can be realized, a request for approval shall be submitted to the procuring activity for consideration. Each request shall be accompanied by complete supporting information.

6.4 As a general rul non-repairable subassemblies should be encapsulated or hermetically-sealed. The number of connections internal to the subassembly should be held to a minimum. Detail parts tolerances and ratings should be so selected that the life of the subassembly is greater than that of a similar repairable one. With few exceptions (such as high voltage power supplies), the non-repairable subassembly should evidence a mean-time-to-failure greater than 5000 hours, and for many applications this figure must be nearer 50,000 hours.

6.5 Precedence of Documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply:

(1) Contract - The contract shall have precedence over any specification.
(2) This Specification - This specification shall have precedence over all applicable subsidiary specifications. Any deviation from this specification, or from subsidiary specifications where applicable, shall be specifically approved in writing by the procuring activity.
(3) Referenced Specifications - Any referenced specification shall have precedence over all applicable subsidiary specifications referenced therein. All referenced specifications shall apply to the extent specified.

6.6 The parentheses (*), when used in the type designation, will be deleted or replaced by either a number of letter furnished by the procuring activity upon application by the contractor for assignment of nomenclature in accordance with 3.3.8. The complete type number shall be used on nameplates, shipping records and instruction books, as applicable.

6.7 Ordering Data - Purchasers should exercise any desired options offered herein, and procurement documents shall specify the following:

(1) Title, number, and date of this specification.
(2) Specify Type I or II requirements per 6.8.
(3) Selection of applicable levels of packaging and packing (see 5.1).
(4) Data requirements (see 1.3).



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

6.8 Items of Equipment - The equipment covered by this specification shall consist of the following items:

| | Compass Set AN/ASN-75(*) | | Type Designation |
|---|---|---|---|
| | Type I | Type II | |
| (1) | Gyroscope, Directional, Displacement | Gyroscope, Directional Displacement | CN-1141/ASN-75 |
| (2) | Amplifier-Power Supply | Amplifier-Power Supply | AM-4606/ASN-75 |
| (3) | Control, Compass Set | Control, Compass Set | C-8021/ASN-75 |
| (4) | Transmitter; Remote Compass Thin Wing (with mechanical-magnetic compensator) | Transmitter, Remote Compass Thin Wing (without mechanical-magnetic compensator) | MIL-T-19576 Type ML-1 |
| (5) | | Compensator, Electronic, Magnetic Compass | CN-1142/ASN-75 |

6.9 Definition

6.9.1 Index Error - An error which is due to misalignment of the ML-1 transmitter and compass system synchros. The index error is equal to the algebraic sum of the errors at the equal incremental headings tested through 360° divided by the number of headings tested.

6.10 Applicable Documents -

SPECIFICATIONS

Military

| | |
|---|---|
| MIL-E-4682 | Electron Tubes and transistors, Choice and Application of |
| MIL-W-5088 | Wiring; Aircraft, Installation of |
| MIL-E-5400 | Electronic Equipment, Aircraft, General Specification for |
| MIL-T-5422 | Testing, Environmental, Aircraft Electronic Equipment |
| MIL-I-6181 | Interference Control Requirements, Aircraft Equipment |
| MIL-C-6781 | Control Panel: Aircraft Equipment, Rack or Console Mounted |
| MIL-M-7793 | Meter, Time Totalizing |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| MIL-T-18303 | Test Procedures; Preproduction and Inspection, for Aircraft Electronic Equipment, format on |
| MIL-N-18307 | Nomenclature and Nameplates for Aeronautical Electronic and Associated Equipment |
| MIL-T-19576 | Transmitter; Remote Compass, Thin Wing Type ML-1 (Unstabilized) |
| MIL-S-002078/113 | Synchro, Control Transmitter Type 26B-18CX4A |
| MIL-S-23603 | System Readiness/Maintainability; Avionic Systems Design General Specification for |
| MIL-F-25173 | Fastener, Control Panel, Aircraft Equipment |

STANDARDS

Military

| | |
|---|---|
| MIL-STD-704L | Electric Power, Aircraft Characteristics and Utilization of |
| MIL-STD-781 | Reliability Tests, Exponential Distribution |
| MS17322 | Meter, Time Totalizing, 115 Volt, 400 Cycle, Rev. B. |

6.10.1 Availability of Documents -

(1) When requested specifications, standards, drawings, and publications refer to both title and number. Copies of this specification and applicable specifications required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Supply Depot, Code 105, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

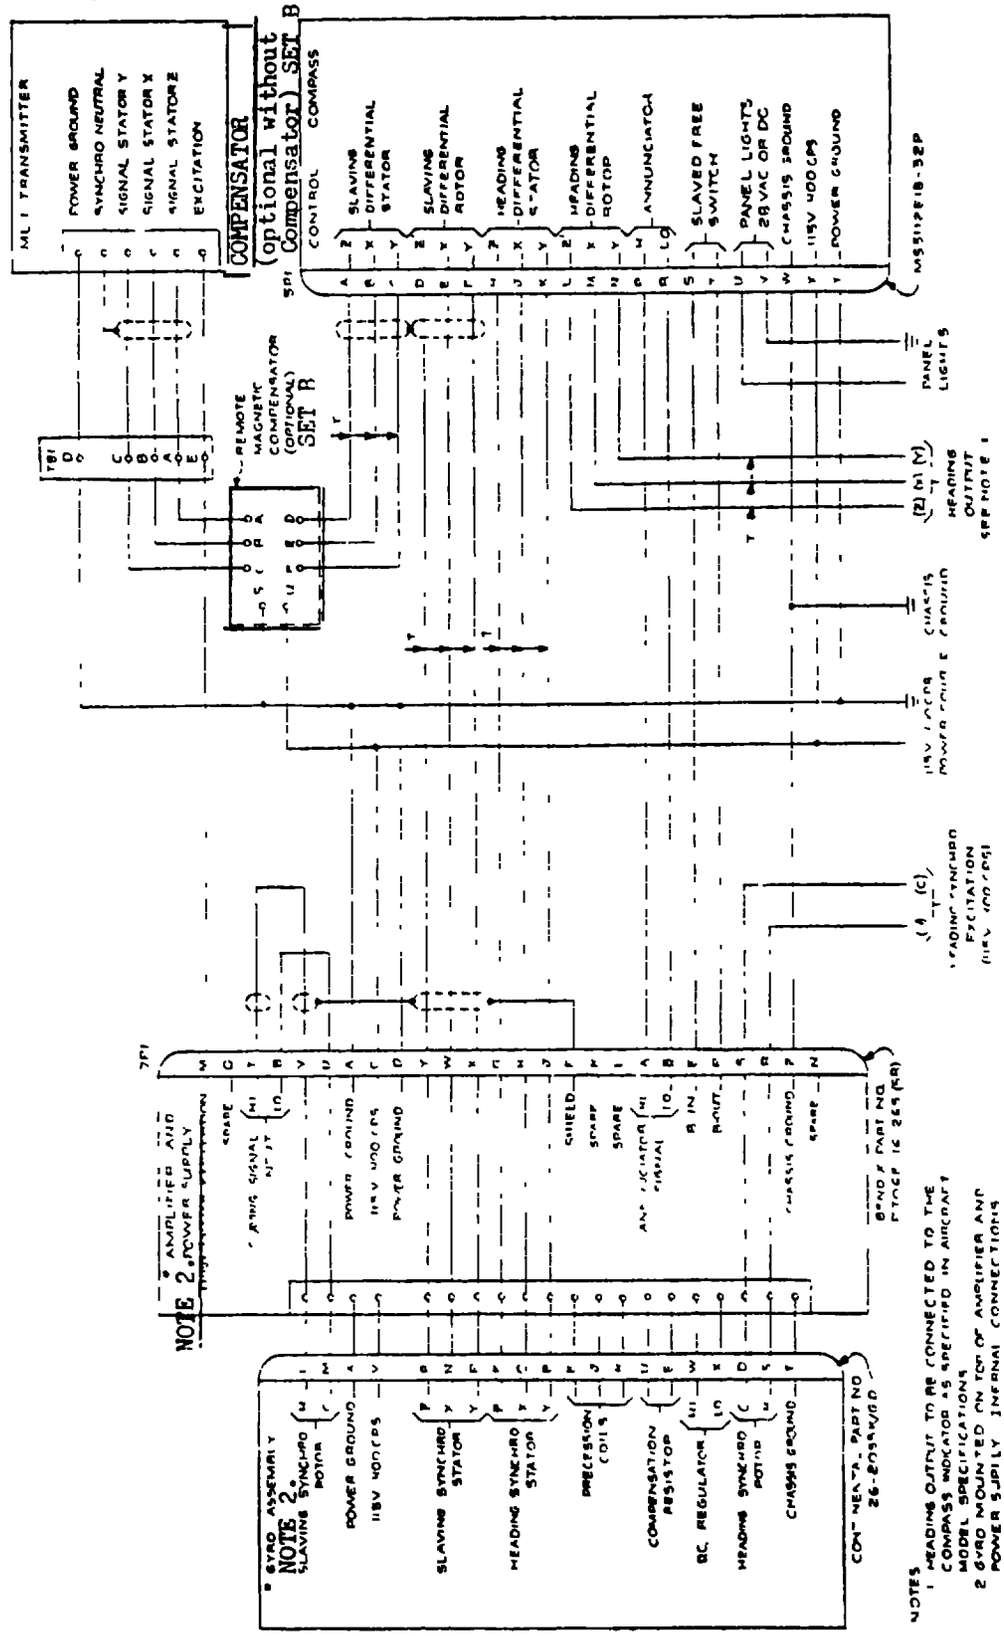



FIGURE 1
INTERCONNECTING WIRING FOR
COMPASS SET, GYROSCOPE REFERENCE,
NAVIGATIONAL AN/ASN-75

FIGURE 1



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

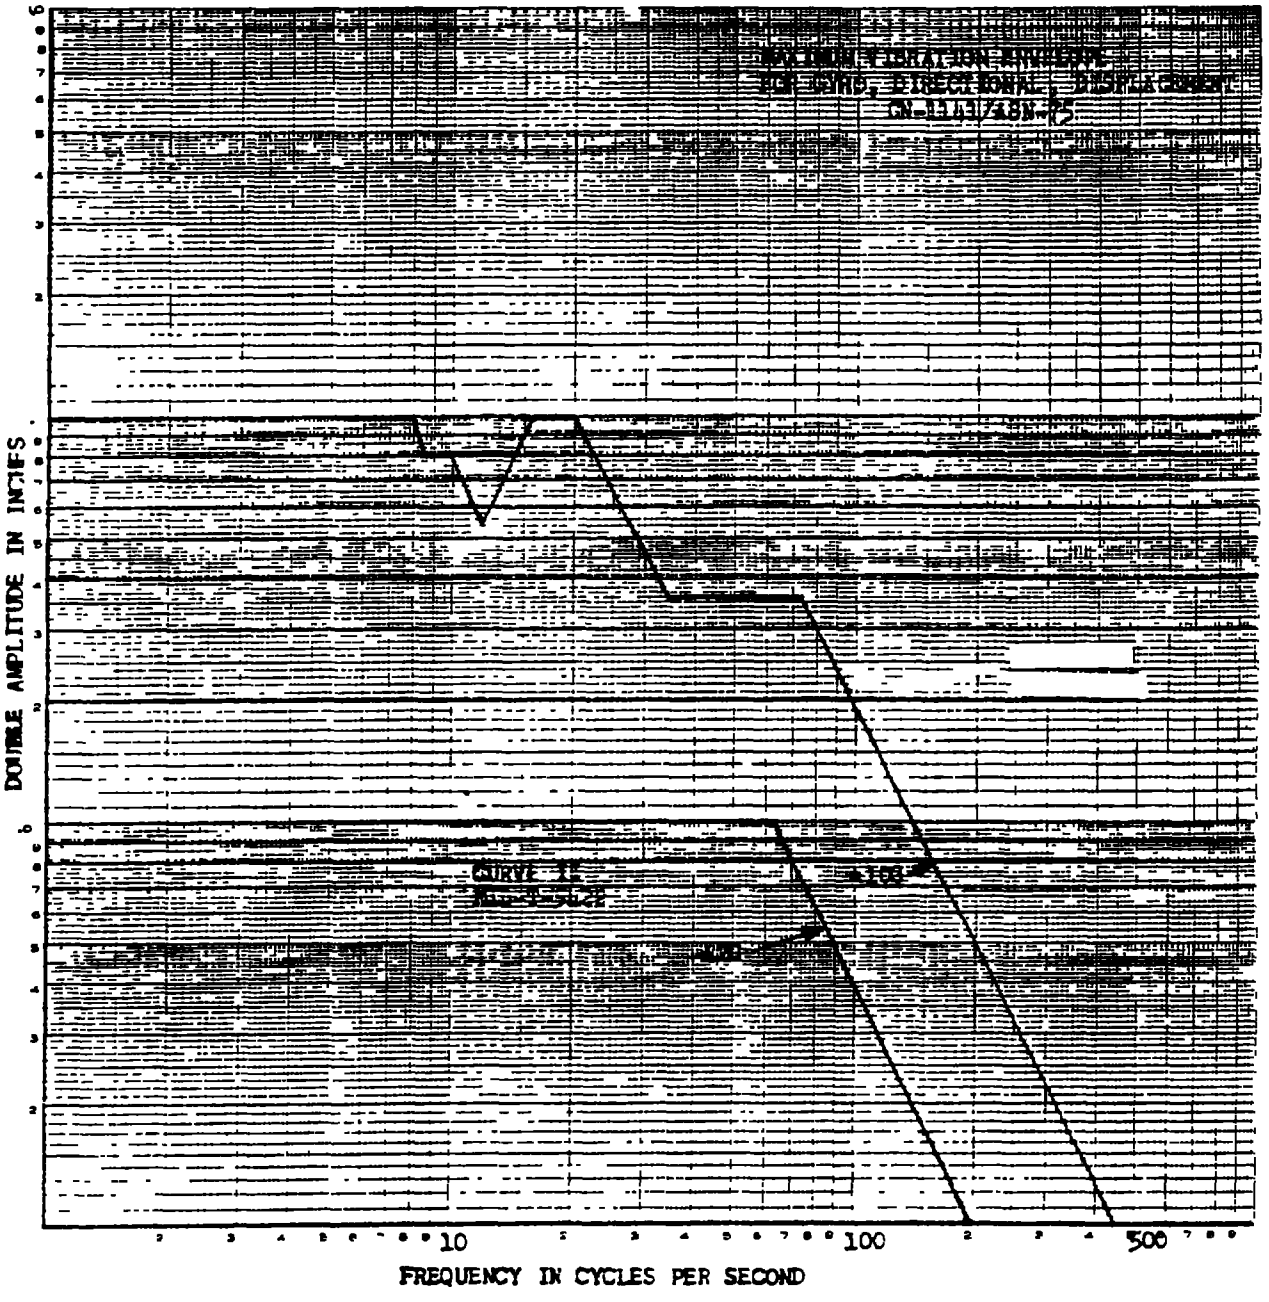



FIGURE 2

GYRO, DIRECTIONAL DISPLACEMENT VIBRATION



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

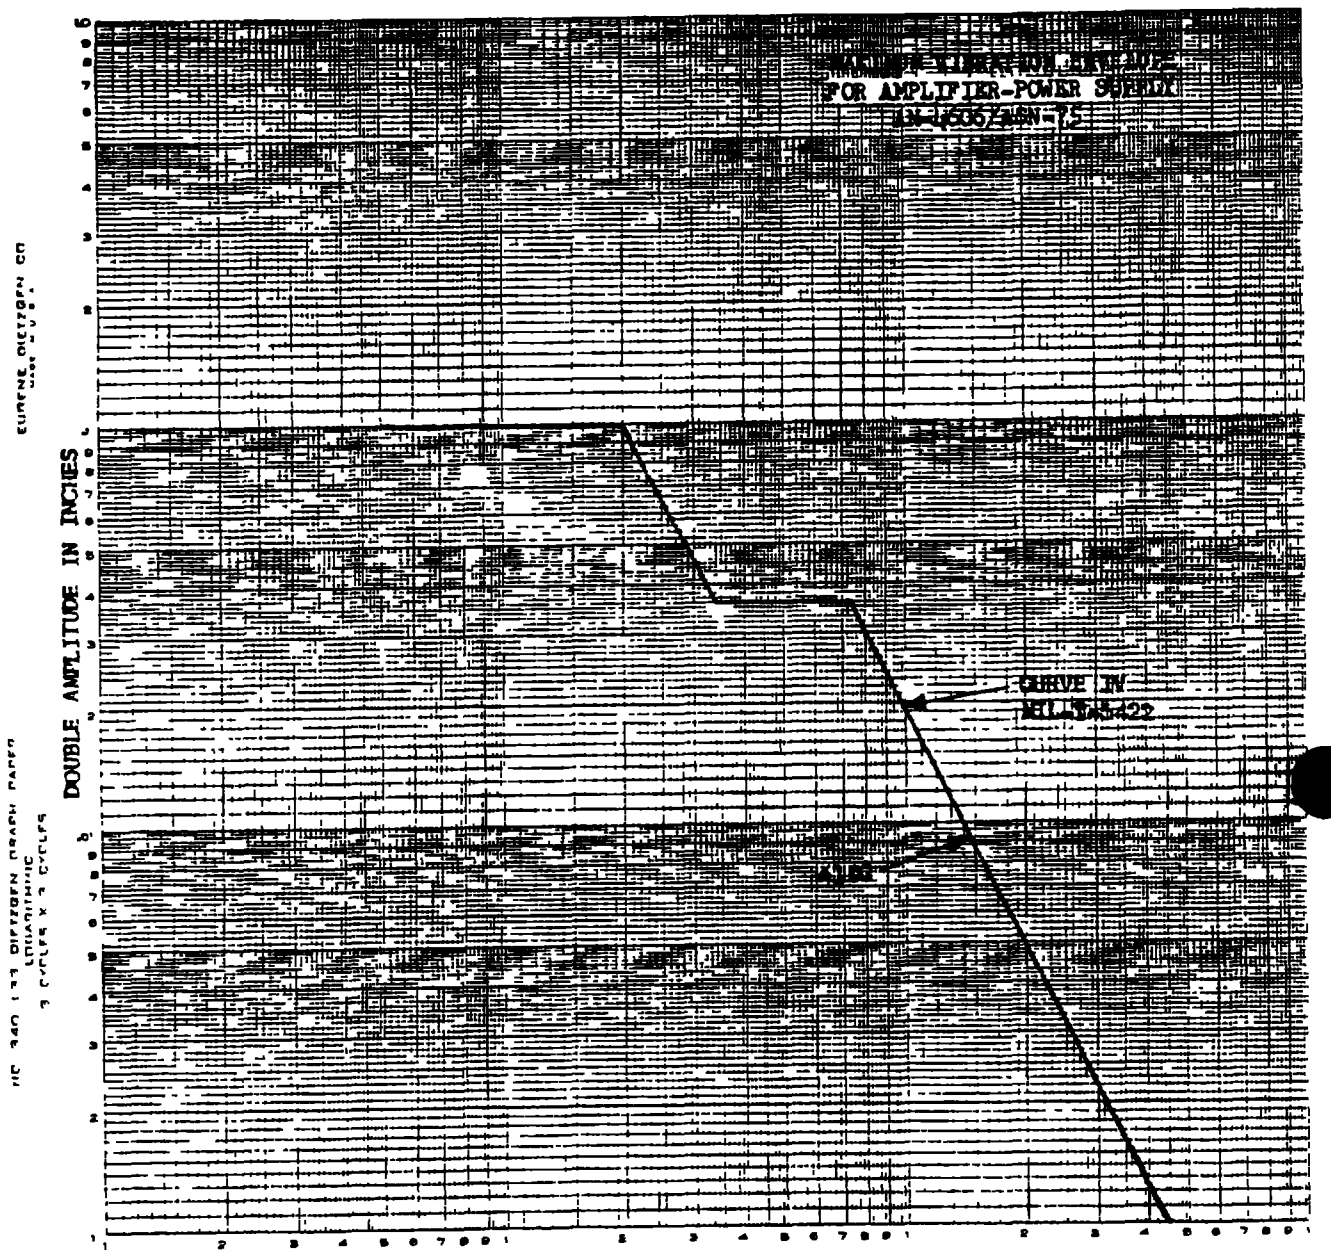



FIGURE 3

AMPLIFIER-POWER SUPPLY VIBRATION



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.


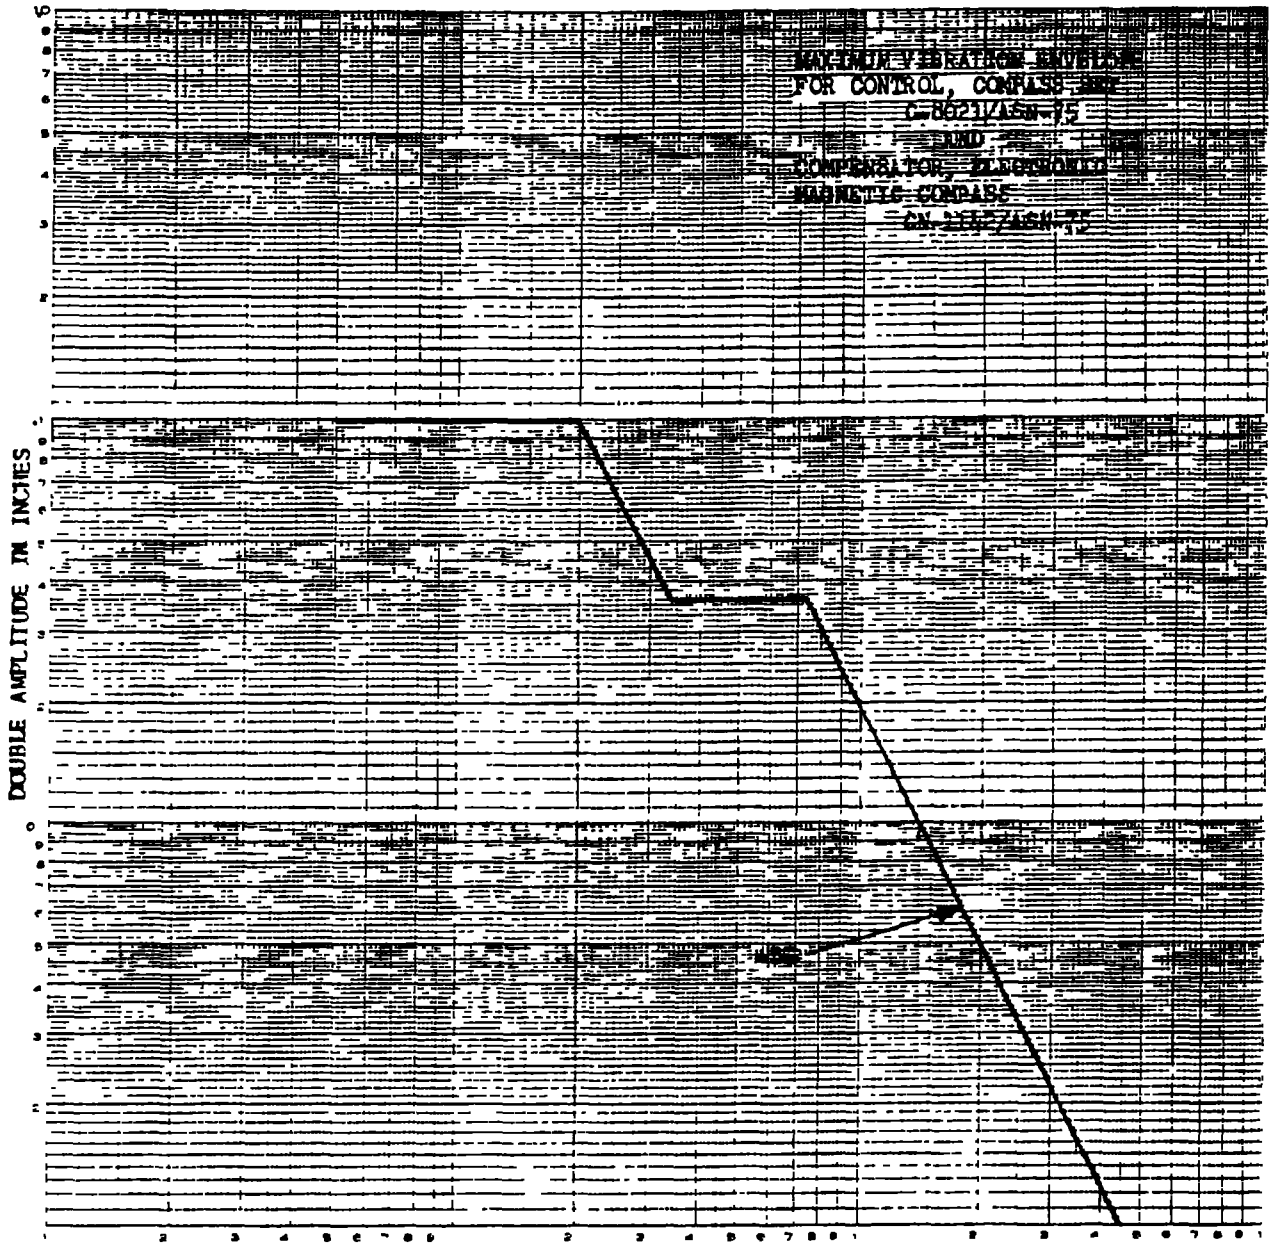



FIGURE 4.
CONTROL, COMPASS SET AND COMPENSATOR,
ELECTRONIC MAGNETIC COMPASS VIBRATION



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

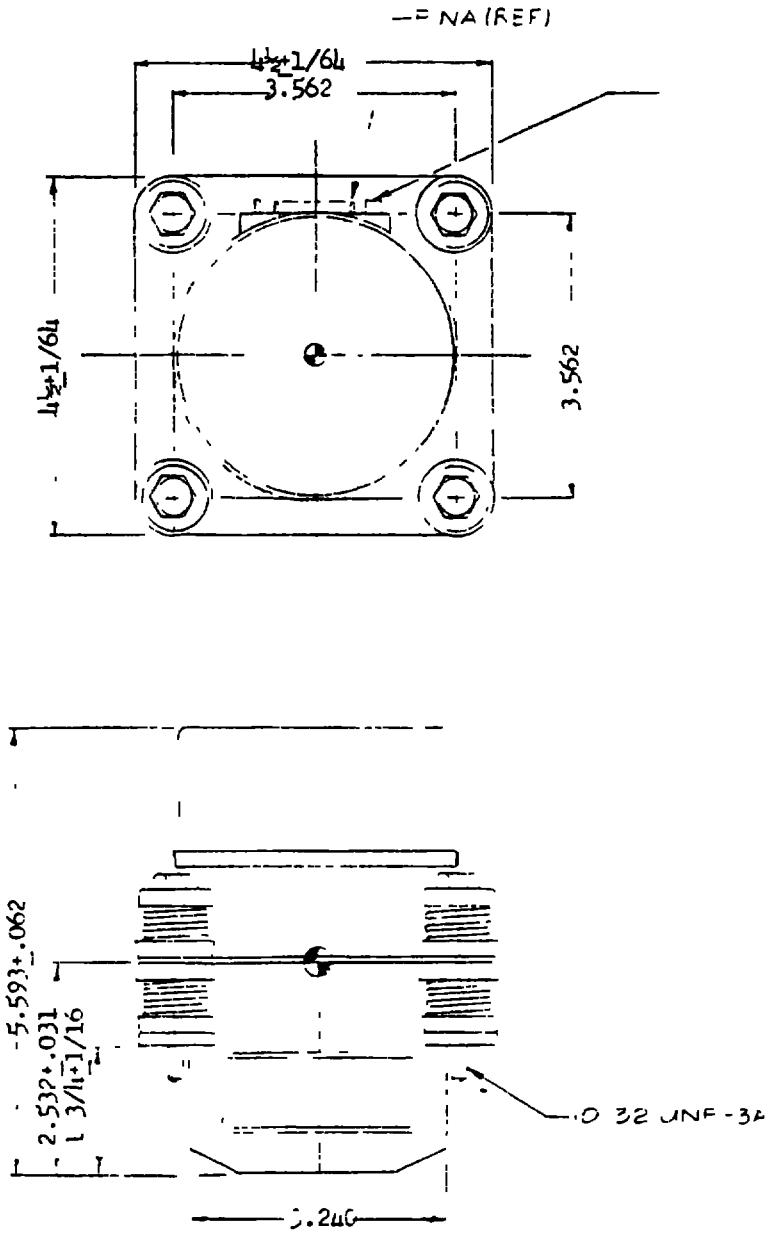


NOTES:
1. ⊕ DENOTES CENTER OF GRAVITY AXES
2. WEIGHT 3 LBS MAXIMUM
3. ALLOW ¼ IN ON ALL SIDES FOR EXCURSION DURING VIBRATION

FIGURE 5
GYROSCOPE, DIRECTIONAL, DISPLACEMENT CN-1141/ASN-75



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

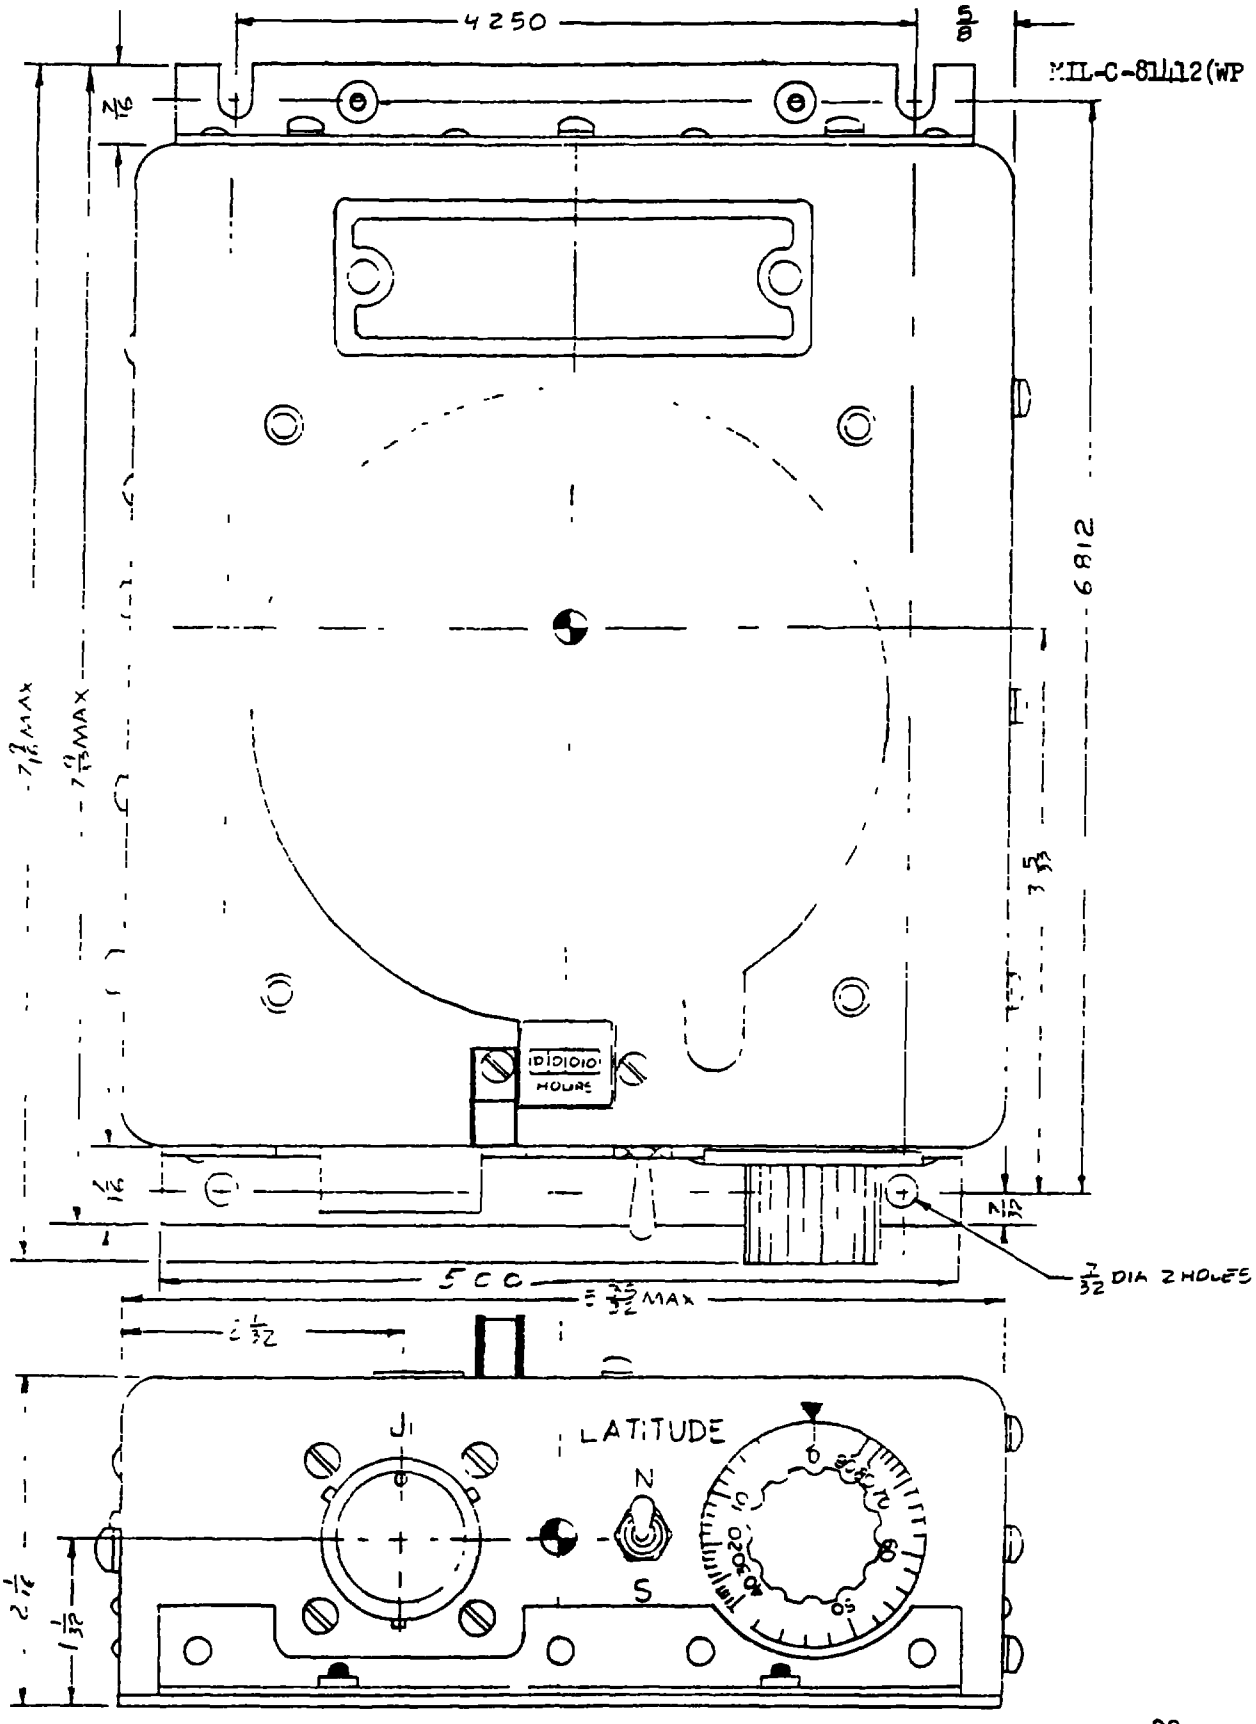



FIGURE 6
AMPLIFIER-POWER SUPPLY AM-4606/ASN-75



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

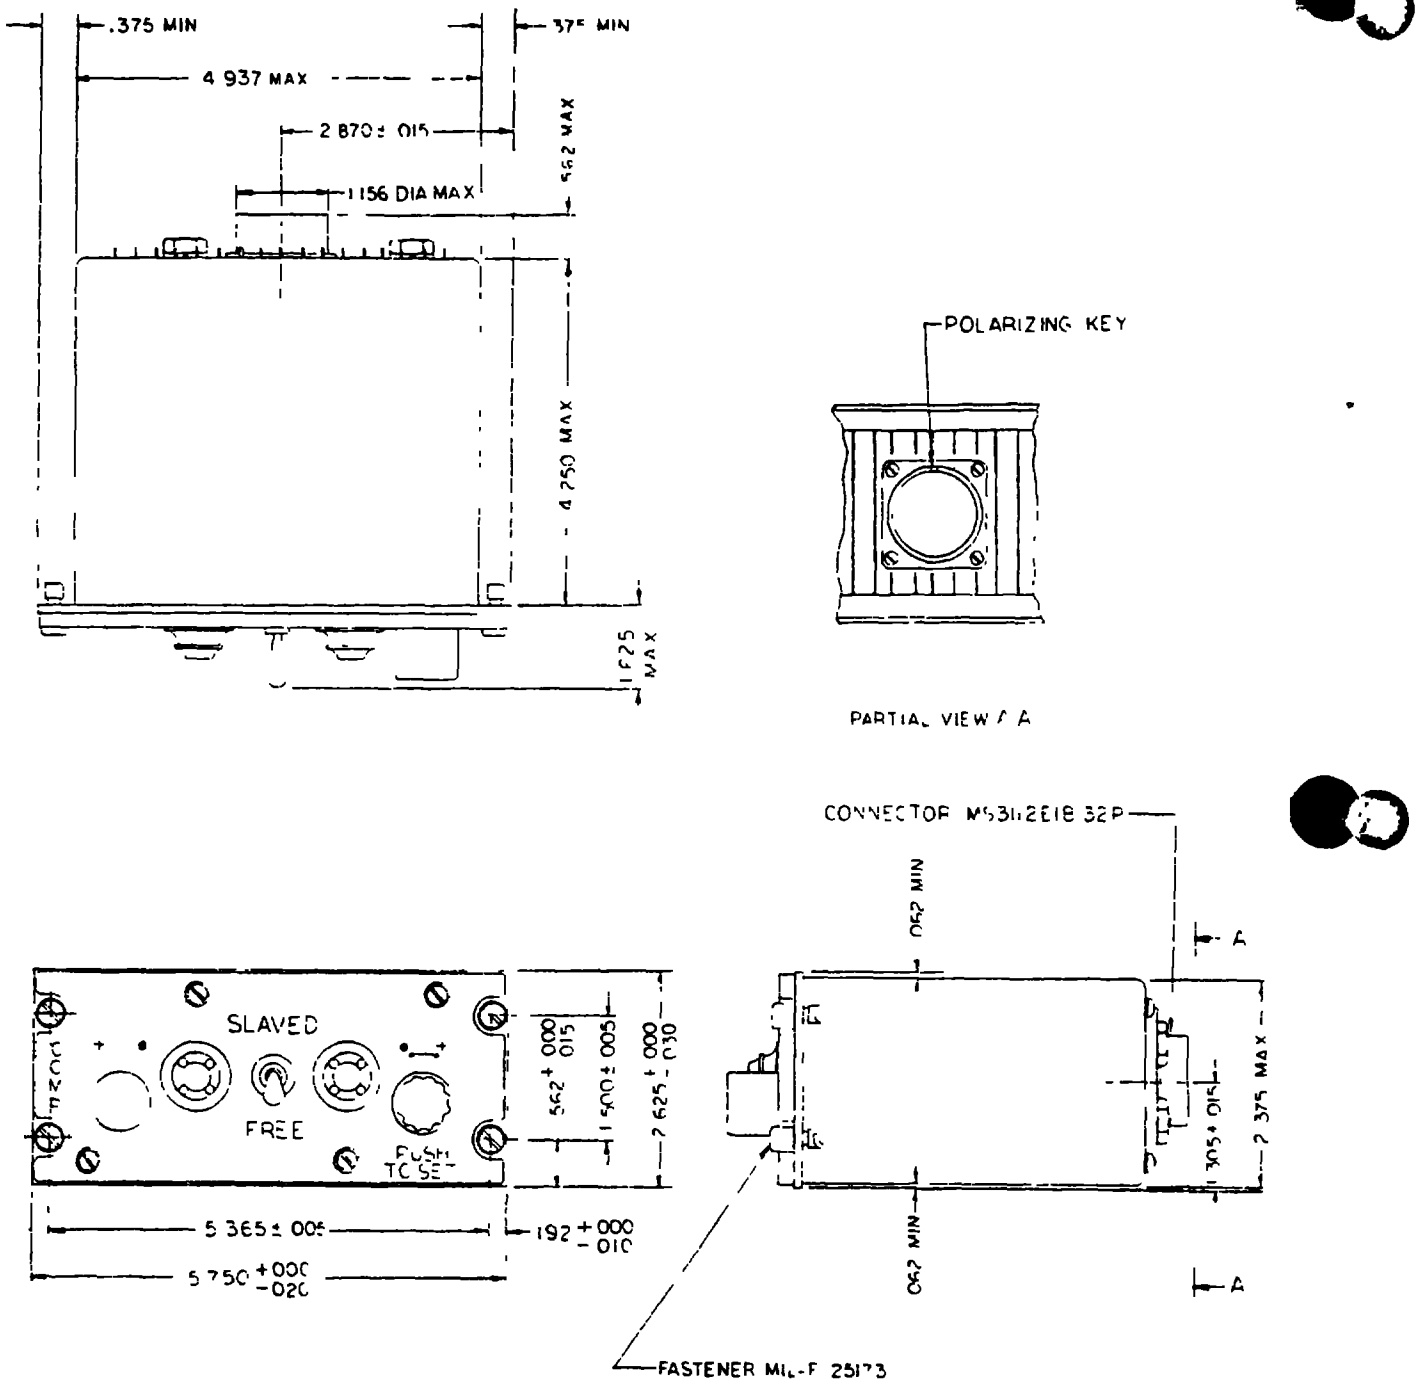



FIGURE 7
CONTROL, COMPASS SET., C- 8021 / ASN- 75



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

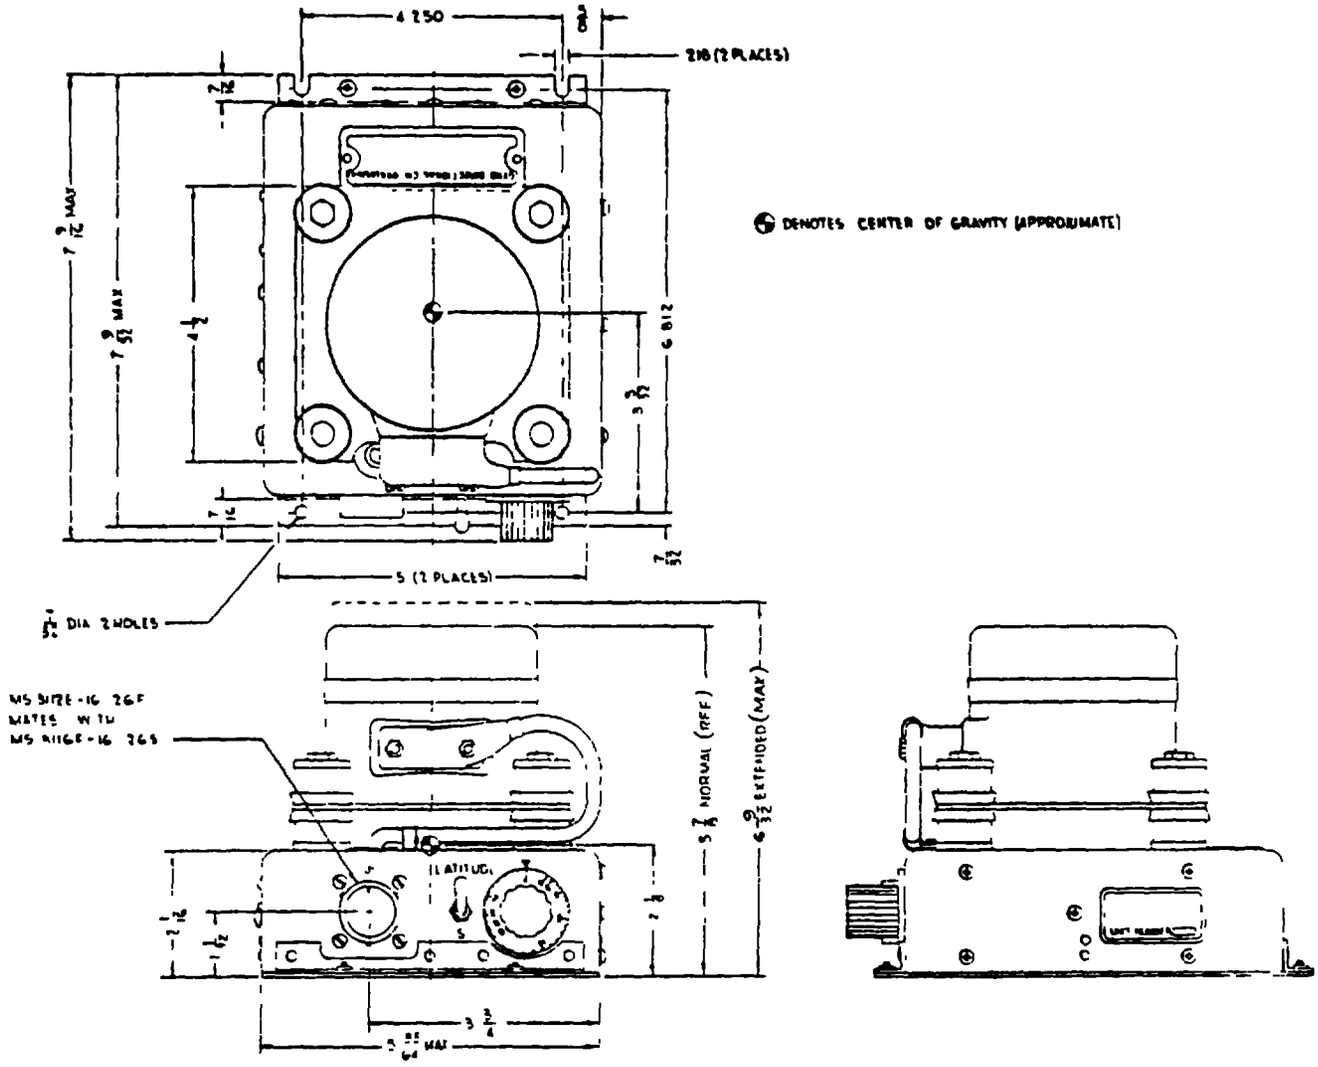



FIGURE 8

GYROSCOPE-AMPLIFIER POWER SUPPLY CONFIGURATION



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.


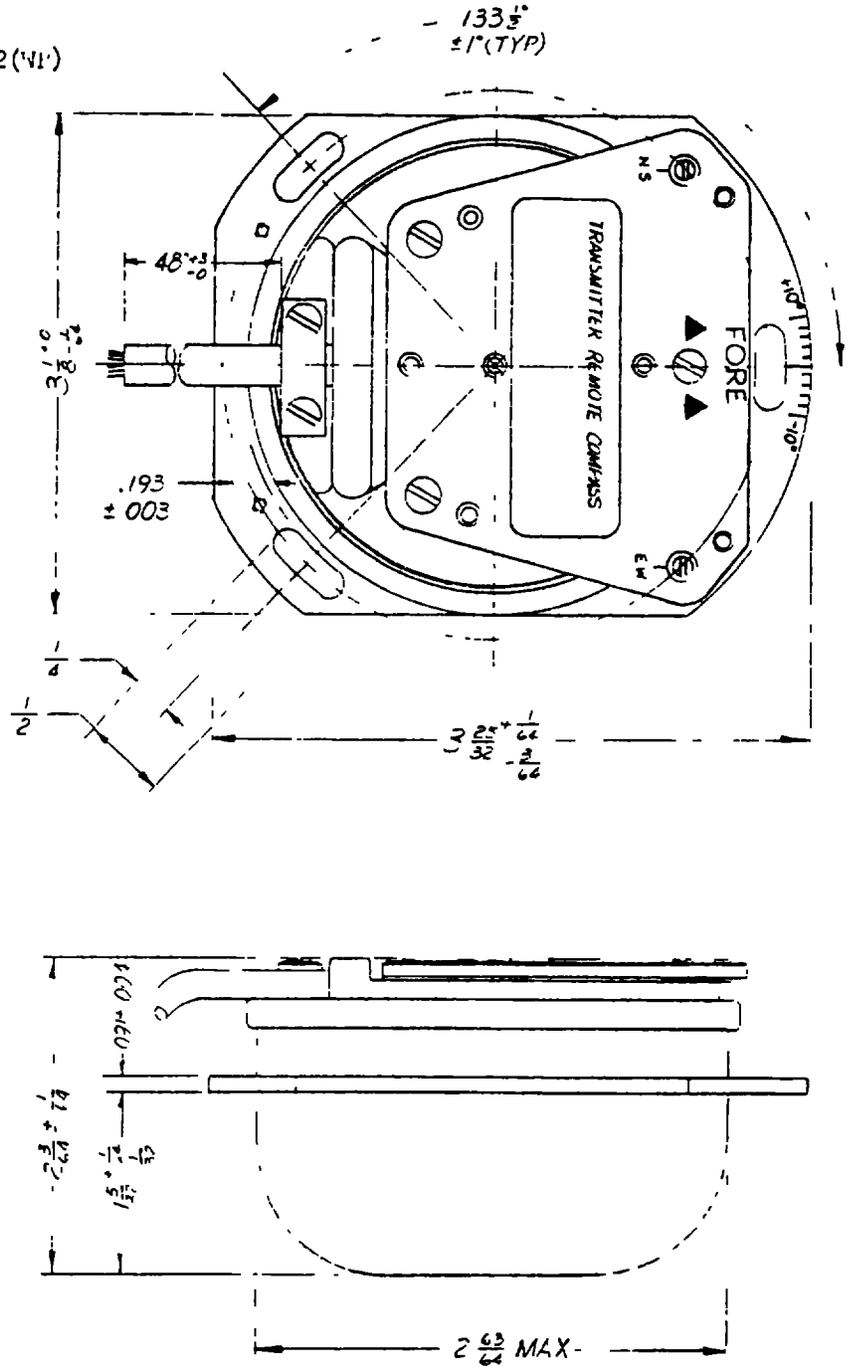



FIGURE 9

TRANSMITTER, REMOTE COMPASS
THIN WING, TYPE ML-1, SET A

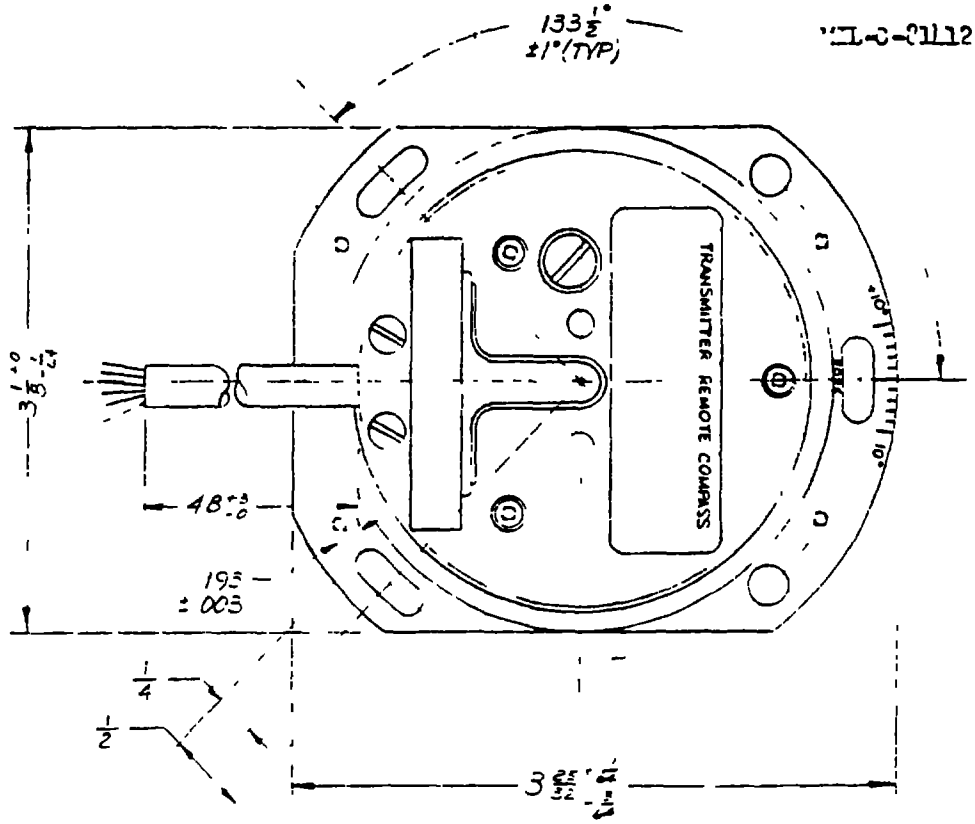

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.



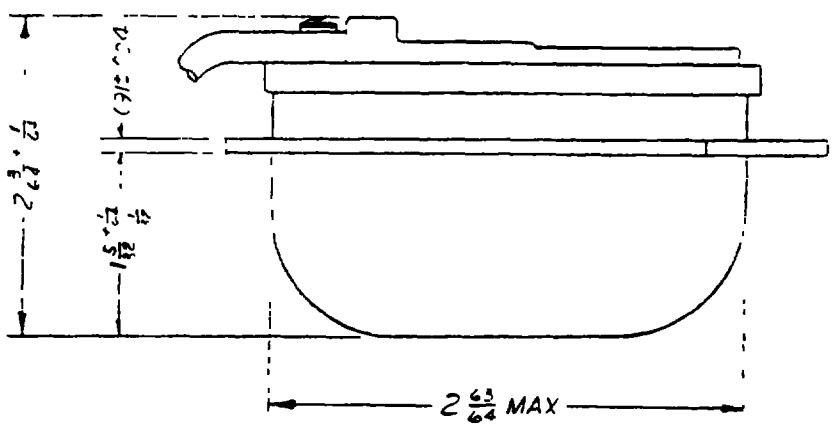



FIGURE 10

TRANSMITTER, REMOTE COMPASS THIN WING, TYPE ML-1
(WITHOUT MAGNETIC COMPENSATOR) SET B



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

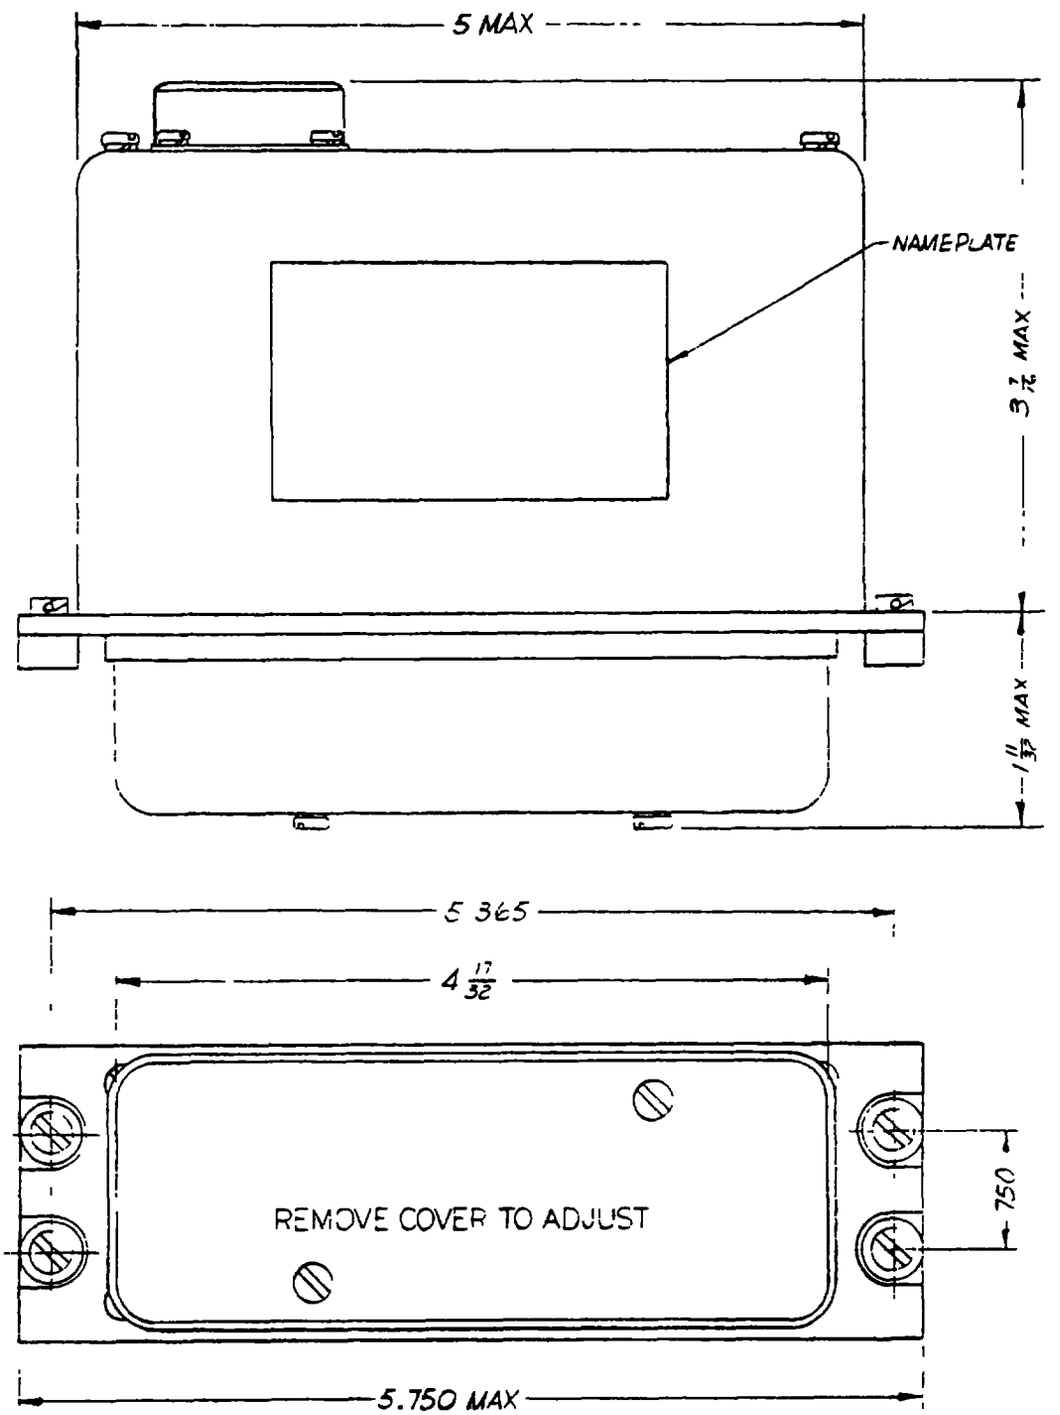



FIGURE 11



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity (as indicated on reverse hereof).

SPECIFICATION
MIL-C-81112(WP) Compass Set, Gyroscope Reference, Navigational AN/ASN-75 (*)

ORGANIZATION (Of submitter) | CITY AND STATE

CONTRACT NO | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?
☐ YES ☐ NO IF "YES", IN WHAT WAY?

4 REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity) | DATE

DD FORM 1 APR 63 1426

C-8370

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Bureau of Naval Weapons
Washington, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

BUREAU OF NAVAL WEAPONS (RREN-5)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.