MILITARY SPECIFICATION

FUZE PROBE ASSEMBLY, PNEUMATIC ASSEMBLING AND PACKING (TOW)

This Specification is approved for use by the U.S. Army Armament Research and Development Command and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification contains requirements not covered by the drawings and provides quality assurance provisions for fabrication of parts, assembly and packing of one type of probe.

2. APPLICABLE DOCUMENTS

2.1 Issues of Documents. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for

STANDARDS

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-794 - Parts and Equipment, Procedures for Packaging and Packing of
MIL-STD-331 - Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-453 - Radiographic Inspection
MIL-STD-810 - Environmental Test Methods

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

DRAWINGS (see 6.5)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

11784424 - TOW Fuze Probe
11784400 - TOW, Fuze Probe Assembly

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the procuring activity or as directed by the Contracting Officer.)

2.2 Other Publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

CODE OF FEDERAL REGULATIONS

49CFR170-189 - Department of Transportation Rules and Regulations for the Transportation of Explosives and Other Dangerous Articles

(The Department of Transportation Regulations are now a part of the Code of Federal Regulations (1974 Edition and revisions) available from the Superintendent of Documents, Government Printing Office, Washington, DC. Orders for the above publications should cite "49CFR0-199 (latest revisions)".)

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and Assemblies. The components and assemblies shall comply with all the requirements specified on Drawing 11784400 and associated drawings and with all requirements specified in applicable specifications and standards.

3.3 Item Definition. The Fuze Probe shall be an extendable device for increasing warhead standoff detonation. A crush switch shall be provided at the forward tip of the probe and at the ogive immediately forward of the explosive charges. The Probe shall be mechanically locked in the stowed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

position prior to launch and in the extended position after deployment. The Fuze Probe extending mechanism shall be self contained and shall be actuated by a bore rider assembly initiated at missile launch.

3.4 Characteristics

3.4.1 Performance. The Fuze Probe shall perform in accordance with the requirements of this specification and shall perform within specified limits while subjected to any natural combinations of environmental, mechanical, and electrical conditions specified herein. Unless otherwise specified, all performance characteristics shall be demonstrated under the following ambient conditions:

a. Temperature Range: +18° to 35°C (+65° to +95°F)

b. Relative Humidity: 10 to 95 percent

c. Barometric Pressure: Local average ± 2 inches of mercury

3.5 Environmental. The TOW Fuze Probe Assembly shall satisfy the functional requirements specified herein when operating within world wide environmental extreme conditions as set forth below.

a. Transportation Vibration

b. Missile Launch Shock

c. Missile Flight Vibration

3.5.1 Transportation Vibration. The Fuze Probe shall be subjected to Transportation Vibration Test.

3.5.2 Missile Launch Shock. The Fuze Probe shall be subjected to Missile Launch Shock Test.

3.5.3 Missile Flight Vibration. The Fuze Probe shall be subjected to Missile Flight Vibration Test.

3.6 Production Drawings. The Fuze Probe shall be fabricated and assembled in accordance with the Fuze Probe drawings, parts lists and specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.7 Electrical Characteristics. The Fuze Probe circuitry and electrical characteristics shall be in accordance with the schematic of the Fuze Probe Assembly Drawing 11784400.

3.8 Electrical Tests of the TOW, Fuze Probe Assembly (Drawing 9332458).

3.8.1 Electrical Continuity

3.8.1.1 Electrical resistance of black wire to outer ogive base shall not exceed 1 ohm.

3.8.1.2 Electrical resistance of black wire to outer probe tip shall not exceed 1 ohm.

3.8.1.3 Electrical resistance of brown wire to inner probe tip shall not exceed 1 ohm.

3.8.1.4 Electrical resistance of brown wire to black wire shall be 10 megohms minimum.

3.8.2 Capacitance. The capacitance as measured between the brown and black wires of the Fuze Probe shall be 175 Picofarads (Pf) $\pm$ 20 Pf.

3.8.3 Insulation Resistance. The insulation resistance as measured between the brown and black wires of the Fuze Probe shall be 100 megohms minimum at 100 $\pm$ 5 VDC.

3.9 Hot Deployment. The TOW, Fuze Probe Assembly shall be subjected to temperature of 60°C (140°F) and the time from bore rider release to probe fully extended shall not exceed 0.400 seconds.

3.10 Cold Deployment. The TOW, Fuze Probe Assembly shall be subjected to temperature of -32°C (-25.6°F) and the time from bore rider release to probe fully extended shall not exceed 0.400 seconds.

3.11 Ambient Deployment. The TOW, Fuze Probe Assembly shall be subjected to ambient temperature and the time from bore rider release to probe fully extended shall not exceed 0.400 seconds.

3.12 Deployment Length. The forward tip of the fully extended probe shall be at Missile Station 1.000 inches. See Drawing No. 11784424, Tow Fuze Probe.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

3.13 Probe Angular/Alignment. The angle formed between a point tangent to the probe at 1.5 probe diameters aft of the probe tip, and the centerline of the probe shall not exceed 1 degree total included angle when loaded to 9.1 pounds normal, in both directions at 0 degrees and 90 degrees with a 6.25 pound axial load applied to the probe tip.

3.14 Pull Test of Terminal Assembly. The terminal assembly (see Drawing 11784390) shall meet a pull test of 5 pounds minimum to 6 pounds maximum.

3.15 Weight. The weight of the TOW Fuze Probe Assembly shall not exceed 1.5 pounds, less Safing Retainer and Mounting Screws.

3.16 Nameplate and Product Marking. The identification and marking of the TOW, Fuze Probe Assembly shall be in accordance with Drawing No. 9342169.

3.17 Gas Bottle Leakage (Drawing No. 11784425). The Gas Bottle shall not exhibit a leakage rate greater than $1x10^{-6}$ atm cc/sec when subjected to leak detection test of MIL-STD-331, Procedure 6.3, or an equivalent procedure having a minimum sensitivity of $1x10^{-7}$ atm cc/sec.

3.18 Radiographic Inspection. Gas bottles shall be radiographically inspected to assure that no brazing material is present in the orifice area. Radiographic inspection shall be in accordance with MIL-STD-453.

3.19 Data Requirements. The contractor shall generate data in accordance with requirements of data item description cited in 6.4.

3.20 First Article Inspection. This specification makes provision for First Article Inspection. Requirements for the submission of First Article samples by the contractor shall be as specified in the contract.

3.21 Workmanship. The TOW, Fuze Probe Assembly and its components shall be fabricated and finished in thorough, workmanlike manner. It shall be free of burrs, chips, sharp edges, unblended radii, cracks, surface defects, dirt, grease, rust, corrosion products and other foreign matter. The cleaning methods used shall not be injurious to any part, nor shall parts be contaminated by the cleaning agents. Exterior surface coatings shall be continuous except for a few light scratches. All required markings shall be neat and sharply defined.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.0 QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspections and Standard Quality Assurance Program. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detailed specification.

4.2 Classification of Inspection. In conformance with MIL-A-48078, the following types of inspection shall be conducted on this item:

a. First Article Inspection

b. Quality Conformance Inspection

4.3 First Article Inspection

4.3.1 Submission. The contractor shall submit a First Article sample as designated by the Contracting Officer. The First Article sample shall consist of the following items in the quantities listed.

DRAWING NO.	PART DESCRIPTION	NO. OF UNITS
9342168	Safing Retainer	5
9342170	Splice Conductor	5
11784377	Section No. 2	5
11784378	Ogive	5
11784379	Contact - Outer	5
11784380	Base and Bore Rider Assembly	5
11784381	Insulator - Aft	5
11784382	Diaphragm	5
11784383	Cone - Inner	5
11784384	Contact - Inner	5
11784385	Ogive Assembly	5
11784386	Hammer	5
11784387	Cam - Bore Rider	5
11784388	Housing	5
11784389	Insulator - Forward	5
11784390-1	Terminal Assembly	5
11784390-2	Terminal Assembly	5
11784390-3	Terminal Assembly	5
11784390-4	Terminal Assembly	5
11784391	Grommet, Rubber	5
11784392	Housing, Bore Rider	5
11784393	Insulator, Crush Switch	5
11784394	Lock, Section 2	5
11784395	Section No. 1 Assembly	5
11784396	Washer, Support	5
11784397	Section No. 1	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

DRAWING NO.	PART DESCRIPTION	NO. OF UNITS
11784398	Pin, Bore Rider	5
11784399	Roller, Bore Rider	5
11784400	TOW, Fuze Probe Assembly	26
11784401	Lock, Section 1	5
11784402	Plunger, Bore Rider	5
11784403	Washer	5
11784404	Terminal	5
11784405	Section No. 2 Assembly	5
11784406-1	Ring, Retaining	5
11784406-2	Ring, Retaining	5
11784407	Tie Strap	5
11784408	Spring - Torsion, Dual	5
11784409	Sleeve	5
11784410	Contact Assembly	5
11784412	Spring - Helical Compression	5
11784413	Post, Bearing	5
11784414	Bottle Holder	5
11784415	Plunger Assembly	5
11784416	Stop Bore Rider	5
11784417	Sleeve, Stop	5
11784418	Plug, Plunger	5
11784419	Release Clip	5
11784420	Cone Assembly	5
11784421	Rivet, Blind	5
11784422	Base and Ogive Assembly	5
11784423	Base and Bore Rider Assembly	5
11784425	Bottle, Gas	5
11784426	Base Assembly	5

4.3.2 Inspection to be Performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 10		DRAWING NUMBER See Below
	TOW, Fuze Probe Assembly, and Components				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Section No. 2 (Dwg 11784377)				
	Examination for Defects	5	---	3.2	4.4.2.1
	Ogive (Drawing 11784378)				
	Examination for Defects	5	---	3.2	4.4.2.2
	Contact, Outer (Dwg 11784379)				
	Examination for Defects	5	---	3.2	4.4.2.3
	Base and Bore Rider Assembly (Dwg 11784380)				
	Examination for Defects	5	---	3.2	4.4.2.4
	Insulator, Aft (Dwg 11784381)				
	Examination for Defects	5	---	3.2	4.4.2.5
	Diaphragm (Dwg 11784382)				
	Examination for Defects	5	---	3.2	4.4.2.6

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components	2 OF 10	See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Cone, Inner (Dwg 11784382)				
	Examination for Defects	5	---	3.2	4.4.2.7
	Contact, Inner (Dwg 11784384)				
	Examination for Defects	5	---	3.2	4.4.2.8
	Ogive Assembly (Dwg 11784385)				
	Examination for Defects	5	---	3.2	4.4.2.9
	Hammer (Dwg 11784386)				
	Examination for Defects	5	---	3.2	4.4.2.10
	Cam, Bore Rider (Dwg 11784387)				
	Examination for Defects	5	---	3.2	4.4.2.11
	Housing (Dwg 11784388)				
	Examination for Defects	5	---	3.2	4.4.2.12

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-F-63412 (AR)

PARAGRAPH	TITLE: TOW, Fuze Probe Assembly, and Components		SHEET 3 OF 10		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Insulator, Forward (Dwg 11784389)				
	Examination for Defects	5	---	3.2	4.4.2.13
	Terminal Assembly (Dwg 11784390-1)				
	Examination for Defects	5	---	3.2	4.4.2.14
	Terminal Assembly (Dwg 11784390-2)				
	Examination for Defects	5	---	3.2	4.4.2.15
	Terminal Assembly (Dwg 11784390-3)				
	Examination for Defects	5	---	3.2	4.4.2.16
	Terminal Assembly (Dwg 11784390-4)				
	Examination for Defects	5	---	3.2	4.4.2.17
	Housing, Bore Rider (Dwg 11784392)				
	Examination for Defects	5	---	3.2	4.4.2.18

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 4 OF 10		DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Insulator, Crush Switch (Dwg 11784393)				
	Examination for Defects	5	---	3.2	4.4.2.19
	Lock, Section 2 (Dwg 11784394)				
	Examination for Defects	5	---	3.2	4.4.2.20
	Section No. 1 Assembly (Dwg 11784395)				
	Examination for Defects	5	---	3.2	4.4.2.21
	Section No. 1 (Dwg 11784397)				
	Examination for Defects	5	---	3.2	4.4.2.22
	Bore Rider Pin (Dwg 11784398)				
	Examination for Defects	5	---	3.2	4.4.2.23
	Bore Rider Roller (Dwg 11784399)				
	Examination for Defects	5	---	3.2	4.4.2.24

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 5 OF 10		DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	TOW, Fuze Probe Assembly (Dwg 11784400) (See Figure 1)				
	Examination for Defects	26	---	3.2	4.4.2.25
	Electrical Tests				
	Black Wire to Outer Ogive	26	---	3.8.1.1	4.5.5
	Black Wire to Outer Ogive Probe Tip	26	---	3.8.1.2	4.4.5
	Brown Wire to Outer Ogive Probe	26	---	3.8.1.3	4.4.5
	Brown Wire to Black Wire	26	---	3.8.1.4	4.4.5
	Capacitance	26	---	3.8.2	4.5.6
	Insulation Resistance	26	---	3.8.3	4.5.7
	Hot Deployment	10	---	3.9	4.5.8
	Deployment Length	10	---	3.12	Gage
	Probe Angular Alignment	10	---	3.13	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components	6 OF 10	See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Cold Deployment	10	---	3.10	4.5.9
	Deployment Length	10	---	3.12	Gage
	Probe Angular Alignment	10	---	3.13	Gage
	Repeat Electrical Tests above	20	---	3.8	4.5.5, 4.5.6, 4.5.7
	Perform Electrical Tests above (See Figure 1)	6	---	3.8	4.5.5, 4.5.6, 4.5.7
	Transportation Vibration	6	---	3.5.1	4.5.2
	Missile Launch Shock	6	---	3.5.2	4.5.3
	Ambient Deployment	6	---	3.11	4.5.10
	Deployment Length	6	---	3.12	Gage
	Probe Angular Alignment	6	---	3.13	Gage
	Missile Flight Vibration	6	---	3.5.3	4.5.4
	Repeat Electrical Tests Above	6	---	3.8	4.5.5

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components	7 OF 10	See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Lock, Section 1 (Dwg 11784401)				
	Examination for Defects	5	---	3.2	4.4.2.26
	Plunger, Bore Rider (Dwg 11784402)				
	Examination for Defects	5	---	3.2	4.4.2.27
	Section No. 2 Assembly (Dwg 11784405)				
	Examination for Defects	5	---	3.2	4.4.2.28
	Strap, Tie (Dwg 11784407)				
	Examination for Defects	5	---	3.2	4.4.2.29
	Spring, Torsion - Dual (Dwg 11784408)				
	Examination for Defects	5	---	3.2	4.4.2.30
	Sleeve (Dwg 11784409)				
	Examination for Defects	5	---	3.2	4.4.2.31

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 8 OF 10		DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Contact Assembly (Dwg 11784410)				
	Examination for Defects	5	---	3.2	4.4.2.32
	Retainer, Safing (Dwg 11784411)				
	Examination for Defects	5	---	3.2	4.4.2.33
	Spring, Helical Compression (Dwg 11784412)				
	Examination for Defects	5	---	3.2	4.4.2.34
	Post, Bearing (Dwg 11784413)				
	Examination for Defects	5	---	3.2	4.4.2.35
	Bottle Holder (Dwg 11784414)				
	Examination for Defects	5	---	3.2	4.4.2.36
	Plunger Assembly (Dwg 11784415)				
	Examination for Defects	5	---	3.2	4.4.2.37

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components	9 OF 10	See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Stop Bore Rider (Dwg 11784416)				
	Examination for Defects	5	---	3.2	4.4.2.38
	Sleeve, Stop (Dwg 11784417)				
	Examination for Defects	5	---	3.2	4.4.2.39
	Release Clip (Dwg 11784419)				
	Examination for Defects	5	---	3.2	4.4.2.40
	Cone Assembly (Dwg 11784420)				
	Examination for Defects	5	---	3.2	4.4.2.41
	Base and Ogive Assembly (Dwg 11784422)				
	Examination for Defects	5	---	3.2	4.4.2.42
	Base and Bore Rider Assembly (Dwg 11784423)				
	Examination for Defects	5	---	3.2	4.4.2.43

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
	TOW, Fuze Probe Assembly, and Components	10 OF 10	See Below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Bottle, Gas (Dwg 11784425)				
	Examination for Defects	5	---	3.2	4.4.2.44
	Base Assembly (Dwg 11784426)				
	Examination for Defects	5	---	3.2	4.4.2.45
	Other Components				
	Examination for Defects	5	---	3.2	4.4.2.46

NOTES:

17

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

Table I - First Article Tests

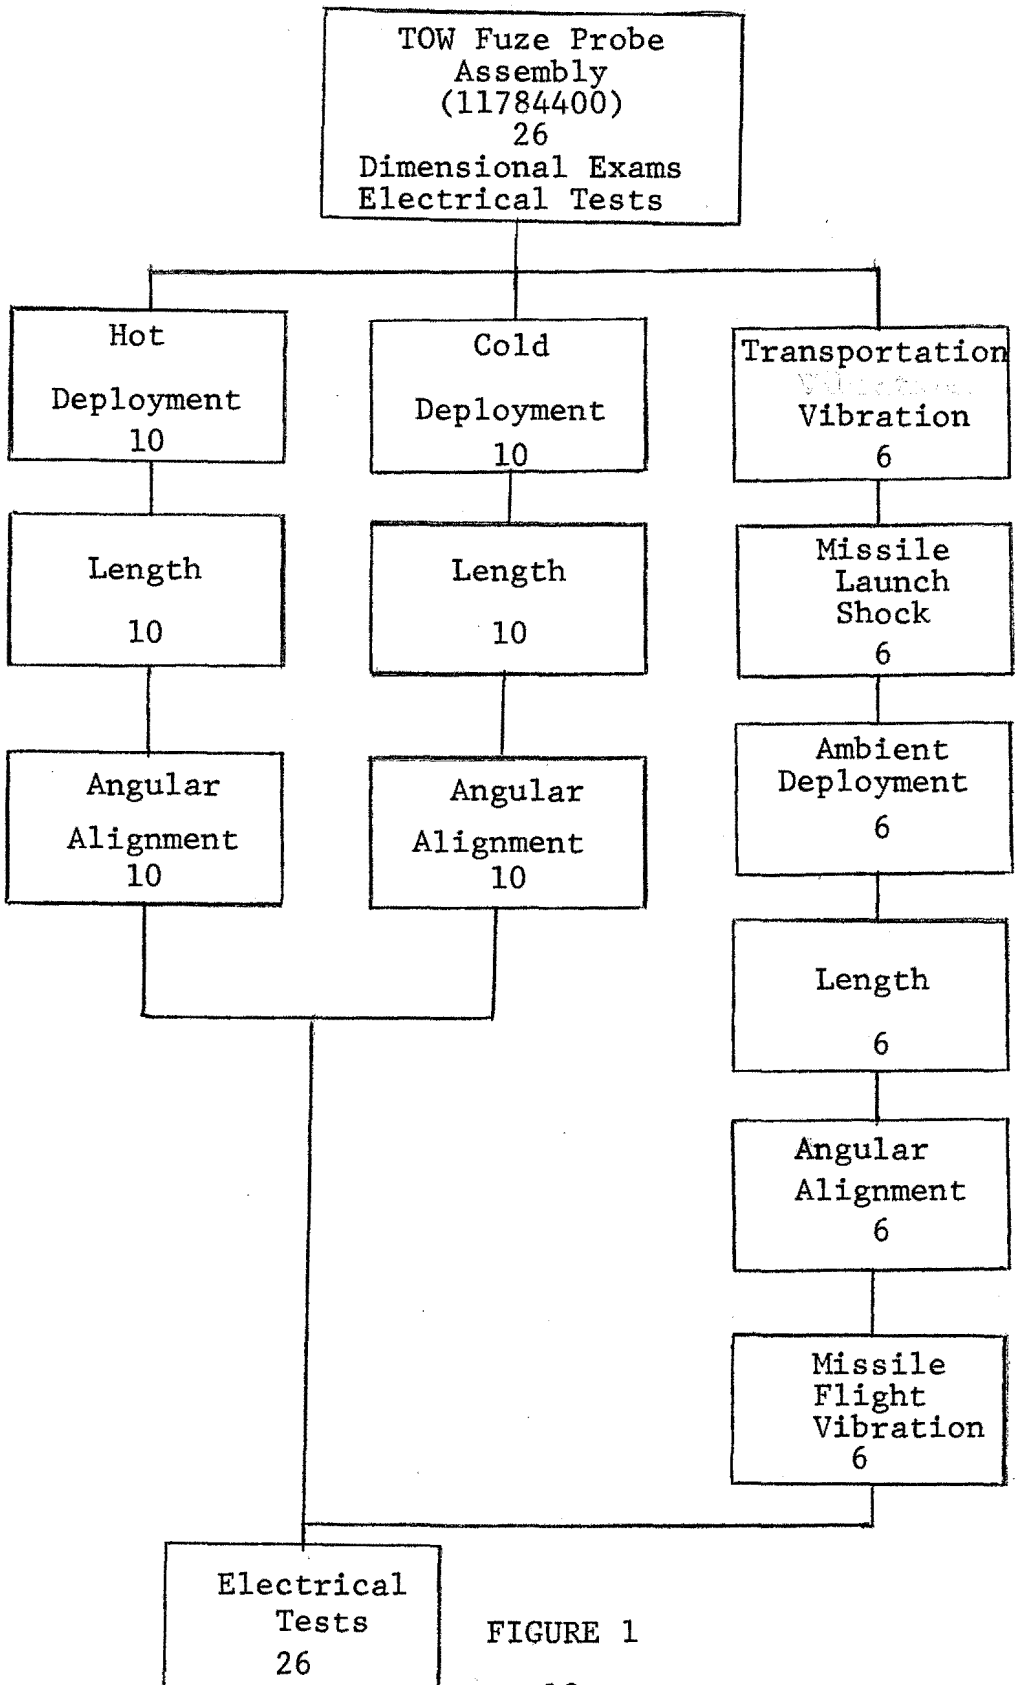


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4 Quality Conformance Inspection

4.4.1 Inspection Lot Formation. Inspection lots shall comply with the lot formation provision of MIL-A-48078. In addition, each inspection lot of TOW, Fuze Probe Assemblies shall contain:

a. Metal parts from one interfix lot number from one manufacturer.

b. Terminal Assembly (Dwg 11784390-1, -2, -3, -4) from not more than one interfix lot number from one manufacturer.

c. Cam (Dwg 11784387) from not more than one interfix lot number from one manufacturer.

d. Hammer (Dwg 11784386) from not more than one interfix lot number from one manufacturer.

e. Ogive (Dwg 11784378) from not more than one interfix lot number from one manufacturer.

f. Diaphragm (Dwg 11784382) from not more than one interfix lot number from one manufacturer.

g. Lock Section No. 1 (Dwg 11784401) and Lock Section No. 2 (Dwg 11784394) from not more than one interfix lot number from one manufacturer.

h. Gas Bottle (Dwg 11784425) from not more than one interfix lot number from one manufacturer.

i. Section No. 1 (Dwg 11784397) and Section No. 2 (Dwg 11784377) from not more than one interfix lot number from one manufacturer.

4.4.2 Examination. See MIL-A-48078.

a. Sampling Plans. Unless otherwise specified in the Classification of Defects and Test Tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 11784377
4.4.2.1	Section No. 2				NEXT HIGHER ASSEMBLY 11784410
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside Diameter - Zone D		0.40%	3.2	Gage
102	Run out of O.D. to I.D. - Zone D		0.40%	3.2	Gage
103	Outside Diameter (O.D.)		0.40%	3.2	Gage
104	Inside Diameter in Zone C		0.40%	3.2	Gage
105	Run out I.D. Zone C to Zone D		0.40%	3.2	Gage
106	O.D. at flange aft end		0.40%	3.2	Gage
107	Run out of hub		0.40%	3.2	Gage
108	I.D. at Section A-A		0.40%	3.2	Gage
109	Location of large hole		0.40%	3.2	Gage
110	Chamfer missing on both side of large hole		0.40%	3.2	Mold and optical comparator

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 11784377
4.4.2.1	Section No. 2				NEXT HIGHER ASSEMBLY 11784410
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
201	O.D. at Section C-C		0.65%	3.2	Gage
202	Length of O.D. at Section C-C		0.65%	3.2	Gage
203	Length from aft shoulder to shoulder at front end		0.65%	3.2	Gage
204	Length of I.D. at Section A-A		0.65%	3.2	Gage
205	Diameter of hub at aft end		0.65%	3.2	Gage
206	Overall length		0.65%	3.2	Gage
207	Burrs and sharp edges not removed on inside corners		0.65%	3.2	Visual
208	Protective finishes missing or incomplete		0.65%	3.2	Visual
209	Diameter of small hole		0.65%	3.2	Gage
210	O.D. at forward end		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 11784377
4.4.2.1	Section No. 2				NEXT HIGHER ASSEMBLY 11784410
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
211	O.D. at Section B-B		0.65%	3.2	Gage
212	Length of O.D. at B-B		0.65%	3.2	Gage
213	Run out of all diameters listed above		0.65%	3.2	Gage
214	Maximum radii at Section C-C		0.65%	3.2	Gage
215	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.2	Ogive				11784378
					NEXT HIGHER ASSEMBLY
					11784385
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside Diameter, base and bore rider - assembly mating surface		0.40%	3.2	Gage
102	Perpendicularity of large diameter face with I.D.		0.40%	3.2	Gage
103	Flatness of large diameter face		0.40%	3.2	Gage
104	True position of rivnut holes		0.40%	3.2	Gage
105	Contour of Zone A		0.40%	3.2	Gage
106	Run out of distance from large outside edge surface with datums		0.40%	3.2	Gage
107	Runout of small I.D. surface with large I.D.		0.40%	3.2	Gage
108	True position of base bore rider assembly rivet holes		0.40%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.2	Ogive	2 OF 2	11784378
			NEXT HIGHER ASSEMBLY 11784385

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
201	Wall thickness - Zone B		0.65%	3.2	Gage
202	Width of slot		0.65%	3.2	Gage
203	Diameter of rivnut holes		0.65%	3.2	Gage
204	Perpendicularity of slot		0.65%	3.2	Gage
205	Diameter of base bore rider assembly rivet holes		0.65%	3.2	Gage
206	Overall height		0.65%	3.2	Gage
207	True position of slot		0.65%	3.2	Gage
208	Protective finishes missing or incomplete		0.65%	3.2	Visual
209	Thickness of hub end		0.65%	3.2	Gage
210	Inside diameter of front end		0.65%	3.2	Gage
211	Evidence of poor workmanship		1.00%	3.20	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.3	Contact, Outer	1 OF 1	11784379
			NEXT HIGHER ASSEMBLY: 11784410

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside Diameter (I.D.)		0.40%	3.2	Gage
102	Thickness of end		0.40%	3.2	Gage
103	Perpendicularity of aft end I.D.		0.40%	3.2	Gage
104	Thickness of spherical radius		0.40%	3.2	Gage
105	Heat Treatment			3.2	Certification
MINOR					
201	Overall length		0.65%	3.2	Gage
202	Spherical radius		0.65%	3.2	Gages
203	Protective finishes missing or incomplete		0.65%	3.2	Visual
204	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784380
4.4.2.4	Base and Bore Rider Assembly				NEXT HIGHER ASSEMBLY 11784422
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Plunger does not move freely or retract		100%	3.2	Visual/Hand
102	Alignment of hammer piercing pin to bottle holder		100%	3.2	Gage
103	Components missing, damaged or improperly assembled		0.40%	3.2	Visual
104	Adhesive missing on screws		0.40%	3.2	Visual
105	Torque test of screws		0.40%	3.2	Gage
106	No freedom of cam in slot of plunger		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784381
4.4.2.5	Insulator, Aft				NEXT HIGHER ASSEMBLY 11784385
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Material dielectric strength			3.2	Certification
MINOR					
201	Outside diameter		0.65%	3.2	Gage
202	Width of groove		0.65%	3.2	Gage
203	Diameter of groove		0.65%	3.2	Gage
204	Thickness		0.65%	3.2	Gage
205	Location of groove		0.65%	3.2	Gage
206	Parts not free of flash, voids, gates, cuts, and mold marks		0.65%	3.2	Visual
207	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 11784382
4.4.2.6	Diaphragm				NEXT HIGHER ASSEMBLY 11784426
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Outside diameter (O.D.) - inspect prior to slotting		0.40%	3.2	Gage
102	Perpendicularity of base with O.D.		0.40%	3.2	Gage
103	Flatness of base		0.40%	3.2	Gage
104	Overall length		0.40%	3.2	Gage
105	Parallelism of small face with base		0.40%	3.2	Gage
106	True position of 6 elongated holes with O.D.		0.40%	3.2	Gage
107	Location of 2 large diameter holes		0.40%	3.2	Gage
108	Diameter of 5 screw holes		0.40%	3.2	Gage
109	Flatness of surface adjacent to hole		0.40%	3.2	Gage
110	Location of 6 rivet holes		0.40%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 11784382
4.4.2.6	Diaphragm				NEXT HIGHER ASSEMBLY 11784426
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
201	Diameter of 6 rivet holes		0.65%	3.2	Gage
202	Dimensions of grommet holes		0.65%	3.2	Gage
203	Thickness in Zone A (4 places)		0.65%	3.2	Gage
204	Width of slot		0.65%	3.2	Gage
205	Run out of I.D. with O.D.		0.65%	3.2	Gage
206	Diameter of large hole on O.D.		0.65%	3.2	Gage
207	Diameter of 2 large holes		0.65%	3.2	Gage
208	Location of large hole on O.D.		0.65%	3.2	Gage
209	Location of 5 screw holes		0.65%	3.2	Gage
210	Perpendicularity of slot with base		0.65%	3.2	Gage
211	Thickness of hub (4 places)		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 11784382
4.4.2.6	Diaphragm				NEXT HIGHER ASSEMBLY 11784426
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
212	Small inside diameter		0.65%	3.2	Gage
213	Location of 2 small holes on 20° angle surface		0.65%	3.2	Gage
214	Protective finish missing or incomplete		0.65%	3.2	Visual
215	Evidence of poorworkmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.7	Cone, Inner				11784383
					NEXT HIGHER ASSEMBLY
					11784420
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL					
MAJOR					
101	Flatness of base		0.40%	3.2	Gage
102	Run out of small inside diameter with diameter of flange		0.40%	3.2	Gage
MINOR					
201	Diameter of large holes		0.65%	3.2	Gage
202	Flange thickness		0.65%	3.2	Gage
203	Location of large holes		0.65%	3.2	Gage
204	Overall height		0.65%	3.2	Gage
205	Diameter of small holes		0.65%	3.2	Gage
206	Parallelism of front end with base		0.65%	3.2	Gage
207	Location of small holes		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 11784383
4.4.2.7	Cone, Inner				NEXT HIGHER ASSEMBLY 11784420
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
208	Perpendicularity of base with O.D. of flange		0.65%	3.2	Gage
209	Contour within Zone A		0.65%	3.2	Gage
210	Inside diameter of front end		0.65%	3.2	Gage
211	Protective Finish missing or incomplete		0.65%	3.2	Visual
212	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 11784384
4.4.2.8	Contact, Inner				NEXT HIGHER ASSEMBLY 11784400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR /100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Outside Diameter		0.40%	3.2	Gage
102	Overall Length		0.40%	3.2	Gage
103	End of Tab to Flange (4) Places		0.40%	3.2	Gage
104	Height of Tab		0.40%	3.2	Gage
MINOR					
201	O.D. of Flange		0.65%	3.2	Gage
202	Thickness		0.65%	3.2	Gage
203	Flatness of Dimple Surface		0.65%	3.2	Gage
204	Diameter of Flat Surface on Dimple		0.65%	3.2	Visual
205	Height of Tab		0.65%	3.2	Gage
206	Depth of Dimple		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Contact, Inner	2 OF 2	11784384
			NEXT HIGHER ASSEMBLY: 11784400

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
206	Diameter of hole in dimple		0.65%	3.2	Gage
207	Run out of flange O.D. with O.D.		0.65%	3.2	Gage
208	Tabs and dimple missing		0.65%	3.2	Visual
209	Protective Finish missing or incomplete		0.65%	3.2	Visual
210	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.9	Ogive Assembly	1 OF 2	11784385
			NEXT HIGHER ASSEMBLY 11784422

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Grommets missing, improperly seated and in improper holes		100%	3.2	Visual
102	Insulators missing or improperly seated		100%	3.2	Visual
103	Ungrommeted rivets touching inner cone assembly		100%	3.2	Visual
104	Blind nut heads not flush with ogive surface		100%	3.2	Visual
105	Blind nuts not secure		100%	3.2	Visual
106	Blind nut thread size		100%	3.2	Gage
107	Blind nuts missing or improperly seated		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
4.4.2.10	Hammer		1 OF 3		11784386
					NEXT HIGHER ASSEMBLY
					11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Parallelism of bearing surfaces		0.40%	3.2	Gage
102	Location of locking pin		0.40%	3.2	Gage
103	Location of piercing pin		0.40%	3.2	Gage
104	Diameter of locking pin		0.40%	3.2	Gage
105	Diameter of piercing pin		0.40%	3.2	Gage
106	Perpendicularity of bearing hole		0.40%	3.2	Gage
107	Height of piercing pin		0.40%	3.2	Gage
108	Perpendicularity of bearing boss		0.40%	3.2	Gage
109	Angle on piercing pin		0.40%	3.2	Gage
110	Angle to piercing pin from centerline		0.40%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.10	Hammer	2 OF 3	11784386
			NEXT HIGHER ASSEMBLY 11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MAJOR (continued)					
111	Included angle between hammer and piercing pin surfaces		0.40%	3.2	Gage
112	Chamfer on locking pin missing		0.40%	3.2	Visual
113	I.D. of bearing hole		0.40%	3.2	Gage
114	Hardness		0.40%	3.2	Rockwell Tester
MINOR					
201	Flatness of Datum A		0.65%	3.2	Gage
202	Width of Slot (2 places)		0.65%	3.2	Gage
203	Height of locking pin		0.65%	3.2	Gage
204	Location of slot (2 places)		0.65%	3.2	Gage
205	Large Radius, maximum		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 11784386
4.4.2.10	Hammer				NEXT HIGHER ASSEMBLY 11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
206	Overall height		0.65%	3.2	Gage
207	Diameter of boss		0.65%	3.2	Gage
208	Surface finish of locking pin		0.65%	3.2	Visual
209	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 11784387
4.4.2.11	Cam, Bore Rider				NEXT HIGHER ASSEMBLY 11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside diameter of boss		0.40%	3.2	Gage
102	Perpendicularity of inside diameter		0.40%	3.2	Gage
103	Run out of inside diameter with Datum B		0.40%	3.2	Gage
104	Hardness		0.40%	3.2	Rockwell Tester
105	Length of cam arm		0.40%	3.2	Gage
MINOR					
201	Overall width		0.65%	3.2	Gage
202	Flatness at Datum A		0.65%	3.2	Gage
203	Outside flatness at top surface		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.11	Cam, Bore Rider	2 OF 2	11784387
			NEXT HIGHER ASSEMBLY: 11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
204	Diameter of boss		0.65%	3.2	Gage
205	Location of cam arm		0.65%	3.2	Gage
206	Surface finish of I.D. of boss		0.65%	3.2	Gage
207	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 11784388
4.4.2.12	Housing				NEXT HIGHER ASSEMBLY 11784426
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside diameter (I.D.) at Section A-A		0.40%	3.2	Gage
102	Outside diameter (O.D.) of flanges at both ends		0.40%	3.2	Gage
103	I.,D. at Datum A		0.40%	3.2	Gage
104	Run out on all diameters listed above		0.40%	3.2	Gage
MINOR					
201	Maximum radius on I.D. Section A-A		0.65%	3.2	Visual
202	Chamfer missing on I.D.		0.65%	3.2	Gage
203	Overall length		0.65%	3.2	Gage
204	Length of small shoulder at aft end		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.12	Housing				11784388
					NEXT HIGHER ASSEMBLY
					11784426
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
205	Length of shoulder at aft end		0.65%	3.2	Gage
206	Width of groove at front end		0.65%	3.2	Gage
207	Length from angle to front end		0.65%	3.2	Gage
208	I.D. of forward end		0.65%	3.2	Gage
209	Small O.D. at aft end		0.65%	3.2	Gage
210	Surface finish of I.D.		0.65%	3.2	Gage
211	Protective finish missing or incomplete		0.65%	3.2	Visual
212	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784389
4.4.2.13	Insulator - Forward				NEXT HIGHER ASSEMBLY 11784385
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Material - Dielectric			3.2	Certification
MINOR					
201	Width of slot		0.65%	3.2	Gage
202	Depth of slot		0.65%	3.2	Gage
203	Inside diameter		0.65%	3.2	Gage
204	Location of slot		0.65%	3.2	Gage
205	Width		0.65%	3.2	Gage
206	Chamfers missing		0.65%	3.2	Gage
207	Evidence of poor workmanship		1.00%	3.21	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.14	Terminal Assembly		11784390-1
			NEXT HIGHER ASSEMBLY 11784400

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Length of wires		0.40%	3.2	Gage
102	Pull test of terminal assembly (2) Wires	Note 1	1.50%	3.14	4.5.11
103	Electrical continuity between terminal lug and end of brown wire		100%	3.2	Test/Multimeter
104	Electrical continuity between terminal lug and end of white wire		0.40%	3.2	Test/Multimeter
105	Insulation on either wire damaged or defective		0.40%	3.2	Visual
106	Wires not proper color		100%	3.2	Visual
MINOR					
201	Length of bare wire on upper wire		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES: 1. Sample size per MIL-STD-105, Inspection Level 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784390-2
4.4.2.15	Terminal Assembly				NEXT HIGHER ASSEMBLY 11784420
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Length of wires		0.40%	3.2	Gage
102	Pull test of terminal assembly (2) places	Note 1	1.50%	3.14	4.5.11
103	Electrical continuity between terminal lug and conductor splice		100%	3.2	Test/Multimeter
104	Insulation on wire damaged or defective		100%	3.2	Visual
105	Wire not proper color		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES: Sample size per MIL-STD-105, Inspection Level 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.16	Terminal Assembly				11784390-3
					NEXT HIGHER ASSEMBLY
					11784420
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Length of wires		0.40%	3.2	Gage
102	Pull test of terminal assembly (2) wires	Note 1	1.50%	3.14	4.5.11
103	Electrical continuity between terminal lug and end of black wire		100%	3.2	Test/Multimeter
104	Electrical continuity between terminal lug and end of blue wire		100%	3.2	Test/Multimeter
105	Insulation on either wire damaged or		0.40%	3.2	Visual
106	Wires not proper color		0.40%	3.2	Visual
MINOR					
201	Length of bare wire or upper wire of 2 wire assembly		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.00%	3.20	Visual

NOTES:
1. Sample size per MIL-STD-105, Inspection Level 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.17	Terminal Assembly	1 OF 1	11784390-4
			NEXT HIGHER ASSEMBLY: 11784420

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Length of wires		0.40%	3.2	Gage
102	Tensile strength of terminal assembly (2) places	Note 1	1.50%	3.14	4.5.11
103	Electrical continuity between terminal lug and conductor splice		100%	3.2	Test/Multimeter
104	Insulation on wire damaged or defective		0.40%	3.2	Visual
105	Wire not proper color		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:
1. Sample size per MIL-STD-105, Inspection Level 1

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.18	Housing, Bore Rider	1 OF 2	11784392
			NEXT HIGHER ASSEMBLY: 11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside diameter		0.40%	3.2	Gage
102	Thread size and depth of full thread		0.40%	3.2	Gage
103	Minor diameter of holes		0.40%	3.2	Gage
104	Finish of I.D. of large hole		0.40%	3.2	Gage
105	Burrs removed from large ends and slot I.D		0.40%	3.2	Visual
MINOR					
201	Outside diameter		0.65%	3.2	Gage
202	Width of slot		0.65%	3.2	Gage
203	Large radius		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 11784392
4.4.2.18	Housing, Bore Rider				NEXT HIGHER ASSEMBLY 11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
204	Location of slot		0.65%	3.2	Gage
205	Location of threaded holes		0.65%	3.2	Gage
206	Location of large hole		0.65%	3.2	Gage
207	Protective finish missing or incomplete		0.65%	3.2	Visual
208	Evidence of poor workmanship		1.00%	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-E-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.19	Insulator, Crush Switch	1 OF 1	11784393
			NEXT HIGHER ASSEMBLY: 11784405

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside diameter aft end		0.40%	3.2	Gage
102	Undercut missing		0.40$	3.2	Gage
MINOR					
201	Small outside diameter		0.65%	3.2	Gage
202	Run out of O.D.'s with I.D.		0.65%	3.2	Gage
203	Run out of I.D. with I.D. Datum		0.65%	3.2	Gage
204	Run out of small O.D. with I.D. Datum		0.65%	3.2	Gage
205	Width of inside flange		0.65%	3.2	Gage
206	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-62412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.20	Lock Section 2	1 OF 1	11784394
			NEXT HIGHER ASSEMBLY
			11784405

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Thickness		0.40%	3.2	Gage
102	Tab height 9 places		0.40%	3.2	Gage
103	Material			3.2	Certification
104	Hardness		0.40%	3.2	Rockwell Tester
MINOR					
201	Width		0.65%	3.2	Gage
202	Width at tip of fingers, 9 places		0.65%	3.2	Gage
203	Inside diameter, maximum		0.65%	3.2	Gage
204	Chamfer missing at front end		0.65%	3.2	Gage
205	Burrs and sharp edges not removed		0.65%	3.2	Visual
206	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784395
4.4.2.21	Section No. 1 Assembly				NEXT HIGHER ASSEMBLY 11784400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Parts not assembled in accordance with Notes on drawing		100%	3.2	Visual
102	Lock tabs in wrong direction		100%	3.2	Visual
103	Presence of excess potting on lock ring		100%	3.2	Visual
104	O.D. of lock ring (except tabs) below O.D. of section		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 11784397
4.4.2.22	Section No. 1				NEXT HIGHER ASSEMBLY 11784395
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside diameter - aft end		0.40%	3.2	Gage
102	Inside diameter - front end		0.40%	3.2	Gage
103	Outside diameter		0.40%	3.2	Gage
104	Outside diameter at Section B-B		0.40%	3.2	Gage
105	Inside diameter at Section A-A		0.40%	3.2	Gage
106	Chamfer missing both side of hole		0.40%	3.2	Mold and optical comparator
107	Run out of I.D. with Datum B		0.40%	3.2	Gage
MINOR					
201	Small O.D. at 15° angle		0.65%	3.2	Gage
202	Width of shoulder on inside		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 11784397
4.4.2.22	Section No. 1				NEXT HIGHER ASSEMBLY 11784395
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
203	Angle missing at aft end		0.65%	3.2	Visual
204	Width of retaining ring groove - forward end		0.65%	3.2	Gage
205	Chamfers missing on inside		0.65%	3.2	Visual
206	Width of retaining ring groove - aft end		0.65%	3.2	Gage
207	Run out on all diameters listed above with O.D.		0.65%	3.2	Gage
208	Length from outside shoulder to front end		0.65%	3.2	Gage
209	Length from front end to inside shoulder		0.65%	3.2	Gage
210	Overall length		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 11784397
4.4.2.22	Section No. 1				NEXT HIGHER ASSEMBLY 11784395
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
211	Length of inside diameter at front end		0.65%	3.2	Gage
212	Diameter of hole in wall		0.65%	3.2	Gage
213	Length of Section B-B diameter		0.65%	3.2	Gage
214	Depth of retaining ring groove aft end		0.65%	3.2	Gage
215	Depth of retaining ring groove front end		0.65%	3.2	Gage
216	Location of hole		0.65%	3.2	Gage
217	Protective finish missing or incomplete		0.65%	3.2	Visual
218	Burrs and sharp edges not removed on inside corners		0.65%	3.2	Visual
219	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.23	Bore Rider Pin				11784398
					NEXT HIGHER ASSEMBLY
					11784415
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Outside diameter		0.40%	3.2	Gage
102	Hardness		0.40%	3.2	Hardness Tester
103	Overall length		0.40%	3.2	Gage
MINOR					
201	Chamfers missing or incorrect		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784399
4.4.2.24	Bore Rider Roller				NEXT HIGHER ASSEMBLY 11784415
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Inside diameter		0.40%	3.2	Gage
102	Hardness		0.40%	3.2	Hardness Tester
MINOR					
201	Outside diameter		0.65%	3.2	Gage
202	Height		0.65%	3.2	Gage
203	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

57

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.25	TOW, Fuze Probe Assembly	1 OF 3	11784400
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None Defined				
MAJOR					
101	Improper stowage of blue and white wires		100%	3.2	Visual
102	Length of uncoiled blue and white wires		100%	3.2	Visual
103	Gas bottle loose or not flush		100%	3.2	Visual
104	Loctite on face of bottle		100%	3.2	Visual
105	Retaining rings missing		100%	3.2	Visual
106	Weight		100%	3.2	Balance
	Electrical Tests		100%	3.8	
107	Continuity - resistance between black wire to outer ogive		100%	3.8.1.1	4.5.5

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER 11784400
4.4.2.25	TOW, Fuze Probe Assembly				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MAJOR (Continued)					
108	Continuity - resistance between black wire to outer ogive probe tip		100%	3.8.1.2	4.5.5
109	Continuity - resistance between brown wire to inner probe tip		100%	3.8.1.3	4.5.5
110	Continuity - resistance between brown wire to black wire		100%	3.8.1.4	4.5.5
111	Capacitance - between black and brown wires		100%	3.8.2	4.5.6
112	Insulation Resistance - between black and brown wires		100%	3.8.3	4.5.7
113	Hot Deployment	(a)	2.5%	3.9	4.5.8
114	Deployment Length		2.5%	3.12	Gage
115	Probe Angular Alignment		2.5%	3.13	Gage
116	Cold Deployment	(a)	2.5%	3.10	4.5.9

NOTES: (a) Sample size per MIL-STD-105, Special Inspection Level S-3. One half of the items shall be subjected to Hot Deployment and one half subjected to Cold Deployment. If the sample is uneven, th larger sample shall be subjected to Cold Deployment. Minimum lot size 51 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.25	TOW, Fuze Probe Assembly		3 OF 3	11784400
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MAJOR (continued)					
117	Deployment Length		2.5%	3.12	Gage
118	Probe Angular Alignment		2.5%	3.13	Gage
119-124	Repeat Electrical Tests above, 107 through 112	(a)	2.5%	3.8.1	4.5.5, 4.5.6, 4.5.7
125	Missile Flight Vibration	(a)	2.5%	3.5.3	4.5.4
126-131	Repeat Electrical Tests above, 107 through 112	(a)	2.5%	3.8.1	4.5.5, 4.5.6, 4.5.7
132	Parts missing, damaged or not assembled properly, and wires and tape loose		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		100%	3.21	Visual

(a) Sample size per MIL-STD-105, Special Inspection Level S-3. One half of the items shall be subjected to Hot Deployment and one half subjected to Cold Deployment. If the sample is uneven, the larger sample shall be subjected to Cold Deployment. Minimum lot size 51 units.

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.26	Lock Section I				11674401
					NEXT HIGHER ASSEMBLY 11784395
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Thickness		0.40%	3.2	Gage
102	Tab height 11 places		0.40%	3.2	Gage
103	Material			3.2	Certification
104	Hardness		0.40%	3.2	Rockwell Hardness Tester
MINOR					
201	Width		0.65%	3.2	Gage
202	Width at tip of fingers, 11 places		0.65%	3.2	Gage
203	Inside diameter, max.		0.65%	3.2	Gage
204	Chamfer missing at front end or incorrect		0.65%	3.2	Visual
205	Burrs and sharp edges not removed		0.65%	3.2	Visual
206	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.27	Plunger, Bore Rider	1 OF 2	11784402
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Diameter of hole at forward end		0.40%	3.2	Gage
102	Outside diameter (O.D.)		0.40%	3.2	Gage
MINOR					
201	Width of slot - 2 places		0.65%	3.2	Gage
202	Inside diameter of large hole		0.65%	3.2	Gage
203	Spherical radius		0.65%	3.2	Gage
204	Depth of inside diameter hole		0.65%	3.2	Gage
205	Location of long slot		0.65%	3.2	Gage
206	Length of long slot		0.65%	3.2	Gage
207	Location of short slot		0.65%	3.2	Gage
208	Length of short slot		0.65%	3.2	Gage
209	Location small hole forward end		0.65%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.27	Plunger, Bore Rider		2 OF 2	11784402
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
210	Overall length		1.00%	3.2	Gage
211	Protective finish missing or incomplete		0.65%	3.21	Visual
212	Burrs not removed from slots and Co' bores		0.65%	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.28	Section No. 2 Assembly	1 OF 2	11784405
			NEXT HIGHER ASSEMBLY 11784400

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Lock, Section 2 installed with fingers toward back land of contact assembly		100%	3.2	Visual
102	Insulator missing		100%	3.2	Visual
103	Pull test of white wire		1.50%	3.14	4.5.11
104	Pull test of blue wire		1.50%	3.14	4.5.11
105	Continuity of white wire to inner contact		100%	3.2	Visual/Multitester
106	Continuity of blue wire end of probe		100%	3.2	Visual/Multitester
107	Inner contact missing and not seated properly		100%	3.2	Visual
108	Rivet on blue wire not flush to below		100%	3.2	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2025-11-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 11784405
4.4.2.28	Section No. 2 Assembly				NEXT HIGHER ASSEMBLY 11784400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MAJOR (continued)					
	flush with outer surface of Section 2				
109	White and blue wires not installed on proper parts		100%	3.2	Visual
110	Inner contact terminal rivet not approximately 180° from section terminal rivet		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26104:272
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.29	Strap Tie				11784407
					NEXT HIGHER ASSEMBLY
					11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined.				
MAJOR	None defined.				
MINOR					
201	Location of holes		0.65%	3.2	Gage
202	Diameter of holes		0.65%	3.2	Gage
203	Thickness		0.65%	3.2	Gage
204	Large radius		0.65%	3.2	Gage
205	Location of radius		0.65%	3.2	Gage
206	Width		0.65%	3.2	Gage
207	Overall length		0.65%	3.2	Gage
208	Hardness		0.65%	3.2	Rockwell Tester
209	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

99

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567, Feb 74, Which is Obsolete

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE			SHEET 1 OF 1	DRAWING NUMBER 11784408
4.4.2.30	Spring, Torsion - Dual				NEXT HIGHER ASSEMBLY 11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Torque, minimum, long tang		0.40%	3.2	Gage
MINOR					
201	Inside diameter 2 places		0.65%	3.2	Gage
202	Angle of straight leg		0.65%	3.2	Gage
203	Free height 2 places		0.65%	3.2	Gage
204	Angle of bent leg		0.65%	3.2	Gage
205	Diameter of wire		0.65%	3.2	Gage
206	Length of straight leg		0.65%	3.2	Gage
207	Location of 2 coils		0.65%	3.2	Gage
208	Length of bent leg		0.65%	3.2	Gage
209	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil | Downloaded: 2026-04-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784409
4.4.2.31	Sleeve				NEXT HIGHER ASSEMBLY 11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Outside Diameter		0.65%	3.2	Gage
202	Overall length		0.65%	3.2	Gage
203	Inside Diameter		0.65%	3.2	Gage
204	Chamfers missing on I.D. or incorrect		0.65%	3.2	Visual
205	Protective finish missing or incomplete		0.65%	3.2	Visual
206	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.32	Contact Assembly				11784410
					NEXT HIGHER ASSEMBLY
					11784405
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Tightness of contact assembly improper		100%	3.2	Visual/Hand
102	Gap improper - 360°		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil Downloaded: 2006-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.33	Retainer, Safing		11784411
			NEXT HIGHER ASSEMBLY 11784400

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Overall profile		0.65%	3.2	Gage
202	Diameter of holes		0.65%	3.2	Gage
203	Location of holes		0.65%	3.2	Gage
204	Thickness		0.65%	3.2	Gage
205	Heat Treatment			3.2	Certification
206	Inside Width		0.65%	3.2	Gage
207	Protective finish missing or incomplete		0.65%	3.2	Visual
208	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

70

Source: https://assist.dla.mil | Downloaded: 2026-04-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.34	Spring Helical Compression	1 OF 1	11784412
			NEXT HIGHER ASSEMBLY 11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Solid Height		0.40%	3.2	Gage
102	Spring Rate		0.40%	3.2	Electronic Spring Tester
MINOR					
201	Free length		0.65%	3.2	Visual
202	Outside diameter		0.65%	3.2	Gage
203	Diameter of wire		0.65%	3.2	Gage
204	Ends not properly closed and ground		0.65%	3.2	Visual
205	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

71

Source: https://assist.dla.mil - Downloaded: 2026-10-20T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.35	Post, Bearing				11784413
					NEXT HIGHER ASSEMBLY
					11784423
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Small outside diameter		0.40%	3.2	Gage
102	Next to largest O.D.		0.40%	3.2	Gage
MINOR					
201	Width of retaining ring groove		0.65%	3.2	Gage
202	Diameter of retaining ring groove		0.65%	3.2	Gage
203	Runout of groove diameter with small O.D.		0.65%	3.2	Gage
204	Inside diameter		0.65%	3.2	Gage
205	Length from shoulder to groove		0.65%	3.2	Gage
206	Runout of next to largest O.D. with small O.D.		0.65%	3.2	Gage
207	Depth of drilled hole		0.65%	3.2	Gage

NOTES:

72

Source: https://assist.dla.mil - Downloaded: 2025-10-26T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.35	Post, Bearing				11784413
					NEXT HIGHER ASSEMBLY
					11784423
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR					
207	Depth of drilled hole		0.65%	3.2	Gage
208	Length from shoulder to rivet end of part		0.65%	3.2	Gage
209	Protective finish missing or incomplete		0.65%	3.2	Gage
210	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-01-23T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.36	Bottle Holder	1 OF 1	11784414
			NEXT HIGHER ASSEMBLY: 11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Depth of full thread on blind hole		0.40%	3.2	Gage
MINOR					
201	Location of small threaded holes		0.65%	3.2	Gage
202	Location of large threaded hole		0.65%	3.2	Gage
203	Pitch diameter of large threaded hole		0.65%	3.2	Gage
204	Pitch diameter of small threaded holes		0.65%	3.2	Gage
205	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil - Downloaded: 2025-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.37	Plunger Assembly	1 OF 1	11784415
			NEXT HIGHER ASSEMBLY 11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Pin not flush on both sides		0.40%	3.2	Visual
102	Parts missing, damaged or not assembled properly		100%	3.2	Visual
103	Spring pin does not extend equidistant above surface		0.40%	3.2	Visual
MINOR					
201	Roller not free to rotate		0.65%	3.2	Visual/Hand
202	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.38	Stop Bore Rider				11784416
					NEXT HIGHER ASSEMBLY
					11784423
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Diameter of holes		0.65%	3.2	Gage
202	Location of holes		0.65%	3.2	Gage
203	Protective finish missing or incomplete		0.65%	3.2	Visual
204	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil. Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.39	Sleeve, Stop		11784417
			NEXT HIGHER ASSEMBLY
			11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR	None defined				
MINOR					
201	Overall length		0.65%	3.2	Gage
202	Outside diameter (O.D.)		0.65%	3.2	Gage
203	Inside diameter (I.D.)		0.65%	3.2	Gage
204	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

77

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567, Feb 74, which is obsolete

Source: https://assist.dla.mil - Downloaded: 2026-01-28T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER 11784419
4.4.2.40	Release Clip				NEXT HIGHER ASSEMBLY 11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Diameter of hole		0.40%	3.2	Gage
MINOR					
201	Width of large slot - open end		0.65%	3.2	Gage
202	Width of small tab		0.65%	3.2	Gage
203	Location of small tab		0.65%	3.2	Gage
204	Location of lead in angle 2 places		0.65%	3.2	Gage
205	Location of elongated hole and hole at open end		0.65%	3.2	Gage
206	Height of small tab		0.65%	3.2	Gage
207	Bend radius of tabs		0.65%	3.2	Gage

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil - Downloaded: 2020-10-20T04:27Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.40	Release Clip	2	2	11784419
				NEXT HIGHER ASSEMBLY: 11784380

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
208	Dimensions of elongated hole		0.65%	3.2	Gage
209	Large radius minimum - 2 places		0.65%	3.2	Gage
210	Thickness		0.65%	3.2	Gage
211	Lead in angle 2 places		0.65%	3.2	Gage
212	Hardness		0.65%	3.2	Hardness Tester
213	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.41	Cone Assembly				11784420
					NEXT HIGHER ASSEMBLY
					11784385
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Orientation and color of wires of terminal assembly not correct		0.40%	3.2	Visual
102	Rivet roll over not tight		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11784422
4.4.2.42	Base and Ogive Assembly				NEXT HIGHER ASSEMBLY 11784400
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Distance from end of ogive assembly to edge of base and bore rider assembly		100%	3.2	Gage
102	All rivets not tight		100%	3.2	Visual/Hand
103	Parts missing or not assembled properly		100%	3.2	Visual
104	Orientation of wires		100%	3.2	Visual
105	Magneform missing or incomplete		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the correct version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.43	Base and Bore Rider Assembly				11784423
					NEXT HIGHER ASSEMBLY
					11784380
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Distance between posts		100%	3.2	Gage
102	Post not secured		100%	3.2	Visual/Hand
103	Parts missing or misassembled		100%	3.2	Visual
MINOR					
201	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.44	Bottle, Gas		11784425
			NEXT HIGHER ASSEMBLY
			11784400

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Weight of nitrogen gas - gross leakage		100%	3.2	Certification
102	Thread size and depth of thread, min.		0.40%	3.2	Gage
103	Depth to diaphragm		0.40%	3.2	Gage
104	Thickness of disc in orifice		100%	3.2	Test/ultrasonic
105	True position of diaphragm hole		0.40%	3.2	Gage
106	Presence of braze in orifice		100%	3.18	MIL-STD-453
107	Leakage test		100%	3.17	4.5.12
MINOR					
201	Stamping missing		0.65%	3.2	Visual

NOTES:

DRDAR-QA Form 160 Jul 77 Replaces SARPA-QA Form 2567 Feb 74 Which is Obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.44	Bottle, Gas	2 OF 2	11784425
			NEXT HIGHER ASSEMBLY 11784400

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MINOR (continued)					
202	Protective finish missing or incomplete		0.65%	3.2	Visual
203	Proof pressure		100%	3.2	Gage
204	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.45	Base Assembly				11784426
					NEXT HIGHER ASSEMBLY 11784423
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
CRITICAL	None defined				
MAJOR					
101	Perpendicularity of diaphragm		0.40%	3.2	Gage
102	Tightness of base assembly improper		0.40%	3.2	Visual/Hand
MINOR					
201	Overall length		0.65%	3.2	Gage
202	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2020-10-26T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.46	Other Components		See below
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Drawing No. — Document Nomenclature				
	11784391 — Grommet, Rubber 11784396 — Washer, Support 11784403 -1, -2, -3, -4 — Washer, Shim 11784404 — Terminal 11784406-1, -2, — Forward and Aft Retaining Rings 11784418 — Plug, Plunger 9342170 — Splice Conductor 11784421 — Rivet, Blind				
CRITICAL	None defined				
MAJOR					
101	Dimensions improper		0.40%	3.2	Visual
102	Operation missing or improperly performed		0.40%	3.2	Visual
103	Material		[illegible]	3.2	Certification
104	Material - Dielectric (if applicable)			3.2	Certification

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2020-10-20T04:27Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-63412 (AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.46	Other Components				See below NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
MAJOR (continued)					
105	Material - Hardness (if applicable)			3.2	Certification
106	Parts free of flash, voids, gates, cuts and mold marks (if applicable)			3.2	Certification
MINOR					
201	Protective finish missing or incomplete		0.65%	3.2	Visual
202	Evidence of poor workmanship		1.00%	3.21	Visual

NOTES:

Source: https://assistdla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

Production Lot Acceptance Tests

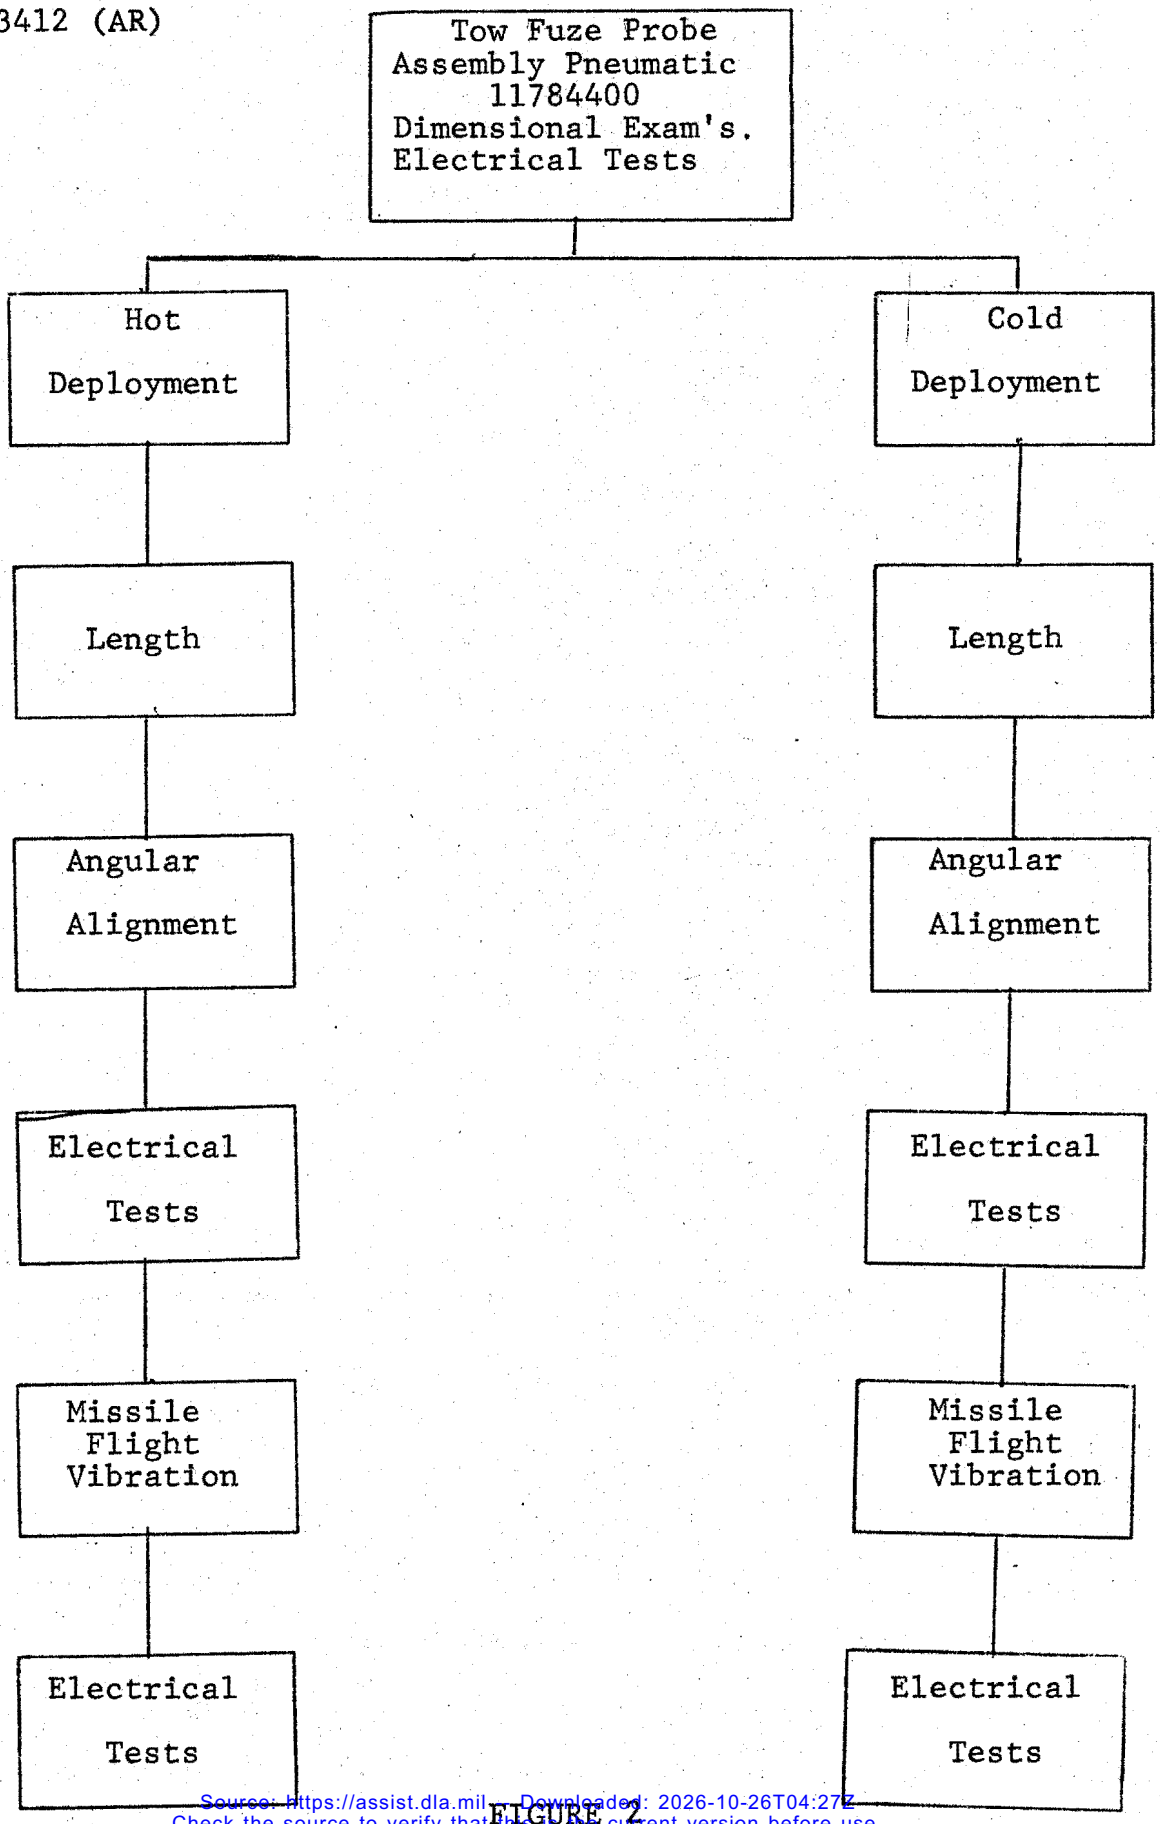


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.4.3 Inspection Equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078 and 6.3 herein.

4.5 Method of Inspection

4.5.1 Materials, Components and Processes. Compliance with all requirements of Section 3 of this specification shall be ascertained by current and continuing examination of inspection and test data to determine that all components (parts, subassemblies, and materials) have been inspected and tested and found to comply with their respective drawing and specification requirements, and that all specified manufacturing processes have been followed.

4.5.1.1 Visual, Mechanical, and Electrical Inspections. The visual, manual and electrical inspections and tests shall verify compliance with the requirements of Sections 3 and 5 of this specification in accordance with 4.4.2 herein and Table I.

4.5.2 Transportation Vibration. The TOW, Fuze Probe Assemblies shall be subjected to the transportation vibration requirements of MIL-STD-331, Method 119, Procedure 11 except as modified herein:

Input spectrum applied to the mounting ring shall be:
0.4 inch DA 10 to 15.7 Hz
2.5g to 500 Hz

Sweep logarithmitically from 10 to 500 to 10 H_z in 30 minutes. Vibrate in each 3 mutually perpendicular axes, two hours in each axis for a total of 6 hours. Temperature - room ambient.

4.5.3 Missile Launch shock. The TOW Fuze Probe assemblies shall be conditioned for a minimum of 8 hours at a temperature of 60°C (140°F). Each assembly shall be removed from the conditioning chamber and within fifteen (15) minutes subjected to one (1) shock of 390 g, one-half sine with a pulse deviation of 2.5 milliseconds in each direction of the 3 mutually perpendicular axis. In the event that all tests are not

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

completed within the fifteen minute time period, the probe assembly shall be reconditioned and the remaining tests completed according to the requirements of this paragraph.

4.5.4 Missile Flight Vibration. The TOW Fuze Probe Assemblies shall be subjected to the random vibration spectrums as shown on Figures 3, 4 and 5. Dwell time per axis shall be 30 second +5, -0 seconds. The probes shall be fully extended and locked for this test. During vibration the crush switches shall be monitored for chatter. The chatter detector shall be set to trigger at 10 μsec. Vibration tolerance is ± 3 db for power spectral density and ± 1.5 db for grms. Axis definition shall be as follows:

Longitudinal - Perpendicular to the bore rider assembly.

Vertical - Parallel with the extended probe section.

Transverse - Parallel with the bore-rider mechanism.

The fully extended and locked probes shall not unlock. There shall be no evidence of loose parts, screws, wires, clamps, bolts or nuts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

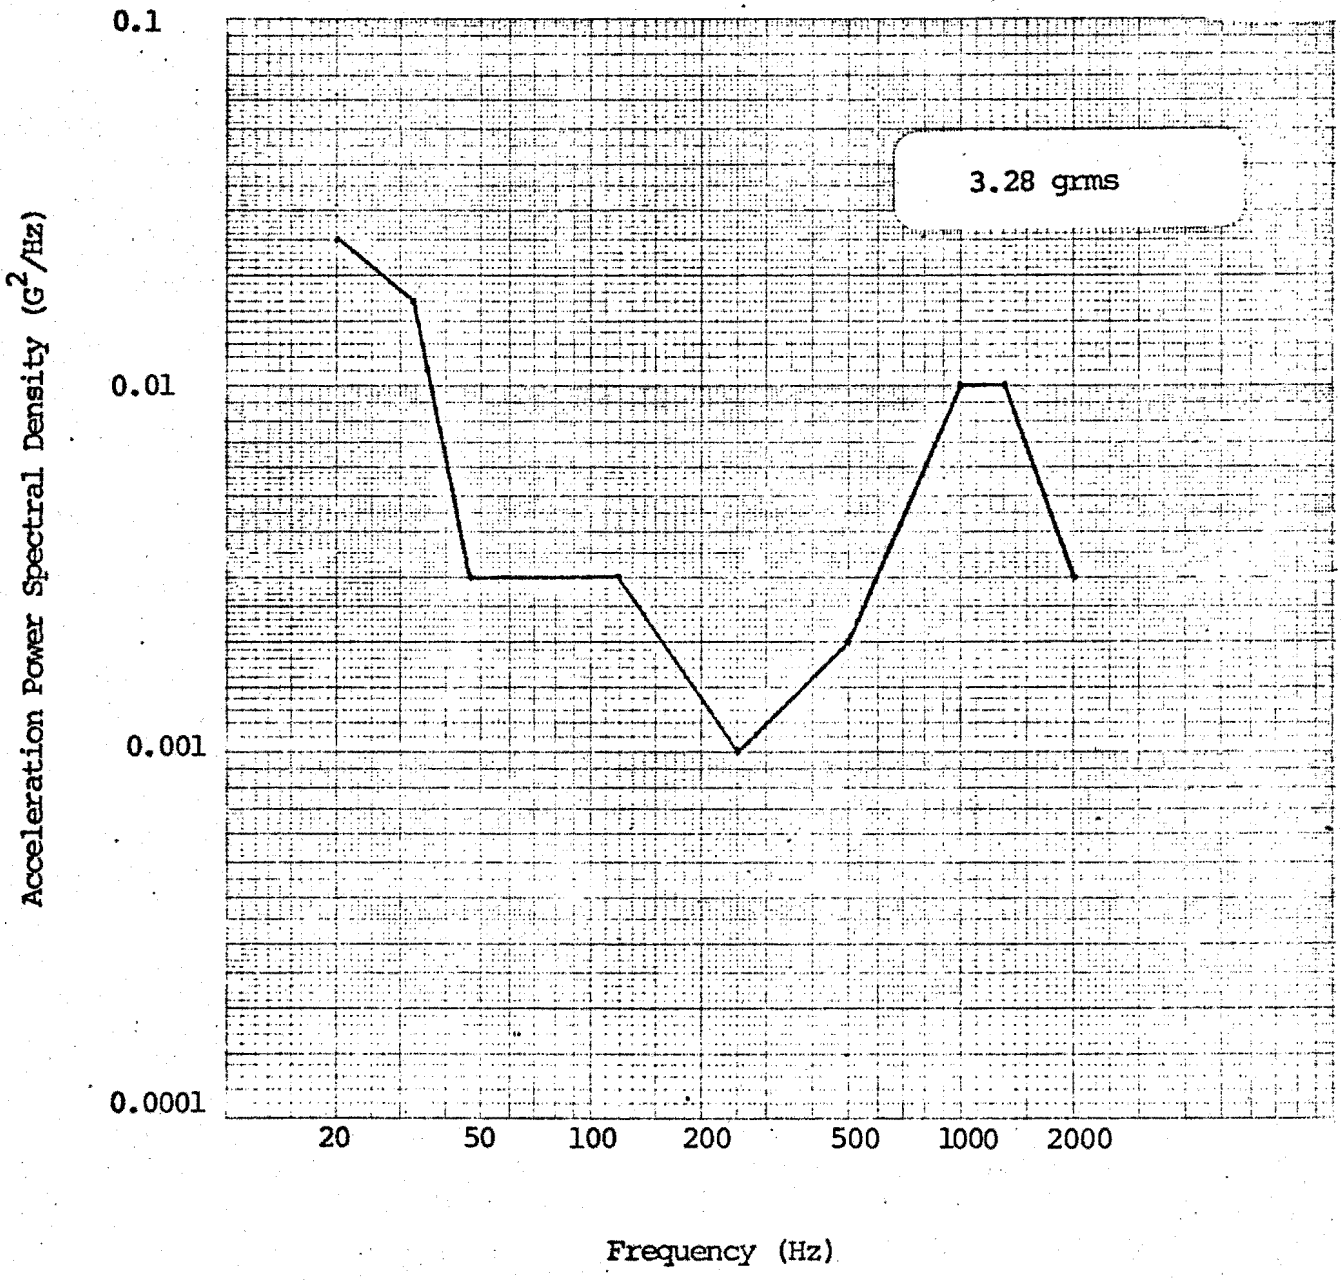


Figure 3

Flight Vibration - Longitudinal Axis

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

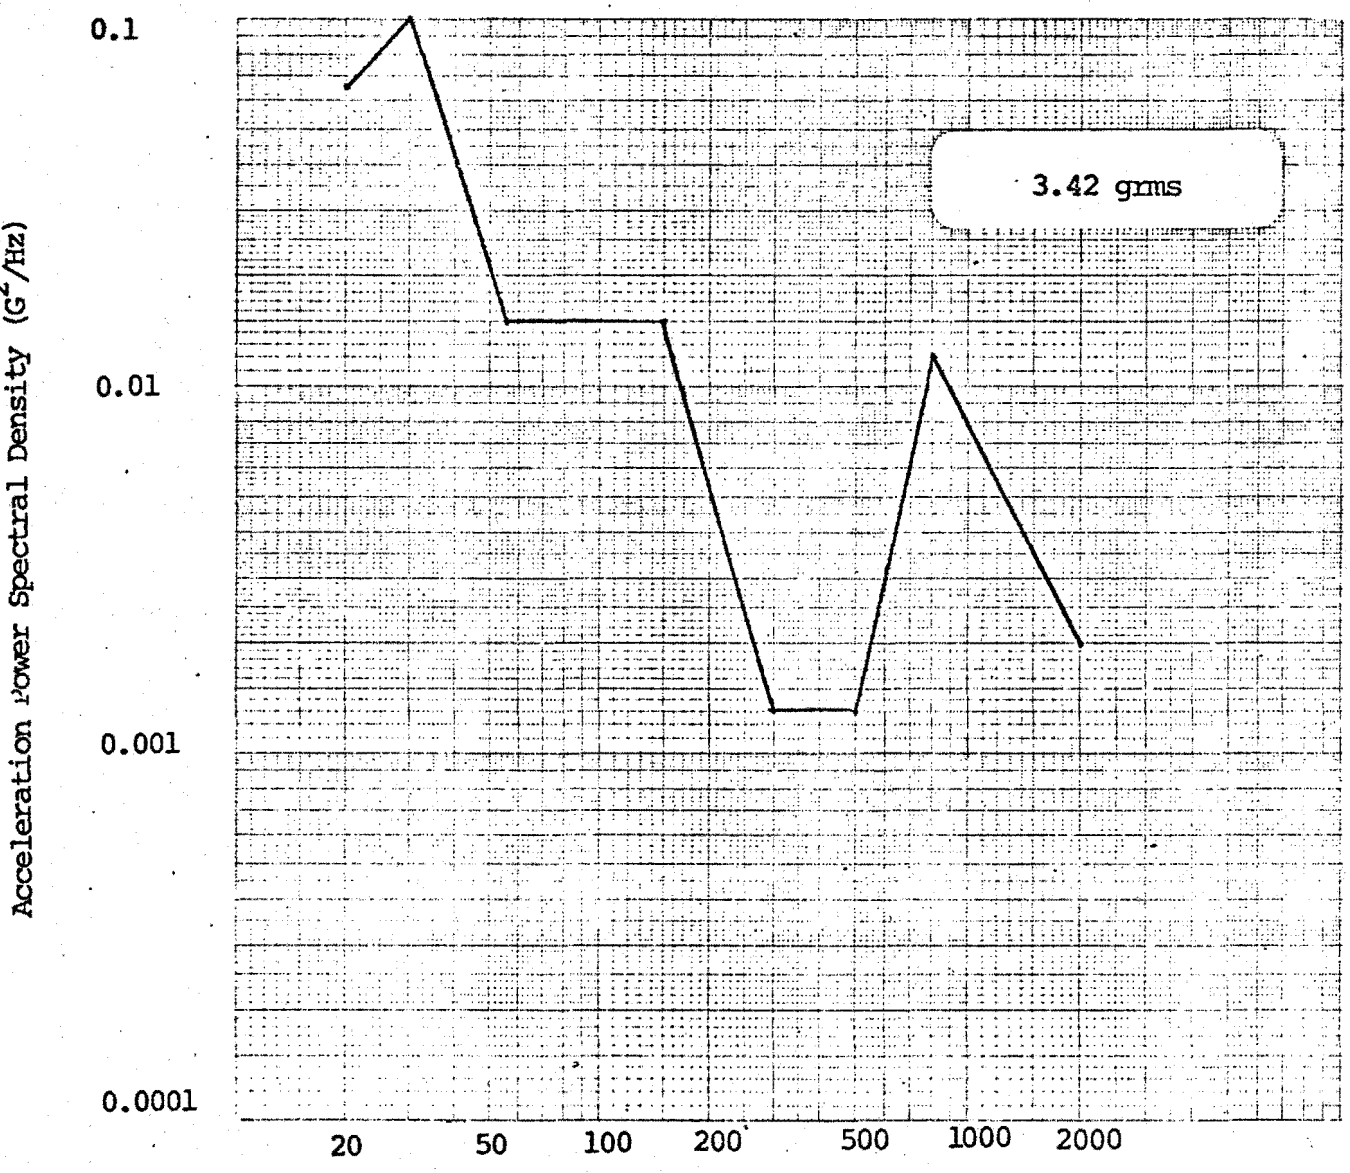


Figure 4

Flight Vibration - Vertical Axis

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

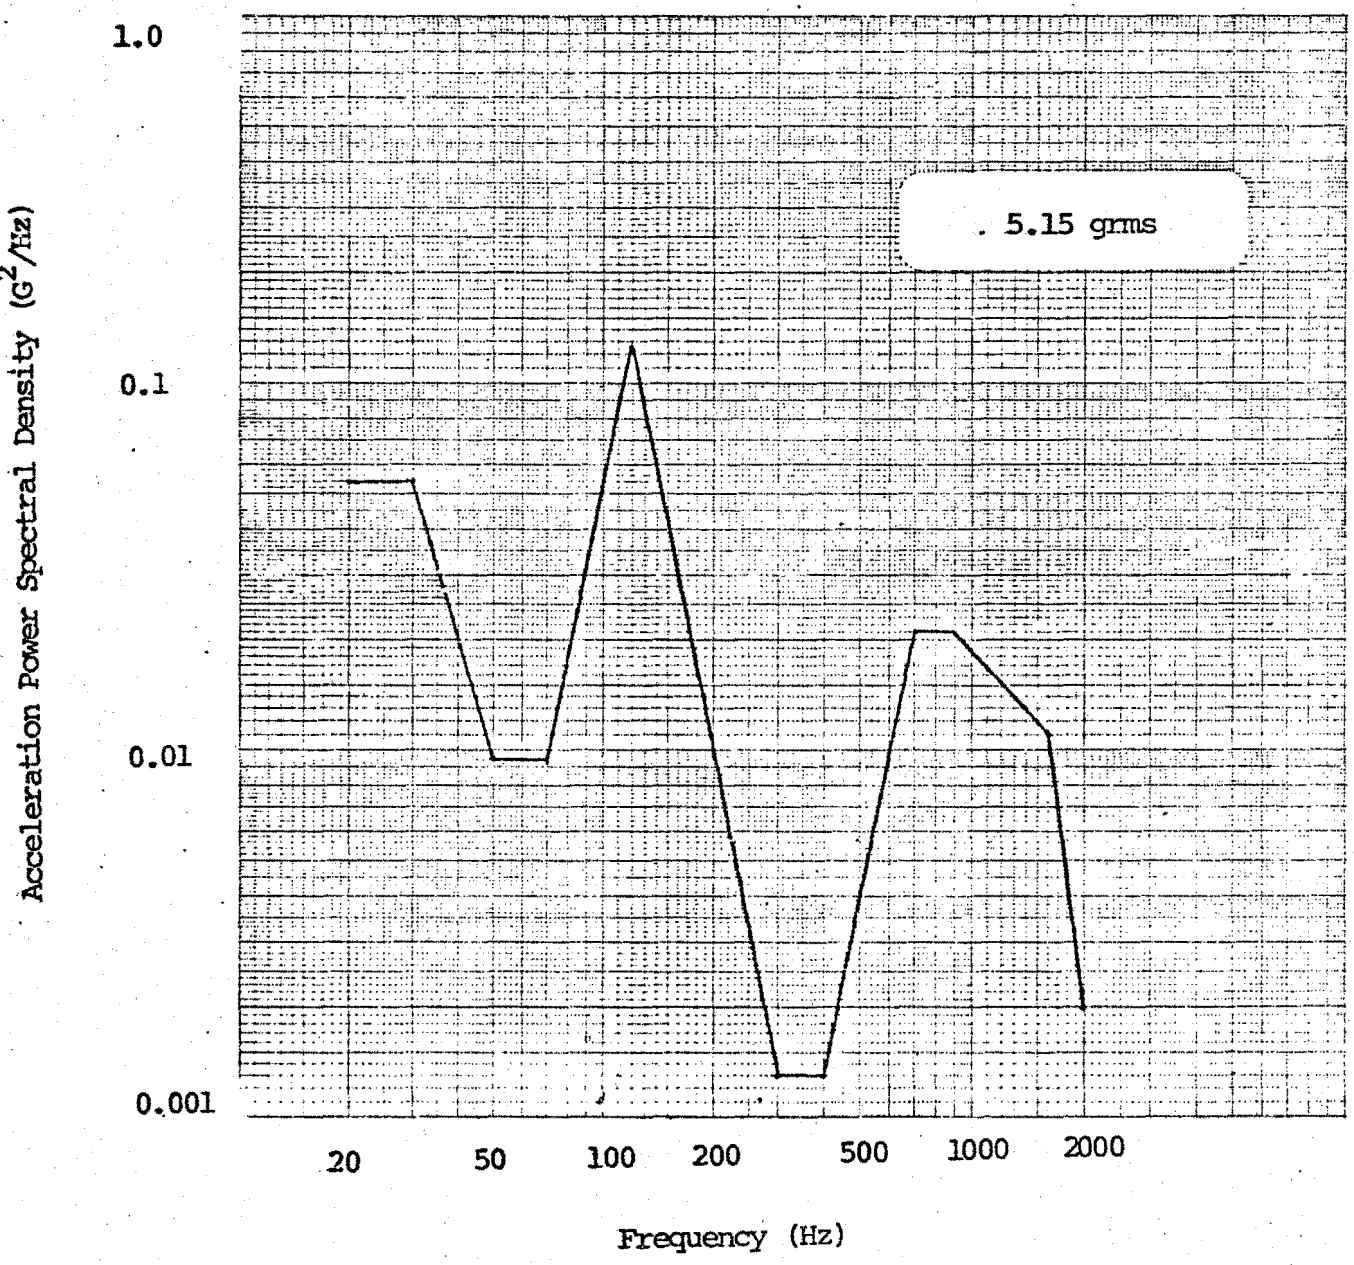


Figure 5
Flight Vibration - Transverse Axis

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

Post Vibration Acceptance. Upon completion of missile flight vibration, the Fuze Probe Assembly shall be inspected for evidence of loose parts, including screws, clamps, bolts, and nuts, that clearly result in component failure or a hazard to personnel safety.

4.5.5 Electrical Continuity. The electrical resistance for 3.8.1.1, 3.8.1.2, 3.8.1.3, and 3.8.1.4 shall be made on the Fuze Probe Assembly. Any assembly on which the resistance measurements do not meet the requirement shall be classed defective and removed from the lot.

4.5.6 Capacitance. The capacitance shall be measured between the brown and black wires of the Fuze Probe Assembly. Any assembly on which the capacitance does not meet the requirements shall be classed defective and removed from the lot.

4.5.7 Insulation Resistance. Insulation resistance measurements shall be taken between the ends of the brown and black wires of the Fuze Probe. Resistance shall be measured under an impressed voltage of 100 volts plus or minus (±) 5 VDC. Any assembly exhibiting a lower insulation resistance measurement than the requirement shall be classed defective and removed from the lot.

4.5.8 Hot Deployment. The TOW, Fuze Probe Assemblies shall be conditioned for a minimum of 2 hours at a temperature of 60°C (140°F). Each assembly shall be removed from the conditioning chamber and within five (5) minutes functioned for probe deployment. The items tested shall meet the requirements of 3.9, 3.12, and 3.13. (Destructive test).

4.5.9 Cold Deployment. The TOW, Fuze Probe Assemblies shall be conditioned for a minimum of 2 hours at a temperature of -32°C (-25.6°F). Each assembly shall be removed from the conditioning chamber and within five (5) minutes functioned for probe deployment. The items tested shall meet the requirements of 3.10, 3.12, and 3.13. (Destructive Test).

4.5.10 Ambient Deployment. The TOW, Fuze Probe Assemblies at ambient temperature shall be functioned for deployment. The items tested shall meet the requirements of 3.11, 3.12, and 3.13. (Destructive Test).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

4.5.11 Pull Test of Terminal Assembly. The terminal assemblies shall be subjected to a pull test of 5 lbs. minimum and 6 lbs. maximum dead weight.

4.5.12 Gas Bottle Leakage. Place the Gas Bottle in the mass spectrometer leak test fixture. Operate the equipment and observe the leakage. A leakage rate in excess of the requirement shall reject the Gas Bottle. The test equipment calibration and equipment shall be in accordance with 4.4.3.

5. PACKAGING

5.1 Preservation, Packaging and Packing. Preservation, packaging and packing and identification shall be in accordance with 49 CFR171-190.

5.1.1 Level B. The level of protection shall be level B in accordance with MIL-STD-794. The probes shall be packed in fiberboard cartons with egg carton inserts to allow multiple packing.

5.1.2 Packing. Wrap each unit in a 4 MIL polyetheyline bag.

5.1.3 Marking. Marking for shipment and storage shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended Use. It is intended that the probe defined by this specification shall be used on the Improved TOW Warhead M207E1, for use in the TOW Guided Missile BGM-714.

6.2 Ordering Data. See MIL-A-48078.

6.2.1 Procurement Requirements

a. Title, number and date of this specification.

b. Quantity required and delivery schedules.

c. Serialization requirements, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

d. Quality Conformance Inspection, if other than specified in Section 4 of item detail specification.

e. First Article sample requirements, if other than specified in Section 4 of item detail specification

f. Packaging requirements, if other than specified in Section 5 of the detail specification.

g. Certificates of conformance for each lot or shipment of product.

6.3 Submission of designs for approval. See 6.2.3 of MIL-A-48078. Submit equipment designs, as required to Commander, ARRADCOM, ATTN: DRDAR-QAR-I, Dover, New Jersey 07801.

Request letter of submittal state contractor, contract number, specification number, item nomenclature and classification of defects or test paragraph.

6.4 Data Requirements. Deliverable data required by the specification is cited in the following paragraph.

PARAGRAPH	DATA REQUIREMENT	APPLICABLE DID
6.5	Ammunition Data	DI-L-1410

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

Custodian:
Army - AR

Preparing Activity
Army - AR

Project No. 1336-A371

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-63412 FUZE PROBE ASSEMBLY, PNEUMATIC ASSEMBLING AND PACKING (TOW)

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:27Z
Check the source to verify that this is the current version before use.

97