INCH-POUND

MIL-F-70807 (AR)
11 March 1988

MILITARY SPECIFICATION

FUZE, PD: M745
(Less Booster and Lead)

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all Department and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers requirements, and acceptance criteria for Fuze, Point Detonating M745, less booster and lead.

2.1.1 Specifications and standards. Unless otherwise specified, the following specifications and standards of the issue listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation or in effect on the data of the invitation for bid or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-P-116	- Preservation, Method of
MIL-A-48078	- Ammunition, Standard Quality Assurance Provisions, General Specification for
MIL-F-70808	- Fuze, PD: M745 (Loading, Assembling and Packing)
MIL-A-2550	- Ammunition, General Specifications for

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedure and Tables For Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-331	- Fuze and Fuze Components, Environmental and Performance Tests for
MIL-STD-1314	- Safety Precaution for Explosive Loaded Items

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, U.S. Army Armament, Munitions, and Chemical Command, Attn. AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A
FSC 1390

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein.

OTHER GOVERNMENT DOCUMENTS

Department of Defense

DOD 4145.26M - Contractor's Safety Manual
Code of Federal Regulations 49CFR 101-190

DRAWINGS

USA LABCOM Harry Diamond Laboratories (FSCM 19202)

DL 11737001 - Fuze, PD: M745 (Less Booster and Lead)
11737000 - Fuze, PD: M745 (Loaded Assembly)

(Copies of specification, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer).

2.1.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Samples. The contractor is responsible for all requirements for providing and testing of samples as prescribed herein. When this specification is assigned to a subcontractor, it shall be the prime contractor's responsibility to insure that sample requirements are met. The prime contractor shall notify the Government at the time of assignment to a

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

subcontractor whether the testing will be performed by the prime or by the subcontractor. The number of units to be manufactured shall include the required deliverable quantities plus those required for all the following samples: First Article, lot acceptance, and comparison.

3.1.1 First Article inspection. Prior to the start of regular production, except when production on a new contract at the same facility follows within 90 days production of acceptable material under this specification, the contractor shall manufacture and submit a first article sample of 397 safety and arming (S&A) devices (11737007), 237 fuzes (11737001) (see figure 1) and the parts for inspection listed in Table 1 in the quantities specified, using as far as possible the methods and processes proposed for quantity production. When processes differ from the production processes, they shall be basically equivalent, and the difference shall be fully described in documentation submitted with the first article sample. Additional samples that may be required because of failure of the sample to meet the requirements of this specification shall be supplied by the contractor at his expense. Prior to approval of the first article sample, acquisition of additional parts and materials or initiation of production will be at the sole risk of the contractor.

3.1.2 Supplemental sample. At the Government's discretion, a supplemental sample may be required whenever there is a break in production continuity of 90 days or more, or a change in design, material, or process that may affect safety, operability, reliability, or interchangeability as defined by the requirements herein. In all cases, such changes will require prior approval of the procuring activity.

3.1.3 Comparison sample. Select at random forty-two fuzes as comparison samples from each of the first three shipping lots (not from

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

acceptance sample) and from one lot per month thereafter, or as specified by the Government procuring activity. These samples shall be shipped to the technical agency designated by the procuring activity.

3.1.4 Ballistic sample. Select at random ballistic lot acceptance samples from each production lot. Ballistic lot acceptance test plan is shown in Figure 2.

3.2 Construction. The device shall be constructed in accordance with applicable drawings for assemblies and parts (see 11737001). Variance from dimensions or characteristics as depicted on the interface control drawing (Figure 3) will not be considered unless such request for variance states that interface dimensions or characteristics are involved.

3.2.1 Materials. Materials shall be those specified by the applicable drawings and specifications.

3.2.2 Dimensions and technical notes

3.2.2.1 Listed. Those dimensions and technical requirements listed in the Classification of Defects are mandatory.

3.2.2.2 Unlisted. The contractor may propose deviations from characteristics shown on the drawings but not listed in the Classification of Defects for the purpose of adapting the item to established manufacturing practices. Such proposals must be accompanied by evidence that the deviation does not affect the function of the item and that all requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

will be met. If the Government confirms the contention of the contractor, the deviation will be approved for the duration of the contract. In case of dispute, the characteristics of the drawings shall apply. Approval of a deviation under provisions of this paragraph does not relieve the contractor from establishing and maintaining an adequate quality assurance program as elsewhere required. Provisions of this paragraph shall not be used to obtain approval for use of discrepant material (i.e., nonconforming material produced before approval is obtained); or for design changes, which should be requested in accordance with change provisions of the contract document. It is expected that deviations will normally be approved prior to the construction of the First Article Approval Sample and be reflected therein.

3.2.2.3 Interchangeability. While the dimensions and tolerances shown in the drawings and specifications will generally insure satisfactory products, the contractor is notified that some selection or matching may be required to obtain combinations which provide proper function or economic use of components. The contractor is responsible for selecting combinations of tolerances within the specified limits which satisfy his process needs and also meet the specified performance and fit requirements.

3.3 Performance requirements. All requirements cited herein are applicable over the temperature range of -25°F to +145°F unless otherwise stated.

3.3.1 FUZE, PD: M745 (Less Booster and Lead) (11737001). The fuze turbine shall not rotate more than one revolution due to air flow into the nozzle prior to actual gun firing. The fuze, when assembled with booster and lead in accordance with Drawing 11737000, MIL-F-70808, and when fired at all quadrant elevations and service charges from a mortar system and as part of a cartridge for which it is standard, shall perform as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.3.1.1 Safety. The fuze shall be safe to handle, be incapable of causing a bore or muzzle burst, and shall have a minimum safe separation distance from the weapon of 100 meters along the trajectory.

3.3.1.2 Ballistic operation requirements. When fired under any tactical condition with any service charge, the fuze shall function on impact with the ground target.

3.3.1.3 Environmental requirements

3.3.1.3.1 Safety and operational requirements. The fully loaded fuze assembly (11737000) shall meet the safety requirements (3.3.1.1) and be operable (3.3.1.2) after being subjected to extreme service conditions of temperature and humidity, salt fog atmosphere, transportation vibration, or temperature extremes. After 1.5 meter drop, bare, the fuze shall be safe, and if not significantly damaged, shall be operable.

3.3.1.3.2 Safety requirements. The loaded fuze assembly (11737000) shall be safe to handle (3.3.1.1) but need not be operable when subjected to extreme service conditions of jolt, jumble, and 40 foot drop.

3.3.2 Safety and arming device (11737007).

3.3.2.1 Spring gear latch (nondestructive, non-arming). With the zig-zag body in the forward position, the spring gear latch shall prevent rotation of more than one revolution of the turbine under .206 + .000, -.006, psig air pressure. The S&A Device shall meet the requirements of 3.3.2.4 following this test and also the requirements in 4.5.1.3 turbine latch test.

3.3.2.2 Acceleration sensor non-function. The zig-zag body shall not lock down when subjected to an acceleration of 215g min for at least one second.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.3.2.3 Acceleration sensor function. The zig-zag body shall lock down when subjected to an acceleration of 395g max for at least one second.

3.3.2.4 Arming time. With the zig-zag body locked down, with air pressure of .206 + .000, -.006 psig on the turbine, and when mated with a standard M745 T/A, the S&A rotor shall arm between 2.5 and 4.0 seconds at ambient temperature. At low temperature, the S&A rotor shall arm between 2.5 and 5.5 seconds with a mean arming time, for the sample tested, not to exceed 4.7 seconds.

3.3.2.5 Spring gear latch (destructive, non-arming). With the zig-zig body in the forward position, the spring gear latch shall prevent rotation of the gear train with 0.7 to 0.8 psig air pressure applied to the turbine. The S&A device need not be operable but shall be safe such that the jackscrew shall not have been withdrawn more than .010 in. following this test.

3.4 Marking. The unit shall be marked in accordance with the requirements of Drawing 11737001, and MIL-STD-129.

3.5 Workmanship. All parts and assemblies shall be free from any loose burrs, chips, or other foreign matter, and any excess flash, cracks, blisters, or any other surface defects unless specifically allowed by the drawings. Cleaning methods used shall not contaminate or otherwise be injurious to the parts. The loading and assembly operations shall be performed in a thorough, workmanlike manner consistent with the best practices of the industry. All required markings shall be neat and sharply defined. (See MIL-A-2550).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

3.5.1 Flash removal. All flash must be completely removed from parting lines, internal and external profiles, cored holes and ejector pin marks, except as noted on the drawings.

parting lines, internal and external profiles, cored holes and ejector pin marks, except as noted on the drawings.

3.5.2 Gates. All waste material remaining from the gates must be removed except when so noted on the drawings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.1.1 Government performed tests. The Government shall be responsible for performing the test described in paragraphs 4.5.1.1, Ballistic Function Test.

4.2 Classification of inspections. The following types of inspections shall be conducted on this item:

a. First article inspection (see 4.3)

b. Quality conformance inspection (see 4.4)

c. Packaging inspection (see 4.5.3)

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with the provisions of 4.3.2.

4.3.2 Inspection to be performed. The first article sample as specified in 3.2.1 shall be examined and tested in accordance with the first article inspection (Figure 1), Classification of Defects (4.4.2), and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

Material and Component Certifications (4.4.3.3). The ten sets of fuze parts identified in Table 1 shall be subjected to 100 percent examination of all characteristics listed on the applicable drawings, and all variables data shall be recorded. These inspections shall be witnessed by the Government Quality Assurance representative or a representative of the cognizant technical agency. Certification for materials, plating, chemical compositions, etc., shall include variables data (e.g., results of chemical analyses), and may be supplied by the vendor on the batches from which the parts were procured.

4.3.3 Rejection. Provisions of MIL-A-48078 shall apply.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. In addition, inspection lots of fuzes shall contain components that meet the following criteria.

a. M55 detonators from one interfix lot number from not more than three lots from one manufacturer.

b. M61 detonators from one interfix lot number from not more than three lots from one manufacturer.

c. Turbine Alternators from not more than one manufacturer and interfix lot number.

d. The lot size shall be a maximum of 20,000 fuzes or one month's production, whichever is smaller.

4.4.2 Examination. See MIL-A-48078 and C of D's.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and test tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

b. C of D's.

4.4.3 Testing.

4.4.3.1 Ballistic samples. The ballistic test samples shall be selected in accordance with 3.1.4 and tested as specified in paragraph 4.5.1.1, ballistic function tests, and (Figure 2).

4.4.3.2 Lot acceptance. Lots shall be accepted on the basis of Classification of Defects (4.4.2), Material and Component Certifications (4.4.3.3), and lot performance tests (Figure 2). Except for ballistic functioning tests, tests shall be performed by the contractor under observation of the on-site Government Quality Assurance representative or a representative of the cognizant technical agency. Inspection may be made at a higher assembly level than specified, provided equal quality assurance provisions are satisfied, but not at a lower level than specified. The ballistic tests shall be performed by the Government after loading. If the ballistic sample fails any of the tests, a failure analysis shall be conducted by the contractor under Government surveillance. Should analysis indicate the need, ballistic tests may be repeated using a controlled sample.

4.4.3.2.1 Disposition of lot acceptance samples. Units in the sample which pass the nondestructive inspections and tests may be returned to the lot. Any unit which contains any defects shall not be returned to the lot.

4.4.3.3 Material and component certification. Prior to acceptance under this procurement, the contractor shall demonstrate by means of certifications or statements of findings that only material and components conforming to the item specifications and drawings have been used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.4.4 Equipment and test conditions.

4.4.4.1 Test and inspection equipment. The contractor is responsible for the design and fabrication of the test and inspection equipment. Special inspection equipment shall be of sufficient accuracy and quality to permit performance of the required inspection. Gage and instrument setting shall be a function of the equipment, and independent of the operator. Equipment shall be marked to indicate the limit of acceptance for each test. The acceptance limits shall be reduced to allow for test equipment inaccuracy. Government certification of the specially constructed equipment and standard measuring and test equipment used for acceptance purposes is required prior to use. The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See section 6 of MIL-A-48078 and section 6.3 herein.

4.4.4.1.1 Centrifuge equipment. The centrifuge shall be of a type which will allow the unit under test to be positioned at a distance of at least 10 inches (measured to ± 0.1 inch) from the center of rotation of the centrifuge. Rotational speed of the centrifuge shall be capable of being measured to an accuracy of ± 1 percent. The distance to be used in calculating the acceleration applied to the device shall be measured from the center of rotation of the centrifuge to the center of the zig-zag body when in the down position.

4.4.4.1.2 Safety and arming device tester. The S&A tester shall be designed to mount the S&A under a stack load of 60 ± 20 lbs, to provide the required air flow, to provide a calibrated M745 turbine/alternator in a dummy nose or equivalent, and the necessary monitoring facilities to test

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

for the requirements of 3.3.2. The air flow shall be such that the difference in indicated pressure at the test assembly input between a stopped and running T/A shall not be greater than 5%. A standard T/A shall be checked as a minimum every 25 arming tests to assure meeting the T/A calibration requirements.

4.4.4.2 Test and inspection measurements and conditions. Unless otherwise specified, all measurements are to be made at normal ambient room conditions of temperature, relative humidity, and altitude. Temperature conversion between Fahrenheit and Celsius shall be carried to the nearest whole degree. The following table of tolerances shall apply to specified test conditions unless otherwise defined in the test procedures.

a.	Temperature in test chamber	± 5 degrees F
b.	Relative humidity	± 5 percent
c.	Vibration amplitude	± 10 percent
d.	Shock acceleration	± 10 percent
e.	Physical measurements	± 1 percent, 0.0001 in or 0.1 degree, which ever is greater

Whenever a negative temperature is specified, the specified temperature listed is maximum (or least negative). Whenever a high positive temperature (e.g., +145°F) is specified, the specified temperature is the minimum.

4.4.4.3 Safety precautions. The contractor is responsible for safety precautions relating to the handling, assembly, testing and storage of explosives and assemblies containing explosives. The provisions of MIL-STD-1314A (NAVY) and the DOD Contractors Safety Manual, DOD 4145.26M shall be followed, and compliance verified by Government personnel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.4.4.4 Performance Tests. All temperature conditioning on fuzes or assemblies shall be for a minimum of four hours. All items shall be tested within one minute of removal from the chamber or as specified below. Assemblies shall be sealed in plastic bags while being conditioned at cold temperature.

4.5 Methods of inspection.

4.5.1 Fuze testing.

4.5.1.1 Ballistic function tests. All conditioned rounds shall be fired as soon as practical after removal from the temperature chamber. Rounds conditioned at cold temperature shall not be removed from their individual containers (exposed to air) for longer than 15 seconds prior to firing to prevent frosting. The rounds shall be fired from a 60mm LightWeight Company Mortar System, M224 with the M722 or 720mm Cartridge. Fuze functioning shall be determined using data from high speed video or visual or a combination of both.

4.5.1.1.1 Impact function. The round shall be fired as specified. The requirements of 3.3.1.2 shall be met.

4.5.1.1.2 Reject categories.

4.5.1.1.2.1 Dud (D). "D" is a category in which the fuze does not initiate the high explosive of the projectile.

4.5.1.1.2.2 Premature (PRE). "PRE" is a function which occurs prior to ground impact. A premature is considered a critical defect. One or more premature functions will reject a lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.5.1.2 Environmental tests.

4.5.1.2.1 Safety and operational tests. The environmental testing is to be conducted during FAAS testing in accordance with (Figure 1). The fuzes shall be loaded with inert boosters and leads for all testing. After completion of the tests, all fuzes shall be x-rayed in two planes to determine the proper safe condition of the fuze to assure safe handling, disassembly, and firing as applicable. The Safety and Arming Device shall be considered safe if the rotor remains held in the full out-of-line position by both of the two safety elements, and none of the explosive elements has been initiated. Fuzes to be disassembled shall be inspected for any damage, partial arming, or initiation of any explosives. Fuzes to be fired as part of the Ballistic Test Plan shall be loaded in accordance with Drawing 11737000 after removal of the inert boosters and leads.

4.5.1.2.1.1 Temperature and humidity. The fuze shall be safe and operable after undergoing Test 105.1, MIL-STD-331A.

4.5.1.2.1.2 Salt Fog. The fuze shall be safe and operable after undergoing Test 107.1 (48 hour test), MIL-STD-331A.

4.5.1.2.1.3 Drop test. The fuze shall be safe, and if not structurally damaged (by visual examination), operable after being subjected to the 1.5 meter (five foot) drop test 111.1, Procedure 2, Criteria B, MIL-STD-331A.

4.5.1.2.1.4 Transportation vibration temperature. The fuze shall be safe and operable after Test 119, Procedure 2, MIL-STD-331A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.5.1.2.1.5 Jolt. The fuze shall be safe after being subjected to Test 101.3, Procedure I, MIL-STD-331A.

4.5.1.2.1.6 Jumble. The fuze shall be safe after being subjected to Test 102.2, MIL-STD-331A.

4.5.1.2.1.7 Forty foot drop. The fuze shall be safe to handle after being subjected to Test 103.2, Procedure 1, MIL-STD-331A.

4.5.1.3 Turbine latch test. The fuze shall have an air flow applied to the input nozzle with a pressure of 0.206 + .000, -.006 psig. Observance of any turbine rotation shall be made visually. The requirements of 3.3.1 shall be met.

4.5.2 Safety and arming device tests. The S&A Devices shall not be explosively loaded for the following tests.

4.5.2.1 Spring gear latch (nondestructive, non-arming test). The S&A Device shall be loaded with a conductive dummy detonator and placed in the tester of 4.4.4.1.2. With the zig-zag body in the forward position, apply an air pressure of .206 + .000, -.006 psig. The spring gear latch shall meet the requirements of 3.3.2.1. Following this test, the arming time test of 4.5.2.4 shall be conducted and the S&A shall meet the requirements of 3.3.2.4.

4.5.2.2 Acceleration sensor nonfunction. The S&A device shall be mounted on the centrifuge equipment (4.4.4.1.1) and spun to achieve an acceleration of 215g min applied axially toward the booster end of the S&A. The position of the zig-zag body may be examined under stroboscopic light without stopping the centrifuge. The requirements of 3.3.2.2 shall be met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

4.5.2.3 Acceleration sensor function. Conduct test in accordance with 4.5.2.2 except at an acceleration of 395g max. The requirements of 3.3.2.3 shall be met.

4.5.2.4 Arming time. The S&A Device shall be placed in the tester of 4.4.4.1.2. With the zig-zag body in the locked down position, and with the turbine restrained from turning, apply an air pressure of .206 + .000, -.006 psig. Release the turbine and start a timer. The timer shall be stopped when the rotor reaches the fully armed position. This measured time shall meet the requirements of 3.3.2.4. For all arming time tests, both the calibrated M745 T/A and the input air shall be at a temperature of 70°F ± 20°F.

4.5.2.5 Spring gear latch (destructive, non-arming test). Conduct test in accordance with 4.5.2.1 at an air pressure of 0.7 to 0.8 psig. The requirements of 3.3.2.5 shall be met.

4.5.3 Packaging inspection. The preparation for delivery inspection shall be as specified in the following paragraphs.

4.5.3.1 Packaging and packing. Verify the item is packaged and packed in accordance with requirement 5.1.

4.5.3.2 Marking. Verify the item has been marked in accordance with requirement 5.2.

5. PACKAGING

5.1 Cleaning, preservation, and packaging. The cleaning, preservation and packaging of items for protection against corrosion, physical damage, and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

other forms of deterioration during interplant handling, shipment, and storage shall be in accordance with Method III of MIL-P-116.

5.1.1 Packaging material. The material used for packaging must not cling to the part, create debris which can lodge inside or onto the part.

5.2 Marking. In addition to any special marking requirements by the contract or order, unit packages, intermediate packages, and shipping containers shall be marked in accordance with requirements of MIL-STD-129.

5.3 Ammunition data cards. Data card information shall be as specified in MIL-A-48078.

6. NOTES

6.1 Intended use. The M745 Fuze is Type Classified on the M722 White Phosphorus (WP) smoke cartridge. It is also used on the 60-mm Lightweight Company Mortar System.

6.2 Instructions for procurement documents.

6.2.1 Documents. Procurement documents shall specify title, date, and number of this specification.

6.2.2 Lead time. The complete testing of the First Article Sampling, including Government conducted testing, will require a maximum of 60 days. If there are any failures, additional time will be required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

6.2.3 Data requirements. The following data are required by this specification to be furnished to the Government and should be entered on DD Form 1423:

Data Requirement	Applicable DID
X-ray Photographs	DI-E-10581
Ammunition Data Card	DI-MISC-80043
Quality Engineering Acceptance Inspection Equipment Design Concepts	DI-R-1713
Quality Inspection, Quality Deficiency Report	DI-R-1725B
Lot Summary Inspection Record	DI-R-1757
Engineering Change Proposals (ECPs) and Requests for Deviations and Waivers (Short Form)	DI-E-2038
Certificate of Compliance	DI-E-2121
Inspection System Program Plan	DI-R-4803
First Article Inspection Report	DI-T-4902/M
Failure Analysis and Corrective Action Report	DI-R-5299C
DD Form 610 "GFE Requirement Schedule"	DI-P-6162A
Calibration System Description	DI-R-7064
	Applicable DAR
Production Progress Report	FAR 52.242.2

6.3 Submission of designs for approval. See 6.2.3 of MIL-A-48078. Submit equipment designs as required to: Director, Harry Diamond Laboratories, SLCHD-TA-OP, Adelphi, MD 20783-1197.

6.4 Items to be included in procurement documents.

6.4.1 Approval of first article. If the sample passes the specified examinations and tests, and the required data and material and component certifications are delivered, it will be approved. If the sample fails any of the examinations and tests, a failure analysis shall be conducted by the contractor under Government surveillance. Should analysis indicate the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

need, ballistic tests may be repeated using a controlled sample. The results of the tests and failure analysis together with the engineering analysis of units shall form a basis for corrective action. Depending upon the degree of corrective action deemed necessary by the Government, the first article sample may be:

a. Conditionally approved with the provisions that the recommended changes are made by the contractor prior to start of regular production or during production of the first lot, as prescribed by the Government. Such portions of first article inspections needed to verify corrective action may be included in the quality conformance inspections for the first lot, at the Government's discretion.

b. Disapproved, and new samples required for inspections failed and for related inspections which might be invalidated by the corrective actions.

c. Disapproved, and a complete new sample required for approval.

In all cases, the contractor shall comply with any required changes for the duration of the contract.

6.4.2 Reinstitution of first article inspection. Acceptance of first article sample does not relieve the contractor from meeting all requirements of this specification throughout the contract. The Government reserves the right to verify independently that all requirements are met by repeating the first article inspection or any portion thereof on any production. If such verification indicates failure to meet requirements previously verified by first article inspection, the contractor will be required to take corrective

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

action. If the requirements are not met on the first lot to which correction can be applied, the Government reserves the right to institute tightened inspection on a lot basis, by adding to the normal lot acceptance inspections all or such parts of the first article inspection needed to verify corrective action. Normal quality conformance inspection will be resumed after two consecutive lots have satisfactorily pass tightened conditions.

6.4.3 Production flow chart. A production flow chart showing the manufacturing and processing sequence to be used, and indicating the stations at which inspections and tests are to be performed, shall be provided as part of the Inspection Plan. The number and nomenclature of the contractor's inspection procedures shall be indicated at the inspection stations to which they apply.

6.4.4 Engineering information. Upon request, copies of the data collected in the acceptance of a lot will be made available to the Govenment representative. Additional data or data required by special requirements, when needed for engineering purposes, will be specifically defined by the contract.

6.4.5 Advisory requirements. Information, instructions, notes, or requirements identified as "advisory" in Government drawings are data acquired by the Government and furnished to the contractor for whatever use

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

he may find them applicable to the performance of the contract. Use of this data is not mandatory.

6.5 Ordering data. See section 6 of MIL-A-48078.

TABLE I. List of First Article Sample Parts

PART NUMBER	NOMENCLATURE - DESCRIPTION	NUMBER REQUIRED
11744131	Pin, Firing	10
11740827	Pad, Booster	10
11740828	Cap, Booster	10
11740824	Cover, Fuze Base	10
11744134	Jackscrew	10
11744135	Wheel, Jackscrew	10
11744136	Shaft, Wheel and Worm	10
11744145	Shaft, Worm Drive	10
11737030	Fuze Base Assembly	10
11737031	Base, Fuze	10
11737029	Fuze Base Cover Assembly	10
11744139	Spring, Gear Latch	10
11744140	Body, Zig Zag	10
11744133	Cover, Rotor	10
11744152	Nose, Ogive	10
11737024	Nose, Insert, M745	10
11740823	Barrier, Fuze Base	10
11744129	Insert, Detonator	10
11744128	Housing, Primer Cage	10
11744147	Can, Rotor	10
11744146	Rotor	10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

11744126	Plate, Switch	10
11737016	Rotor Assembly	10
11748021	Spring, Bias	10
11744127	Spring, Stab Prime	10
11737012	Turbine Alternator & Switch Plate Assy	5
11744137	Cam	10
11744138	Pin, Groove	10
11744130	Spring, Rotor	10
11744141	Spring Lock	10
11737020	Lock, Rotor	10
11737021	Rotor Lock Spring	10
11737027	Cage, Detonator	10
11740819	Ogive Base	10
11744125	Post, Center	10
11737013	Turbine Assembly	10

NOTE: Any components, assembly or sub-assembly covered by its own source or specification control drawings shall have samples submitted and inspected to the listed criteria specified in its respective drawings.

6.6 Subject term (key word) listing.

Fuze, DP: M745 (less booster and lead)
Safety Arming Device

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1390-A579)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.1	Fuze, Point Detonating: Dual Purpose, M745		11737001
			NEXT HIGHER ASSEMBLY 11737000

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	ACL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical					
1	S&A rotor in the armed (in-line) positon		100%	3.1	Gage/Visual through lead hole
Major					
101	Exceeds 3.700 lenoth		.40%	3.1	Gage
102	Shaft, worm drive (11744145) and alternator shaft (11740806) not engaged		.40%	3.1	X-ray
103	Molding compound (11744121) not present in vent hole		.40%	3.1	Visual/Gage
Minor					
201	Fuze identification not present or not legible		.65%	3.1	Visual
202	Evidence of poor workmanship		.65%	3.5	Visual

NOTES

AMSMC Form 1570, 1 Feb 05

Replaces DRSMC-QA (U) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.2	Safety and Arming Device (Loaded)				11737010
					NEXT HIGHER ASSEMBLY 11737001
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL CR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical					
1	Body, Zig-zag (11744140) not in the safety (up, into the hole of the fuze base cover) (11740824) position		100%	3.1	Probe
2	.646 Depth of jackscrew (11744134) too large		100%	3.1	Gage
3	Non-locking of rotor assy (11737016) in safe position by jackscrew (11744134) (note 3 of 11737010)		100%	3.1	Manual/Probe (rotor remains in safe position with zig-zag down)
Major					
101	.646 depth of jackscrew (11744134) too small		.40%	3.1	Gage
102	.034 depth of the shaft, worm drive (117444145) too large		.40%	3.1	Gage

NOTES:

AMSMC Form 70, 1 Feb 85 Replaces MIRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.2	Safety and Arming Device (Loaded)		11737010
			NEXT HIGHER ASSEMBLY 11737001

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL CR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Major					
103	Spring, Rotor (11744130) missing		.40%	3.1	See note below
104	Primer Housing assy (11737026) above top of rotor assy (11737016)		.40%	3.1	Probe
105	Primer Housing assy (11737026) improperly oriented in layered hole in rotor.		.40%	3.1	Visual, X-ray, Probe
Minor					
201	Evidence of poor workmanship		.65%	3.5	Visual

NOTE: With the rotor in the safe position, the zig-zag body down (in the armed position), and the jackscrew extended, rotate the rotar assembly counter-clockwise to rotor stop. Release rotor. The rotor shall snap back to locked safe position.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Primer Housing Assembly		11737026
			NEXT HIGHER ASSEMBLY 11737010

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Missing stab primer spring		0.40%	3.1	Probe/IG test
102	Missing or improperly oriented M61 detonator		0.40%	3.1	Visual
103	Missing or improperly oriented M55 detonator		0.40%	3.1	Visual
104	Stab primer above surface A		0.40%	3.1	Visual/Probe
105	Improper staking of M55 detonator		0.40%	3.1	Force test
106	Loaded primer cage bound		0.40%	3.1	Manual
Minor					
201	Improper crimp of primer cage to detonator insert		0.65%	3.1	Torque test
202	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

Standards Document - Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.4	Cage, Detonator	1 of 1	11737027
			NEXT HIGHER ASSEMBLY: 11737026

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	.148 diameter out-of-tolerance		0.40%	3.1	Gage
102	.040 diameter too small		0.40%	3.1	Gage
103	.309 diameter out-of-tolerance		0.40%	3.1	Gage
104	.303 depth out-of-tolerance		0.40%	3.1	Gage
105	.109 diameter out-of-tolerance		0.40%	3.1	Gage
Minor					
201	.268 diameter out-of-tolerance		0.65%	3:1	Gage
202	.042 length too small		0.65%	3.1	Gage
203	.243 diameter too large		0.65%	3.1	Gage
204	Any .005 x 45° chamfer too small		0.65%	3.1	Gage
205	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: http://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Spring, Stab Primer				11744127
					NEXT HIGHER ASSEMBLY
					11737026
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL CR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	Incapable of working in .312 diameter hole		.65%	3.1	Gage
202	Incapable of working over a .268 diameter rod		.65%	3.1	Gage
203	Load at compressed length of .234 is out-of-tolerance		.65%	3.1	Gage
204	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.6	Housing, Primer Cage		11744128
			NEXT HIGHER ASSEMBLY 11737026

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	.328 diameter too large		.65%	3.1	Gage
202	.312 diameter too small		.65%	3.1	Gage
203	.270 diameter out-of-tolerance		.65%	3.1	Gage
204	.410 length out-of-tolerance		.65%	3.1	Gage
205	.090 tab width too large		.65%	3.1	Gage
206	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: http://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Insert, Detonator		11744129
			NEXT HIGHER ASSEMBLY 11737026

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	.312 diameter out-of-tolerance		.65%	3.1	Gage
202	.290 diameter too large		.65%	3.1	Gage
203	.115 dimension out-of-tolerance		.65%	3.1	Gage
204	.180 dimension out-of-tolerance		.65%	3.1	Gage
205	.083 height out-of-tolerance		.65%	3.1	Gage
206	.155 diameter too large		.65%	3.1	Gage
207	.193 diameter out-of-tolerance		.65%	3.1	Gage
208	.264 diameter out-of-tolerance		.65%	3.1	Gage
209	Evidence of poor workmanship		.65%	3.1	Visual

NOTES:

AMSMC Form 1570, 1 Feb 05

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Fuze Base Cover Assembly	1 of 1	11737029
			NEXT HIGHER ASSEMBLY 11737007

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Height of firing pin exceeds .033		.40%	3.1	Gage
102	Firing pin not retained or immobilized		.40%	3.1	Note A
Minor					
201	Evidence of poor workmanship		.65%	3.5	Visual

NOTES: A. Check tightness manually. Then push firing pin with 4 lbs. force against stake. It shall not move.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Cover, Fuze Base				11740824
					NEXT HIGHER ASSEMBLY 11737029
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	.200 tab out-of-tolerance		.40%	3.1	Gage
Minor					
201	.110 thickness out-of-tolerance		.65%	3.1	Gage
202	.265 diameter out-of-tolerance		.65%	3.1	Gage
203	.206 diameter out-of-tolerance		.65%	3.1	Gage
204	.020 flat too small		.65%	3.1	Gage
205	.020 radius (Section FP) out-of-tolerance		.65%	3.1	Gage
206	1.224 diameter out-of-tolerance		.65%	3.1	Gage
207	.031 diameter too small		.65%	3.1	Gage
208	.081 diameter out-of-tolerance		.65%	3.1	Gage
209	.134 diameter out-of-tolerance		.65%	3.1	Gage
210	.060 thickness (in .081 hole) out-of-toleranc		.65%	3.1	Gage
211	.040 Tab out-of-tolerance		.65%	3.1	Gage
212	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:40Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE			SHEET 1 OF 1	DRAWING NUMBER 11744131
4.4.2.10	Pin, Firing				NEXT HIGHER ASSEMBLY 11737029
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	.087 length out-of-tolerance		.40%	3.1	Gage
102	.005 flatness too small		.40%	3.1	Gage
103	26° cone out-of-tolerance		.40%	3.1	Gage
Minor					
201	.030 diameter out-of-tolerance		.65%	3.1	Gage
202	.077 diameter out-of-tolerance		.65%	3.1	Gage
203	Evidence of poor workmanship		.65%	3.5	Visual

NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.11	Spring, Rotor	1 of 1	11744130
			NEXT HIGHER ASSEMBLY: 11737007

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Torque at 345° less than 1.50 oz.-in.		.40%	3.1	Gage
Minor					
201	Free outside diameter greater than .264		.65%	3.1	Gage
202	Incapable of working over a .186 diameter rod		.65%	3.1	Gage
203	Either .220 length out-of-tolerance		.65%	3.1	Gage
204	Evidence of poor workmanship		.65%	3,5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER 11737030
4.4.2.12	Fuze Base Assembly		NEXT HIGHER ASSEMBLY 11737007

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR LTPD	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	55° location of lead hole to slot out-of-tolerance		.40%	3.1	Gage
102	Barrier (11740823) depth less than .009		.40%	3.1	Gage
103	Evidence of poor workmanship		.40%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 05

Replaces DRSMC-QA (U) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30:
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.13	Barrier, Fuze Base	1 of 1	11740823
			NEXT HIGHER ASSEMBLY 11737030

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Structural or process defects		.40%	3.1	Explosive test, note A
102	.248 thickness out-of-tolerance		.40%	3.1	Gage
103	.1715 diameter out-of-tolerance		.40%	3.1	Gage
104	.969 diameter or position out-of-tolerance		.40%	3.1	Gage
105	.104 diameter or position out-of-tolerance		.40%	3.1	Gage
Minor					
201	.994 knurl diameter out-of-tolerance		.65%	3.1	Gage
202	.093 knurl height out-of-tolerance		.65%	3.1	Gage
203	Evidence of poor workmanship		.65%	3.5	Visual
204	Presence of foreign matter in pores		.65%	3.1	Visual (200X mag)

NOTE A: Two-thirds of the sample shall be conditioned to -50°F and one-third to +145°F for two hours minimum. The barrier shall be assembled into a loaded S&A (11737010). The S&A explosives shall be initiated electrically with the rotor in the safe position. There shall be no evidence of fragmentation, cracking or breakthrough of the barrier, bulging in excess of .015 inch on booster side face, or scorching of lead charge explosives after the M61 detonator has fired.

NOTES

Source: https://assist.dla.mil -- Downloaded: 2020-09-16T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.14	Base, Fuze		11737031
			NEXT HIGHER ASSEMBLY 11737030

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	1.935 diameter too large		.40%	3.1	Gage
102	.360 location of centerpoint of .120R out-of-tolerance		.40%	3.1	Gage
103	.025 slot depth too shallow		.40%	3.1	Gage
104	Improper 1.500-12UNF-1A threads		.40%	3.1	Gage
105	1.080 length out-of-tolerance		.40%	3.1	Gage
106	1.410 diameter or its runout out-of-tolerance		.40%	3.1	Gage
107	1.529 diameter out-of-tolerance		.40%	3.1	Gage
108	.970 diameter or its position out-of-tolerance		.40%	3.1	Gage
109	.258 depth out-of-tolerance		.40%	3.1	Gage
110	.650 depth out-of-tolerance		.40%	3.1	Gage
111	1.130 diameter out-of-tolerance		.40%	3.1	Gage
112	.204 slot width out-of-tolerance		.40%	3.1	Gage
113	.102 slot half width out-of-tolerance		.40%	3.1	Gage
114	170° location out-of-tolerance		.40%	3.1	Gage
115	125° location out-of-tolerance		.40%	3.1	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET 2 OF 2	DRAWING NUMBER
4.4.2.14	Base, Fuze		11737031
			NEXT HIGHER ASSEMBLY 11737030

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	1.080 diameter out-of-tolerance		.65%	3.1	Gage
202	1.026 diameter too large		.65%	3.1	Gage
203	.100 width out-of-tolerance		.65%	3.1	Gage
204	.795 depth out-of-tolerance		.65%	3.1	Gage
205	.749 radius out-of-tolerance		.65%	3.1	Gage
206	.030 flange thickness out-of-tolerance		.65%	3.1	Gage
207	.980 diameter out-of-tolerance		.65%	3.1	Gage
208	.880 diameter out-of-tolerance		.65%	3.1	Gage
209	.280 depth out-of-tolerance		.65%	3.1	Gage
210	.075 depth out-of-tolerance		.65%	3.1	Gage
211	.160 dimension out-of-tolerance		.65%	3.1	Gage
212	.085 depth out-of-tolerance		.65%	3.1	Gage
213	1.225 diameter out-of-tolerance		.65%	3.1	Gage
214	1.355 diameter or its position out-of-tolerance		.65%	3.1	Gage
215	.030 depth out-of-tolerance		.65%	3.1	Gage
216	.062 depth out-of-tolerance		.65%	3.1	Gage
217	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

...use DD Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.15	Rotor Assembly				11737016
					NEXT HIGHER ASSEMBLY 11737007
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Jackscrew (11744134) length not within ± .003 (immediately) prior to assembly		100%	3.1	Gage
Major					
101	.030 protrusion of groove pin (11744138) out-of-tolerance		.40%	3.1	Gage before Zig-Zag body inserted
102	Misalignment of rotor can and rotor subassembly		.40%	3.1	Gage plug per note 9, if alternate can orientation feature used
103	Spring, Lock (11744141) not present		.40%	3.1	Visual/Probe
104	Lock, Rotor (11737020) or rotor lock spring (11737021) missing		.40%	3.1	Visual
Minor					
201	Defective rotor can crimp		.65%	3.1	Visual
202	Exceeds .643 height		.65%	3.1	Gage
203	Evidence of poor workmanship		.65%	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.16	Cover, Rotor		11744133
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	.112 width or position out-of-tolerance		.40%	3.1	Gage
102	.091 diameter out-of-tolerance		.40%	3.1	Gage
Minor					
201	.020 tab thickness (zone D7) out-of-tolerance		.65%	3.1.	Gage
202	1.065 diameter out-of-tolernnce		.65%	3.1	Gage
203	.003 flatness of bottom surface out-of-tolerance		.65%	3.1	Gage
204	Either .098 tab location out-of-tolerance		.65%	3.1	Gage
205	Either .198 tab width out-of-tolerance		.65%	3.1	Gage
206	Evidence of poor workmanship		.65%	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.17	Jackscrew	1 OF 1	11744134
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	.500 length out-of-tolerance		.40%	3.1	Gage
102	.066 width between flats out-of-tolerance		.40%	3.1	Gage
103	.090 diameter out-of-tolerance		.40%	3.1	Gage
104	.250 thread length out-of-tolerance		.40%	3.1	Gage
105	6-32 UNC-2A threads improper		.40%	3.1	Gage
106	Incorrect material		.40%	3.1	Gage
Minor					
201	.270 distance to step too long		.65%	3.1	Gage
202	Evidence of poor workmanship		.65%	3.5	Visual

NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.18	Shaft, Worm Drive	1 OF 1	11744145
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Either 18° angle too large		.40%	3.1	Gage
102	.090 diameter out-of-tolerance		.40%	3.1	Gage
103	.080 diameter out-of-tolerance		.40%	3.1	Gage
104	.090 diameter and .080 diameter nonconcentric more than .002		.40%	3.1	Gage
105	.566 length out-of-tolerance		.40%	3.1	Gage
Minor					
201	.162 worm operating diameter out-of-tolerance		.65%	3.1	Gage
202	.03939 worm axial pitch out-of-tolerance		.65%	3.1	Gage
203	.187 worm outside diameter out-of-tolerance		.65%	3.1	Gage
204	.120 worm root diameter out-of-tolerance		.65%	3.1	Gage
205	.002 total composite error too large		.65%	3.1	Gage
206	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Downloaded from https://assist.dla.mil - 2026-02-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4 2. 19	Wheel, Jackscrew				11744135
					NEXT HIGHER ASSEMBLY 11737016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	.280 diameter out-of-tolerance		.65%	3.1	Gage
202	.418 length out-of-tolerance		.65%	3.1	Gage
203	Flash in hole		.65%	3.5	Visual
204	Evidence of poor workmanship		.65%	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.20	Shaft, Wheel and Worm	1 OF 1	11744136
			NEXT HIGHER ASSEMBLY: 11737016

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	.510 length out-of-tolerance		.65%	3.1	Gage
202	Either .081 diameter out-of-tolerance		.65%	3.1	Gage
203	Flash on gear teeth or worm		.65%	3.1	Visual
204	Poorly filled gear teeth		.65%	3.1	Visual
205	Gear total composite error too large		.65%	3.1	Gage
206	Worm total composite error too large		.65%	3.1	Gage
207	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.21	Rotor Lock Spring	1 OF 1	11737021
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	.099 diameter out-of-tolerance		.65%	3.1	Gage
202	Incapable of working over a .072 diameter rod		.65%	3.1	Gage
203	Load at compressed length of .215 exceeds 155 grams max		.65%	3.1	Gage
204	Evidence of poor workmanship		.65%	3.5	Visual

NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.22	Plate, Switch				11744126
					NEXT HIGHER ASSEMBLY 11737012
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Any .073 diameter or position out-of-tolerance		.40%	3.1	Gage
102	Either .108 diameter or position out-of-tolerance		.40%	3.1	Gage
103	.724 dimension out-of-tolerance		.40%	3.1	Gage
104	.197 depth of tab out-of-tolerance		.40%	3.1	Gage
Minor					
201	.047 tab half width out-of-tolerance		.65%	3.1	Gage
202	.095 tab width out-of-tolerance		.65%	3.1	Gage
203	.093 thickness not uniform (per note 2 of (11723038))		.65%	3.1	Gage
204	1.290 diameter out-of-tolerance		.65%	3.1	Gage
205	Flatness (left side, section AA) out-of-tolerance		.65%	3.1	Gage
206	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.23	Rotor	1 OF 1	11744146
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Position of .266 diameter out-of-tolerance		.40%	3.1	Gage
102	Position of .110 diameter hole out-of-tolerance		.40%	3.1	Gage
103	.020 slot width too small or containing flash		.40%	3.1	Gage and Visual
104	Position of .295 diameter hole out-of-tolerance		.40%	3.1	Gage
Minor					
201	Flatness of top surface out-of-tolerance		.65%	3.1	Gage
202	1.080 diameter or position out-of-tolerance		.65%	3.1	Gage
203	.310 depth out-of-tolerance		.65%	3.1	Gage
204	.201 diameter or position out-of-tolerance		.65%	3.1	Gage
205	Evidence of poor workmanship		.65%	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.24	Pin, Groove	1 OF 1	11744138
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Either .046 diameter out-of-tolerance		.40%	3.1	Gage
102	.051 knurl diameter out-of-tolerance		.40%	3.1	Gage
Minor					
201	Insufficient finish within .040 of either end		.65%	3.1	Gage
202	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T07:00Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH 4.4.2.25	TITLE Spring, Bias	SHEET 1 OF 1	DRAWING NUMBER 11740821
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST*	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	Load at compressed length of .526 is less than 125 grams		.40%	3.1	Force test
Minor 201	Inside diameter less than .122		.65%	3.1	Gage
202	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.26	Spring, Gear Latch	1 OF 1	11744139
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	.625 length out-of-tolerance		.40%	3.1	Gage
102	.280 length out-of-tolerance		.40%	3.1	Gage
Minor					
201	.055 bend depth out-of-tolerance		.65%	3.1	Gage
202	.413 location of bend out-of-tolerance		.65%	3.1	Gage
203	10° angle out-of-tolerance		.65%	3.1	Gage
204	Evidence of poor workmanship		.65%	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH: 4.4.2.27	TITLE: Can, Rotor		SHEET: 1 OF 1		DRAWING NUMBER: 11744147
					NEXT HIGHER ASSEMBLY: 11737016
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR LTPD	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major 101	.101 diameter or its location out-of-tolerance		.40%	3.1	Gage
Minor 201	.065 depth of scallop (view AA) too small		.65%	3.1	Gage
202	1.082 diameter or its location out-of-tolerance		.65%	3.1	Gage
203	Position of .062 diameter orientation feature out-of-tolerance		.65%	3.1	Gage
204	Flatness of bottom surface out-of-tolerance		.65%	3.1	Gage
205	.160 diameter or position out-of-tolerance		.65%	3.1	Gage
206	Evidence of poor workmanship		.65%	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.28	Body, Zig Zag	1 OF 1	11744140
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	.048 track width out-of-tolerance		.40%	3.1	Gage
102	.180 height out-of-tolerance		.40%	3.1	Gage
103	Any cam track layout dimension out-of-tolerance		.40%	3.1	Gage
104	.200 diameter out-of-tolerance		.40%	3.1	Gage
Minor					
201	.291 diameter out-of-tolerance		.65%	3.1	Gage
202	.238 height out-of-tolerance		.65%	3.1	Gage
203	.167 inner diameter out-of-tolerance		.65%	3.1	Gage
204	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 11744148
4.4.2.29	Grease Lubricating Mixture				NEXT HIGHER ASSEMBLY 11737016
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	Proportion of grease to Freon out-of tolerance		100%	3.1	Note A
Minor	None defined				
be drawn evaporation at 180°F weight.	NOTE A: Draw a sample of the mixture immediately after lubrication. One sample must for each batch lubricated. Weigh sample at 75 ± 10°F and place in an approved on dish of known weight to a depth of no greater than .030 inch. Place in oven set ± 10°F for two hours. Weight of residue shall be between 11.3% and 13.6% of the original Alternative methods must be approved by the Government.				

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.30	Spring, Lock	1 OF 1	11744141
			NEXT HIGHER ASSEMBLY 11737016

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major 101	.375 arm length out-of-tolerance		.40%	3.1	Gage
Minor 201	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.31	Head Assembly				11737023
					NEXT HIGHER ASSEMBLY
					11737001
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH, REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Exceeds 2.423 length		0.40%	3.1	Gage
Minor					
201	Ogive nose not properly oriented		0.65%	3.1	Visual
202	Molding compound not visable in vent hole		0.65%	3.1	Visual
203	Excess molding compound above surface of ogive nose or more than .050 outside external seams		0.65%	3.1	Visual
204	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

Click on the source to verify that this is the current version before use. https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.32	Spring, Grounding/Retaining	1 OF 1	11744151
			NEXT HIGHER ASSEMBLY: 11737023

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Angular or symmetric location of any of three .100 wide kick-ins out-of-tolerance		.40%	3.1	Gage
102	Either .055 height out-of-tolerance		.40%	3.1	Gage
103	.035 height out-of-tolerance		.40%	3.1	Gage
104	Not plated		.40%	3.1	Visual
Minor					
201	1.204 outside diameter out-of-tolerance		.65%	3.1	Gage
202	Material thickness out-of-tolerance		.65%	3.1	Gage
203	Any .535 radius too long		.65%	3.1	Gage
204	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-F-70807 (AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.33	Nose, Insert	1 OF 1	11737024
			NEXT HIGHER ASSEMBLY: 11737023

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor					
201	.462 diameter out-of-tolerance		.65%	3.1	Gage
202	1.435 diameter out-of-tolerance		.65%	3.1	Gage
203	.312 diameter out-of-tolerance		.65%	3.1	Gage
204	.446 diameter out-of-tolerance		.65%	3.1	Gage
205	.530 diameter out-of-tolerance		.65%	3.5	Visual

NOTES:

AMSMC Form 1570, 1 Feb 05

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.34	Post, Center	1 OF 1	11744125
			NEXT HIGHER ASSEMBLY: 11737023

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	1.445 diameter out-of-tolerance		.65%	3.1	Gage
202	1.409 diameter too large		.65%	3.1	Gage
203	.440 diameter out-of-tolerance		.65%	3.1	Gage
204	.378 width out-of-tolerance		.65%	3.1	Gage
205	Either .386 widths or positions out-of-tolerance		.65%	3.1	Gage
206	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.35	Base, Ogive	1 OF 2	11740819
			NEXT HIGHER ASSEMBLY 11737023

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Improper characters		.40%	3.1	Gage
102	Any .376 post width out-of-tolerance		.40%	3.1	Gage
103	Location of either of two .376 posts to the third out-of-tolerance		.65%	3.1	Gage
104	1.240 diameter out-of-tolerance		.65%	3.1	Gage
105	Improper plating		.65%	3.1	Gage
106	.100 keying slot out-of-tolerance		.65%	3.1	Gage
107	.050 keying slot half-width out-of-tolerance		.65%	3.1	Gage
108	.250 slot width or position on draft out-of-tolerance		.65%	3.1	Gage
109	Any .193 groove centerline out-of-tolerance		.65%	3.1	Gage
110	.318 leg height out-of-tolerance		.65%	3.1	Gage
111	Either .338 leg height out-of-tolerance		.65%	3.1	Gage
112	1.625 diameter too small		.65%	3.1	Gage
113	1.530 diameter out-of-tolerance		.65%	3.1	Gage
114	1.431 diameter out-of-tolerance		.65%	3.1	Gage
115	.706 depth too large		.65%	3.1	Gage
116	.770 depth out-of-tolerance		.65%	3.1	Gage

Source: https://assist.dla.mil - Downloaded: 2025-10-28T04:50Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2. 35	Base..Ogive	2 OF 2	11740819
			NEXT HIGHER ASSEMBLY 11737023

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	1.445 diameter out-of-tolerance		.65%	3.1	Gage
202	Either .100 diameter hole or position out-of-tolerance		.65%	3.1	Gage
203	1.935 diameter too large		.65%	3.1	Gage
204	1.204 diameter out-of-tolerance		.65%	3.1	Gage
205	1.501 diameter too small		.65%	3.1	Gage
206	1.370 diameter out-of-tolerance		.65%	3.1	Gage
207	Evidence of poor workmanship		.65%	3.5	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.36	Nose, Ogive	1 OF 1	11744152
			NEXT HIGHER ASSEMBLY 11737023

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	1.680 outer diameter out-of-tolerance		.40%	3.1	Gage
Minor					
201	.466 diameter out-of-tolerance		.65%	3.1	Gage
202	1.445 diameter out-of-tolerance		.65%	3.1	Gage
203	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.37	Turbine Alternator and Switch Plate Assembly	1 OF 1	11737012
			NEXT HIGHER ASSEMBLY 11737023

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major	None defined.				
Minor					
201	Switch plate position out-of-tolerance		.65%	3.1	Gage
202	Evidence of poor workmanship		.65%	3.6.	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.38	Plate, Switch		11744126
			NEXT HIGHER ASSEMBLY 11737012


CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined.				
Major					
101	Any .073 diameter or position out-of-tolerance		40%	3.1	Gage
102	Either .108 diameter or position out-of-tolerance		.40%	3.1	Gage
103	.724 dimension out-of-tolerance		.40%	3.1	Gage
104	.197 depth of tab out-of-tolerance		.40%	3.1	Gage
Minor					
201	.047 tab half width out-of-tolerance		.65%	3.1	Gage
202	.095 tab width out-of-tolerance		.65%	3.1	Gage
203	.087 thickness not uniform (per note 2 of (11744126)		.65%	3.1	Gage
204	1.290 diameter out-of-tolerance		.65%	3.1	Gage
205	Flatness (left side, section AA) out-of-tolerance		.65%	3.1	Gage
206	Evidence of poor workmanship		.65%	3.5	Visual

NOTES:

... which may ... be used.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

FIGURE 1
FIRST ARTICLE INSPECTION FLOW CHART

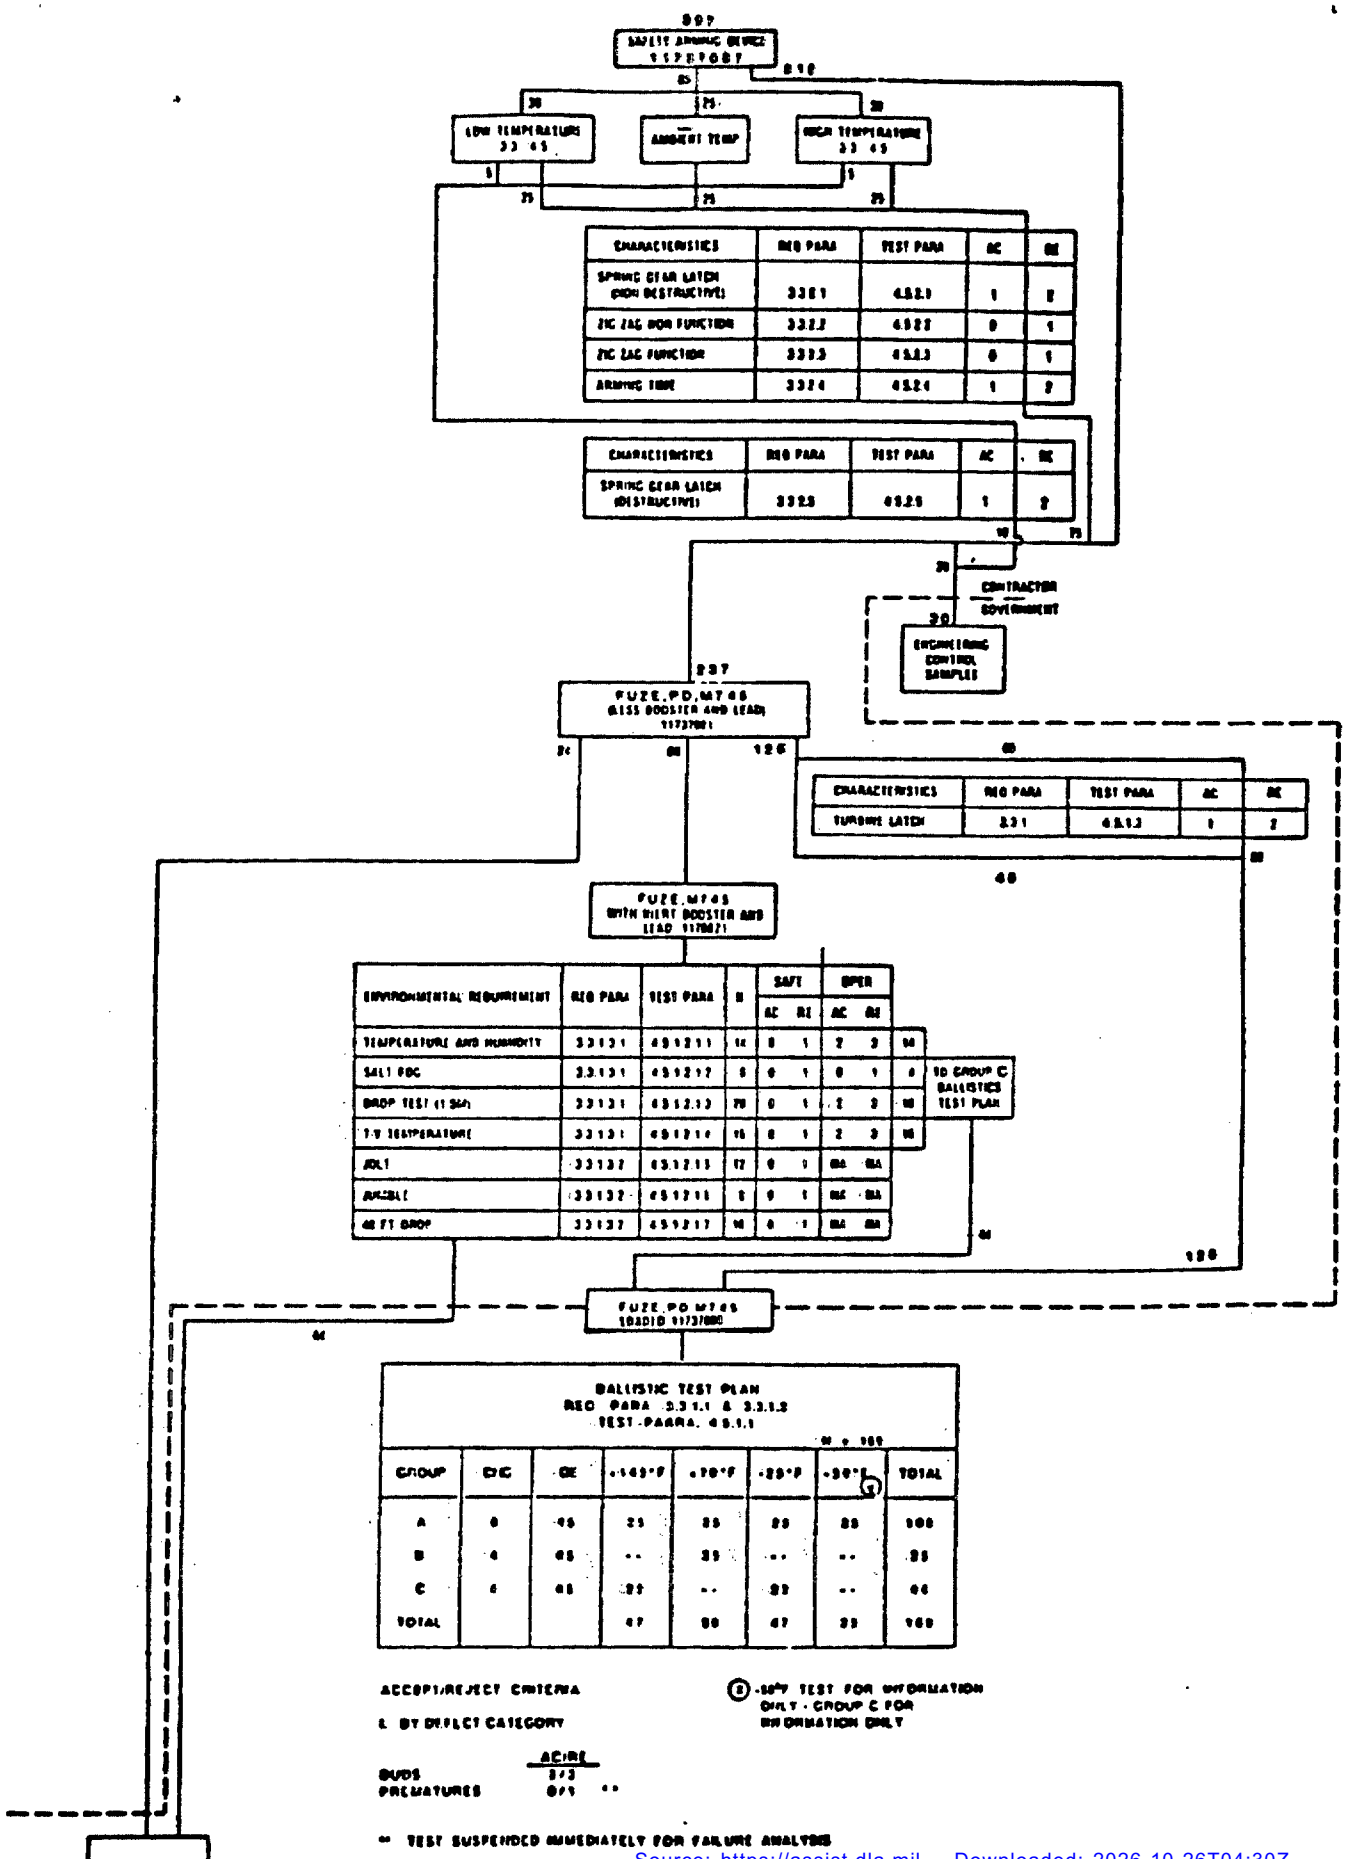

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

FIGURE 3
LOT PERFORMANCE INSPECTION FLOW CHART

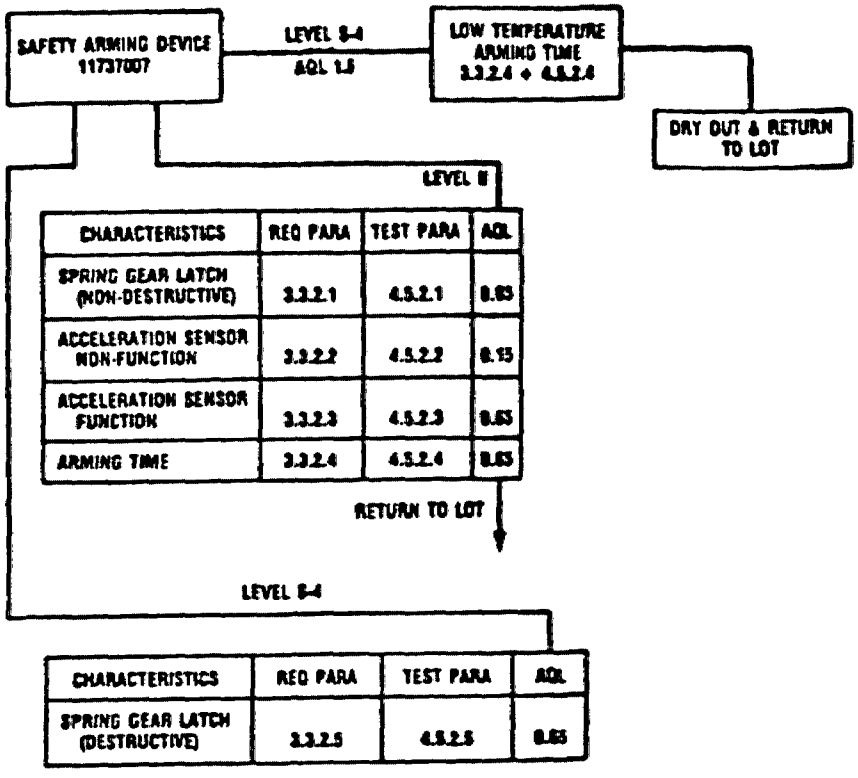

FUZE, PD: M745
LOADED 11737000

BALLISTIC LOT ACCEPTANCE TEST PLAN
REQ PARA - 3.3.1.1 - 3.3.1.2 PARA 4.5.1

GRP	CHG	QE	TEMP	N	CARTRIDGE
A	0	45° +10°/-0°	AMB	12	M722 OR M720
B	4	45° +10°/-0°	AMB	62	M722 OR M720

FUZE, PD: M745
LESS BOOSTER & LEAD 11737001

LEVEL II

CHARACTERISTICS	REQ PARA	TEST PARA	AQL
TURBINE LATCH	3.3.1	4.5.1.3	0.65

OVERALL CRITERIA	N	AC/RC	APPLICABLE PARA
ALL MALFUNCTIONS	124	0/0	4.5.1.1.2.1 TO 4.5.1.1.2.2
DUDS	124	2/3	4.5.1.1.2.1
PREMATURES	124	0/1*	4.5.1.1.2.2

* TESTS SUSPENDED IMMEDIATELY FOR FAILURE ANALYSIS

Source: https://assist.dla.mil - Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.

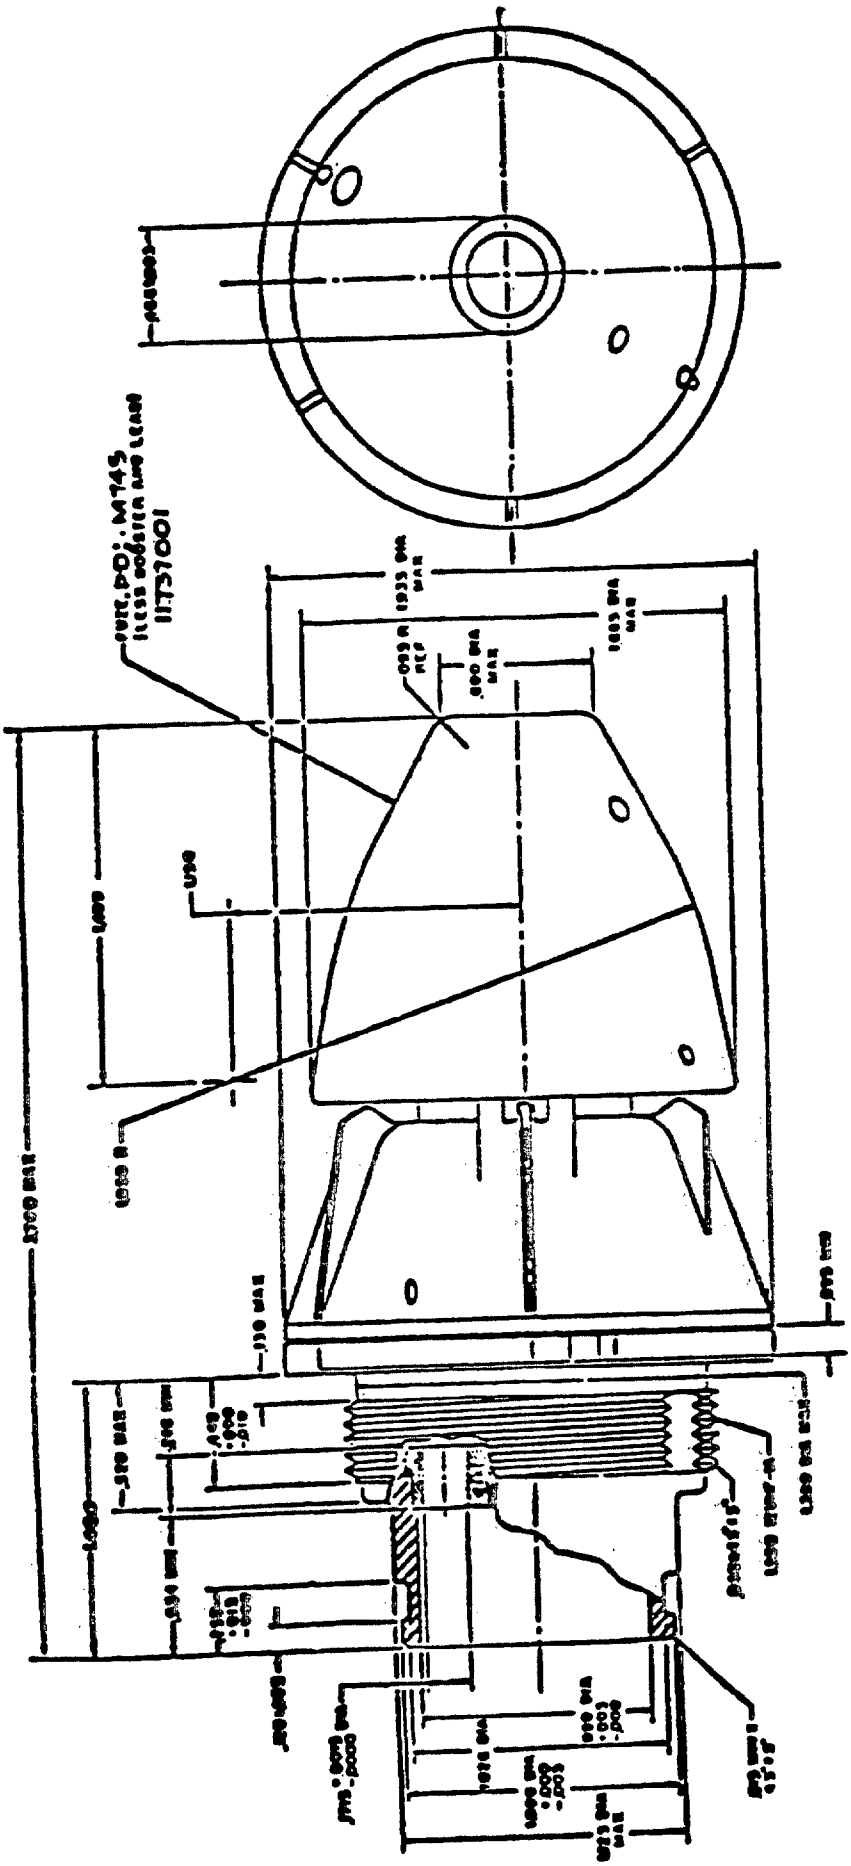


FIGURE B INTERFACE CONTROL DRAWING

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:30Z
Check the source to verify that this is the current version before use.