MILITARY SPECIFICATION

POWER BOX COMPONENTS ASSEMBLY, ELECTRONICS BOX COMPONENTS ASSEMBLY, CABLE ASSEMBLIES AND TRANSMITTER ASSEMBLY FOR MINE DISPENSER: M138 (FLIPPER)

This specification is approved for use within the U.S. Army Armament, Munitions and Chemical Command, and is available for use by all the Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification provides requirements and quality assurance provisions for the fabrication, inspection and packing of electrical assemblies and parts used in the Mine Dispenser: M138.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-B-117	Bag, Sleeve and Tubing - Interior Packaging.
MIL-S-19500/115	Semiconductor Device, Diode, Silicon, Voltage Regulator Types lN3821a Through lN3828a And lN3016b Through lN3051b Tx lN3821a Through lN3828a And lN3016b Through Tx lN3051b.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S Army Armament Munitions and Chemical Command, Attn AMSMC-QA, Picatinny Arsenal, New Jersey 07806-5000 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

MIL-S-19500/118	Semiconductor Device, Diode, Silicon Types (Tx and Non Tx) 1N483b, 1N485b, 1N486b, 1N5194, 1N5195 And 1N5196.
MIL-S-19500/291	Semiconductor Device, Transistor, P_{SN_B} Silicon Switching Types 2N2906, 2N2906a, 2N2907, And 2N2907a, JAN, JANTX, JANTXV, And JANS.
MIL-S-19500/472	Semiconductor Device, Darlington, Transistor, Npn, Silicon Power Type 2N6350, TX2N6350, 2N6351, 2N6352, TX2N6352, 2N6353 And TX2N6353.
MIL-S-19500/500	Semiconductor Device, Diode, Silicon, Transient Voltage Suppressor, Types 1N5907, 1N5629a Through 1N5665a, JAN, JANTX, JANTXV, And JANS.
MIL-S-19500/523	Semiconductor Device, Darlington Transitor, Npn Silicon, Power Types 2N6383, 2N6384, 2N6385 Non TX, TX And TXV. .
MIL-M-38510/50	Microcircuit, Digital, CMOS, Nand Gates Monolithic Silicon, Positive Logic.
MIL-M-38510/51	Microcircuit, Digital, CMOS, Flip Flops And Latches, Monolithic Silicon.
MIL-M-38510/103	Microcircuits, Linear, Voltage Comparator Monolithic Silicon.
MIL-C-39003/1	Capacitor, Fixed, Electrolytic (Solid Electrolyte) , Tantalum, (Polarized Sintered Slug), Established Reliability, Style Csr 13 .
MIL-C-39006/27	Capacitors, Fixed, Electrolytic (Nonsolid Electrolyte), Tantalum, (Polarized, Sintered Slug), 85°C (Voltage Derated to 125°C), Established Reliability, Style Clr 76.
MIL-R-39008/1	Resistor, Fixed, Composition (Insulated), Established Reliability, Style Rcr 07.
MIL-R-39008/2	Resistor, Fixed, Composition (Insulated), Established Reliability, Style Rcr 20.
MIL-C-39014/1	Capacitor, Fixed, Ceramic Dielectric (General Purpose), Established Reliability, Style Ckr 05.
MIL-C-39014/5	Capacitor, Fixed, Ceramic Dielectric (General Purpose), Established Reliability Style Ckr 16.
MIL-R-39035/1	Resistor, Variable, Nonwire Wound Adjustment Type, Lead Screw Actuated) Established Reliability Style Rjr 12.
MIL-W-45205	Welding, Gas Metal Arc and Gas Tungsten Arc, Aluminum Alloys, Readily Weldable for Structure, Excluding Armor.
MIL-S-45743	Soldering, Manual Type, High Reliability, Electrical and Electronic Equipment.
MIL-C-46168	Coating, Aliphatic Polyurethane, Chemical Agent Resistant.
MIL-S-46844	Solder Bath Soldering of Printed Wiring Assemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

MIL-R-55182/5	Resistor, Fixed, Film, Established Reliability, Style RNR 65.
MIL-R-55182/6	Resistor, Fixed, Film, Established Reliability, Style RNR 70.
MIL-W-63150	Weapons and Support Materiel, Standard Quality Assurance Provisions for.

STANDARDS

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-275	Printed Wiring for Electronic Equipment.
MIL-STD-750	Test Methods For Semiconductor Devices
MIL-STD-810	Environmental Test Methods and Engineering Guidelines.

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

US ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

9359910	Power Box Components Assembly.
9360008	Electronics Box Components Assembly.
9360014	Cable Assembly, Power, Electrical: Electronics.
9360017	Cable Assembly, Power, Electrical: Dispenser.
9360043	Cable Assembly, Power, Electrical: Motor .
9360044	Cable Assembly, Tachometer: Motor .
9360065	Transmitter Assembly.
9360072	Cable Assembly, Special: Proximity Switch.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issue of the nongovernment documents which is current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:29Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM D 3951 - Standard Practice for Commercial Packaging.

(Application for copies should be addressed to: American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Material. Material shall be in accordance with applicable drawings and specifications.

7.2 Components and assemblies. The components and assemblies shall comply with all the requirements specified on Drawing (Dwg.) 9359910, Dwg. 9360008, Dwg. 9360014, Dwg. 9360017, Dwg. 9360043, Dwg. 93360044, Dwg. 9360065, Dwg. 9350072 and associated drawings.

3.3.1 Power box assembly. The power outputs shall be as follows when tested as specified in 4.5.1.1.

Pin	Voltage
J6-5(+) to J6-2,6(-)	26 ± .5
J5-A(+) to J5-B(-)	5
J5-C(+) to J5-B(-)	0

3.3.2 Power box assembly. The power outputs shall be as follows when tested as specifed in 4.5.1.2.

Pin	Voltage
J6-5(+) to J6-2,6(-)	26 ± .5
J5-A(+) to J5-B(-)	26 ± .5
J5-C(+) to J5-B(-)	26 ± .5

3.3.3 Ambient temperature (75 ± 10°F). After conditioning as specified in 4.5.1.3, the power box shall meet the requirements specified in 3.3.1 and 3.3.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

3.3.4 Cold temperature (Minus 25°F - 5°F). After conditioning as specified in 4.5.1.4, the Power Box Assembly shall meet the requirements specified in 3.3.1 and 3.3.2.

3.3.5 Hot temperature (120°F + 5°F). After conditioning as specified in 4.5.1.5, the Power Box Assembly shall meet the requirements specified in 3.3.1 and 3.3.2.

3.3.6 Transportation vibration. After being subjected to vibration specified in 4.5.1.6, the Power Box Assembly shall meet the requirements specified in 3.3.1 and 3.3.2.

3.4 Circuit board 1 assembly (Dwg. 9360006) prior to assembly into electronics box. The printed circuit board when tested as specified in 4. 5.2 shall meet the following requirements:

3.4.1 The power outputs shall be as follows when tested as specified in 4.5.2.4:

Pin	Volts
A, L	0 + .1
B (Info Only)	5.30 to 5.45 (Info Only)
E	Less Than 1
J	8.2 ± 1
K	11 ± 1
U	13 ± 1
V	6 ± .l
X	2 ± 1
Y	11 ± 1

3.4.2 The power outputs shall be as follows when tested specified in 4.5.2.5:

Pin	Volts
A, L	0 + .1
B (Info only)	5.30 to 5.45 (Info Only)
E	Less Than 1
J	8.2 ± 1
K	44 ± 1
U	14 ± 1
V	23.5 ±1
X	5.95 ±.1
Y	44 ± 1

3.5 Circuit board 2 assembly Dwg. 9360013 prior lto assembly into electronics box. The printed circuit board when tested as specified in 4.5.3 shall meet the following requirements:

3.5.1 Power outputs. The power outputs shall be follows when tested as specified in 4.5.3.1:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

Pin	Volts
A, P	0 ±.1
B	11±1
C	13±1
D	13±l
H	44±1
K	13±1
M	0±.5
N	0±.5
R	0±1
T	21.5 ± 1

3.5.2 Power outputs. The power outputs shall be as follows when tested as specified in 4.5.3.2:

Pin	Volts
A, P	0±.1
B	11±1
c	13±1
D	13±1
H	44 ± l
K	13 ± l
M	0 ± .5
N	0 ± .5
R	8 ± l
T	21.5±1

3.6 Electronics box components assembly (Dwg. 9360008).

3.6.1 Electronics box assembly. The power outputs shall be as follows when tested as specified in 4.5.4.1 (MODE switch “OFF”).

Pin	Voltage
P7-5(+) to P7-2,6(-)	26 ± .5
P7-4(+) to GND	0
P7-3(+) to GND	0
J3-2(+) to J3-4(-)	0
J3-6(+) to J3-4(-)	0

3.6.2 Electronics box assembly. The power outputs and observations shall be as follows when tested as specified in 4.5.4.2 (MODE switch “NORMAL”).

Pin	Voltage
P7-5(+) to P7-2,6(-)	26 ± .5
P7-4(+) to GND	0
P7-3(+) to GND	0
“READY” light should be off	
“FAIL” light should be off	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

3.6.2.1 Self check light bulb test. The Ready Light and Fail Light shall come on when tested as specified in 4.5.4.3.

3.6.3 Electronics box assembly. The power outputs shall be as follows when tested as specified in 4.5.4.3.

Pin	Voltage
TB 3-1(-) and TB 3-9(+)	13 ± 1

3.6.4 Electronics box assembly. The power outputs and observations shall be as follows when tested as specified in 4.5.4.4.

	Pin	Voltage
1.	READY light is ON	-
2.	FAIL light is OFF	-
3.	TB 3-1(-) and TB 3-3(+)	26 ± .5
4.	TB 3-1(-) and TB 3-2(+)	21 ± 1
5.	TB 3-1(-) and TB 3-5(+)	10 ± 1
6.	TB 3-1(-) and TB 3-8(+)	13 ± 1
7.	TB 3-1(-) and TB 3-9(+)	Less than 1 volt
8.	TB 3-1(-) and TB 3-10(+)	26 ± .5
9.	TB 3-1(-) and TB 3-11(+)	4 ± 1 AC
10.	TB 3-1(-) and TB 3-12(+)	5.2 to 5.4 volts @ trigger (for information only).

3.6.4.1 Ready light test. The ready light shall brighten or become dim when tested as specified in 4.5.4.5a.

3.6.5 Electronics box assembly. The READY light shall go off and come on in less than ten (10) seconds when the proximity switch is activated as specified in 4.5. 4.5,b.

3.6.6 Electronics box assembly. The READY light shall stay on and the FAIL light shall come on and stay on after the transmitter coil is disconnected and the prox switch is activated as specified in 4.5.4.6.

3.6.7 Electronics box assembly. The READY light shall come on and the FAIL light shall be off when the Transmitter Assembly is connected to J2 on the electronics box as specified in 4.5.4.7.

3.6.8 Electronics box assembly. The READY light shall go off and stay off and the FAIL light shall not come on. The output of the transmitter shall be -9 ± 2 volts on the oscilloscope as shown in Figure 1 when tested as specified in 4.5.4.8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

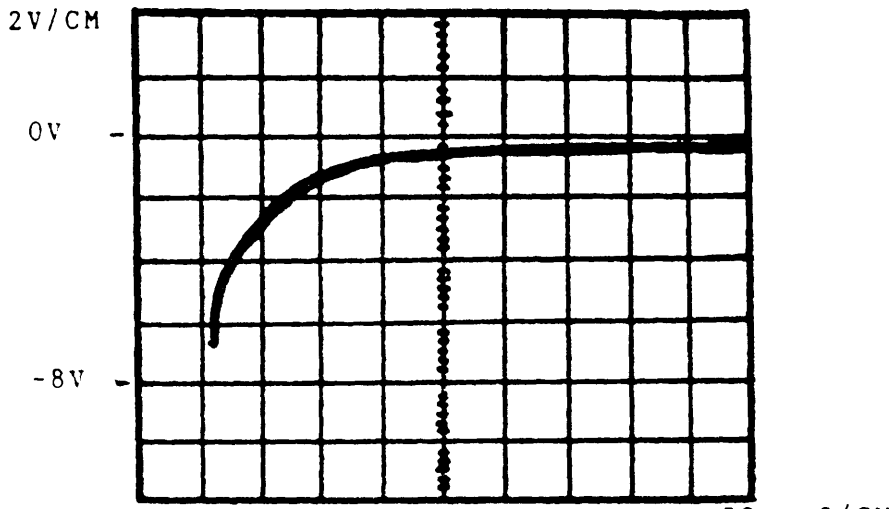


FIGURE 1 - NORMAL

3.6.9 Electronics box assembly. The power outputs and observations shall be as follows when tested as specified in 4.5.4.9.

Pin	Voltage
1. READY light is ON	
2. FAIL light is OFF	
3. TB 3-1 and TB 3-3	26 ± 1
4. TB 3-1 and TB 3-2	21 ± 1
5. TB 3-1 and TB 3-5	44 ± 1
6. TB 3-1 and TB 3-8	13 ± l
7. TB 3-1 and TB 3-9	Less than 1 volt
8. TB 3-1 and TB 3-10	26 ± 1
9. TB 3-1 and TB 3-11	4 ± 1 AC volts
10. TB 3-1 and TB 3-12	5.2 to 5.4 volts @ trigger point for (for information only.)

3.6.10 Electronics box assmbly. The READY light shall go off and stay off and the FAIL light shall stay off. The output shall be 33 ± 3 volts on the oscilloscope as shown in Figure 2 when tested as specified in 4. 5.4.10.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T04:29Z
Check the source to verify that this is the current version before use.

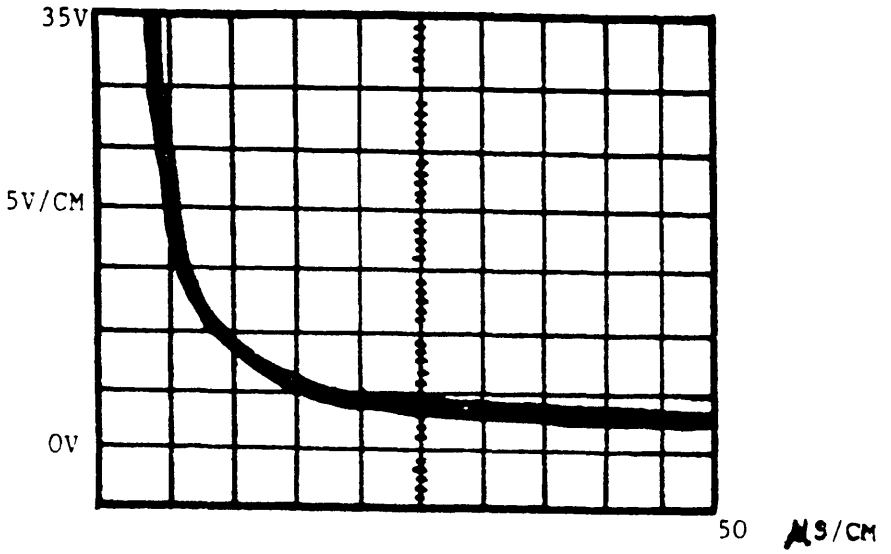


FIGURE 2 - EXTENDED

3.6.11 Electronics box assembly. When Figure 7 is applied as shown in 4.5.4.11, the "READY" light will go OFF on the first pulse, shall stay OFF during the second pulse and will come 'ON" between 6 to 10 seconds. The "FAIL" light shall stay OFF.

3.6.12 Ambient temperature (75°F ± 10°F). After conditioning as specified in 4.5.4.14, the Electronics Box Assembly shall meet the requirements specified in 3.6.1 through 3.6.11.

3.6.13 Cold temperature (Minus 25°F - 5°F). After conditioning as specified in 4.5.4.15, the Electronics Box Assembly shall meet the requirements specified in 3.6.1 through 3.6.11.

3.6.14 Hot temperature (120°F + 5°F). After conditioning as specified in 4.5.4.16, the Electronics Box Components Assembly shall meet the requirements specified in 3.6.1 through 3.6.11.

3.6.15 Transportation vibration. After Electronics Box Components Assembly is subjected to vibration as specififed in 4.5.4.17, the Electronics Box Components Assembly shall meet the requirements as specified in 3.6.1 through 3.6.11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

3.7 Procedures.

3.7.1 Welding. Welding of aluminum alloys, readily weldable for structures shall be in accordance with MIL-W-45205. All welds shall be classified Class A. Prior to production fabrication of any weldment, the contractor shall submit, in triplicate, the joint welding procedure and drawings to the contracting officer who will forward two copies to the procuring activity for certification.

3.7.1.1 Specimens. Prior to production fabrication of any weld joints, the contractor shall prepare workmanship specimens of all weld joints representing the acceptable weld quality to be used in production. These specimens shall also represent the minimum acceptable cleaning procedure. These specimens shall be prepared using the welting procedures to be used in production and may either be an actual part or sample simulating all of the proposed weld.

3.7.1.2 Capability of welder equipment and welder operators. The contractor shall perform all applicable welding as prescribed in the contractor's or manufacturer's welding procedure and shall meet the requirements established by the approved workmanship sample.

3.7.2 Soldering. Soldering procedures and acceptance criteria for the soldered connections shall comply with MIL-S-45743 and MIL-S-46844.

3.7.2.1 Solderability. Electronic assembly parts that are to be soldered shall comply with the solderability requirements of MIL-S-45743, MIL-S-46844 and MIL-STD-202 (Method 208).

3.8 Workmanship. All parts shall be fabricated and finished in a thorough workmanlike manner, and all manufacturing, processing and assembly operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil corrosion products and other foreign matter. The cleaning method used shall net be injurious to any part or assembly, nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings shall be neat, legible and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements. Unless otherwise specified herein or in the contract, the provisions of MIL-W-63150 shall apply and are hereby made a part of this specification.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.2 Classification of inspections. The following types of inspections shall be conducted on these items.

a. First article inspection.

b. Quality Conformance Inspection (see 4.4).

4.3 First article inspection.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with the provisions of 4.3.2. The first article shall consist of any or all of the following components: (as applicable)

a. One (1) Power Box components Assembly (Dwg. 9359910).
b. One (1) Electronics Box Components Assembly (Dwg. 9360008).

4.3.2 Inspection to be performed. See MIL-W-63150 and the Table I specified herein.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of an assembly, component or test specimen in the sample to comply with any of the stated requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE: See Below		SHEET 1 OF 1		DRAWING NUMBER: See Below
					NEXT HIGHER ASSEMBLY: --
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Power Box Components Assembly (Dwg. 9359910)	1			
	Examination for defects			3.2	4.4.2.17
	Power box output			3.3.1	4.5.1.1
	Power box output			3.3.2	4.5.1.2
	Ambient temperature			3.3.3	4.5.1.3
	Cold temperature			3.3.4	4.5.1.4
	Hot temperature			3.3.5	4.5.1.5
	Transportation vibration			3.3.6	4.5.1.6
					--
	Electronics Box Components Assembly (Dwg. 9360008)	1			
	Examination for defects			3.2	4.4.2.55
	"FAIL" light normal setting			3.6.8	4.5.4.8
	"FAIL" light extended setting			3.6.10	4.5.4.10
	"READY" light normal setting			3.6.8	4.5.4.8
	"READY" light extended setting			3.6.10	4.5.4.10
	FUNCTIONAL				
	Ambient temperature			3.6.12	4.5.4.14
	Cold temperature			3.6.13	4.5.4.15
	Hot temperature			3.6.14	4.5.4.16
	Transportation vibration			3.6.15	4.5.4.17

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T04:29Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-STD-105.

4.4.2 Examination.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test tables, sampling plans for major and minor defects shall be in accordance with MI L-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9360065
4.4.2.1	Transmitter Assembly				NEXT HIGHER ASSEMBLY --
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None Defined				
Major					
101	Electrical performance		100%	3.2	SMTE
102	Length of conductors incorrect (2)		100%	3.2	SMTE
103	Height of connector incorrect		100%	3.2	SMTE
104	Length of connector/adapter molding incorrect		100%	3.2	SMTE
105	Location of mounting holes (8)	1/	100%	3.2	SMTE
106	Hole diameter (8) incorrect	1/	100%	3.2	SMTE
107	Potting improper or not as specified		100%	3.2	Visual
108	Soldering not as specified		100%	3.2	Visual
109	Improper connector assembly or missing parts		100%	3.2	Visual
110	Depth of mounting hole cavities (8) incorrect		100%	3.2	SMTE
111	Diameter of body transmitter coil cavity (Datum A) incorrect		100%	3.2	SMTE
112	Overall thickness of body (2) incorrect	1/	100%	3.2	SMTE
113	Diameter of conductors (2) incorrect		100%	3.2	SMTE
114	Orientation of connector or connector large key incorrect		100%	3.2	Visual
Minor					
201	Protective finish missing or defective		2.5%	3.2	Visual
202	Marking missing or improper		2.5%	3.2	Visual
203	Poor workmanship (See MIL-W-63150)		2.5%	3.8	Visual

NOTES:

1/ To be inspected prior to assembly.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.2	Cable Assy, Power, Electrical: Dispenser				9360017
					NEXT HIGHER ASSEMBLY
					--
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit continuity test		100%	3.2	SMTE
102	Circuit Isolation Test		100%	3.2	SMTE
103	Overall length incorrect		100%	3.2	SMTE
104	Height of connectors (2) incorrect		100%	3.2	SMTE
105	Orientation of connectors (2) incorrect		100%	3.2	Visual
106	Improper assembly or missing parts		100%	3.2	Visual
107	Soldering not as specified		100%	3.2	MIL-S-45743
108	Marking missing or improper		100%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.3	Connector Assembly (Component of Cable Assy Power, Electrical: Dispenser, P/N/ 9360017)				9360092
					NEXT HIGHER ASSEMBLY 9360018
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Connector mating depth incorrect		100%	3.2	SMTE
102	I.D. or insert opening incorrect (Datum-A-)		100%	3.2	SMTE
103	Diameter of center post incorrect		100%	3.2	SMTE
104	Location of center post incorrect		100%	3.2	SMTE
105	Min distance between shell I.D. and O.D. of insert, outer connector tang (8 places, Dwg. 9360096)		100%	3.2	SMTE
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.4	Cable Assy, Power, Electrical: Electronics				9360014
					NEXT HIGHER ASSEMBLY
					--
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit Continuity test		100%	3.2	SMTE
102	Circuit Isolation test		100%	3.2	SMTE
103	Overall length incorrect		0.40%	3.2	SMTE
104	Height of connectors (2) incorrect		0.40%	3.2	SMTE
105	Orientation of connectors, or connector master keys (2), incorrect		100%	3.2	Visual
106	Improper connector (2), assembly, or missing parts		100%	3.2	Visual
107	Soldering not as specified		0.40%	3.2	MIL-S-45743
108	Marking and colors missing or improper		100%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.5	Cable Assy, Power, Electrical: Motor	1 of 1	9360043
			NEXT HIGHER ASSEMBLY: --

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit continuity test		100%	3.2	SMTE
102	Circuit isolation test		100%	3.2	SMTE
103	Overall length incorrect		0.40%	3.2	SMTE
104	Height of connectors (2) incorrect		0.40%	3.2	SMTE
105	Orientation of connectors or connector master keyways (2) incorrect		100%	3.2	Visual
106	Improper connector (2), assembly or missing parts		100%	3.2	Visual
107	Soldering not as specified		0.40%	3.2	MIL-S-45743
108	Marking and colors missing or improper		100%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.6	Cable Assy, Tachometer: Motor				9360044
					NEXT HIGHER ASSEMBLY: --
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit continuity test		100%	3.2	SMTE
102	Circuit isolation test		100%	3.2	SMTE
103	Overall length incorrect		0.40%	3.2	SMTE
104	Height of connectors (2) incorrect		0.40%	3.2	SMTE
105	Orientation of connectors or connector master keys (2) incorrect		100%	3.2	Visual
106	Improper connector (2), assembly or missing parts		100%	3.2	Visual
107	Soldering not as specified		0.40%	3.2	MIL-S-45743
108	Marking and colors missing or improper		100%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.7	Cable Assy, Special: Prox Switch				9360072
					NEXT HIGHER ASSEMBLY
					--
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Circuit continuity test		100%	3.2	SMTE
102	Circuit isolation test		100%	3.2	SMTE
103	Overall length incorrect		0.40%	3.2	SMTE
104	Height of connectors (2) incorrect		0.40%	3.2	SMTE
105	Orientation of connectors or connector master keys (2) incorrect		100%	3.2	Visual
106	Improper connector (2), assembly or missing parts		100%	3.2	Visual
107	Soldering not as specified		0.40%	3.2	MIL-S-45743
108	Marking and colors missing or improper		100%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER
4.4.2.8	Body, Power Box				9359909
					NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Structural and welding: incorrect, damaged, or defective		0.40%	3.6.1	Visual
102	Location of cover mounting hole(s) incorrect (20 places) (prior to assy of clinch nuts)		0.40%	3.2	Gage
103	Diameter of cover mounting hole(s) incorrect (20 places) (prior to assy of clinch nuts)		0.40%	3.2	Gage
104	Location of Terminal TB2 mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
105	Diameter of Terminal TB2 mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
106	Location of Relay Power Box mounting hole(s) incorrect (2 places)		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 3		DRAWING NUMBER
4.4.2.8	Body, Power Box				9359909
					NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
107	Diameter of Relay Power Box mounting hole(s) incorrect (2 places)		0.40%	3.2	Gage
108	Location of J5 receptacle connector hole incorrect		0.40%	3.2	Gage
109	Diameter of J5 receptacle connector hole incorrect		0.40%	3.2	Gage
110	Location of J5 receptacle mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
111	Diameter of J5 receptacle mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
112	Location of J6 receptacle connector hole incorrect		0.40%	3.2	Gage
113	Diameter of J6 receptacle connector hole incorrect		0.40%	3.2	Gage
114	Location of J6 receptacle mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
115	Diameter of J6 receptacle mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
116	Location of box mounting hole(s) incorrect (6 places)		0.40%	3.2	Gage

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 9359909
4.4.2.8	Body, Power Box				NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
117	Diameter of box mounting hole(s) incorrect (6 places)		0.40%	3.2	Gage
118	Small mounting tab (2) not flush to below flush with Datum -H- (2 places)		0.40%	3.2	Gage
119	Surface finish, improper, damaged or defective	1/	0.40%	3.2	4.5.5/Visual
120	Clinch nut(s) incorrect, missing or improperly assembled after surface finish treatment (20 places)		0.40%	3.2	Visual
121	Protective finish, improper, damaged or defective	1/	0.40%	3.2	4.5.5/Visual
122	Protective finish present in surface where not permitted		0.40%	3.2	Visual
123	Markings and colors incorrect, in wrong place or illegible (2 places)		0.40%	3.2	Visual
Minor					
201	Box opening dimension(s) incorrect (2 places)		0.65%	3.2	Gage
202	Box square dimension incorrect		0.65%	3.2	Gage
203	Depth of box incorrect		0.65%	3.2	Gage
204	Width of small mounting tab(s) incorrect (2 places)		0.65%	3.2	Gage
205	Width of large mounting tab(s) incorrect (2 places)		0.65%	3.2	Gage
206	Distance from centerline to outer edge of mounting tab(s) incorrect (4 places)		0.65%	3.2	Gage
NOTE 07	Poor workmanship		1.00%	3.8	Gage

1/ Test panel shall be inspected in accordance with 4.5.5. Visual inspection shall be performed on component.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.9	Cover, Power Box	1 OF 2	9360022
			NEXT HIGHER ASSEMBLY: 9360012

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of cover mounting hole(s) incorrect (20 places)		0.40%	3.2	Gage
102	Diameter of cover mounting hole(s) incorrect (20 places)		0.40%	3.2	Gage
103	Location of Vehicle Receptacle (J8) hole incorrect		0.40%	3.2	Gage
104	Diameter of Vehicle Receptacle (J8) hole incorrect		0.40%	3.2	Gage
105	Location of Vehicle Receptacle mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
106	Diameter of Vehicle Receptacle mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
107	Location of Circuit Breaker (CB1) hole incorrect		0.40%	3.2	Gage
108	Dimension of Circuit Breaker (CB1) hole incorrect		0.40%	3.2	Gage
109	Square dimension of cover incorrect		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER
4.4.2.9	Cover, Power Box				9360022
					NEXT HIGHER ASSEMBLY 9360012
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
110	Marking(s) incorrect or illegible (4 places)		0.40%	3.2	Visual
111	Surface treatment finish, incorrect incomplete or damaged		0.40%	3.2	4.5.5/Visual
112	Protective finish, incorrect, incomplete or damaged		0.40%	3.2	4.5.5/Visual
113	Protective finish present in areas where not permitted		0.40%	3.2	Visual
Minor 201	Poor workmanship		1.00%	3.8	Visual
NOTES:					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Cover, Power Box Assembly				9360012
					NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Sealant improper or missing from screw(s) threads (J8) (4 places) (prior to assembly)		0.40%	3.2	Visual
102	Components missing or improperly assembled		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9360023
4.4.2.11	Gasket, Power Box				NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of hole(s) incorrect (20 places)		0.40%	3.2	Gage
102	Gasket square dimension incorrect		0.40%	3.2	Gage
103	Width of gasket incorrect (4 places)		0.40%	3.2	Gage
104	Location of hole(s) incorrect (20 places)		0.40%	3.2	Gage
Minor					
201	Thickness of gasket incorrect		0.65%	3.2	Gage
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.12	Gasket, Connector - J5 Power Box				9360026
					NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of gasket hole(s) incorrect (4 places)		0.40%	3.2	Gage
102	Diameter of gasket hole(s) incorrect (4 places)		0.40%	3.2	Gage
103	Diameter of gasket center hole incorrect		0.40%	3.2	Gage
104	Square dimension of gasket incorrect		0.40%	3.2	Gage
Minor					
201	Thickness of gasket incorrect		0.65%	3.2	Gage
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.13	Gasket, Connector J3, J6, P7, P14				9360027
					NEXT HIGHER ASSEMBLY
					9359910/9360008
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of gasket hole(s) incorrect (4 places)		0.40%	3.2	Gage
102	Diameter of gasket hole(s) incorrect (4 places)		0.40%	3.2	Gage
103	Diameter of gasket center hole incorrect		0.40%	3.2	Gage
104	Square dimension of gasket incorrect		0.40%	3.2	Gage
Minor					
201	Thickness of gasket incorrect		0.65%	3.2	Gage
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.14	Terminal Marker, TB2: Power Box	1 OF 1	9360028
			NEXT HIGHER ASSEMBLY: 9359910

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
102	Diameter of mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
103	Marking missing, illegible or incorrect		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.15	Relay, Power Box				9360030
					NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major	None defined				
Minor 201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.16	Power Box components Assembly (prior to assembly of cover)	1 OF 3	9359910
			NEXT HIGHER ASSEMBLY: ---

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Sealant improper or missing from screw(s) threads (J5) (4 places) (prior to assembly)		0.40%	3.2	Visual
102	Connector, receptacle (J5) and gasket incorrect, improperly assembled or missing		0.40%	3.2	Visual
103	Sealant improper or missing from screw(s) threads (J6) (4 places) (prior to assembly)		0.40%	3.2	Visual
104	Connector receptacle (J6) and gasket incorrect, improperly assembled or missing		0.40%	3.2	Visual
105	Sealant improper or missing from screw(s) threads (relay) (2 places) (prior to assembly)		0.40%	3.2	Visual
106	Sealant improper or missing from screw(s) threads (terminal TB2) (4 places) (prior to assembly)		0.40%	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH 4.4.2.16	TITLE Power Box components Assembly (prior to assembly of cover)		SHEET 2 OF 3		DRAWING NUMBER 9359910
					NEXT HIGHER ASSEMBLY ---
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
109	Wire(s) incorrect gages (5 leads from J6)		0.40%	3.2	Visual
110	Soldering connections unacceptable (J6 terminal) (5 places)		0.40%	3.7.2	MIL-S-45743
111	Lug terminals improperly assembled to or, incorrect for J6 leads (5 places)		0.40%	3.2	Visual
112	Leads from J6 connected to improper terminal (5 places)		0.40%	3.2	Visual
113	Wire(s) incorrect gage (3 leads from J5)		0.40%	3.2	Visual
114	Soldering connections unacceptable (J5 terminal) (3 places)		0.40%	3.7.2	MIL-S-45743
115	Lug terminals improperly assembled to or incorrect for J5 leads (3 places)		0.40%	3.2	Visual
116	Leads from J5 connected to improper terminal(s) (3 places)		0.40%	3.2	Visual
117	Diode (CR12) missing, wrong polarity or assembled to wrong terminals (2 leads)		0.40%	3.2	Visual
118	Connection between Relay and Terminal Marker TB2 missing or connected to wrong terminal(s)		0.40%	3.2	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER 9359910
4.4.2.16	Power Box components Assembly (prior to assembly of cover)				NEXT HIGHER ASSEMBLY ---
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
119	Tranzorb (CR3) missing, wrong polarity or assembled to wrong terminal(s) (2 places)		0.40%	3.2	Visual
120	Connection(s) between circuit breaker (CB1) missing or connected to wrong terminal(s) (3 places)		0.40%	3.2	Visual
121	Connection between Terminal TB2 and J8 receptacle missing or connected to wrong terminal		0.40%	3.2	Visual
122	Orientation of connector(s) incorrect (2 places)		0.40%	3.2	Visual
123	Insulation sleeving improper or missing from body and leads of tranzorb (CR3)		0.40%	3.2	Visual
124	Insulation sleeving improper or missing at terminal(s) of connector J5 (3 places)		0.40%	3.2	Visual
125	Insulation sleeving improper or missing at terminal(s) of connector J6 (5 places)		0.40%	3.2	Visual
Minor 201	Poor workmanship		1.00%	3.8	Visual
NOTES:					

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.17	Power Box Components Assembly				9359910
					NEXT HIGHER ASSEMBLY
					9359983
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Sealant improper or missing from cover screw(s) threads (prior to assembly) (20 places)		0.40%	3.2	Visual
102	Cover improperly assembled or gasket missing		0.40%	3.2	Visual
	Functional:				
103	Ambient temperature		100%	3.3.3	4.5.1.3
104	Cold temperature		100%	3.3.4	4.5.1.4
105	Hot temperature		100%	3.3.5	4.5.1.5
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.18	Gasket, Cover, Electronics Box		9360041
			NEXT HIGHER ASSEMBLY 9360008

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of hole(s) incorrect (28 places)		0.40%	3.2	Gage
102	Diameter of hole(s) incorrect (28 places)		0.40%	3.2	Gage
103	Width of gasket incorrect		0.40%	3.2	Gage
104	Length of gasket incorrect		0.40%	3.2	Gage
105	Flange width of gasket incorrect		0.40%	3.2	Gage
Minor					
201	Thickness of gasket incorrect		0.65%	3.2	Gage
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.19	Shielding, Gasket, Electronics: J2	1 OF 1	9360050
			NEXT HIGHER ASSEMBLY: 9360008

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of hole(s) incorrect (4 places)		0.40%	3.2	Gage
102	Diameter of hole(s) incorrect (4 places)		0.40%	3.2	Gage
103	Diameter of center hole incorrect		0.40%	3.2	Gage
104	Square dimension of gasket incorrect		0.40%	3.2	Gage
Minor					
201	Gasket thickness incorrect		0.65%	3.2	Gage
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.20	Terminal Marker TB1: Electronic Box	1 of 1	9360020
			NEXT HIGHER ASSEMBLY 9360008

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of terminal marker mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
102	Diameter of terminal marker mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
103	Marking missing or incorrect		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.21	Body, Electronics Box		9360034
			NEXT HIGHER ASSEMBLY 9360033

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Structural and welding, incorrect, damaged or defective		0.40%	3.7.1	Visual
102	Location of slot(s) incorrect (2 places)		0.40%	3.2	Gage
103	Width of flange(s) incorrect (3 places)		0.40%	3.2	Gage
Minor					
201	Box length incorrect		0.65%	3.2	Gage
202	Overall width incorrect		0.65%	3.2	Gage
203	Overall height incorrect		0.65%	3.2	Gage
204	Radius of bend(s) incorrect (6 places)		0.65%	3.2	Gage
205	Length of mounting surface(s) incorrect (2 places)		0.65%	3.2	Gage
206	Angle of side(s) incorrect (2 places)		0.65%	3.2	Gage
207	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.22	Support, Front Electronics Box	1 of 1	9360038
			NEXT HIGHER ASSEMBLY: 9360033

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Bottom edge length incorrect		0.40%	3.2	Gage
102	Top edge length incorrect		0.40%	3.2	Gage
103	Angle of top edge incorrect		0.40%	3.2	Gage
104	Location of cutout incorrect		0.40%	3.2	Gage
105	Height of support incorrect		0.40%	3.2	Gage
106	Width of top flange incorrect		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.23	Electronics Box (Weldment)				9360033
					NEXT HIGHER ASSEMBLY 9360032
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Structural and welding; incorrect, damaged or defective		0.40%	3.7.1	Visual
102	Heat treatment incorrect		0.40%	3.2	Certification
103	Surfaces not flush		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH 4.4.2.24	TITLE Electronics Box		SHEET 1 OF 4		DRAWING NUMBER 9360032
					NEXT HIGHER ASSEMBLY 9360008
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of terminal TB1 mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
102	Diameter of terminal TB1 mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
103	Location of connector receptacle hole (J2) incorrect		0.40%	3.2	Gage
104	Diameter of connector receptacle hole (J2) incorrect		0.40%	3.2	Gage
105	Location of connector receptacle (J2) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
106	Diameter of connector receptacle (J2) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
107	Location of connector receptacle hole (J3) incorrect		0.40%	3.2	Gage
108	Diameter of connector receptacle hole (J3) incorrect		0.40%	3.2	Gage
109	Location of connector receptacle (J3) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
110	Diameter of connector receptacle (J3) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 2 OF 4		DRAWING NUMBER
4.4.2.24	Electronics Box				9360032
					NEXT HIGHER ASSEMBLY
					9360008
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
111	Location of connector receptacle (P7) hole incorrect		0.40%	3.2	Gage
112	Diameter of connector receptacle (P7) hole incorrect		0.40%	3.2	Gage
113	Location of connector receptacle (P7) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
114	Diameter of connector receptacle (P7) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
115	Location of connector receptacle (P14) hole incorrect		0.40%	3.2	Gage
116	Diameter of connector receptacle (P14) hole incorrect		0.40%	3.2	Gage
117	Location of connector receptacle (P14) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
118	Diameter of connector receptacle (P14) mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
119	Location of standoff hole(s) incorrect (4 places)		0.40%	3.2	Gage
120	Diameter of standoff hole(s) incorrect (4 places)		0.40%	3.2	Gage
121	Location of electronics box mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH 4.4.2.24	TITLE Electronics Box		SHEET 3 OF 4		DRAWING NUMBER 9360032
					NEXT HIGHER ASSEMBLY 9360008
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
122	Diameter of electronics box mounting hole(s) incorrect (4 places)		0.40%	3.2	Gage
123	Location of terminal board TB3 mounting hole(s) incorrect (2 places)		0.40%	3.2	Gage
124	Diameter of terminal board TB3 mounting hole(s) incorrect (2 places)		0.40%	3.2	Gage
125	Location of TB3 slot incorrect		0.40%	3.2	Gage
126	Length of TB3 slot incorrect		0.40%	3.2	Gage
127	Width of TB3 slot incorrect		0.40%	3.2	Gage
128	Location of TB3 cover mounting hole(s) incorrect (18 places)		0.40%	3.2	Gage
129	Diameter of TB3 cover mounting hole(s) incorrect (18 places)		0.40%	3.2	Gage
130	Location of front cover mounting hole(s) incorrect (20 places)		0.40%	3.2	Gage
131	Diameter of front cover mounting hole(s) incorrect (20 places)		0.40%	3.2	Gage
132	Location of top cover mounting hole(s) incorrect (28 places)		0.40%	3.2	Gage
133	Diameter of top cover mounting hole(s) incorrect (28 places)		0.40%	3.2	Gage

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026/0-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 4 OF 4		DRAWING NUMBER
4.4.2.24	Electronics Box				9360032
					NEXT HIGHER ASSEMBLY 9360008
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
134	Surface treatment damaged, incorrect or defective (prior to assembly of clinch nuts)	1/	0.40%	3.2	4.5.5/Visual
135	Clinch nut(s) incorrect, missing or improperly assembled (67 places)		0.40%	3.2	Visual
136	Protective finish damaged, incorrect	1/	0.40%	3.2	4.5.5/Visual
137	Protective finish in area(s) where not permitted (4 places)		0.40%	3.2	Visual
138	Markings and colors incorrect, in wrong place or illegible (4 places)		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES: 1/ Test panels shall be inspected in accordance with 4.5.5. Visual inspection shall be performed on component.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.25	Cover, Access: Electronics	1 OF 1	9360037
			NEXT HIGHER ASSEMBLY: 9360008

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of hole(s) incorrect (28 places)		0.40%	3.2	Gage
102	Diameter of hole(s) incorrect (28 places)		0.40%	3.2	Gage
103	Surface treatment incorrect, damaged or defective	1/	0.40%	3.2	4.5.5/Visual
104	Protective finish incorrect, damaged or defective	1/	0.40%	3.2	4.5.5/Visual
105	Protective finish in area where not permitted		0.40%	3.	Visual
106	Marking missing or incorrect (2 places)		0.40%	3.2	Visual
107	Location of marking incorrect		0.40%	3.2	Gage
Minor					
201	Overall length incorrect		0.65%	3.2	Gage
202	Overall width incorrect		0.65%	3.2	Gage
203	Poor workmanship		1.00%	3.8	Visual

NOTES: 1/ Test panel shall be inspected in accordance with 4.5.5. Visual inspection shall be performed on component.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.26	Front, Electronics Box		9360040
			NEXT HIGHER ASSEMBLY 9360039

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of hole(s) incorrect (20 places)		0.40%	3.2	Gage
102	Diameter of hole(s) incorrect (20 places)		0.40%	3.2	Gage
103	Location of cutout(s) incorrect (2 places)		0.40%	3.2	Gage
104	Square dimension of cutout(s) incorrect (2 places)		0.40%	3.2	Gage
105	Overall height incorrect		0.40%	3.2	Gage
106	Diameter of recess incorrect		0.40%	3.2	Gage
107	Location of recess incorrect		0.40%	3.2	Gage
108	Depth of recess incorrect		0.40%	3.2	Gage
109	Location of recess hole incorrect		0.40%	3.2	Gage
110	Diameter of recess hole incorrect		0.40%	3.2	Gage
111	Location of detent hole incorrect		0.40%	3.2	Gage
112	Diameter of detent hole incorrect		0.40%	3.2	Gage
113	Depth of detent hole incorrect		0.40%	3.2	Gage
114	Overall length incorrect		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.27	Panel, Electronics Box	1 of 1	9360039
			NEXT HIGHER ASSEMBLY: 9360008

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of markings incorrect		0.40%	3.2	Gage
102	Markings missing or incorrect		0.40%	3.2	Visual
103	Surface treatment incorrect, damaged or defective	1/	0.40%	3.2	4.5.5/Visual
104	Protective finish incorrect, damaged or defective	1/	0.40%	3.2	4.5.5/Visual
105	Protective finish on surface where not permitted		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES: 1/ Test panels shall be inspected in accordance with 4.5.5. Visual inspection shall be performed on component.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.28	Gasket, Panel, Electronics Box				9360042
					NEXT HIGHER ASSEMBLY 9360008
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of hole(s) incorrect (20 places)		0.40%	3.2	Gage
102	Diameter of hole(s) incorrect (20 places)		0.40%	3.2	Gage
103	Overall length incorrect		0.40%	3.2	Gage
104	Overall width incorrect		0.40%	3.2	Gage
105	Width of gasket material incorrect (4 places)		0.40%	3.2	Gage
Minor					
201	Thickness of gasket incorrect		0.65%	3.2	Gage
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.29	Cover Access: Test Block	1 OF 1	9360076
			NEXT HIGHER ASSEMBLY 9360008

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of cover mounting hole(s) incorrect (18 places)		0.40%	3.2	Gage
102	Diameter of cover mounting hole(s) incorrect (18 places)		0.40%	3.2	Gage
103	Height of cover incorrect		0.40%	3.2	Gage
104	Width of flange incorrect		0.40%	3.2	Gage
105	Overall length incorrect		0.40%	3.2	Gage
106	Surface treatment damaged, defective or incorrect	1/	0.40%	3.2	4.5.5/Visual
107	Protective finish damaged, defective or incorrect	1/	0.40%	3.2	4.5.5/Visual
108	Protective finish on underside of flange		0.40%	3.2	Visual
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:
1/ Test panel shall be inspected in accordance with 4.5.5. Visual inspection shall be performed on component.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH 4.4.2.30	TITLE Gasket, Test Block		SHEET 1 OF 1		DRAWING NUMBER 9360079
					NEXT HIGHER ASSEMBLY 9360008
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of hole(s) incorrect (18 places)		0.40%	3.2	Gage
102	Diameter of hole(s) incorrect (18 places)		0.40%	3.2	Gage
103	Location of slot incorrect		0.40%	3.2	Gage
104	Length of slot incorrect		0.40%	3.2	Gage
105	Width of slot incorrect		0.40%	3.2	Gage
Minor					
201	Overall length incorrect		0.65%	3.2	Gage
202	Overall width incorrect		0.65%	3.2	Gage
203	Thickness of gasket incorrect		0.65%	3.2	Gage
204	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.31	Board, Printed Wiring		9360007/9360019
			NEXT HIGHER ASSEMBLY
			9360006/9360013

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of component terminal holes incorrect		0.40%	3.2	Gage
102	True position of holes incorrect		0.40%	3.2	Gage
103	Circuit(s) discontinuous		100%	3.2	Visual
104	Circuit short(s)		100%	3.2	Visual
Minor					
201	Overall length incorrect		0.65%	3.2	Gage
202	Overall width incorrect		0.65%	3.2	Gage
203	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.32	Resistor, Fixed, Composition (Insulated) Style RCR 07 ± 5%, 1/4W	1 OF 1	MIL-R-39008/1
			NEXT HIGHER ASSEMBLY 9360006/9360013

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	PART NUMBER — PART VALUE RCR07G 22 1JS — 220 OHM RCR07G 18 1JS — 180 OHM RCR07G 51 2JS — 5.1 K OHM RCR07G 20 2JS — 2 K OHM RCR07G 10 2JS — 1 K OHM RCR07G 10 3JS — 10 K OHM RCR07G 51 3JS — 51 K OHM RCR07G 56 2JS — 5.6K OHM RCR07G 51 1JS — 510 OHM RCR07G 20 1JS — 200 OHM RCR07G 20 0JS — 20 OHM RCR07G 10 4JS — 100K OHM RCR07G 68 2JS — 6.8K OHM RCR07G 68 0JS — 68K OHM				
Critical	None defined				
Major					
101	Resistance		0.40%	3.2	MIL-R-39008/1
102	Solderability, 2 leads	10	10-0-1	3.7.2.2	MIL-S-45743
Minor					
201	Identification or marking incorrect		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 — Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.33	Resistor, Fixed, Composition (Insulated) 240 ohm, ± 5%, 1/2W, RCR20 G 241JS				MIL-R-39008/2
					NEXT HIGHER ASSEMBLY 9360013
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Resistance		0.40%	3.2	MIL-R-39008/2
102	Solderability, 2 leads	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Identification or marking incorrect		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.34	Resistor, Fixed, Film, Established Reliability Style RNR65 or RNC65 ± 1%, 1/4W	1 OF 1	MIL-R-55182/5
			NEXT HIGHER ASSEMBLY 9360006

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	PART NUMBER — PART VALUE RNC65H 200 1FS — 2 K OHM RNC65H 825 2FS — 82.5 K OHM RNC65H 158 2FS — 15.8 K OHM RNC65H 100 3FS — 100 K OHM				
Critical	None defined				
Major					
101	Resistance		0.40%	3.2	MIL-R-55182/5
102	Solderability, 2 leads	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Identification or marking incorrect		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 — Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.35	Resistor, Fixed, Film, Established Reliability Style RNC70 or RNR70, ± 1%, 1/2W	1 OF 1	MIL-R-55182/6
			NEXT HIGHER ASSEMBLY: 9360013

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	PART NUMBER / PART VALUE RNC70H 3921FS / 3.92 K OHM RNC70H 2431FS / 2.43 K OHM				
Critical	None defined				
Major					
101	Resistance		0.40%	3.2	MIL-R-55182/6
102	Solderability, 2 leads	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Identification or marking incorrect		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 — Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.36	Resistor, Variable, Nonwire-Wound (Adjustment Type, Lead Screw Actuated) Established Reliability, RJR 12 FY203P, 20K	1 OF 1	MIL-R-39035/1
			NEXT HIGHER ASSEMBLY: 9360006

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Resistance		0.40%	3.2	MIL-R-39035/1
102	Solderability, pins	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Identification or marking incorrect		0.65%	3.2	Visual
202	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.37	Capacitor, Fixed, Ceramic Dielectric (General Purpose), Established Reliability STYLE CKR05	1 OF 1	MIL-C-39014/1
			NEXT HIGHER ASSEMBLY 9360006

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	PART NUMBER / PART VALUE M39014/1-1581 .022MF, 50V M39014/1-1357 .001MF, 200V M39014/1-1575 0.01MF, 50 V M39014/1-1593 0.1 MF, 50 V M39014/1-1339 100 PF, 50 V				
Critical	None defined				
Major					
101	Capacitance		100%	3.2	MIL-STD-202, Method 305
102	Leakage current		100%	3.2	MIL-STD-202, Method 302
103	Dissipation factor		100%	3.2	MIL-STD-202, Method 306
104	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
105	Conformance to MIL-C-39014/1			3.2	Certification
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 — Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.38	Capacitor, Fixed, Ceramic Dielectric (General Purpose), Established Reliability STYLE CKR16	1 OF 1	MIL-C-39014/5
			NEXT HIGHER ASSEMBLY: 9360006

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	PART NUMBER / PART VALUE M39014/5-2333 — 2.2MF, 50 V M39014/5-2331 — 1.0MF, 50 V				
Critical	None defined				
Major					
101	Capacitance		100%	3.2	MIL-STD-202, Method 305
102	Leakage current		100%	3.2	MIL-STD-202, Method 302
103	Dissipation factor		100%	3.2	MIL-STD-202, Method 306
104	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
105	Conformance to MIL-C-39014/5			3.2	Certification
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH 4.4.2.39	TITLE Capacitor, Fixed, Electrolytic (Solid Electrolyte) Tantalum, (Polarized, Sintered Slug) 10 MF, 50V PN #M39003/01-3094		SHEET 1 OF 1		DRAWING NUMBER MIL-C-39003/1
					NEXT HIGHER ASSEMBLY 9360013
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Missing or incorrect color band on cathode end of diode		100%	3.2	Electrical 1/
102	Capacitance		100%	3.2	MIL-STD-202, Method 305
103	Leakage current		100%	3.2	MIL-STD-202, Method 302
104	Dissipation factor		100%	3.2	MIL-STD-202, Method 306
105	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
106	Conformance to MIL-C-39003/1			3.2	Certification
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES: 1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on the cathode end of diode.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.40	Rectifier, Silicon Controlled				9360062
					NEXT HIGHER ASSEMBLY 9360006
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Min holding current at +125°F incorrect		100%	3.2	SMTE
102	Overall length of SCR incorrect		0.40%	3.2	SMTE
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.41	Capacitor, Fixed, Electrolyte (Nonsolid Electrolyte), Tantalum, (Polarized, Sintered Slug) 85°C (Voltage) Derated to 125°C Established Reliability, Style CLR 76 M39006/27-0056	1 OF 1	MIL-C-39006/27
			NEXT HIGHER ASSEMBLY: 9360006

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Missing or incorrect color band on cathode end of diode		100%	3.2	Electrical 1/
102	Capacitance		100%	3.2	MIL-STD-202, Method 305
103	Leakage current		100%	3.2	MIL-STD-202, Method 302
104	Reverse voltage		100%	3.2	MIL-C-39006/27
105	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
106	Conformance to MIL-C-39006/27			3.2	Certification
Minor					
201	Poor workmanship		1.00%	3.8	Visual

REMARKS: 1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on the cathode end of diode.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.42	Semiconductor Device, Diode, Silicon Voltage Regulator Types	1 OF 1	MIL-S-19500/115
			NEXT HIGHER ASSEMBLY 9360006/9360013

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	PART NUMBER / PART VALUE JANTX 1N3018B / 8.2 Volts JANTX 1N3019B / 9.1 Volts JANTX 1N3021B / 11 Volts JANTX IN3827A / 5.6 Volts				
Critical	None defined				
Major					
101	Missing or incorrect color band on cathode end of diode		100%	3.2	Electrical 1/
102	Reverse current		100%	3.2	MIL-STD-750, Method 4016 DC
103	Zener breakdown voltage		100%	3.2	MIL-STD-750, Method 4022
104	Forward voltage drop		100%	3.2	MIL-STD-750, Method 4011
105	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
106	Conformance to MIL-S-19500/115			2/	2/ Certification
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES: 1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on the cathode end of diode.
2/ Visual evidence of JANTX marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.43	Semiconductor Device, Transistor, Pnp, Silicon Switching Type JANTX 2N2907				MIL-S-19500/291
					NEXT HIGHER ASSEMBLY 9360006
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Bond wire material incorrect			3.2	Certification
102	Conformance to MIL-S-19500/291			3.2	Certification 1/
103	Solderability, (3 leads)	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

1/ Visual evidence of JANTX marking.

AMSMC Form 1570, 1 Feb 85

Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.44	Semiconductor Device, Darlington Transistor Npn, Silicon, Power Type JANTX 2N6350				MIL-S-19500/472
					NEXT HIGHER ASSEMBLY 93600006
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformance to MIL-S-19500/472			3.2	Certification 1/
102	Solderability, (4 leads)	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES: 1/ Visual evidence of JANTX marking.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.45	Semiconductor Device, Darlington Transistor Npn Silicon, Power Type JANTX 2N6385				MIL-S-19500/523
					NEXT HIGHER ASSEMBLY 9360006
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformance to MIL-19500/523			3.2	Certification 1/
102	Solderability, (4 leads)	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES: 1/ Visual evidence of JAN marking.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.46	Semiconductor Device, Diode, Silicon Type JAN 1N485B	1 OF 1	MIL-S-19500/118
			NEXT HIGHER ASSEMBLY: 9360006

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Missing or incorrect color band on cathode end of diode		100%	3.2	Electrical 1/
102	Reverse current		100%	3.2	MIL-STD-750, Method 4016, DC
103	Forward voltage drop		100%	3.2	MIL-STD-750, Method 4011
104	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
105	Conformance to MIL-S-19500/118			3.2	Certification 2/
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:
1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on the cathode end of diode.
2/ Visual evidence of JAN marking.

Replaces DESC-DA (D) Form 160, 1 Aug 83, which may not be used.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.47	Semiconductor Device, Diode, Silicon Transient Voltage Suppressor, Type JAN 1N5647A				MIL-S-19500/500
					NEXT HIGHER ASSEMBLY 9359910
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Reverse current		100%	3.2	MIL-STD-750, Method 4016, DC
102	Breakdown voltage		100%	3.2	MIL-STD-750, Method 4022
103	Clamping voltage max. (pulsed)		100%	3.2	MIL-S-19500/500 4.5.4
104	Forward voltage drop		100%	3.2	MIL-STD-750, Method 4011
105	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
106	Missing or incorrect color band on cathode end of diode		100%	3.2	Electrical 1/
107	Conformance to MIL-S-19500/500			3.2	Certification 2/
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:
1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on cathode end of diode.
2/ Visual evidence of JAN marking.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.48	Microcircuit, Digital, Positive Logic P/N M38510/05001BCB	1 OF 1	MIL-M-38510/50
			NEXT HIGHER ASSEMBLY 9360006

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformance to MIL-M-38510/50			3.2	Certification 1/
102	Solderability	5	5-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

1/ Full compliance with MIL-M-38510/50.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.49	Microcircuit, Digital CMOS Flip-Flop and Latches P/N M38510/05101BCB	1 OF 1	MIL-M-38510/51
			NEXT HIGHER ASSEMBLY: 9360006

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformance to MIL-M-38510/51			3.2	Certification 1/
102	Solderability	5	5-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:
1/ Full compliance with MIL-M-38510/51.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH 4.4.2.50	TITLE Microcircuit Comparator, Voltage, Linear Monolithic Silicon P/N M38510/10304 BGC		SHEET 1 OF 1		DRAWING NUMBER MIL-M-38510/103
					NEXT HIGHER ASSEMBLY 9360006/9360013
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Conformance to MIL-M-38510/103			3.2	Certification 1/
102	Solderability	5	5-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

1/ Full compliance with MIL-M-38510/103.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.51	Diode, 1N2069				9360060
					NEXT HIGHER ASSEMBLY
					9360013/9359910
CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Missing or incorrect color band on cathode end of diode		100%	3.2	Electrical 1/
102	Reverse current		100%	3.2	MIL-STD-750, Method 4016, DC
103	Forward voltage drop		100%	3.2	MIL-STD-750, Method 4011
104	Solderability	10	10-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:
1/ Color band end shall be used as cathode end during reverse current test; reverse current test is used to confirm that the color band is on the cathode end of diode.

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
4.4.2.52	Connector Plug P1, P15 Receptacle J1, J15				9360054-1, -2, -3. -4
					NEXT HIGHER ASSEMBLY 9360008/9360013/9360006
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Electrical Requirements				
Critical	None defined				
Major					
101	Insulation resistance at 500 VDC below min.		100%	3.2	Test
102	Breakdown voltage between contacts below min.		100%	3.2	Test
103	Solderability	5	5-0-1	3.7.2.1	MIL-S-45743
Minor					
201	Poor workmanship		1.00%	3.8	Visual
NOTES:					

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.52	Connector Plug P1, P15 Receptacle J1, J15	2 OF 2	9360054-1, -2, -3, -4
			NEXT HIGHER ASSEMBLY 9360008/9360013/9360006

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Mechanical Requirements				
Critical	None defined				
Major					
101	Number of contacts incorrect		0.40%	3.2	Visual
102	Location of hole(s) incorrect (2 places) each, plug and receptacle		0.40%	3.2	Gage
103	Diameter of hole(s) incorrect (2 places each, plug and receptacle		0.40%	3.2	Gage
104	Distance between pins on plug incorrect		0.40%	3.2	Gage
105	Mated length incorrect		0.40%	3.2	Gage
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-P-70624A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.53	Printed Circuit Board Assembly #1				9360006
					NEXT HIGHER ASSEMBLY 9360008
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Soldering connections unacceptable		100%	3.7.2	MIL-S-45743
102	Conformal coating missing, damaged or incorrect or in areas where not permitted		100%	3.2	Visual
103	Components missing or incorrect		100%	3.2	Visual
104	Adhesive missing or incomplete (16 places)		100%	3.2	Visual
	Functional				
105	Output between Pin A & Pin B incorrect		100%	3.4	4.5.2
106	Output between Pin A & Pin V incorrect		100%	3.4	4.5.2
107	Output between Pin A & Pin X incorrect		100%	3.4	4.5.2
108	Output between Pin A & Pin E incorrect		100%	3.4	4.5.2
109	Output between Pin A & Pin U incorrect		100%	3.4	4.5.2
110	Output between Pin K & Pin Y incorrect (NORMAL MODE)		100%	3.4	4.5.2
111	Output between Pin K & Pin Y incorrect (EXTENDED MODE)		100%	3.4	4.5.2
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

AMSMC Form 1570, 1 Feb 85 — Replaces DRSMC-QA (D) Form 160, 1 Aug 83, which may not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.54	Printed Wiring Board Assembly #2	1 OF 1	9360013
			NEXT HIGHER ASSEMBLY: 9360008

CATEGORY	EXAMINATION OR TEST	NO OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Soldering connections unacceptable		100%	3.7.2	MIL-S-45743
102	Components missing or incorrect		100%	3.2	Visual
103	Conformal coating missing, damaged or improper or in areas where not permitted		100%	3.2	Visual
104	Adhesive missing or incomplete (6 places)		100%	3.2	Visual
	Functional				
105	The output between Pins A & N incorrect		100%	3.5	4.5.3
106	The output between Pins A & M incorrect		100%	3.5	4.5.3
107	The output between Pins A & C incorrect		100%	3.5	4.5.3
108	The output between Pins A & D incorrect		100%	3.5	4.5.3
109	The output between Pins A & R incorrect		100%	3.5	4.5.3
110	The output between Pins A & K incorrect		100%	3.5	4.5.3
111	The output between Pins A & T incorrect		100%	3.5	4.5.3
112	The output between Pins A & B incorrect		100%	3.5	4.5.3
113	The output between Pins A & H incorrect		100%	3.5	4.5.3
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

PARAGRAPH 4.4.2.55	TITLE Electronics Components Assy		SHEET 1 OF 2		DRAWING NUMBER 9360008
					NEXT HIGHER ASSEMBLY ---
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Soldering connections unacceptable		100%	3.7.2	MIL-S-45743
102	Sealant improper or missing from screw(s) threads (prior to assembly)		100%	3.2	Visual
103	Orientation of connectors improper (4)		100%	3.2	Visual
104	Components missing		100%	3.2	Visual
	Functional				
105	Pin outputs incorrect		100%	3.6.1	4.5.4.1
106	Pin outputs incorrect		100%	3.6.2	4.5.4.2
107	Pin output incorrect		100%	3.6.3	4.5.4.3
108	Pin outputs incorrect		100%	3.6.4	4.5.4.4
109	Improper function of "READY" light		100%	3.6.5	4.5.4.5b
110	Improper function of "READY" and "FAIL" lights		100%	3.6.6	4.5.4.6
111	Improper function of "READY" and "FAIL" lights		100%	3.6.7	4.5.4.7
112	Pin output incorrect		100%	3.6.8	4.5.4.8
113	Pin outputs incorrect		100%	3.6.9	4.5.4.9
114	"READY" and "FAIL" light improper		100%	3.6.10	4.5.4.10

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.55	Electronics Components Assy	2 OF 2	9360008
			NEXT HIGHER ASSEMBLY ---

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major					
115	Improper function of "READY" and "FAIL" lights		100%	3.6.11	4.5.4.11
116	Improper functioning of dim light		100%	3.6.4.1	4.5.4.5a
117	Ambient temperature		100%	3.6.12	4.5.4.14
118	Cold temperature		100%	3.6.13	4.5.4.15
119	Hot temperature		100%	3.6.14	4.5.4.16
Minor					
201	Poor workmanship		1.00%	3.8	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection Tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the examinations and tests prescribed herein is described in the "Paragraph Reference/Inspection Method" column in the tables starting with 4.4.2.1. The contractor shall submit for approval inspection equipment designs in accordance with the terms of the contract. See MIL-W-63150 and 6.3 herein.

4.5 Methods of inspection.

4.5.1 Power box components assembly (Dwg. 9359910).

4.5.1.1 Power box components assembly test procedure.

a. Set the power supply to 26 ± .5 VDC and turn it OFF.

b. Connect the power supply to the NATO connector J8, the positive lead to (+), (center pin) of NATO connect and the negative lead to (-).

c. Turn power supply to ON. Use a multimeter to measure the pin values for the requirements specified in 3.3.1.

4.5.1.2 Power box components assembly test procedure.

a. Turn power OFF and connect a jumper wire from J6-3 to J6-4.

b. Turn power ON. Use a multimeter to measure the pin values for the requirements specified in 3.3.2.

c* Turn power OFF and disconnect all connections.

4.5.1.3 Ambient temperature (75°F ± 10°F). The Power Box Components Assembly shall be conditioned at the specified temperature for a minimum of 24 hours prior to testing as specified in 4.5.1.1 and 4.5.1.2.

4.5.1.4 Cold temperature (-25°F -5°F). The Power Box Components Assembly shall be conditioned in accordance with MIL-STD-810, Method 502.1, Table 502.2-1, Basic Cold (Cl) Procedures II. The Power Box Components Assembly shall be tested immediately after conditioning as specified in 4.5.1.1 and 4.5.1.2.

4.5.1.5 Hot temperature (120°F +5°F). The Power Box Components Assembly shall be conditioned in accordance with MIL-STD-810, Method 501.2 Table 501.2-111, Hot (Al) Procedure II. The Power Box Components Assembly shall be tested immediately after conditioning as specified in 4.5.1.1 and 4.5.1.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.5.1.6 Transportation vibration. The Power Box Components Assembly shall be conditioned in accordance with MIL-STD-810, Method 514.3, Category 8, Test Procedure I, Figure 514.3-7 thru 514.3-9 (500 miles) and Figure 514.3-10 thru 514.3-22 (50 miles). The power box components assemblies shall be tested after conditioning and as specified in 4.5.1.1 and 4.5.1.2. (First Article Only)

4.5.2 Printed circuit board assembly (Dwg. 9360006) test procedure.

4.5.2.1 Board power.

Pin	Voltage
C	13 ± 1
P	21.5 ± .5
A, L	0 (GND)

4.5.2.2 Circuit board assembly test procedure.

a. With power OFF, solder a lead temporarily to the plated through hole on the PC board land going to pin 1 of U108 and mark the lead "U108-1".

b. Set the signal generator at 1000 HZ sinewave 10V P-P.

c. Connect positive lead of multimeter to lead "U108-1".

d. Apply board power per Para. 4.5. 2.1, and on Pin Z apply the 1000HZ 10V P-P Sinewave.

e. The voltage of U108-1 should be less than 0.10V. If not, adjust potentiometer R147 to reach this condition.

f. Turn the potentiometer R147 until the voltage on U108-1 first exceeds 0.2V. The voltage should be between 0.2 and 2.0 volts.

g. If the voltage is greater than 2.0V, repeat steps e and f.

h. Slowly increase the frequency of the sinewave until the voltage of U108-1 just rises above 6.5 volts. The frequency should be between 1440 and 1450 HZ.

i. Connect the positive lead of the multimeter to pin B. The meter should read between 5.30 and 5.50 volts. Turn power and signal generator off.

4.5.2.3 Circuit board assembly test procedure. Connect printed wiring board in accordance with Figure 3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

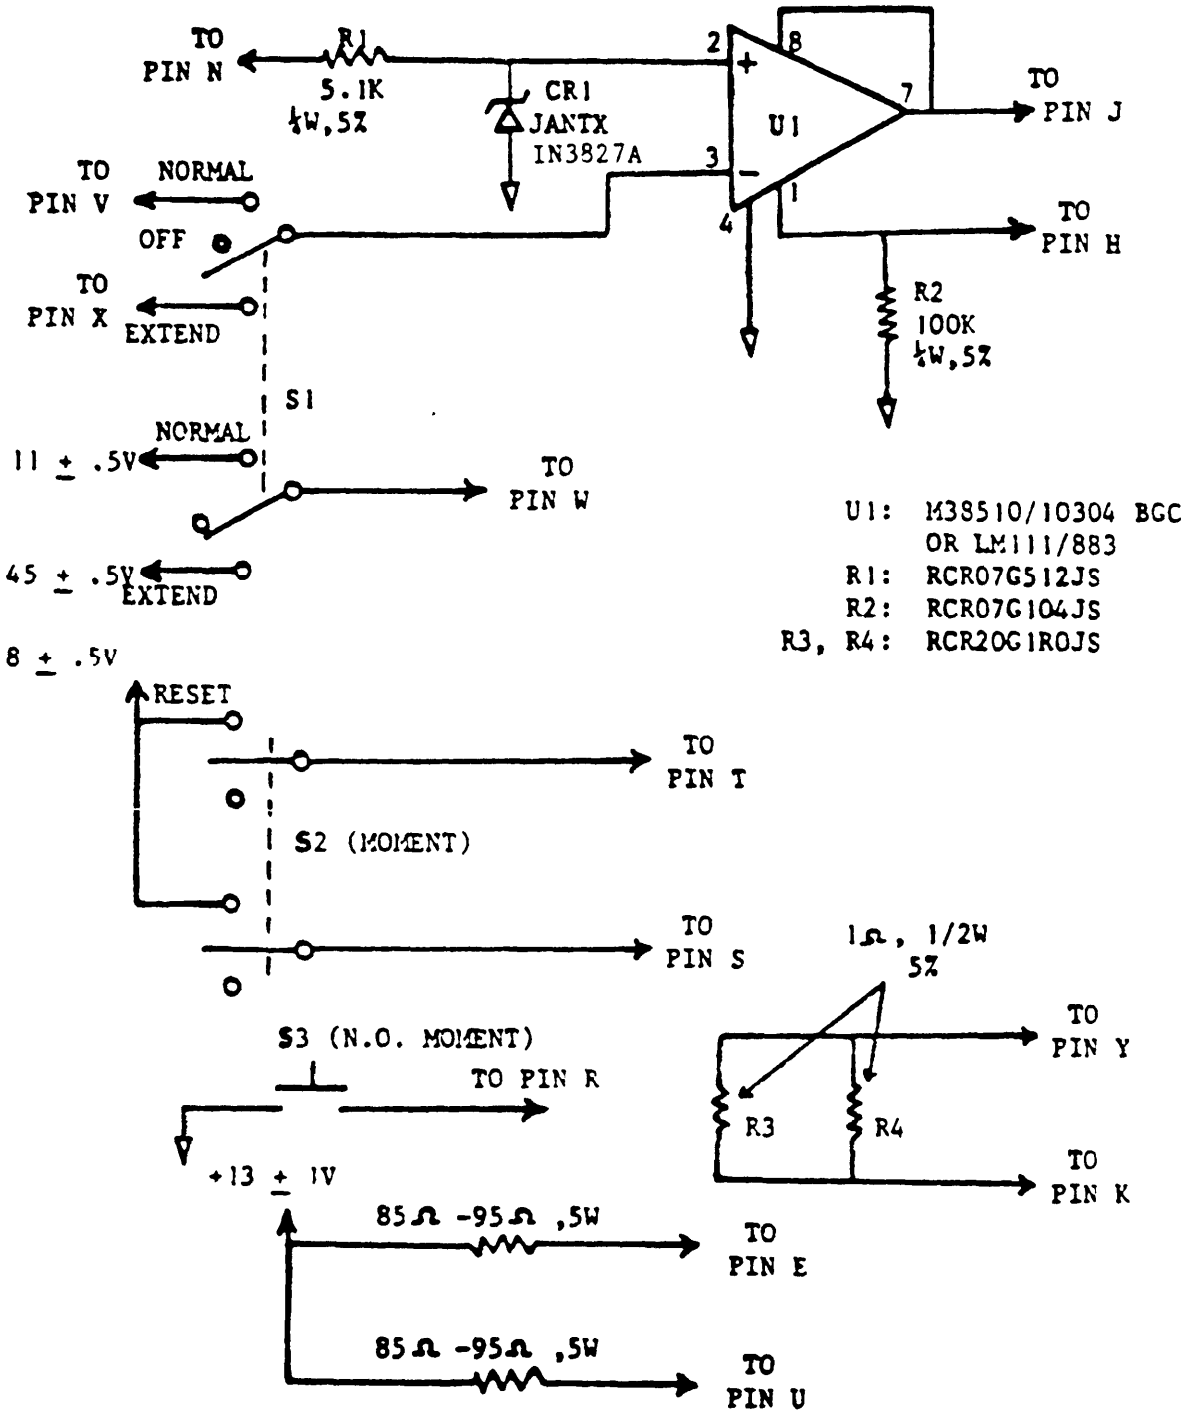


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.5.2.4 Circuit board assembly test procedure.

a. Turn on board power per para. 4.5.2.1, the signal generator and power to switches S1 and S2 (as shown in Figure 3). Voltage at Pin E should be 13 ± 1 volts the first 6-10 seconds and after that should read less than 1 volt. Pin U should read 13 ± 1 volts.

b. Turn signal generator to 1200 HZ and activate S3. Voltage at Pin E should be 13 ± 1 volts and Pin U less than 1 volt.

c. Press S2. Voltage at Pin U should be 13 ± 1 volts.

d. Set signal generator to 1450 HZ, 10V P-P.

e. Set S1 to ‘NORMAL”. Use a multimeter to measure the pin values for the requirements specified in 3.4.1.

4.5.2.5 Circuit board assembly test procedure.

a. Disconnect generator and Multimeter. Connect oscilloscope common lead to Pin K and vertical input to Y. V input 2 v/cm and Time 1 millisec/cm, positive trigger.

b. Activate S3 switch momentarily. Pin E should read 13 ± 1 volts the first 6 to 10 seconds and after that should read less than 1 volt. Scope reading should be 8 ± 1 volt peak decaying to 0 volts over 6 milliseconds. (Figure 4). Turn off oscilloscope.

c. Recheck Pin U. It should read less than 1 volt. Press S2 switch momentarily. Pin U should read 13 ± 1 volt.

d. Connect generator to Pin Z and voltmeter to Pin E. Readjust signal generator to 1200 HZ. Press S3 momentarily. Pin E should read 13 ± 1 volt and Pin U less than 1 volt.

e. Press S2. Pin U should read 13 ± 1 volts.

f. Set S1 switch to EXT. Readjust signal generator to 1450 HZ. Use a multimeter to measure the requirements specified in 3.4.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

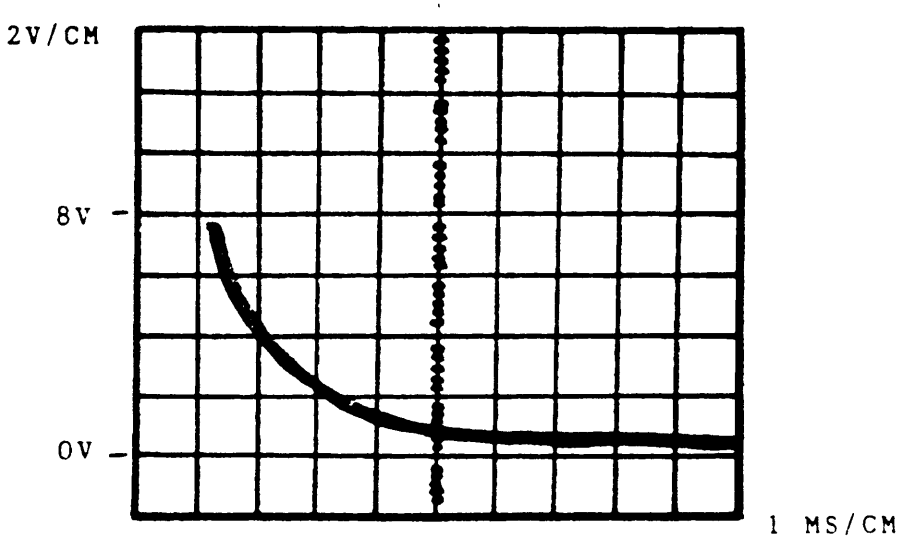


FIGURE 4 - NORMAL

4.5.2.6 Circuit board assembly test procedure.

a. Remove voltmeter and generator. Reset oscilloscope common to Pin K and vertical input to Y; set up scope for positive trigger. V input, 5 v/cm and Time, 1 millisec/cm.

b. Activate S3 switch. Pin E should read 13 ± 1V the first 6 to 10 seconds and after that less than 1 volt. Scope reading should be 33 ± 3 volts peak decaying to O volts over 6 milliseconds (Figure 5) .

c. Recheck Pin U. It should read less than 1 volt.

d. Press S2 switch. Pin U should read 13 ± 1 Volt.

Connect generator and voltmeter. Readjust signal generator to 1200 HZ: Activate S3 switch momentarily. Pin E should read 13 ± 1 volts and Pin U less than 1 volt. press S2 switch; Pin U should read 13 ± 1 volts.

f. Turn off all power and disconnect board, equipment and the lead “U108-1”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

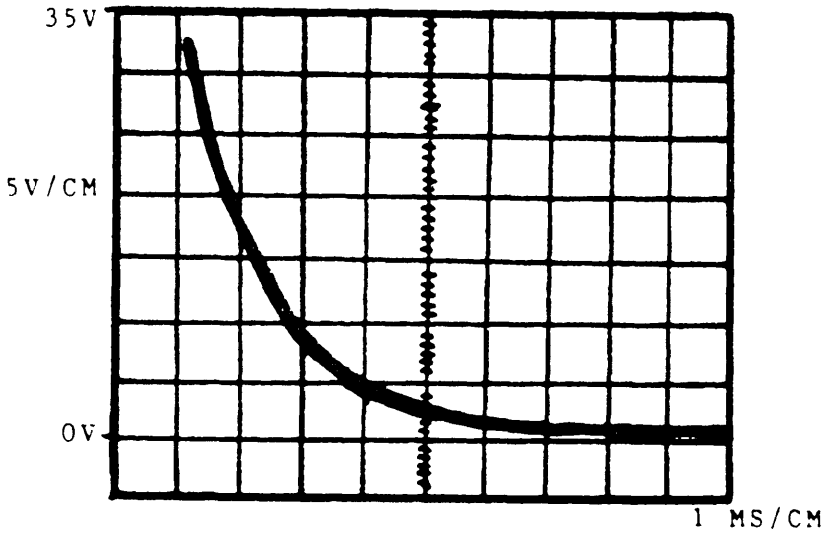


FIGURE 5 - EXTENDED

4.5.3 Printed circuit board assembly (Dwg. 9360013) test procedure.

4.5.3.1 Circuit board assembly test procedure.

a. Set a power supply to 26 ± .5 VDC.

b. Apply Figure 6 to the board.

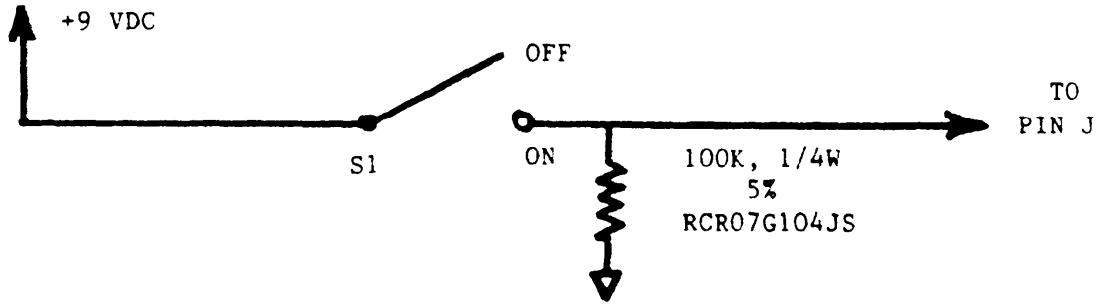


FIGURE 6

c. Apply 26 ± .5 VDC to pins F (+) and A, P (-) and 8.0 ± .5 VDC to pin S (+) and A, P (-). Using a multimeter, measure the pin values for the requirements specified in 3.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.5.3.2 Circuit board assembly test procedure.

a. S1 switch to ON. Using a multimeter, measure the pin values for the requirements specified in 3.5.2.

b. Turn off all power and disconnect board and equipment.

4.5.4 Electronics box components assembly (Dwg. 9360008) test procedure.

NOTE: The following procedure will be performed prior to installation of item 44, “Cover, Access: Test Block”, Dwg. 9360078.

4.5.4.1 Circuit board assembly test procedure.

a. Set the MODE switch to OFF.

b. Apply 26 ± .5 volts DC to TB3-3 (+) and TB3-1 (-).

c. Connect the signal generator to TB3-11(+) and TB3-1 (-). Keep it off.

d. With the MODE switch OFF and the power supply ON, use a multimeter to measure the pin values for the requirements specified in 3.6.1.

Depress the “FAIL” light. Neither the "READY" nor the “FAIL” light should light. Depress the “READY” light twice. It should not light.

4.5.4.2 Circuit board assembly test procedure.

a. Connect proximity sensor to J3 and transmitter coil assembly to J2.

b. Set the MODE switch to ‘NORMAL”. Use a multimeter to measure the pin values for the requirements and observations specified in 3.6.2.

4.5.4.3 Circuit board assembly test procedure. Depress "FAIL" light. Both “READY” and “FAIL” lights should come on. If any light stays on, trigger prox switch to initialize system. Use a multimeter to measure the pin values for the requirements specified in 3.6.3.

4.5.4.4 Circuit board assembly test procedure. Turn on Sine Wave Generator and set to 1K scale. Adjust output level until a 10 volts peak to peak at 1200 HZ is obtained. Adjust frequency slowly until green ready light comes on. Use a multimeter to measure and observe the requirements specified in 3.6.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.5,4.5 Circuit board assembly test procedure.

a. Depress READY light once. It shall come on dim. Depress again. It shall come on in full brightness.

b. Activate the proximity switch by moving a metal object not more than 1/8 inch from the sensor. Observe READY light and compare with requirements specified in 3.6.5.

4.5.4.6 Circuit board assembly test procedure. Disconnect transmitter coil and activate proximity switch. Observe READY light and FAIL light and compare with requirements specified in 3.6.6.

4.5.4.7 Circuit board assembly test procedure. Turn the MODE switch to “OFF”. Connect the Transmitter Assembly to J2 on the electronics box. Turn the MODE switch to “NORM”. observe the READY light and FAIL light and compare with requirements specified in 3.6.7.

4.5.4.8 Circuit board assembly test procedure. Disconnect the Sine Wave Generator. Connect the oscilloscope common lead to terminal TB3-4 and the vertical input lead to terminal TB3-5. Set up scope for negative trigger, V to vertical input at 2 v/cm and time at fifty (50) microseconds/cm. Activate the proximity switch by moving a metal object not more than 1/8 inch from the sensor. Observe READY light, FAIL light and oscilloscope and compare observations with requirements specified in 3.6.8.

4.5.4.9 Circuit board assembly test procedure.

a. Turn the MODE switch to “OFF”. Disconnect the oscilloscope.

b. Connect the sine wave generator to TB 3-1(-) and TB 3-11(+).

c. Turn the MODE switch to "extended” position. Set generator to 1200 HZ. Turn on sine wave generator slowly until ready light is on. Use a multimeter to measure and observe the requirements specified in 3.6.9.

4.5.4.10 Circuit board assembly test procedure. Disconnect the sine wave generator. Connect the oscilloscope common lead to terminal TB 3-4 and the vertical input lead to terminal TB 3-5. Set up scope for positive trigger. vertical input 5 volts\cm. and time fifty (50) microseconds\cm. Activate the proximity switch. Use a multimeter to measure and observe for the requirements specified in 3.6.10.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.5.4.11 Circuit board assembly test procedure.

Set MODE switch to OFF. Connect the sine wave generator to TB3-1(-) and TB3-11(+).

b. Disconnect the proximity sensor and apply Figure 7 to terminal TB 3-2 (+) and TB 3-1 (-).

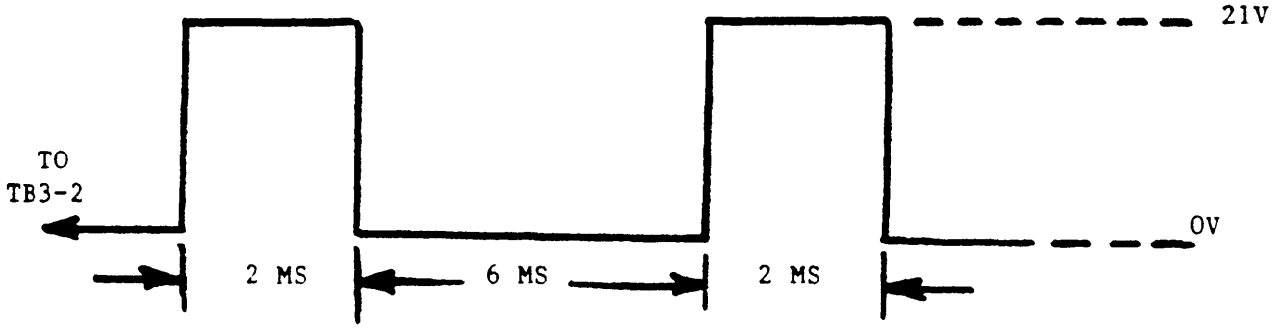


FIGURE 7

c. Turn MODE switch to “NORMAL”.

d. When Figure 7 is applied, observe for the requirements specified in 3.6.11.

4.5.4.12 Circuit board assembly test procedure.

a. Turn the MODE switch to “EXTENDED”.

b. When Figure 7 is applied, observe for the requirements specified in 3.6.11.

4.5.4.13 Circuit board assembly test procedure. Disconnect the oscilloscope and all other test equipment. Turn the MODE switch to OFF. Disconnect the power supply, the proximity switch, cable and the transmitter coil assembly. Assemble item 44, “Cover Access: Test Block” .

4.5.4.14 Ambient temperature (75°F ± 10°F). The electronics box components assembly shall be conditioned at the specified temperature for a minimum of 24 hours prior to testing as specified in 4.5.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

4.5.4.15 Cold temperature (-25°F -5°F). The electronics box shall be conditioned in accordance with MIL-STD-810, Method 502.1, Table 502.2-1, Basic Cold (Cl) Procedures II. The electronics box shall be tested immediately after conditioning as specified in 4.5.4.

4.5.4.16 Hot temperature (12°F +5°F). The electronics box shall be conditioned in accordance with MIL-STD-810, Method 501.2 Table 501.2-111, Hot (Al) Procedure II. The electronics box shall be tested immediately after conditioning as specified in 4.5.4.

4.5.4.17 Transportation vibration. The electronics box shall be conditioned in accordance with MIL-STD-810, Method 514.3, Category 8, Test Procedure I, Figure 514.3-7 thru 514.3-9 (500 miles) and Figure 514.3-10 thru 514.3-22 (50 miles). The electronics box shall be tested after conditioning as specified in 4.5.4.

4.5.5 Protective finish. The contractor shall prepare test panels of the same material as used in the component, at the time of finishing the components or assemblies, subjected to the same finishing process, and shall submit the test panels for the tests specified in MIL-C-46168, para. 3.6.6, 3.6.7, 3.6.8, 3.6.10, 3.6.11 and 3.6.14. .

5. PACKAGING (See 6.3)

5.1 Preservation and packing.

5.1.1 Level A. All of the components included in this specification shall be packaged in accordance with Level A of the corresponding Packaging Data Sheets.

5.1.2 Level B. Same as Level A above.

5.1.3 Level C. Each component shall be packed in accordance with commercial requirements of ASTM-D-3951 with the following mandatory requirements. All items shall be packed individually in a fiberboard box with cushioning as required. The fiberboard box shall be sealed in a barrier bag conforming to Type 1, Class F of Specification MIL-B-117. Note: Cable must not be kinked or bent excessively. Unit pack quantity shall be “Each”.

5.2 Packing.

5.2.1 Level A. All of the components shall be packed as specified in the corresponding Packaging Data Sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Same as Level A above.

5. 2.3 Level C. Each component shall be packed in accordance with the commercial requirements of ASTM-D-3951. Sufficient cushioning and separators shall be used between the barrier bag and outer box to prevent damage to the items or tearing of the barrier bag.

5.3 Marking.

5.3.1 Level A. Mark in accordance with the corresponding Packaging Data Sheets.

5.3.2 Level B. Same as Level A above.

5.3.3 Level C. The marking of the outer box shall be in accordance with the commercial requirements of ASTM-D-3951.

6. NOTES

6.1 Intended use. All of the components included in this specification are intended to be used for Assembly to Dispenser, Mine: M138.

6.2 Ordering data. See MIL-W-63150. The DC Motor (P/N 9359810) shall be inspected and tested in accordance with QAP 9359810.

6.3 Definitions of packaging and packing levels.

6.3.1 Level A. Full military protection for unrestricted (OCONUS) shipment and storage.

6.3.2 Level B. Limited military Protection for limited (OCONUS) shipment and storage.

6.3.3 Level C. For interplant (CONUS) shipment and very limited storage.

6.3.4 For further detailed information concerning packaging and packing levels, consult AR-700-15.

6.4 Submission of inspection equipment designs for approval. See MIL-W-63150. Submit equipment designs as required to: Commander, US Army Armament Research, Development and Engineering Center (ARDEC), AMSMC-QAT-I(D}, Picatinny Arsenal, New Jersey 07806-5000.

Source: https://assist.dla.mil -- Downloaded: 202610-26T04:29Z
Check the source to verify that this is the current version before use.

6.5 Distribution of ammunition data cards and test data. Distribution of data cards and functioning test data shall include the following: Commander, US Army Armament Research, Development and Engineering Center (ARDEC), AMSC-QAT-MD), Picatinny Arsenal, New Jersey 07806-5000.

6.6 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research, Development and Engineering Center (ARDEC) may aso include drawings prepared by, and identified as US Army Armament Research and Development Command (ARRANOM), Edgewood Arsenal, Frankford Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARDEC.

6.7 Changes from previous issue. The margins of this specification are marked with asterisks (or vertical lines) to indicate where changes (additions, modifications corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

6.8 Subject term (key word) listing.

Circuit Board Assembly
Electronics Box
Oscilloscope
Power Box
Sine Wave Generator

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1345-A456)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE. This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D C
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDER
ARDEC
ATTN: AMSMC-QA
PICATINNY ARSENAL, NJ 07806-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-P-70624A	POWER BOX COMPONENTS ASSEMBLY, ELECTRONICS BOX COMPONENTS ASSEMBLY

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:29Z
Check the source to verify that this is the current version before use.