MILITARY SPECIFICATION

PROGRAMMER, AIRCRAFT WEAPONS RELEASE SET

MX-7016(*)/AWE-1

This specification has been approved by the Naval Air Systems Command, Department of the Navy.

1. SCOPE

1.1 Scope - The equipment covered by this specification shall generate the pulse train required to release stores from the aircraft.

1.2 Classification - Aircraft Weapons Release Set Programmer MX-7016(*)/AWE-1 shall consist of the items listed in 6.9.

2. APPLICABLE DOCUMENTS

2.1 General - The documents listed in 6.11 of the issue in effect on the date of invitation for bids form a part of this specification to the extent specified herein.

3. REQUIREMENTS

3.1 Preproduction - This specification makes provision for preproduction testing.

3.2 Parts and Materials - In the selection of parts and materials, fulfillment of major design objectives shall be the prime consideration. In so doing the following shall govern:

(1) Microelectronic items shall conform to requirements specified herein.

(2) Other parts and materials requirements shall conform to Specification MIL-E-5400.

(3) Nonrepairable subassemblies, as outlined in Specification MIL-E-5400, shall be used when practicable. The general size of the subassembly and the amount of circuitry to be included therein shall be approved by the procuring activity. Nonrepairable subassemblies must be reliable (see 6.4).

FSC 1280

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

(4) When previously produced models of this equipment did not use nonrepairable subassemblies, the design shall not be changed to employ nonrepairable assemblies without the approval of the procuring activity.

3.2.1 Nonstandard Parts and Materials Approval - Approval for the use of nonstandard parts and materials (including transistors and diodes) shall be obtained as outlined in Specification MIL-E-5400.

3.2.2 Microelectronic Modular Assemblies - When used, Microelectronic Modular Assemblies shall be described by a contractor procurement specification and must be approved by the procuring agency. Microelectronic Modular Assemblies (Microelectronic Circuits) (MICS) shall be contained within Maintenance Modules (for example, on printed circuit cards). The choice of Microelectronic Modular Assemblies shall be based on at least two sources of supply, which can be used interchangeably.

3.2.3 Modules, Maintenance - The electronic portions of the equipment shall be divided into maintenance modules (see Specification MIL-S-23603). Maintenance modules shall normally be considered repairable.

3.2.4 Microelectronic Interchangeability - Microelectronic circuits (MICS) shall be interchangeable at the MIC level, or at the Maintenance module level when approved by the procuring activity (see 6.13).

3.3 Design and Construction - The equipment shall conform with all the applicable requirements of Specification MIL-E-5400 for design, construction and workmanship, except as otherwise specified herein.

3.3.1 Reliability -

3.3.1.1 Operational Stability - The equipment shall operate with satisfactory performance, continuously or intermittently for a period of at least 1,000 hours without the necessity for readjustment of any controls which are inaccessible to the operator during normal use.

3.3.1.2 Operating Life - The equipment shall have total operating life of 10,000 hours with reasonable servicing and replacement of parts. Parts requiring scheduled replacement shall be specified by the contractor.

3.3.1.3 Reliability in Mean Time Between Failure (MTBF) - The equipment shall have 2,000 hours of mean (operating) time between failures when tested and accepted as outlined under the requirements of 4.4.3.

3.3.3 Cabling and Connections -

3.3.3.1 Cables and Connectors - The equipment shall provide for the use of cables and connectors in accordance with Specification MIL-E-5400.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T07:12:34Z
Check the source to verify that this is the current version before use.

3.3.4 Interchangeability of Reordered Equipment - For reordered equipment, interchangeability shall exist between units and all replaceable assemblies, subassemblies, and parts of a designated model of any previously manufactured equipment, supplied or designated by the procuring activity.

3.3.5 Interference Control - The generation of radio interference by the equipment and the vulnerability of the equipment to radio interference shall be controlled within the limits of Specification MIL-I-6181.

3.3.6 Maintenance Provisions and Field Testing - Provisions for maintenance shall be as specified in Specification MIL-E-5400. Specific test points and test facilities shall be provided to the greatest extent practicable for ease of field testing and maintenance.

3.3.7 Nomenclature and Nameplates - Nomenclature assignment and nameplate approval for equipment identification shall be in accordance with Specification MIL-N-18307.

3.3.8 Standard Conditions - The following conditions shall be used to establish normal performance characteristics under standard conditions and for making laboratory bench tests.

Temperature	Room ambient (25 ±5 °C)
Altitude	Normal ground
Vibration	None
Humidity	Room ambient up to 90% relative humidity
Input power voltage	115 ±1.0vac and/or 27.5 ±0.5vdc

3.3.9 Service Conditions - The equipment shall operate satisfactorily under any of the environmental service conditions or reasonable combination of these conditions as specified in Specification MIL-E-5400 for Class II equipment, except as modified herein:

3.3.9.1 Vibration - The equipment shall operate satisfactorily when subjected to the vibration requirements of Curve I of Specification MIL-E-5400.

3.3.9.2 Altitude - The equipment shall operate satisfactorily when subjected to the altitude requirements of Specification MIL-E-5400 with the exception that the operational altitude be limited to 50,000 feet.

3.3.10 Warm-Up Time - The equipment shall require no warm-up time.

3.3.11 Primary Input Power Requirements - The equipment shall meet all applicable requirements of MIL-STD-704 and shall give specified performance from the

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

following power sources with characteristics as defined in MIL-STD-704 having limits as specified therein. The power required shall not exceed the specified amounts.

(1) AC Power (Single Phase) 115V, 400Hz, Category "B", 10 VA

(2) AC Power (Single Phase) 5V, 400Hz, Category "B", 5 VA

(3) DC Power 28V, Category "B", 0.25 amp, 7 Watts

3.3.11.1 Degraded Performance - Degraded performance will be permitted for voltage transients not exceeding 0.5 second during normal electric system operation. Operation shall return to normal with no resulting damage to the equipment.

3.4 Performance - Unless otherwise specified, values set forth to establish the requirements for satisfactory performance apply to performance under both standard and extreme service conditions. When reduced performance under the extreme conditions is acceptable, tolerances or values setting forth acceptable variations from the performance under the standard conditions will be specified.

3.4.1 Operation - The programmer will automatically translate drop information, as selected by the pilot, into electronic signals which activate the appropriate weapons stations.

3.4.2 Station Select - Station select lines are identified in figure 1. A station is selected by applying +28 vdc ±10 per cent to the associated line as a direct function of the weapons release signals.

3.4.3 Quantity Select - Quantity select lines are identified in figure 1. A quantity is selected by applying a +28 vdc ±10 per cent level to the associated line. All quantity select lines not selected shall be grounded. Only one quantity shall be selected at any one time.

3.4.4 Station Transfer - Station transfer lines are identified in figure 1. The mode of transfer is effected by grounding one of the two lines associated with each station. One line controls the 2 to 6 transfer mode. The other controls the 7 or more transfer mode. Only one of the two lines is grounded at any one time. If both lines are ungrounded, the transfer will be made after one (1) output fire pulse.

3.4.5 "E" Reset Line - After switch S1 is closed, before each individual test, the "E" reset line, as identified in figure 1, shall be momentarily grounded and then a 6.0 ±0.5 vdc level applied to this line while the individual test is performed unless otherwise specified in the individual test instructions.

3.4.6 Mode of Operation - Singles, pairs, and salvo mode lines are identified in figure 1. A mode of operation is selected by applying +28 vdc ±10 per cent level to the associated line. Only one mode line shall be selected at any one time.

3.4.7 Output Fire Pulse - A +28 vdc ±10 per cent pulse present on a station output line.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

3.4.8 Simultaneous Output Fire Pulses - Output fire pulses shall be considered simultaneous if they occur within a three (3) millisecond period of each other.

3.4.9 System Tone Closure - The tone closure shall be monitored during all functional tests except section 6.10.4.3. A closure shall be indicated between pins X and Y of plug 2J4 whenever an output fire pulse is present on any station output line, as required in the individual tests. A closure shall not be indicated when output fire pulses are not present on any station output line.

3.4.10 Weapons Release Signal - A +28 vdc ±10 per cent signal applied to the programmer thru pin S of plug 2J3.

3.4.11 Programmer Reset - The programmer shall be reset by opening switch as identified in figure 1. The programmer can also be reset by grounding pin T of plug 2J5.

3.5 Detailed Requirements -

3.5.1 Programmer, Aircraft Weapons Release Set MX-7016 (*)/AWE-1 - The programmer shall meet the following requirements:

3.5.1.1 Function - The Programmer is the unit of the system that contains all the electronic equipment to perform the releasing requirements of this specification under command from the weapon release switch, control and the stores information that may be available from the aircraft weapon stations. Its package size shall enable it to operate from one to nine stores racks. This is accomplished by the proper addition of logic modules to the basic package. These logic modules are supplied as part of the system dependent on the number of stations required to be served.

3.5.1.2 Form Factor - The programmer shall conform to the dimensions and requirements shown in figure 2.

3.5.1.3 Weight - The weight of the basic one-station (center) programmer shall not exceed 8.4 pounds.

3.5.1.4 Contents - The programmer shall be composed of the following:

(1) Logic Power Supply - The logic power supply shall be operated from the aircraft 115-v, 400-Hz or 28-vdc line. Its output shall provide all logic level voltages required by the system.

(2) Station Transfer Logic - If the selected number of stores to be released exceeds the capacity of the highest priority station or pair of stations selected, the system shall automatically change to the next lower priority station(s) selected and continue releasing stores until the select number of stores have been released. The stores transfer information shall be obtained from inputs as follows: (This equipment shall vary as dependent on 3.5.1.1).

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

(a) Multiple Stores (2 Through 6 Rounds) - The system shall receive an identification signal (a ground) when a rack with multiple stores (2 through 6 rounds) is being carried. Each weapon station will have its own individual line to the system in order to provide these signals. The removal of this ground, after it has been initially received, shall cause the system to change station as required by 3.5.1.4(2).

(b) Fire Pulse Counters - The system shall provide a fire pulse counter for each weapon station. If a rack is providing a multiple store (2 through 6 rounds) ground signal and the removal of this signal is not received by the time 6 fire pulses are counted, the fire pulse counter itself shall generate the station transfer signal, thereby causing the system to change stations to the next lowest priority station (s) selected.

(c) Multiple Stores (7 or More Rounds) - The system shall receive an identification signal (a ground) when a rack with multiple stores (7 or more rounds) is being carried. Each weapon station will have its own individual line to the system in order to provide these signals. The removal of this ground, after it is initially received, shall cause the programmer, to change stations as required by 3.5.1.4 (2). The presence of this signal shall cause the disabling of the associated fire pulse counter circuit described in 3.5.1.4 (2) (b).

(d) Single Store - If both the signals of 3.5.1.4. (2) (a) and 3.5.1.4 (2) (c) are initially missing, the system shall assume a single store and, if required by the quantity select control, shall change stations as required by 3.5.1.4 (2).

(3) Output Drivers - A driver is provided for each station to provide output current as specified in 3.4.7.

(4) Quantity Select Logic - This logic allows only the amount of ripple output pulses as specified in 3.4.3.

3.5.1.5 Controls - The programmer shall have no direct control.

3.5.1.6 Electrical Connections - Connections to external circuits shall be provided as indicated in Figure 1.

3.5.2 Assembly, Left-Right Station 65A132F5 - The left-right station assembly shall meet the following requirements and those of MIL-A-81369(AS).

3.5.2.1 Output Driver - Each assembly provides the necessary firing pulse(s) for stores release to a left station and a corresponding right station.

Source: https://assist.dla.mil -- Downloaded: 2026-12-26T04:23:45Z
Check the source to verify that this is the current version before use.

3.5.2.2 Form Factor - The left-right station assembly shall conform to the dimensions and requirements shown in figure 3.

3.5.3 Assembly, Center Station 65A132F6 - The center station assembly shall meet the following requirements and those of MIL-A-81370(AS).

3.5.3.1 Output Driver - The assembly provides the necessary firing pulse(s) for stores release to the center weapons station.

3.5.3.2 Form Factor - The center station assembly shall conform to the dimensions and requirements shown in figure 4.

3.5.4 Assembly, Station Transfer 65A132F7 - The station transfer assembly shall meet the following requirements and those of MIL-A-81371(AS).

3.5.4.1 Station Transfer Logic - Each assembly provides release of stores from highest priority stations first, then automatically changes to the next lower priority station(s) and continues releasing stores, in conjunction with 3.5.2, until the selected number of stores have been released.

3.5.4.2 Form Factor - The station transfer assembly shall conform to the dimensions and requirements shown in figure 5.

3.5.5 Assembly, Priority Logic 65A132F8 - The priority logic assembly shall meet the following requirements and those of MIL-A-81372(AS).

3.5.5.1 Priority Levels - The assembly shall set priorities for release among the various weapons stations on board the aircraft containing stores to be released.

3.5.5.2 Form Factor - The priority logic assembly shall conform to the dimensions and requirements shown in figure 6.

3.5.6 Assembly, Quantity Select 65A132F9 - The quantity select assembly shall meet the following requirements and those of MIL-A-81373(AS).

3.5.6.1 Quantity Select Logic - The assembly limits the number of ripple output pulses to the quantity selected by the pilot.

3.5.6.2 Form Factor - The quantity select assembly shall conform to the dimensions and requirements shown in figure 7.

3.6 Design Data - No data is required by this specification (other than reports accompanying samples submitted for testing) or by applicable documents, unless specified in the contract or ordered (see 6.7).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Classification of Tests - Items covered by this specification shall be subjected to the following tests to determine compliance with all applicable requirements:

(1) Preproduction Tests

(2) Initial Production Tests

(3) Acceptance Tests

(4) Life Tests

4.2 Preproduction Tests - Preproduction tests shall be made on an equipment representative of the production equipments to be supplied under the contract. Preproduction tests shall be accomplished under the responsibility of the contractor and shall be conducted in accordance with the approved test procedure of 4.6. The government inspector and the procuring activity shall be advised when tests are to be conducted so that a representative may be designated to witness or supervise the tests when so desired. Contractors not having adequate facilities to conduct all required tests shall obtain the services of a commercial testing laboratory acceptable to the Government.

4.2.1 Preproduction Test Data - The contractor shall submit all data collected in conducting these tests to the procuring agency for review and approval. On first production contracts this data shall include a list of all electrical and electronic parts giving their specified voltage, current and temperature rating and the applied circuit voltage, current and ambient and surface temperatures. The ambient and surface temperature shall be obtained under the extreme high temperature operating condition.

4.2.2 Scope of Tests - Preproduction tests shall include all tests deemed necessary by the procuring activity to determine that the equipment meets all the requirements of this specification and the contract. Preproduction tests shall include environmental tests in accordance with the procedures of Specification MIL-T-5422 and interference tests in accordance with Specification MIL-I-6181.

4.2.3 Preproduction Approval - Approval of the preproduction sample shall be by the procuring activity upon satisfactory completion of all tests. No production equipments shall be delivered prior to the approval of the preproduction sample. Prefabrication of production equipment prior to the approval of the preproduction sample is at the contractor's own risk. The approved preproduction sample shall be retained by the contractor for his use in the fabrication and testing of equipment to be submitted for acceptance. The preproduction sample shall not be considered as one of the equipments under the contract.

4.2.4 Production Equipments - Equipments supplied under the contract shall in all respects, including design, construction, workmanship, performance and quality, be

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

equivalent to the approved preproduction sample. Each equipment shall be capable of successfully passing the same tests as imposed on the preproduction sample. Evidence of non-compliance with the above shall constitute cause for rejection and for equipment already accepted by the Government, it shall be the obligation of the contractor to make necessary corrections as approved by the procuring activity.

4.3 Initial Production Tests - One of the first ten production equipments shall be selected and sent at the contractor's expense to a designated Government laboratory for tests. This equipment shall be selected by the procuring activity after the equipment has successfully passed all individual tests. The preproduction sample shall not be selected for this test.

4.3.1 Scope of Tests - This equipment may be subjected to any and all tests the procuring activity deems necessary to assure that the production equipment is equivalent to the previously approved preproduction sample in design, construction, workmanship, performance and quality and that it meets all applicable requirements.

4.3.2 Accessory Material - In addition to the complete equipment submitted for initial production tests the contractor shall also submit such accessory material and data necessary to test the equipment.

4.3.3 Initial Production Sample Approval - Approval of the initial production sample shall be by the procuring activity upon satisfactory completion of all tests. Any design, material or performance defect made evident during this test shall be corrected by the contractor to the satisfaction of the procuring activity. Failure of the initial production sample to pass any of the tests shall be cause for deliveries of equipment under the contract to cease until proper corrective action is approved and accomplished. Corrective action shall also be accomplished on equipment previously accepted when requested by the procuring activity.

4.3.4 Reconditioning of Initial Production Test Sample - On completion of the initial production test the equipment shall be reworked by the contractor by replacing all wear or damaged items. After reworking, the contractor shall resubmit the equipment for acceptance.

4.4 Acceptance Tests - The contractor shall furnish all samples and shall be responsible for accomplishing the acceptance tests. All inspection and testing shall be under the supervision of the government inspector. Contractors not having testing facilities satisfactory to the procuring activity shall engage the service of a commercial testing laboratory acceptable to the procuring activity. The contractor shall furnish test reports showing quantitative results for all acceptance tests. Such reports shall be signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during the course of manufacture shall not be construed as a guarantee of the acceptance of the finished product. Acceptance tests shall consist of the following:

(1) Individual Tests

(2) Sampling Tests

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:57Z
Check the source to verify that this is the current version before use.

(3) Reliability Assurance Tests

(4) Special Tests

4.4.1 Individual Tests - Each equipment submitted for acceptance shall be subjected to the individual tests. These tests shall be adequate to determine compliance with the requirements of material, workmanship, operational adequacy and reliability. As a minimum, each equipment accepted shall have passed the following tests:

(1) Examination of Product

(2) Operational Test

(3) Manufacturing Run In Test

4.4.1.1 Examination of Product - Each equipment shall be examined carefully to determine that the material and workmanship requirements have been met.

4.4.1.2 Operational Test - Each equipment shall be operated long enough to permit the equipment temperature to stabilize and to check sufficient characteristics and record adequate data to assure satisfactory equipment operation.

4.4.1.3 Manufacturing Run In Test - Each equipment shall be operated under the conditions specified herein for a period of 6 hours without failure. A failure shall be defined as anything which causes malfunctioning of the equipment. Only those adjustments will be permitted which can be made by using such controls and adjustments that are accessible to the operator during the normal use of the equipment.

Temperature	Ambient room
Humidity	Ambient room
Vibration	Any selected frequency within the range of 20 to 30 Hz (excluding resonant points) and a minimum amplitude of ±3 g's

The equipment shall be vibrated (without vibration isolators) for a period of 10 minutes prior to the beginning of the 6-hour period of operation. Where feasible, the equipment shall be operated during this vibration period for the purpose of detecting flaws and imperfect workmanship. Operation within the specified limits of satisfactory performance is not necessarily required during the vibration period. The direction of vibartion should be vertical to the normal mounting plane for 5 minutes and lateral to the plane for 5 minutes. Where it is not feasible to vibrate the equipment in 2 directions, the vertical direction shall be used. During the 6-hour period of operation following the 10-minute vibration period, the equipment shall be mechanically cycled periodically through its various phases of operation. Should a failure occur, it should be repaired and the test started over, except that the 10-minute vibration period need not be repeated when it is certain the failure was not a result of the vibration. Should repetitive failures occur, corrective action shall be taken to

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

eliminate this defect from future equipment. A record shall be kept of all failures. The 6-hour period specified above may be composed of two 3-hour periods to conform with standard working hours.

4.4.2 Sampling Tests - Equipments selected for sampling tests shall first have passed the individual tests. Equipments shall be selected for sampling tests by the government inspector in accordance with the following: (Sampling tests shall not be conducted unless reliability assurance tests of 4.4.3 are deleted by contractual action.)

Quantity of Equipments Offered for Acceptance	Quantity to be Selected For Sampling Test
First 10	0*
Next 50	1
Next 75	1
Next 100	1
	1 for each additional 200 or fraction thereof

*NOTE: If by contract action the initial production test (4.3) is deleted, then a sample test shall be conducted on one equipment from the first 10 produced.

4.4.2.1 Scope of Tests - As a minimum, each equipment selected for sampling tests shall be subjected to the following tests:

(1) Complete operational test at ambient room conditions, making all necessary measurements to assure that all applicable specification requirements have been met.

(2) Operational test at certain environmental conditions. The conditions may vary for each equipment tested and should be based on results of the preproduction, initial production, individual and special tests.

(3) Manufacturing run in test specified in 4.4.1.3 except that the test duration shall be 120 hours with no restriction on the number of failures. However, each failure shall be analyzed as to cause and remedial action necessary to reduce the possibility of its recurrence in future equipment.

4.4.3 Reliability Assurance Tests - Reliability assurance tests shall be conducted as required by MIL-STD-781. Equipments selected for reliability assurance tests shall first have passed the individual tests.

4.4.3.1 Test Level - The test level shall be F from Table I of MIL-STD-781.

4.4.3.2 Accept-Reject Criteria - Test plan V of MIL-STD-781 shall be used to determine the accept-reject criteria for the reliability qualification test plan. Test plan VI of MIL-STD-781 shall be used to determine the accept-reject criteria for the reliability sampling test plan.

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T04:23:45Z
Check the source to verify that this is the current version before use.

4.4.3.3 Length of Heat Portion of Cycle - After stabilization at the high temperature limit required by the test level, the equipment shall be operated 2 hours during each cycle.

4.4.3.4 Performance Characteristics to be Measured - The performance characteristics to be measured shall be as specified in 6.10.

4.4.3.5 Failure Criteria - In addition to the requirements of MIL-STD-781, the following requirements shall be used to determine when a failure has occurred during the test:

(1) Whenever performance characteristics fall below the acceptance requirement (4.4.3.4) at least one failure has occurred. If subsequent analysis reveals that several parts have deteriorated, each shall be counted a failure, unless one caused the other parts to fail.

4.4.3.6 Preventive Maintenance - During the period of the tests no preventive maintenance measures are required.

4.4.4 Special Tests - Special tests shall be conducted on a quantity of equipments for the purpose of checking the effect of any design or material change on the performance of the equipment and to assure adequate quality control. The equipment selected for special tests may be selected from equipments previously subjected to the sampling or reliability assurance tests.

4.4.4.1 Special Test Schedule - Selection of equipments for special tests shall be made as follows:

(1) On an early equipment after an engineering or material change.

(2) Whenever failure reports or other information indicate additional tests are required. (This will be determined by the procuring activity.)

4.4.4.2 Scope of Tests - Special tests shall consist of such tests as approved by the procuring activity. Test procedures previously approved for the preproduction tests shall be used where applicable. When not applicable, the contractor shall prepare a test procedure and submit it to the procuring activity for approval prior to conducting the tests.

4.4.5 Equipment Failure - Should a failure occur during either the sampling, reliability assurance or special tests, the following action shall be taken:

(1) Determine the cause of failure.

(2) Determine if the failure is an isolated case or design defect.

(3) Submit to the procuring activity for approval, proposed corrective action intended to reduce the possibility of the same failure(s) occurring in future tests.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

(4) Where practical, include a test in the individual test to check all equipment for this requirement until reasonable assurance is obtained that the defect has been satisfactorily corrected.

4.5 Life Test - The contractor shall furnish all samples and shall be responsible for accomplishing the life test. The test shall be of 300-hours duration and shall be conducted on equipments that have passed the individual test. The life test shall be performed under the conditions specified in 4.5.1. The life test sample shall be selected by the government inspector in accordance with the following. (Equipments which have successfully passed the initial production test, sampling tests, reliability tests, or special tests may be selected for life tests.) When reliability tests are conducted, the life test may be omitted if, during the reliability tests, a quantity of equipments equal to, or more than, that listed below receive at least 300 hours each of test time.

Quantity of Equipments Offered for Acceptance	Quantity to be Selected for Life Test
First 25	1
Next 175	1
Next 300	1
	1 for each additional 500 or fraction thereof

4.5.1 Test Conditions - The life test shall be conducted under the following simulated service conditions:

Temperature	Normal room
Altitude	Normal ground (0 - 5000 ft)
Humidity	Room ambient
AC voltage	115 ±5V (at lowest applicable frequency)
DC voltage	27.0 ±2.0V

4.5.2 Test Periods - The test may be run continuously or intermittently. Any period of operation shall be of sufficient duration to permit the equipment temperature to stabilize. Periodically, the equipment shall be turned on and off several times and put through its various phases of operation.

4.5.3 Performance Check - At approximately 8-hour intervals during the test, a limited performance check shall be made. The performance check proposed by the contractor shall be subject to approval by the procuring activity.

4.5.4 Test Data - The contractor shall keep a daily record of the performance of the equipment, making particular note of any deficiencies or failures. In the event of part failures, the defective part shall be replaced and the operation resumed for the balance of

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

the test period. A record shall be kept of all failures throughout the test, including all tube failures. This record shall indicate the following:

(1) Part type number

(2) The circuit reference symbol number

(3) The part function

(4) Name of the manufacturer

(5) Nature of the failure

(6) The number of hours which the part operated prior to failure

4.5.4.1 Failure Report - In the event of a failure, the government inspector shall be notified immediately. A report shall be submitted to the procuring activity upon completion of the test. In this report, the contractor shall propose suitable and adequate design or material corrections for all failures which occurred. The procuring activity will review such proposals and determine whether they are acceptable.

4.5.5 Reconditioning of Life Test Samples - Equipment which has been subjected to the life test shall be reconditioned as follows:

(1) On completion of the life tests, the equipment shall be reworked by the contractor by replacing all "wear" items. The "wear" items shall be determined by agreement between the contractor and the procuring activity.

(2) After reworking, the contractor shall resubmit the equipment for acceptance.

4.6 Test Procedures - The procedures used for conducting preproduction tests, acceptance tests and life tests shall be prepared by the contractor and submitted to the procuring activity for review and approval. The right is reserved by the procuring activity or the government inspector to modify the tests or require any additional tests deemed necessary to determine compliance with the requirements of this specification or the contract. Specification MIL-T-18303 shall be used as a guide for preparation of test procedures. When approved test procedures are available from previous contracts such procedures will be provided and may be used when their use is approved by the procuring activity. However, the right is reserved by the procuring activity to require modification of such procedures, including additional tests, when deemed necessary.

4.7 Reconditioning of Tested Equipment - Equipment which has been subjected to acceptance and life tests shall be reconditioned by the contractor by replacing all wear or damaged items. After reworking the contractor shall resubmit the equipment for acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

4.8 Presubmission Testing - No item, part or complete equipment shall be submitted by the contractor until it has been previously tested and inspected by the contractor and found to comply, to the best of his knowledge and belief, with all applicable requirements.

4.9 Rejection and Retest - Equipment which has been rejected may be reworked or have parts replaced to correct the defects and resubmitted for acceptance. Before resubmitting, full particulars concerning previous rejection and the action taken to correct the defects found in the original shall be furnished the government inspector.

5. PREPARATION FOR DELIVERY

5.1 General - All major units and parts of the equipment shall be preserved, packaged, packed and marked for the level of shipment specified in the contract or order in accordance with Specification MIL-E-17555.

6. NOTES

6.1 Intended Use - The programmer generates release pulses for as many as nine stations (one center station and four pairs of wing stations) bearing stores on the aircraft. The number and repetition rate of the pulses, and the particular stations to which these are routed, are determined by the inputs to the unit.

6.2 Test Values - Normal and limiting values of performance data shall be determined at input voltages of 27.5 ±0.5 vdc and 115 ±1.0 vac as applicable. These data are to be used in testing the equipment at installation points for compliance with minimum acceptance standard of performance.

6.3 Performance Objectives - Minimum size and weight, simplicity of operation, ease of maintenance, and an improvement in the performance and reliability of the specific functions beyond the requirements of this specification are objectives which shall be considered in the production of this equipment. Where it appears a substantial reduction in size and weight or improvement in simplicity of design, performance, ease of maintenance or reliability will result from the use of materials, parts and processes other than those specified in Specification MIL-E-5400, it is desired their use be investigated. When investigation shows advantages can be realized, a request for approval shall be submitted to the procuring activity for consideration. Each request shall be accompanied by complete supporting information.

6.4 As a general rule, nonrepairable subassemblies should be encapsulated or hermetically-sealed. The number of connections internal to the subassembly should be held to a minimum. Detail parts tolerances and ratings should be so selected that the life of the subassembly is greater than that of a similar repairable one. With few exceptions (such as high voltage power supplies), the nonrepairable subassembly should evidence a mean-time-to-failure greater than 5000 hours, and for many applications this figure must be nearer 50,000 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-01-28T04:23:45Z
Check the source to verify that this is the current version before use.

6.5 Precedence of Documents - When the requirements of the contract, this specification, or applicable subsidiary specifications are in conflict, the following precedence shall apply:

(1) Contract - The contract shall have precedence over any specification.

(2) This Specification - This specification shall have precedence over all applicable subsidiary specifications. Any deviation from this specification, or from subsidiary specifications where applicable, shall be specifically approved in writing by the procuring activity.

(3) Referenced Specifications - Any referenced specification shall have precedence over all applicable subsidiary specifications referenced therein. All referenced specifications shall apply to the extent specified.

6.6 The parentheses (*), when used in the type designation, will be deleted or replaced by either a number or letter furnished by the procuring activity upon application by the contractor for assignment of nomenclature in accordance with 3.3.7. The complete type number shall be used on nameplates, shipping records and instruction books, as applicable.

6.7 Ordering Data - Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(1) Title, number, and date of this specification.

(2) Selection of applicable levels of packaging and packing (see 5.1).

(3) Data requirements (see 3.6).

6.8 Asterisk - In specification revisions and superseding amendments an asterisk "*" preceding a paragraph number denotes paragraphs in which changes have been made from the previous issue. This has been done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the asterisk notations and relationship to the last previous issue.

6.9 Items of Equipment - The equipment covered by this specification shall consist of the following items:

Item	Type Designation	Appl. Para.	Quantity
Programmer, Aircraft Weapons Release Set	MX-7016(*)/AWE-1	3.5.1	1

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

Item	Type Designation	Appl. Para.	Quantity
Assembly, Left-Right Station	65A132F5	3.5.2	4
Assembly, Center Station	65A132F6	3.5.3	1
Assembly, Station Transfer	65A132F7	3.5.4	4
Assembly, Priority Logic	65A132F8	3.5.5	1
Assembly, Quantity Select	65A132F9	3.5.6	1

6.9.1 Associated Equipment - The equipment shall operate with the following associated equipment:

Item	Type Designation	Specification
Indicator, Aircraft Weapons Release Set	ID-1310(*)/AWE-1	MIL-A-81359(AS)
Control, Aircraft Weapons Release Set	C-6682(*)/AWE-1	MIL-C-81360(AS)

6.10 Performance Characteristics to Be Measured - The equipment shall meet the following performance characteristics.

6.10.1 Functional Tests - With the unit under test wired as shown in figure 8, the following tests shall be performed:

6.10.2 Singles mode -

6.10.2.1 One of Each - Select all stations. Leave all station transfer lines open. Select singles mode of operation. Select quantity 40. Remove the +28-vdc input to 2J3-M. Leave the +28-vdc input on 2J3-X. Close switch S1 and then restore the +28-vdc input to 2J3-M. Close and open the weapons release switch nine (9) times. An output fire pulse shall appear on the nine (9) station output lines in the following sequence: LI+3, RI+3, LI+2, RI+2, LI+1, RI+1, LI, RI, and C. Close and open the weapons release switch once more. No further fire pulses shall appear on any station output line. Open switch S1.

6.10.2.2 Two to Six - Select all stations. Ground all 2 to 6 transfer lines. Select singles mode of operation. Select quantity 40 and close switch S1. Close and open the weapons release switch two (2) times. An output fire pulse shall appear first on the LI+3 output line and then on the RI+3 output line. Remove the grounds on the 2 to 6 transfer lines for stations LI+3 and RI+3. Close and open the weapons release switch two (2) times. An output

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

fire pulse shall appear first on the LI+2 output line and then on the RI+2 output line. Remove the grounds on the 2 to 6 transfer lines for stations LI+2 and RI+2. Close and open the weapons release switch two (2) times. An output fire pulse shall appear first on the LI+1 output line and then on the RI+1 output line. Remove the grounds on the 2 to 6 transfer lines for stations LI+1 and RI+1. Close and open the weapons release switch two (2) times. An output fire pulse shall appear first on the LI output line, and then on the RI output line. Remove the grounds on the 2 to 6 transfer lines for stations LI and RI. Close and open the weapons release switch two (2) times. Two output fire pulses shall appear on the center station output line. Remove the ground on the 2 to 6 transfer line for center station. Close and open the weapons release switch once (1). No further output fire pulses shall appear on any station output line. Open switch S1.

6.10.3 Pairs Mode -

6.10.3.1 Pairs - Stores Disable - Select all stations. Leave station transfer lines on LI+3, LI+2, LI+1, LI, and C open. Ground the 2 to 6 station transfer lines on RI+3, RI+2, RI+1, and RI. Select pairs mode of operation. Select quantity 40 and close switch S1. Close and open the weapons release switch. An output fire pulse shall appear simultaneously on the LI+3 and the RI+3 output lines. Close and open the weapons release switch three (3) times. Output fire pulses shall appear simultaneously in the following sequence: LI+2 and RI+2, LI+1 and RI+1, LI and RI. Close and open the weapons release switch once more. No further fire pulses shall appear on any output line. Open the station transfer lines on RI+3, RI+2, RI+1, and RI. Ground the 2 to 6 station transfer lines on LI+3, LI+2, LI+1, and LI. Open and close switch S1. Close and open the weapons release switch four (4) times. Output fire pulses shall appear simultaneously in the following sequence: LI+3 and RI+3, LI+2 and RI+2, LI+1 and RI+1, and LI and RI. Close and open the weapons release switch once more. No further fire pulses shall appear on any output line. Open switch S1.

6.10.4 Salvo -

6.10.4.1 Two to Six - Select all stations. Ground all 2 to 6 station transfer lines. Select salvo mode of operation. Select quantity 40 and close switch S1. Close and open the weapons release switch six (6) times. For each closure of the weapons release switch, an output fire pulse shall appear on all station output fire lines simultaneously. Close and open the weapons release switch once more. No further fire pulses shall appear on any station output line. Open switch S1.

6.10.4.2 Seven or More - Select all stations. Ground all 7 or more station transfer lines. Select salvo mode of operation. Select quantity 40 and close switch S1. Close and open the weapons release switch seven (7) times. For each closure of the weapons release switch, an output fire pulse shall appear on all station output fire lines simultaneously. Remove all 7 or more station transfer lines from ground. Close and open the weapons release switch once more. No further fire pulses shall appear on any station output line. Connect pin T of 2J5 momentarily to pin P of 2J5. Close and open the weapons release switch once. An output fire pulse shall appear simultaneously on all station output lines. Once again close and open the weapons release switch. No further fire pulses shall appear on any output lines. Open switch S1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22 07:42:34Z
Check the source to verify that this is the current version before use.

6.10.4.3 Output Pulse Width - Select all stations. Ground all 2 to 6 transfer lines. Select salvo mode of operation. Select quantity 40 and close switch S1. Remove the jumper between 2J1-c and 2J1-d as identified in figure 1. Close the weapons release switch. Apply a train of seven (7) or more input pulses to 2J1-c. The input pulse amplitude shall be +28 vdc ±10 per cent. The input pulse period shall be 20 millisecond ±1 per cent with a pulse width of 50 per cent ±2 per cent of the input pulse period. An output fire pulse shall appear on all nine (9) station output lines simultaneously during each of the first six (6) input pulses applied to 2J1-c. All the output fire pulses shall have a pulse width of 10 millisecond ±40 per cent. Open switch S1. Open the weapons release switch and restore the jumper between 2J1-c and 2J1-d.

6.10.5 Quantity Select -

Quantity 2 - Select any station. Ground the 7 or more transfer line of the station selected. Select salvo mode of operation. Select quantity 2. Close switch S1. Close and open the weapons release switch three (3) times. Two (2) output fire pulses shall appear on the output line of the station selected. Ground the "E" reset line momentarily and then apply a +6.0 vdc ±10 per cent level to the "E" reset line for the duration of this quantity select test.

6.10.5.1 Quantity 3 - Select quantity 3. Close and open the weapons release switch four (4) times. Three (3) output fire pulses shall appear on the station output line.

6.10.5.2 Quantity 4 - Select quantity 4. Close and open the weapons release switch two (2) times. One (1) output fire pulse shall appear on the station output line.

6.10.5.3 Quantity 5 - Select quantity 5. Close and open the weapons release switch two (2) times. One (1) output fire pulse shall appear on the station output line.

6.10.5.4 Quantity 6 - Select quantity 6. Close and open the weapons release switch two (2) times. One (1) output fire pulse shall appear on the station output line.

6.10.5.5 Quantity 8 - Select quantity 8. Close and open the weapons release switch three (3) times. Two (2) output fire pulses shall appear on the station output line.

6.10.5.6 Quantity 12 - Select quantity 12. Close and open the weapons release switch five (5) times. Four (4) output fire pulses shall appear on the station output line.

6.10.5.7 Quantity 16 - Select quantity 16. Close and open the weapons release switch five (5) times. Four (4) output fire pulses shall appear on the station output line.

6.10.5.8 Quantity 20 - Select quantity 20. Close and open the weapons release switch five (5) times. Four (4) output fire pulses shall appear on the station output line.

6.10.5.9 Quantity 30 - Select quantity 30. Close and open the weapons release switch eleven (11) times. Ten (10) output fire pulses shall appear on the station output line.

Source: https://assist.dla.mil -- Downloaded: 2026-02-10T04:23:45Z
Check the source to verify that this is the current version before use.

6.10.5.10 Quantity 40 - Select quantity 40. Close and open the weapons release switch eleven (11) times. Ten (10) output fire pulses shall appear on the station output line. Open switch S1.

6.10.6 Off Pairs - Select stations LI+3, LI+2, LI+1, LI, and C. Leave all station transfer lines open. Select pairs mode of operation. Select quantity 40 and close switch S1. Close and open the weapons release switch once. No output fire pulses shall appear on any station output line. Open switch S1 and deselect stations LI+3, LI+2, LI+1, and LI. Select stations RI+3, RI+2, RI+1, and RI. Close switch S1. Close and open the weapons release switch once. No output fire pulse shall appear on any station output line. Open switch S1 and deselect stations RI+3, RI+2, RI+1, RI and C. Close switch S1. Close and open the weapons release switch once. No output fire pulse shall appear on any station output line. Open switch S1.

6.10.7 Off Load & Memory - Select stations LI+3, LI+2, LI+1, LI, C, and RI+3. Ground the 2 to 6 transfer line on station LI+3. Leave all other station transfer lines ungrounded. Select singles mode of operation. Select quantity 40 and close switch S1. Close and open the weapons release switch once. An output fire pulse shall appear on the LI+3 output line. Deselect station RI+3. Close and open the weapons release switch once. An output fire pulse shall appear on the LI+3 output line. Open the 2 to 6 transfer line on station LI+3. Close and open the weapons release switch four (4) times. Four output fire pulses shall appear in the following sequence. LI+2, LI+1, LI, and C. Open switch S1.

6.10.8 Leakage Current - Select all stations. Ground all 2 to 6 station transfer lines. Select salvo mode of operation. Select quantity 40 and close switch S1. The leakage current through each station output line to ground shall not exceed 100 ua. Open switch S1.

6.10.9 System By-Pass - Select all stations. With switch S1 open, close and open the weapons release switch once. An output fire pulse shall appear on all station output lines simultaneously.

6.10.9.1 Master Arm Bleeder Resistor - Select all stations. Leave all station transfer lines open. Select singles mode of operation. Select quantity 40 and close switch S1. Remove the +28 vdc input to 2J3-M and after a delay of at least 1.0 second, close and open the weapon release switch once. No fire pulses shall appear on any station output line. Restore the +28 vdc input to 2J3-M and open switch S1.

6.10.10 Fail Safe - Remove the +28 vdc input from pin M on the 2J3 plug. The +28 vdc input on pin X on the 2J3 plug shall remain. Perform the following test. Switch S1 open. Select all stations. Leave all station transfer lines open. Select salvo mode of operation. Select quantity 40 and close switch S1. Close and open the weapons release switch once. No output fire pulses shall appear on any station output line. Now restore the +28 vdc input to pin M on the 2J3 plug. Close and open the weapons release switch once. An output fire pulse shall appear on all station output lines. Open switch S1.

6.10.11 Support Equipment Outputs - With the programmer wired as shown in figure 8 and with switch S1 and the weapons release switch closed, the following outputs shall be measured on plug 2J5.

Source: https://assist.dla.mil -- Downloaded: 2026-01-22 09:10:42 EST
Check the source to verify that this is the current version before use.

Pin U - 115 ±5 vac 400 Hz
Pin V - 115 volt common
Pin W - +28 vdc ±10%
Pin P - 28 volt ground
Pin N - +28 vdc ±10%

Open the weapons release switch. The +28 vdc ±10 per cent signal on pin N shall disappear. Open switch S1. The +28 vdc ±10 per cent level on pin W shall remain. The 115 ±5 vac between pins U and V shall remain. The stores display lines are identified in figure 8. A +28 vdc ±10 per cent pulse shall be present on these lines at the same time and for the same duration as the fire pulse on the station output lines during normal programmer operation.

6.10.11.1 Power and Ground Lines - With the programmer wired as shown in figure 8, and with switch S1 closed, 115 ±5V 400 Hz shall be present between pins e and f of plug 2J1. When switch S1 is opened, the 115-volt 400-Hz voltage between pins e and f shall not be present. Pin T on plug 2J1, pins K and L on plug 2J3, pin Z on plug 2J4, pin P on plug 2J5, pin K on plug 2J6 and the programmer chassis shall all be common.

6.11 Applicable Documents -

SPECIFICATIONS

Military

MIL-W-5088	Wiring; Aircraft, Installation of
MIL-E-5400	Electronic Equipment, Aircraft, General Specification for
MIL-T-5422	Testing, Environmental, Aircraft Electronic Equipment
MIL-I-6181	Interference Control Requirements, Aircraft Equipment
MIL-E-17555	Electronic and Electrical Equipment and Associated Repair Parts, Preparation for Delivery of
MIL-T-18303	Test Procedures; Preproduction and Inspection, for Aircraft Electronic Equipment, Format for
MIL-N-18307	Nomenclature and Nameplates for Aeronautical Electronic and Associated Equipment

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

MIL-S-23603	System Readiness/Maintainability; Avionic Systems Design, General Specifications for

STANDARDS

Military

MIL-STD-704	Electric Power, Aircraft Characteristics and Utilization of
MIL-STD-781	Reliability Tests Exponential Distribution

PUBLICATIONS

Naval Air Systems Command

MIL-A-81359(AS)	Aircraft Weapons Release Set AN/AWE-1
MIL-C-81360(AS)	Control, Aircraft Weapons Release Set C-6682(*)/AWE-1
MIL-A-81369(AS)	Assembly, Left-Right Station 65A132F5
MIL-A-81370(AS)	Assembly, Center Station 65A132F6
MIL-A-81371(AS)	Assembly, Station Transfer 65A132F7
MIL-A-81372(AS)	Assembly, Priority Logic 65A132F8
MIL-A-81373(AS)	Assembly, Quantity Select 65A132F9

6.11.1 Availability of Documents -

(1) When requested specifications, standards, drawings, and publications refer to both title and number. Copies of this specification and applicable specifications required by contractors in connection with specific procurement functions may be obtained upon application to the Commanding Officer, Naval Supply Depot, Code 105, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120.

Source: https://assist.dla.mil -- Downloaded: 2026-01-22T07:42:35Z
Check the source to verify that this is the current version before use.

6.12 Criteria for Multiple Source - The criteria of this paragraph shall be used for determining the extent to which the requirement for multiple independent source availability of microcircuits is satisfied. For interchangeability at the MIC level, multiple source availability exists if the devices from the different sources may be used interchangeably, device by device, in the final equipment without any need for mechanical or electrical changes. For interchangeability at the card level, multiple source availability exists if a card composed of MICS from one source is mechanically and electrically interchangeable with another card composed of MICS from another source. Numerous aspects need be considered to arrive at the independence of sources; these involve production independence, corporate (or firm) and financial independence, and geographical separation. The production independence of one source of another is determined by the extent to which the one source is independent of the other for manufacture; and by the lack of common original suppliers of raw or processed materials. Design, process information, technology, and diffusion masks may be derived from a common source. However, in such a case, each device source shall have a demonstrated capability of originating these items. The corporate (or firm) and financial independence of one source of another is determined by the absence of common directors, common officers, or holders of large common financial interests. Geographical separation is simply the distance between the locations where principal manufacture takes place by two sources.

6.13 Microelectronic Interchangeability Demonstration - Interchangeability of microelectronic elements shall be demonstrated as follows:

(1) For the interchangeability at the MIC level, it shall be demonstrated for each type of functional MIC from one source, as used in the system, that it is mechanically and electrically interchangeable with that from another source (see 6.12)

(2) For the interchangeability at the Maintenance module level, it shall be demonstrated that modules typical of those to be used in the system composed of MICS from one source are mechanically and electrically interchangeable with modules composed of MICS from another source.

(3) For the completed equipment, it shall be demonstrated that modules composed of MICS from one source are interchangeable with corresponding modules composed of MICS from another source. When interchange has been effected, no degradation shall take place in system and subsystem performance.

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

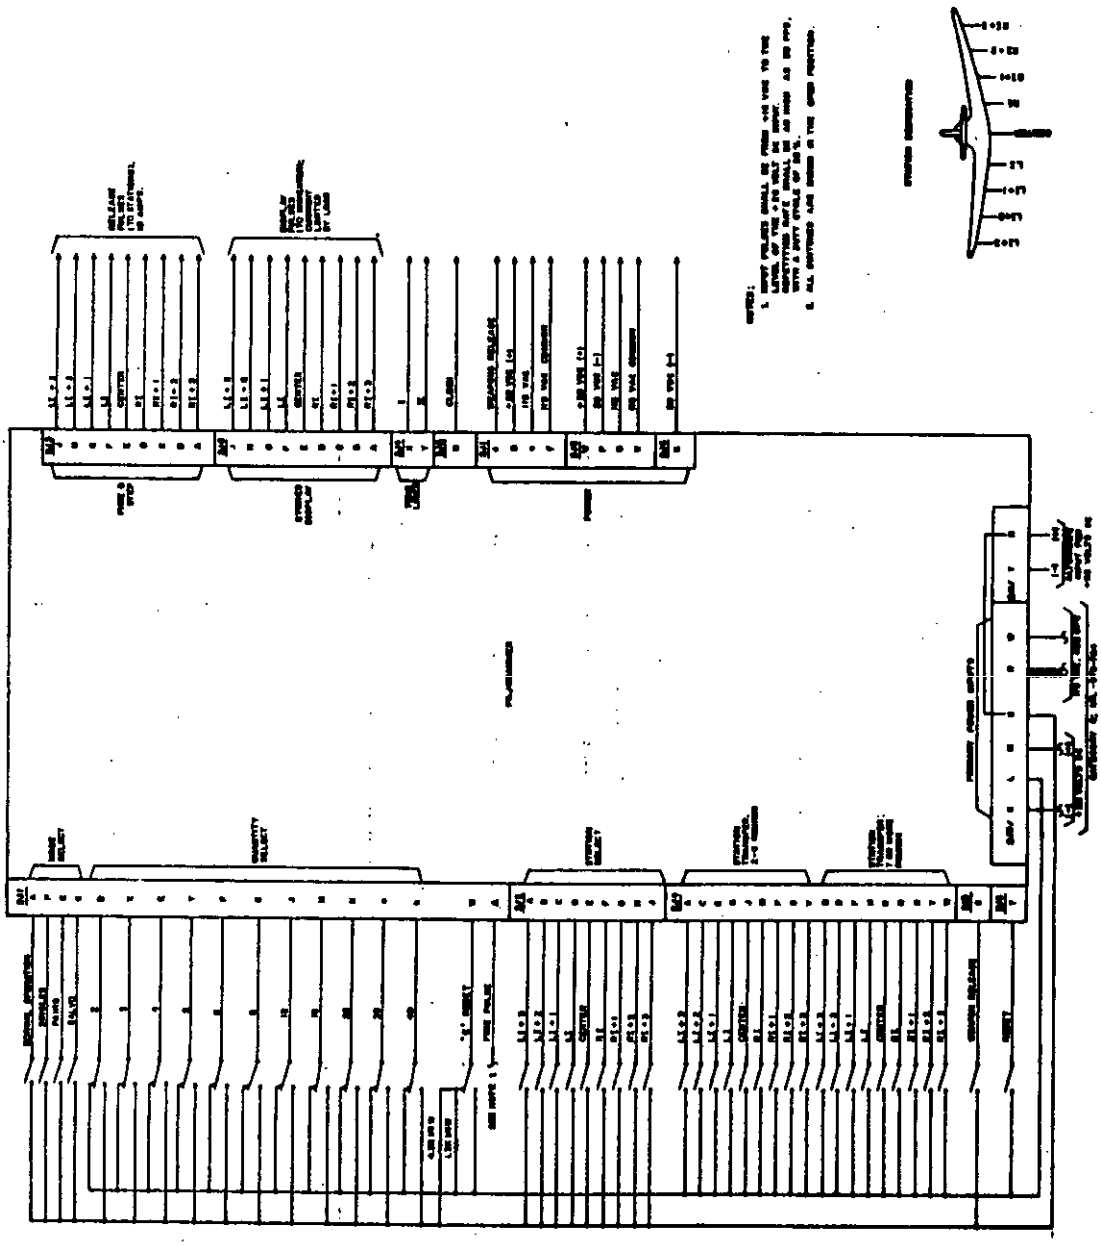


Figure 1. Operational Test Setup

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T01:23:45Z
Check the source to verify that this is the current version before use.

The digital copy of MIL-P-81361(AS), dated 4-June-1970 does not include the foldout pages for 25/26. Please call ASSIST Help Desk at 215-697-6396 for copies of this foldout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T04:34Z
Check the source to verify that this is the current version before use.

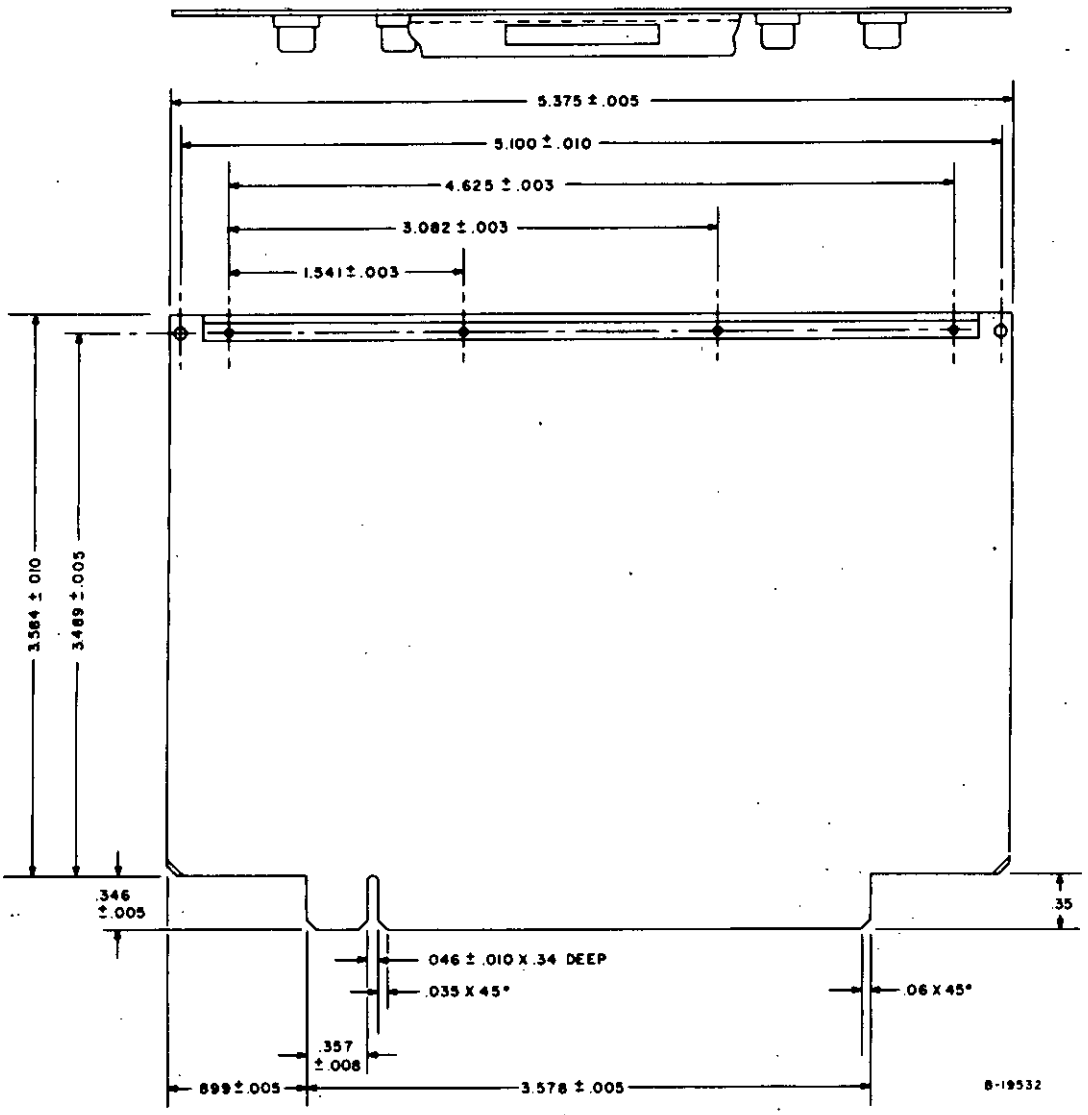


Figure 3. Outline Dimensions of Left-Right Station Assembly 65A132F5

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

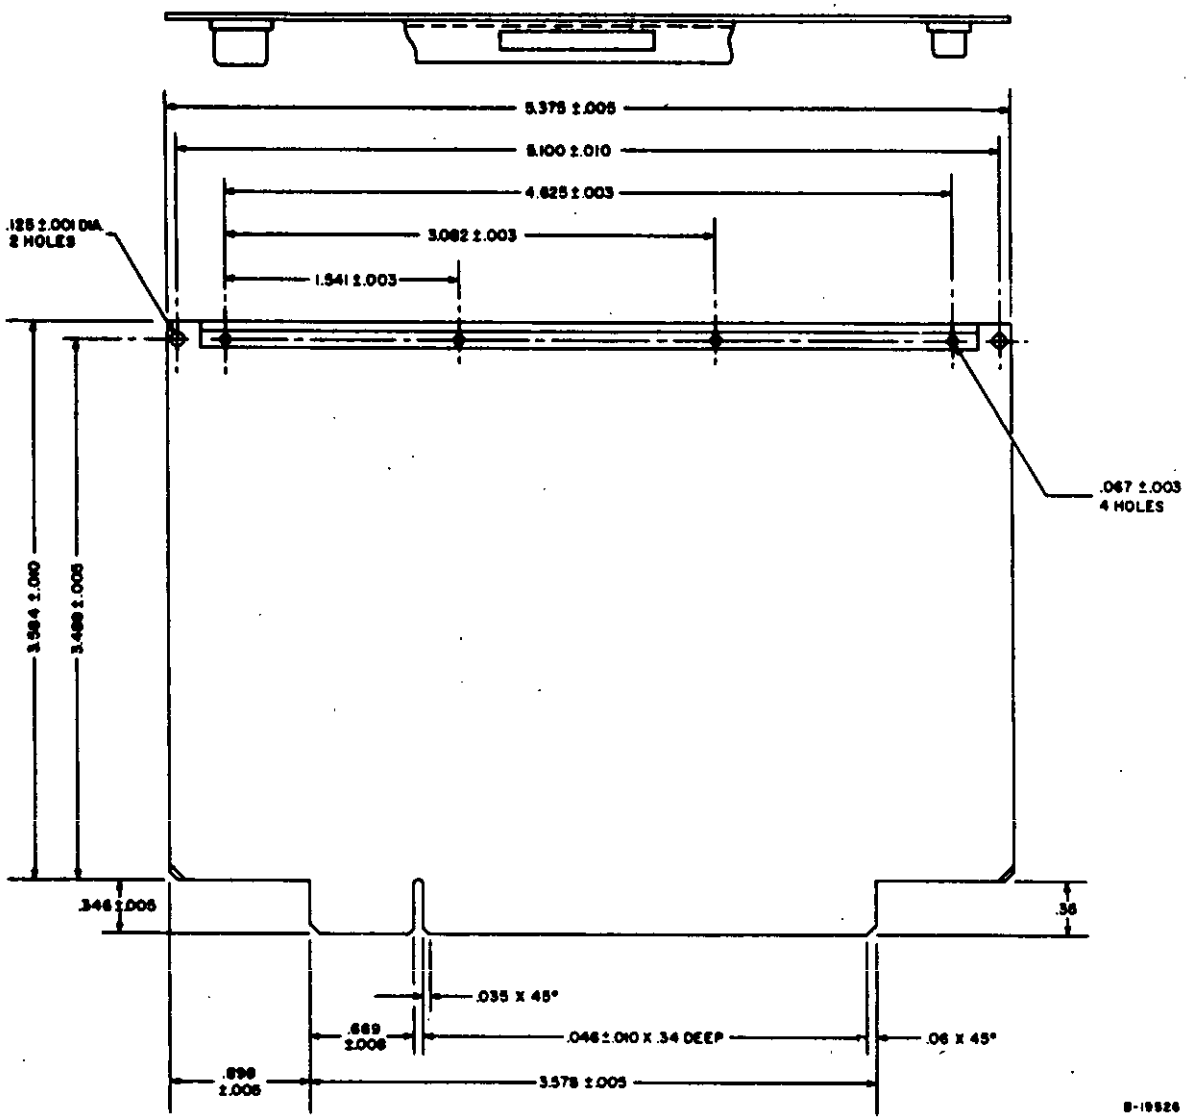


Figure 4. Outline Dimensions of Center Station Assembly 65A132F6

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

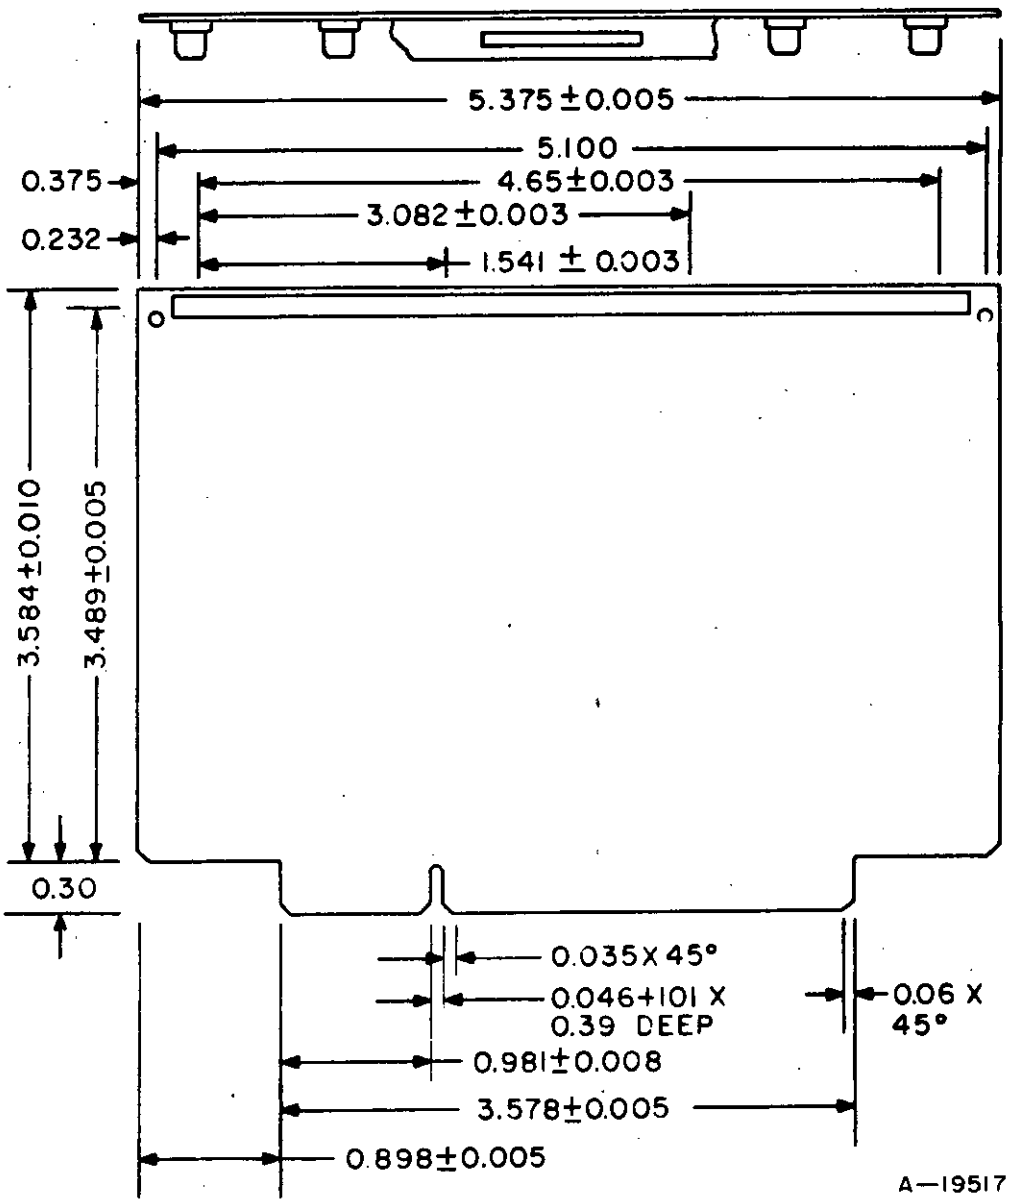


Figure 5. Outline Dimensions of Station Transfer Logic Assembly 65A132F7

Source: https://assist.dla.mil -- Downloaded: 2026-12-26T04:23:45Z
Check the source to verify that this is the current version before use.

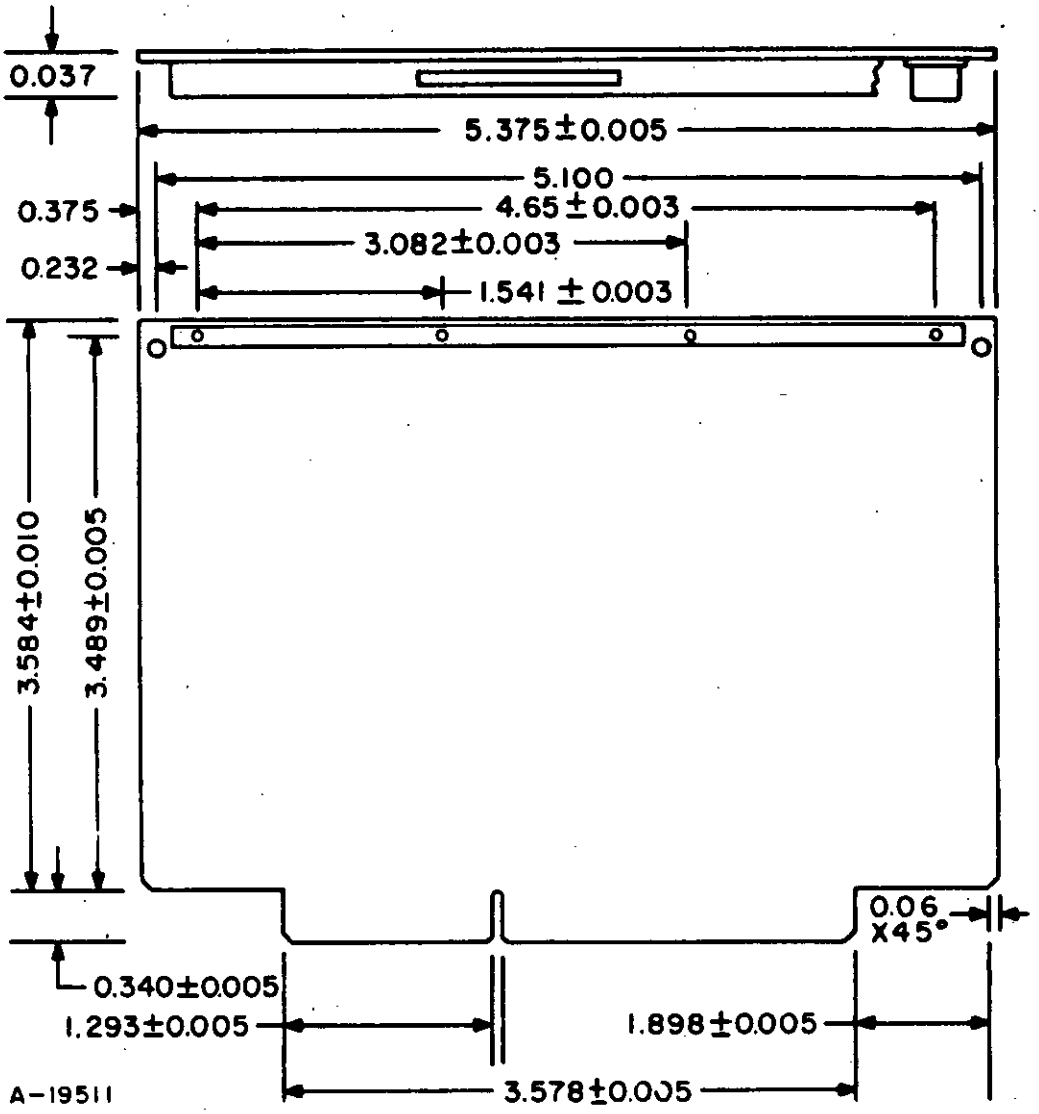


Figure 6. Outline Dimensions of Priority Logic Assembly 65A132F8

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

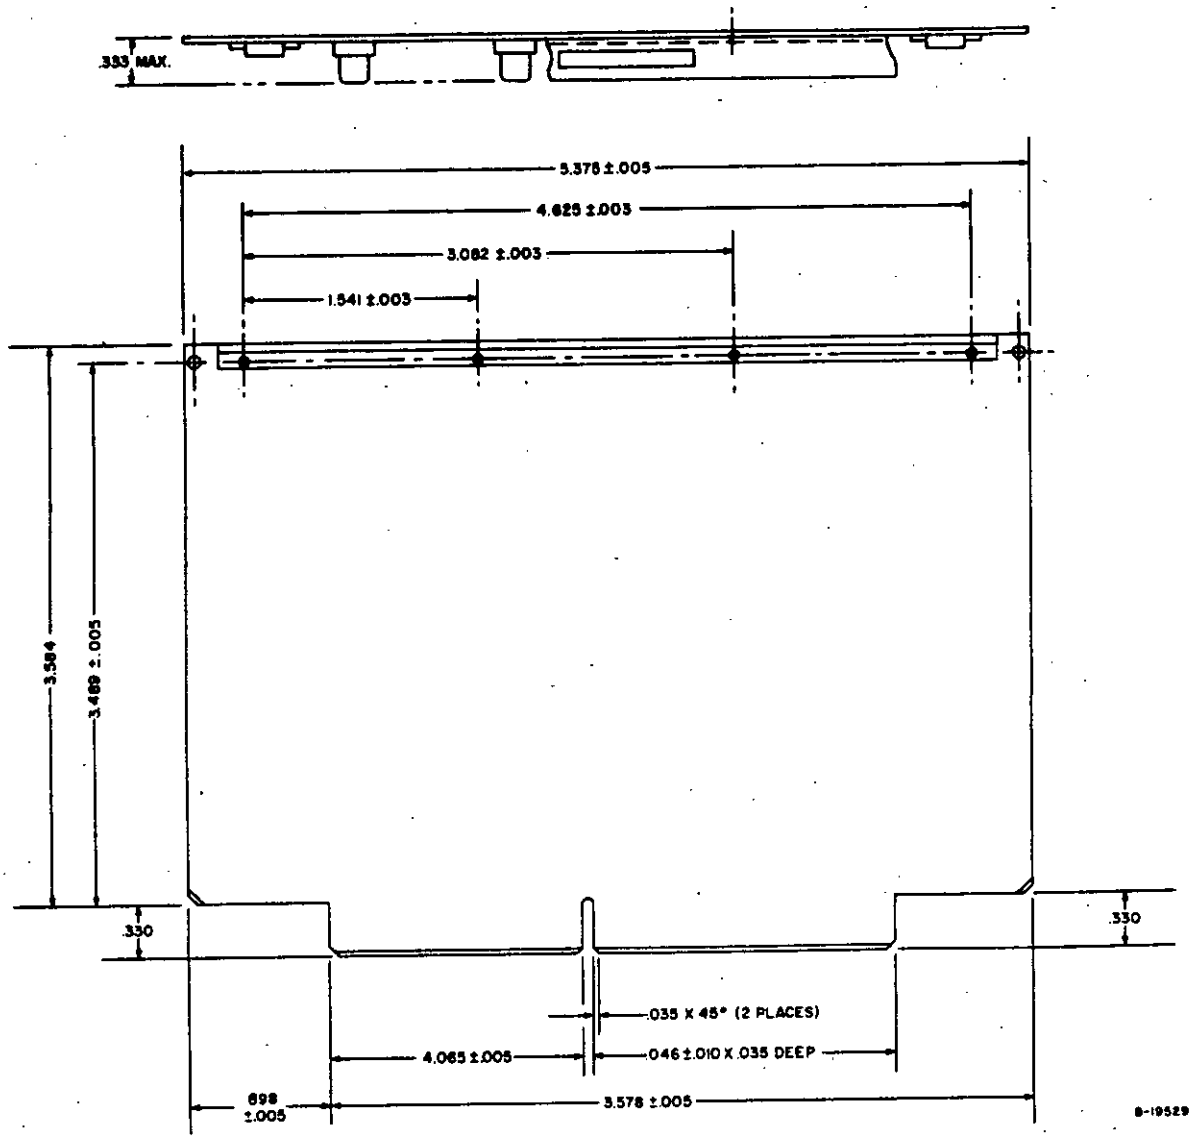


Figure 7. Outline Dimensions of Quantity Select Assembly 65A132F9

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

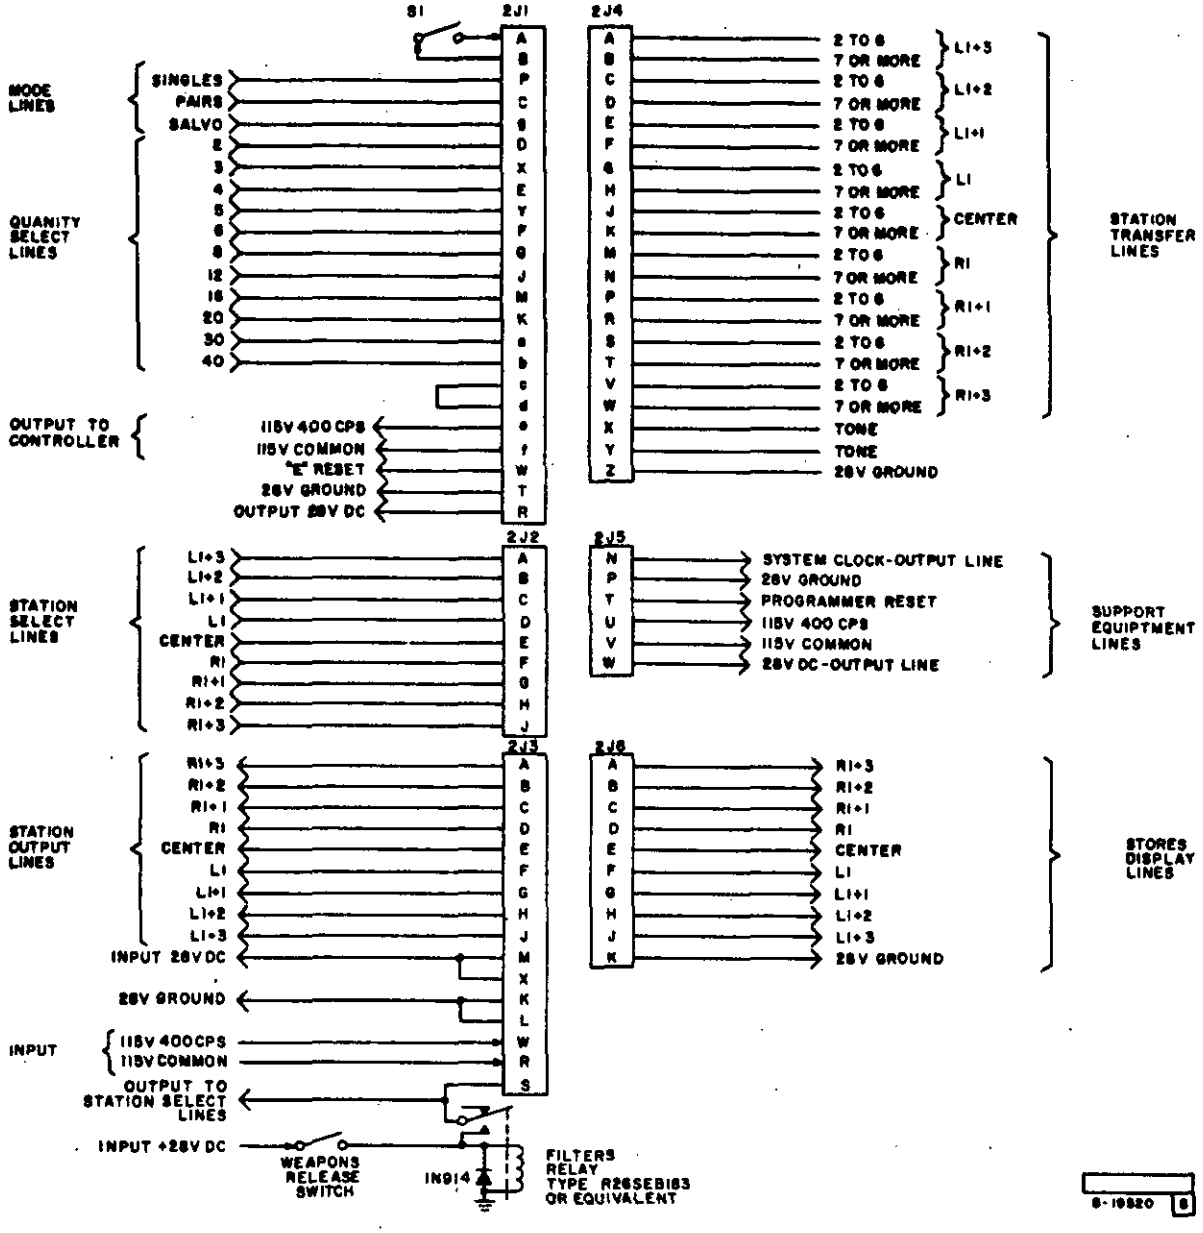


Figure 8. Test Value Reference

☆U.S. GOVERNMENT PRINTING OFFICE:1970-433-688/8024

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Air Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL AIR SYSTEMS COMMAND (AIR-52021)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-02-20T04:23:45Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION
MIL-P-81361(AS) PROGRAMMER, AIRCRAFT WEAPONS RELEASE SET MX-7016(*)/AWE-1

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-8978

Source: https://assist.dla.mil -- Downloaded: 2026-02-26T04:23:45Z
Check the source to verify that this is the current version before use.