INCH-POUND


MIL-DTL-27536/1
15 December 1995
SUPERSEDING
MS27114C
1 November 1966

DETAIL SPECIFICATION SHEET

COUPLING, CLAMP, GROOVED, V-BAND, 1.750 TO 14.250 FLANGE OD (-65° TO +800°F).

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-27536, listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

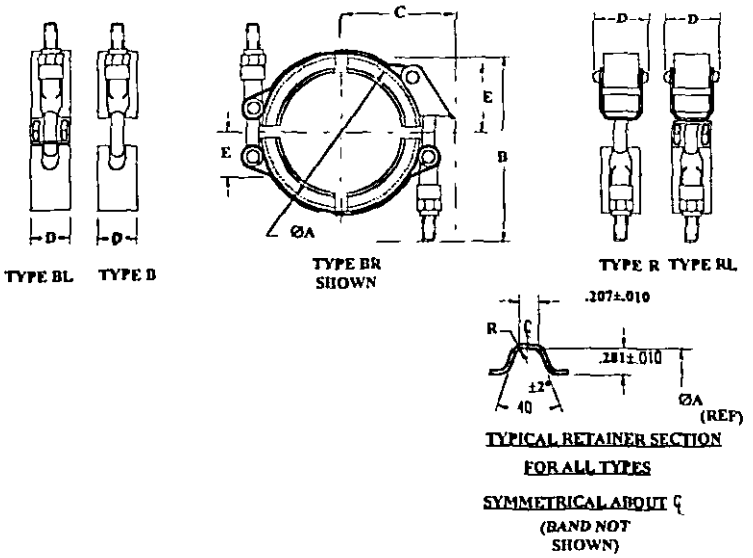

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Defense Industrial Supply Center, (Code DISC-EED), 700 Robbins Avenue, Phila., PA 19111-5096, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:19Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NO.	FLANGE OD MS24563 FIG.2A	AXIAL LOAD RATING (LBF)	ØA +.03 -.06	LATCH ENVELOPE														BOLT DIA	RATED TORQUE (LBF-IN)	MAX WT (LB)				R ±.020
				B MAX				C MAX				D MAX				E MAX								
				B	BL	R	RL	B	BL	R	RL	B	BL	R	RL	B	BL	R	RL			B	BL	R	RL	
01	1.75	8790	1.88					1.75		1.85												.35	.40	.39	.44	
02	1.88	8820	2.00					1.80		1.90												.36	.41	.40	.45	
03	2.00	8855	2.12					1.85		1.95												.37	.42	.41	.46	
04	2.12	8890	2.25					1.90		2.00												.39	.44	.43	.48	
05	2.25	8925	2.38	3.50	4.00	4.00	4.50	2.00		2.10										50		.40	.45	.44	.49	.055
06	2.38	8960	2.50					2.05		2.15												.41	.46	.45	.50	
07	2.50	8995	2.62					2.10		2.20												.42	.47	.46	.51	
08	2.62	9025	2.75					2.20		2.30		.80	.90	1.10	1.10	1.00		1.50		.250		.44	.49	.48	.53	
09	2.75	9060	2.88					2.25		2.35												.45	.50	.49	.54	
10	2.88	13850	3.00					2.45		2.50												.77	.87	.85	.95	
11	3.00	13925	3.12					2.50		2.60											100	.79	.89	.87	.97	
12	3.12	14000	3.25					2.60		2.65												.80	.90	.88	.98	
13	3.25	14100	3.38					2.65		2.70												.82	.92	.90	1.00	
14	3.50	14325	3.62					2.75		2.85												.85	.95	.93	1.03	
15	3.75	14500	3.88					2.90		2.95											105	.88	.98	.96	1.06	
16	4.00	14725	4.12					3.00		3.10												.92	1.02	1.00	1.10	
17	4.25	14900	4.38					3.15		3.20												.95	1.05	1.03	1.13	
18	4.75	15300	4.88					3.40		3.45											110	1.02	1.12	1.10	1.20	.063
19	5.25	15700	5.38	4.30	4.90	4.90	5.40	3.65		3.70		.95	1.00	1.25	1.25	1.15		1.70		.312	115	1.09	1.19	1.17	1.27	
20	5.75	16100	5.88					3.90		3.95												1.16	1.26	1.24	1.34	
21	6.25	16500	6.38					4.15		4.20											120	1.60	1.75	1.68	1.83	
22	6.75	16950	6.88					4.40		4.45												1.67	1.82	1.75	1.92	
23	7.25	17400	7.38					4.65		4.70											125	1.74	1.89	1.82	1.97	
24	7.75	17800	7.88					4.90		4.95											130	1.81	1.96	1.89	2.04	
25	8.25	18250	8.38					5.15		5.20												1.88	2.03	1.96	2.11	
26	8.75	18700	8.88					5.40		5.45											135	1.95	2.10	2.03	2.18	
27	9.25	19100	9.38					5.65		5.70		1.20	1.25								140	2.02	2.17	2.10	2.25	
28	9.75	19550	9.88					5.90		5.95												2.10	2.25	2.18	2.33	
29	10.25	20000	10.38					6.15		6.20											145	2.17	2.32	2.25	2.40	
30	10.75	20500	10.88					6.40		6.45											150	2.24	2.39	2.32	2.47	
31	11.25	21000	11.38					6.65		6.70												2.37	2.46	2.39	2.54	
32	11.75	21450	11.88					6.90		6.95											155	2.39	2.54	2.47	2.62	
33	12.25	21900	12.38					7.15		7.20											160	2.46	2.61	2.54	2.69	
34	12.75	22400	12.88					7.40		7.45												2.53	2.68	2.61	2.76	
35	13.25	22850	13.38					7.65		7.70											165	2.60	2.75	2.68	2.83	
36	13.75	23300	13.88					7.90		7.95											170	2.67	2.82	2.75	2.90	
37	14.25	23800	14.38					8.15		8.20												2.74	2.89	2.82	2.97	

Source: https://assist.dla.mil -- Downloaded: 20260-20T12:19Z
Check the source to verify that this is the current version before use.

Requirements:

1. Material: See procurement specification - MIL-DTL-27536.

2. Finish: See procurement specification - MIL-DTL-27536.

3. Remove all burrs and sharp edges.

4. The part number consists of M27536/1 and a dash number taken from Table I plus a code letter for coupling type.

Examples of part number: (00 represents dash number)

M27536/1-00B = Basic T-Bolt Latch Coupling

M27536/1-00R = Quick Release Latch Coupling

M27536/1-00BR = Basic T-Bolt and Quick Release Latch Coupling

M27536/1-00BL = Basic T-Bolt Latch with Secondary Safety Latch

M27536/1-00RL = Quick Release Latch with Secondary Safety Latch

M27536/1-00BRL = Basic T-Bolt Latch and Quick Release Latch with Secondary Safety Latch

NOTES:

1. Double Latch couplings (Type BR and Type BRL) are available for sizes 21 and up.

2. Latch elements are optional within envelopes shown.

3. Envelope dimensions apply when the coupling is in the tightened condition at the maximum and minimum positions of its diametrical range.

4. Quick release latch coupling shall contain only one quick release latch.

5. When revision or cancellation of this standard is proposed, see procurement specification MIL-DTL-27536 so that appropriate action may be taken respecting the international agreement concerned.

Source: https://assist.dla.mil -- Downloaded: 202610-20T12:19Z
Check the source to verify that this is the current version before use.

6. Changes from previous issue: Marginal notations are not used in this Revision to identify changes with respect to the MS27114C due to the extent of the changes.

7. Cross-reference data: Coupling-clamps conforming to this MIL-DTL-27536/1 are interchangeable/substitutable with coupling-clamps conforming to MS27114C dated 1 November 1966.

TABLE II. CROSS-REFERENCE TABLE.

Cancelled MS PIN	Replacement Specification Sheet PIN
MS27114 - * 1/	M27536/1 - * 1/

1/ * Represent the same designation codes for both MS and specification sheet PINs.

Custodians:
Navy - AS
Air Force - 99

Review activity:
Air Force - 82

Preparing activity:
DLA-IS

(Project 5340-2230)

Source: https://assist.dla.mil -- Downloaded: 202610-20T12:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3 and 8. In block 1, both the document number and revision letter should be given
2. The submitter of this form must complete blocks 4, 5, 6 and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, or to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-DTL-27536/1	2. DOCUMENT DATE (YYMMDD) 951215

3. DOCUMENT TITLE: COUPLING, CLAMP, GROOVED, V-BAND, 1.750 TO 14.250 FLANGE OD (-65 DEG TO +800 DEG F)

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY DLA-IS

a. NAME Emelia Altomari	b. TELEPHONE (Include Area Code) (1) *Commercial* (215) 697-6827
c. ADDRESS (Include Zip Code) Defense Industrial Supply Center 700 Robbins Avenue Bldg. 3 (Code DISC EED) Philadelphia, PA 19111-5096	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403 Falls Church, VA 22041 TELEPHONE (703) 756-2340 AUTOVON 289-2340

DD Form 1426, OCT 89 Previous editions are obsolete. 198/290

Source: https://assist.dla.mil -- Downloaded: 202610-20T12:19Z
Check the source to verify that this is the current version before use.