MIL-F-27531A(USAF)
4 February 1972
SUPERSEDING
MIL-F-27531(USAF)
16 January 1962

MILITARY SPECIFICATION

FOOT SACK, EXTREME COLD WEATHER SURVIVAL TYPE SRU-12/P

1. SCOPE

1.1 Scope. This specification covers the requirements for a down-filled cold weather survival foot sack.

* 1.2 Classification. The foot sack shall be one type and two classes, as specified (6.2):

Class 1 - sage green (3.1.1.1)
Class 2 - Indian orange (3.1.1.1)

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

C-F-160	Feathers, Waterfowl; And Down, Waterfowl
V-T-295	Thread Nylon
DDD-L-20	Label, For Clothing, Equippage And Tentage
PPP-B-636	Box, Fiberboard

Military

MIL-B-371	Braid, Textile, Tubular
MIL-C-16375	Cloth, Wigan, Cotton
MIL-B-17757	Boxes, Fiberboard, Corrugated (Modular Sizes)
MIL-C-26643	Cloth, Nylon Marquisette
MIL-L-40069	Leather, Cattlehide, Chrome Tanned Cold-Climate

STANDARDS

Federal

FED-STD-191	Textile Test Methods
FED-STD-751	Stitches, Seams, And Stitchings

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-105	Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	Marking For Shipment And Storage

DRAWING

Air Force

61K4023	Patterns - Extreme Cold Weather Survival Foot Sack

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

COLOR ASSOCIATION OF THE UNITED STATES, INC.

TCA Cable Numbers and Colors

(Copies of this publication may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York NY 10016.)

3. REQUIREMENTS

* 3.1 **Materials.**

* 3.1.1 Outer shell and inner shell. The material for the inner and outer shells shall be RIP-STOP nylon cloth. The fabric shall be woven from 30 denier filament nylon in the warp and 60 denier filament nylon in the filling. The basic weave of the fabric shall be plain weave. The warp shall have 18 ends in each repeat with 14 ends weaving plain and 4 ends weaving as two. The filling shall have 13 picks on each repeat with 11 picks weaving plain and 2 picks weaving as one. Nondurable types of water repellents, such as wax or aluminum or zirconium soaps shall not be used. Finishing agents shall be nontoxic. Manufacturer's certificate of compliance is acceptable for the finishing agents. The finished material shall meet the requirements specified in Table I.

* 3.1.1.1 Color. The color of the finished material shall be sage green USAF shade No. 1511 for class 1 and Indian orange (Color Card Association Cable Number 70072) for class 2 (1.2 and 6.3).

* 3.1.1.1.1 Matching. The color shall match the approved shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the approved shade under incandescent lamplight at 2800 degrees Kelvin.

* 3.1.2 Diaphragm. The material for the diaphragm shall be in accordance with MIL-C-26643. The color shall be natural.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

TABLE I - PHYSICAL AND CHEMICAL REQUIREMENTS OF THE FINISHED MATERIAL

CHARACTERISTIC	REQUIREMENT
Weight, oz/sq yard	1.6 ±0.1
Thread Count, Inch	
Warp	150 minimum
Filling	100 minimum
Breaking Strength, lbs.	
Warp	65 minimum
Filling	60 minimum
Tearing Strength, lbs.	
Warp	2.5 minimum
Filling	2.5 minimum
Air Permeability, cu. ft/min/sq. ft. @ 1/2 inch water pressure differential	3.5 maximum
Water Repellency	
Hydrostatic Pressure, cm	60 minimum
Spray Rating	90 minimum
Residual Shrinkage, Percent	
Warp	2.0 maximum
Filling	2.0 maximum
Nonfibrous Materials, Percent	2.0 maximum
pH	5.5 - 8.5
Colorfastness to light	Good
Weave	As specified (3.1.1)

* 3.1.3 Foot end stay. The material for the foot end stay shall conform to 3.1.1.

* 3.1.4 Drawstring thong. The leather for the drawstring thong shall conform to type I, selection A or B of MIL-L-40069 and shall be 2 to 3 ounces thick. The color shall be natural pearl chrome.

* 3.1.5 Drawstring. The drawstring shall be braid, textile, tubular, conforming to type I of MIL-B-371. The color shall be natural. The drawstring ends shall be dipped in a solution of 50 percent bees wax and 50 percent parafin to prevent fraying.

* 3.1.6 Thread. Thread for all sewing operations shall be nylon conforming to type I, class 1, size B of V-T-295. The color shall approximate the color of the basic material.

* 3.1.7 Down. The filling for the foot sack shall be down conforming to type II, class 2, grade A of C-F-160.

* 3.2 Design. The foot sack shall consist of horizontal, downfilled tubes and a circular, down-filled bottom. The foot sack shall be tapered so that the bottom circumference is smaller than the top. A braided cotton drawstring shall be inserted through a channel to permit closure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

* 3.3 Construction. The foot sack shall be constructed in accordance with Table II, but the manufacturer is not required to follow the exact sequence of operations as specified therein.

* 3.3.1 Stitches, seams, and stitchings. Stitches, seams, and stitchings shall conform to FED-STD-751. Whenever two or more methods, seams, or stitches are specified for the same operation, any one of them may be used.

* 3.3.1.1 Stitches per inch. The range of stitches per inch specified in Table II shall be interpreted to mean the minimum and the maximum number permitted.

* 3.3.1.2 Ends of stitchings and thread breaks. Except when caught in other seams and stitchings, all ends of stitchings shall be securely backstitched with a continuous stitch for not less than 1/2 inch. Thread breaks shall be backstitched not less than 1 inch.

* 3.4 Patterns. The dies or patterns for cutting all parts of the foot sack shall be furnished by the contractor and shall be of the proper proportions to provide good fitting. The manufacturer's working patterns shall be identical in size and shape to the patterns referenced on Drawing 61K4023 The working patterns shall be duplicates of the Government patterns which show size, directional lines, and notches for proper assembly of all parts.

* 3.5 Combination label. Each foot sack shall have a combination identification and instruction label in accordance with classes 1 and 3 combined, type I of DDD-L-20. The label shall contain the following information:

FOOT SACK, EXTREME COLD WEATHER SURVIVAL, TYPE SRU-12/P
MIL-F-27531(USAF)
STOCK NO. *
ORDER NO. *
MANUFACTURER'S NAME OR TRADEMARK *

INSTRUCTIONS FOR USE: For sleeping, loosen the waist drawstring of the down-filled foot sack. Extend the footsack full length. Remove shoes and adjust the down-filled footwear covers loosely. Shake up the foot sack; pull it on, and tighten the drawstring just enough to make a seal against the coat but NO TIGHTER. Put all spare clothing underneath hips, shoulders, and feet. ON COLD NIGHTS, withdraw arms from the sleeves to the inside of the coat.

* The manufacturer shall insert the applicable information.

* 3.5.1 Location of combination label. The combination label shall be approximately centered on the vertical outer shell fold line (pattern drawing 61K4023) and on the second outer tube from top of foot sack. The label will be upside down such that it may be read after donning the foot sack.

* 3.5.2 Content label. A label conforming to state requirements for items containing down or feathers shall be attached at the foot end of each foot sack.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
1.	CUTTING. The foot sack shall be cut in strict accordance with furnished patterns that show size, shape, notches, directional lines, and markings for proper assembling of all parts.			
2.	SHADE MARKING. All parts shall be marked to insure a uniform shade throughout the sack. Metal fastening devices or sewn-on tickets shall not be used for shade marking. Adhesive tickets may be used provided that the adhesion shall not discolor the fabric and that the adhesive mass shall not adhere to the fabric when the tickets are removed.			
3.	JOIN DIAPHRAGM TO INNER SHELL AND OUTER SHELL. Form the channels by stitching the diaphragm alternately to the inner shell and the outer shell from the bottom to the top. The channels shall be distributed as shown by the pattern notches.			
	a. Join the diaphragm to inside of the outer shell at the bottom edge, with a single row of stitching, 1/2 inch from the edge.	301	SSa-1	10-12
	b. Join the diaphragm at the first notch to the inside of the inner shell at the first notch with a single row of stitching.	301	SSa-1	10-12
	NOTE: When sewing the diaphragm to the inner shell to form channels, take tucks about 3/8 inch evenly spaced to take up differential in size, since the outer shell and the diaphragm are same in circumference, and the inner shell is smaller.			
	c. Join the diaphragm at the second notch from the bottom to the outer shell at the first notch from the bottom, with a single row of stitching, from side to side.	301	SSa-1	10-12
	d. Join the diaphragm at the third notch from the bottom to the inner shell at the second notch from the bottom, with a single row of stitching.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (Cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
	e. Continue sewing the channels up to the top edge of the diaphragm as in No. 3c and 3d, except at different notches.	301	SSa-1	10-12
	f. Join the diaphragm 1/2 inch from the top edge to the outer shell at the tenth notch, with a single row of stitching.	301	SSa-1	10-12
	NOTE: During the above operations locate and stitch the combination label as specified in 3.5.1.			
4.	JOIN INNER SHELL. Join the inner shell from the bottom to the top, with a single row of stitching 1/2 inch from the edge. When sewing this seam, care shall be taken to fold the edges of the diaphragm netting back (between the rows of the channel stitching) so that the down filling may flow across the seam when it is completely closed. The diaphragm shall be between the inner shell and the outer shell when completed.	301	SSa-1	10-12
5.	JOIN OUTER SHELL. Join the outer shell from the bottom up, to two inches, with a double row of stitching, 3/16 inch and 1/4 inch from the folded edge. Turn 1/2 inch to the inside.	301	SSc-2	10-12
	a. Join the outer shell from the top, down to 3 inches, with a double row of stitching, 3/16 inch and 1/4 inch from the folded edge. Turn 1/2 inch to the inside.	301	SSc-2	10-12
6.	FOOT STAY. Join the foot stay to inside of the inner and the outer end foot pieces, with a single row of stitching, at the pattern marks. across the length of stay, 1/4 inch from the edge. Backstitch 1/2 inch at the ends.	301	SSa-1	10-12
7.	INNER FOOT END PIECE. Join the inner foot end piece to the foot sack inner shell around the circumference, with a single row of stitching, 1/2 inch from the edge.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (Cont'd)


No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
8.	OUTER FOOT END PIECE. Join the outer foot end piece to the foot sack outer shell around the circumference, with a double row of stitching, 3/16 inch from the edge and 1/4 inch from the edge. Turn 1/2 inch to the inside. Leave 3 inches open for down filling.	301	SSc-2	10-12
9.	CLOSE TOP OF FOOT SACK. Stitch the inner and outer shells together with a single row of stitching, 1/4 inch from the top edges. Take 1 inch tucks in the outer shell since the inner shell is smaller in circumference.	301	SSa-1	10-12
10.	MAKE DRAW STRING CHANNEL. Cut a strip of the inner-outer shell fabric, 3 inches wide and 60-1/2 inches long. Starting at the vertical seam. outside rear of foot sack, place one edge of the strip on the inner shell, flush with the top edges of the inner-outer shells, and stitch with one row of stitching 5/16 inch from the top edge. Continue to make channel in accordance with Figure 1. To complete the channel, the strip shall be turned under and shall overlap the starting end. a. Prior to closing the drawstring channel, the leather thong should be attached to the channel and a 72 inch, plus or minus 1 inch, drawstring shall be placed in the channel. Each end of the drawstring will be threaded through the center hole. A knot will be tied at each end. NOTE: The leather thong will be stitched to the outside of the channel, at front of foot sack, as shown in Figure 2. This may be accomplished during operation 10 or during a separate operation.	301	SSa-1	10-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

TABLE II - SEWING OPERATIONS (Cont'd)

No.	Description of Operation	Stitch Type	Seam and Stitching Type	Stitches Per Inch
11.	FILL FOOT SACK WITH DOWN. Record in ink or indelible pencil the weight of the unfilled footsack on an attached commercial type tag. Fill each tube and the foot end with down. The total required weight of the down used to fill the tubes and the foot end shall be 9.5 ounces, plus or minus 1/2 ounce. Each tube and foot end shall be fully filled so that no areas are either partially filled or unfilled. a. Record weight of filled foot sack on the weight tag. The supplier shall not remove the weight tag.			
12.	CLOSE REMAINDER OF OUTER SHELL. Join the outer shell down the side seam, with a double row of stitching, 3/16 inch and 1/4 inch from the edge, overlapping the stitching 1/2 inch at the top and the bottom made in No. 5 and 5a. Turn 1/2 inch to the inside.	301	SSc-2	10-12
13.	CLOSE OUTER SHELL FOOT END. Join the 3 inches of the outer shell foot end (left open for filling), with a double row of stitching, 3/16 and 1/4 inch from the edge, overlapping 1/2 inch the stitching, made in No. 8. Turn 1/2 inch to the inside.	301	SSc-2	10-12
14.	TOLERANCES. The tolerances on dimensions shall be as follows: a. Plus or minus 1/16 inch for dimensions under 1 inch. b. Plus or minus 1/8 inch for dimensions from 1 inch to 5 inches. c. Plus or minus 1/4 inch for dimensions from 5 inches to 12 inches. d. Plus or minus 1/2 inch on dimensions from 12 inches to 40 inches. e. Plus or minus 1 inch on dimensions over 40 inches.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

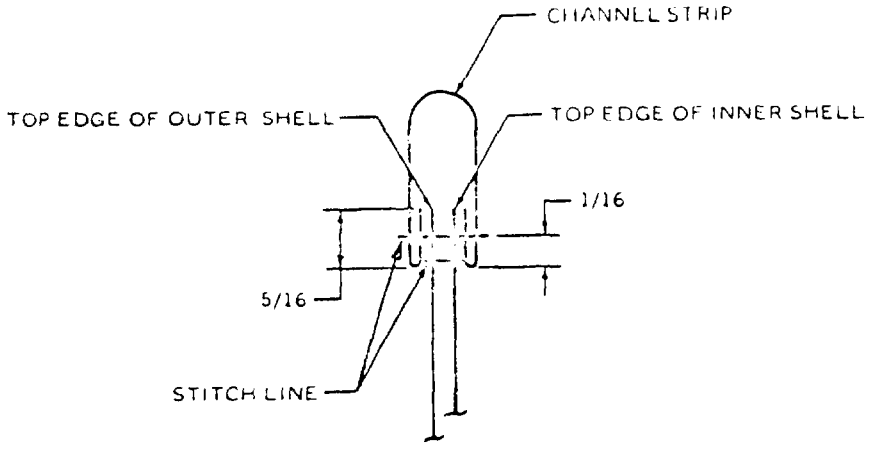


NOTES:

1. ALL DIMENSIONS IN INCHES
2. USE STITCH TYPE 301.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

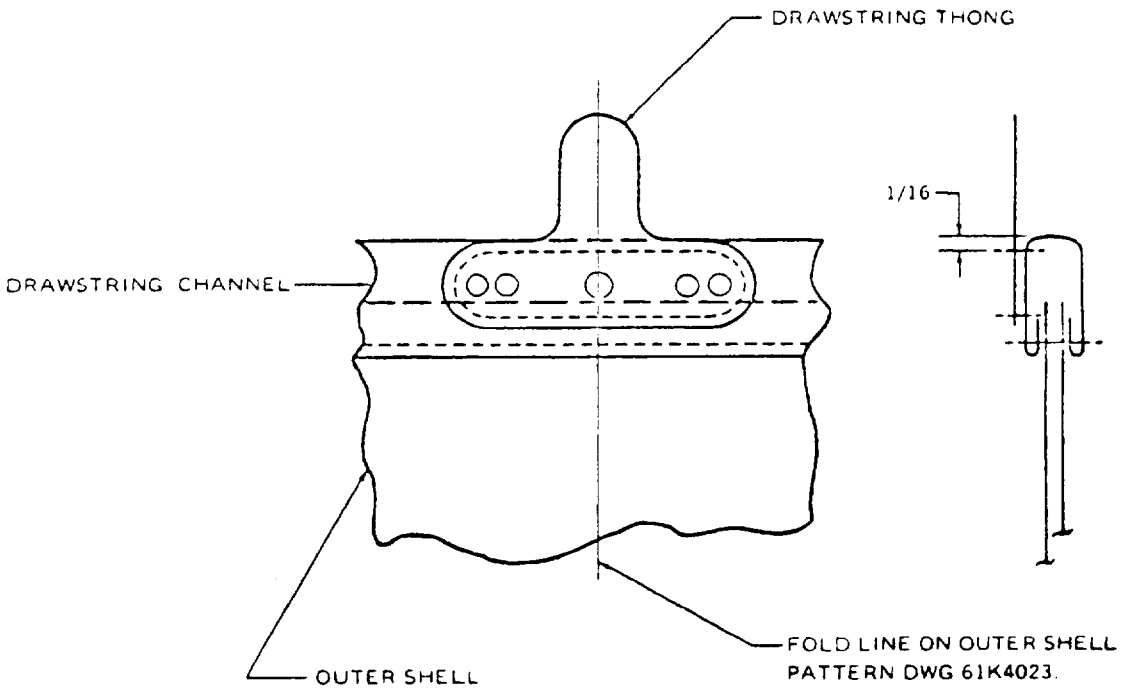

NOTES:

1. ALL DIMENSIONS IN INCHES.
2. WITH THONG TABS FLUSH WITH TOP OF CHANNEL, STITCH ALL AROUND, 1/16 FROM THONG EDGE, USING STITCH TYPE 301.

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

* 3.5.3 Finished measurements. Finished measurements shall conform to Table III.

TABLE III

Finished Measurements (Inches)			
Measurements 1/		Tolerance Plus	Minus
Foot sack length	52	1	1/2
Foot sack opening	60-1/2	1/2	1/2

1/ NOTES:

1. The foot sack length shall be measured from the top edge of the drawstring channel (top of foot sack) to the foot-end seam with the foot sack flattened.

2. The foot sack opening shall be measured from folded side to folded side, with the foot sack flattened, along the drawstring channel.

* 3.6 Workmanship. The finished foot sack shall be clean and well made, shall have all thread ends trimmed, and shall be free from any defects that might affect appearance or serviceability.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check-test such items to determine the validity of the certification.

* 4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated herein.

* 4.2.1 Component and material testing. Components shall be tested in accordance with all the requirements of referenced specifications, drawings and standards, unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. The basic fabric described in 3.1.1 shall be tested for the requirements of Table I in accordance with the FED-STD-191 test methods shown in Table IV. The manufacturer's certificate of compliance stating that toxic and nondurable finishing agents were not used will be acceptable. Where the "determinations per sample unit" or "results

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

reported as" are not specified, they shall be as indicated in the applicable test method. All requirements are applicable to the sample unit. All test reports shall contain the individual values used in expressing the final results.

TABLE IV - Testing of Base Fabrics

Characteristic	Test Method
Weight	5041
Thread Count	5050
Breaking Strength	5100
Tearing Strength	5134
Air Permeability	5450
Hydrostatic Pressure	5514
Spray Rating	5526
Residual Shrinkage	5552
pH	2811
Colorfastness to light 1/	5660
Nonfibrous Material	2611
Weave	Visual 2/

1/ Exposure time - 10 hours.

2/ One determination shall be made on each sample unit and the result reported as "pass" or "fail."

* 4.2.1.1 Sampling for testing of fabrics. Unless otherwise specified in a subsidiary specification, the sampling for testing of fabrics shall be in accordance with Table V. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified. The lot size shall be expressed in yards. The sample unit for the base fabric shall be 3-1/2 yards full width.

TABLE V - Sample Size

Lot Size	Sample Size
800 or less	2
801 to 22,000 inclusive	3
22,001 and up	5

* 4.2.1.2 Sampling for testing of other components. Unless otherwise specified in a subsidiary specification, sampling for testing of other components shall be in accordance with inspection level S-1 and an AQL of 6.5 defects per 100 units. Sample units shall be one (1) pound of down, one (1) set snap fasteners and one (1) each label unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

* 4.2.2 Intermediate inspection. Inspection of the unfilled foot sack shall be made to verify the weight of the casings recorded by the supplier on the tag attached to each foot sack . This inspection shall be performed prior to filling foot sack with down. The sample unit for these examinations shall be one unfilled footsack. The defects found during these examinations shall be in accordance with 4.2.2.1.

* 4.2.2.1 Examination for weight of unfilled casing.

Examine	Defect	Classification	
		Major	Minor
NOTE: Utmost care shall be taken to see that scales used to perform this examination are properly calibrated and accurate.			
Weight	In excess of weight indicated on tag:		
	-by 1/4 ounce or less		X
	-by more than 1/4 ounce	X	

4.2.3 Examination of end item. The sample unit shall be one complete foot sack. The lot size shall be expressed in units of one foot sack.

4.2.3.1 Classification of defects. Defects shall be classified in accordance with the lists in 4.2.3.2 and 4.2.3.3.

4.2.3.2 Defects. Defects shall be classified as follows:

Defects	Classification		
		Minor	
	Major	A	B
1. Material Defects and Workmanship Damages.			
a. Any weakening defect such as a smash, multiple float, loose slub, et cetera, that may develop into a hole.	X		
b. Shade bars, slubs, dye or finishing streaks.		X	
c. Hole, scissor or knife cut, tear, mend, or burn or a needle chew that may develop into a hole.	X		
d. Ruptured fibers in the line of sewing (usually caused by broken, blunt, or hooked needles), affecting appearance or serviceability.		X	
2. Shade Parts.			
a. Badly shaded parts.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

Defects	Classification		
	Major	Minor A	Minor B
3. Cleanness			
a. Spots or stains of a permanent nature		X	
b. Removable spot or stain, clearly noticeable.		X	
c. Thread ends not trimmed or loose threads not removed.			X
d. One or more shade tickets not removed.			X
e. Shade marking of an obvious permanent nature exposed or visible on outside of foot sack (score only when conspicuously located so that it is clearly noticeable).		X	
4. Cutting.			
a. Any component not cut in conformance with directional lines indicated on patterns or in accordance with specification requirements.	X		
5. Component and Assembly.			
a. Unless otherwise classified herein, any component part or required operation omitted.	X		
6. Seams and Stitching.			
a. Accuracy of seaming.			
(1) Part of foot sack caught in any unrelated operation or stitching.		X	
(2) Unless specifically classified otherwise, seams twisted, puckered, or pleated.		X	
(3) Thread break(s) or end(s) of stitching (stitch type 301) not backstitched when not caught in other seams or stitching.			X
(4) Thread(s) not same shade or not satisfactorily matching shade of foot sack.			X
b. Gage of stitching (edge, top, or raise stitching) very uneven, not within required range, or varies more than 1/16 inch when no range is specified.			X
c. Open seams. Except on edge or raise stitching, a break in a line of stitching or continously skipped or run-off stitches constitutes an open seam.			
(1) Any open seam (on seams that would allow escape of down from foot sack).	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

Defects	Classification		
		Minor	
	Major	A	B
(2) On all other seams			
-1/4 inch or less			X
-over 1/4 inch to and including 1/2 inch		X	
-over 1/2 inch	X		
d. Stitches skipped or broken on raise or edge stitching when seam is seamed, turned, and stitched			
-1/4 inch to and including 3/4 inch			X
-over 1 inch		X	
e. Raw edges. Raw edges not securely caught in stitching shall be classified as an open seam.			
-1/2 inch to and including 1 inch			X
-over 1 inch		X	
f. Run-offs			
(1) On joining seams, when resulting in an open seam, score as an open seam.			
(2) On raised or topstitching when not resulting in an open seam (outside only)			
-1/2 to 1 inch inclusive			X
-over 1 inch		X	
g. Seam and stitch types not as specified		X	
h. Stitch tension. Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.			
(1) Loose tension resulting in a loose seam.	X		
(2) Loose tension on raised or edge stitching, resulting in loosely exposed loops of lower or top thread.		X	
(3) Tight tension, i.e., stitches break when normal strain is applied, classify as an open seam.			
i. Stitches per inch. To be scored only when the condition occurs on the major portion of seam.			
(1) Less than minimum specified.			
-one stitch			X
-two stitches		X	
-three or more stitches	X		
(2) More than maximum specified.			
-one stitch			X
-two stitches		X	
-three or more stitches	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

Defects	Classification		
	Major	Minor A	Minor B
7. Label.			
a. Missing, incorrect or illegible	X		
b. Not located as specified		X	
8. Channels.			
a. Number of channels less than specified	X		
b. Any channel trapped, causing part of channel to remain unfilled	X		
c. Varying from specified width by more than 1/2 inch		X	
d. Badly twisted between rows of channel stitching		X	
e. Any unfilled channel	X		
9. Drawstring.			
a. Drawstring caught in drawstring channel stitching	X		
b. Drawstring ends not knotted or dipped in beeswax solution		X	

* 4.2.3.3 Examination for weight and dimensions of filled foot sack.

Examine	Defect	Classification Major	Classification Minor
Filled foot sack for required weight of down	More than 1/4 ounce under the total weight of required down	X	
	1/4 ounce or less under the total weight of required down		X
Finished Measurement	Any finished measurement and tolerance deviating from the nominal measurements and tolerances specified in Table III	X	

NOTE 1: The weight of down shall be as specified

NOTE 2: To determine weight of mixture blown into the foot sack deduct the weight of unfilled foot sack noted on tag from total weight of filled foot sack.

NOTE 3: Inspection for weight of filled foot sack shall be performed immediately following the closing operation. No sample shall be selected for weight inspection if more than 1-1/2 hours have elapsed between the filling and closing operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

* 4.2.3.4 Inspection levels and acceptable quality levels. Inspection levels and acceptable quality levels (AQLs) expressed in defects per 100 units (DHU).

	AQL	Inspection Level
For 4.2.3.2		II
Major	2.5	
Major, Minor A (Combined)	6.5	
Totals (Major, Minor A and Minor B, Combined)	15.0	
For 4.2.2.1		I
Major	1.5	
Minor	6.5	
For 4.2.3.3		I
Major	1.5	
Minor	6.5	

* 4.2.4 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defects
Marking (exterior and interior)	Omitted, incorrect, illegible of improper size, location, sequence or method of application.
Materials	Any component missing Any component damaged, affecting serviceability
Workmanship	Inadequate application of components, such as: incomplete closure of case liners, container flaps, loose strapping, inadequate stapling Bulging or distortion of containers
Content	Number of intermediate packages is more or less than required.

5. PREPARATION FOR DELIVERY

* 5.1 Packaging. Packaging shall be levels A or C as specified (see 6.2).

5.1.1 Level A. Each foot sack shall be tightly rolled to a final size of approximately 23 inches in length and 5 inches in diameter. The rolled foot sack shall be secured by tying with cotton tape or twine approximately 4 inches from each end of the roll and once in the center (three ties).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

* 5.1.2 Level C. Foot sacks shall be packaged in a manner to afford adequate protection from the supply source to the first receiving activity. The contractor may use his commercial practice provided the latter meets the requirements of this level.

* 5.2 Packing. Packing shall be levels A, B or C, as specified (see 6.2).

5.2.1 Level A. Sixteen foot sacks packaged as specified in 5.1 shall be packed in four rows, four tiers high, in a fiberboard shipping container assembled, closed, and reinforced to conform to weather-resistant class, size 3A of MIL-B-17757.

5.2.2 Level B. Sixteen foot sacks packaged as specified in 5.1 shall be packed in four rows, four tiers high, in a fiberboard shipping container, assembled and closed to conform to domestic class, size 3A of MIL-B-17757. Each exterior shipping container shall be reinforced by applying one flat metal band girthwise in accordance with PPP-B-636 when only one metal band is used in a given direction.

* 5.2.3 Level C. Foot sacks shall be packed in a manner that will afford adequate protection at the lowest rate against damage during direct shipment from the supply source to the first receiving activity. Containers shall conform to applicable carrier rules and regulations applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order (6.2), shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The foot sack covered by this specification is a component part of a cold weather survival clothing assembly that is vacuum packed in survival kits for the use of flight personnel.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Class required (1.2).

c. Additional marking required (5.3).

d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Color samples. Color samples may be obtained from the procuring activity or as directed by the contracting officer.

* 6.4 Figure 3 shows general style and is for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

* 6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 82

Review Activity:
Air Force - 82

Preparing Activity:
Air Force - 82

Project No. 8415-F625

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

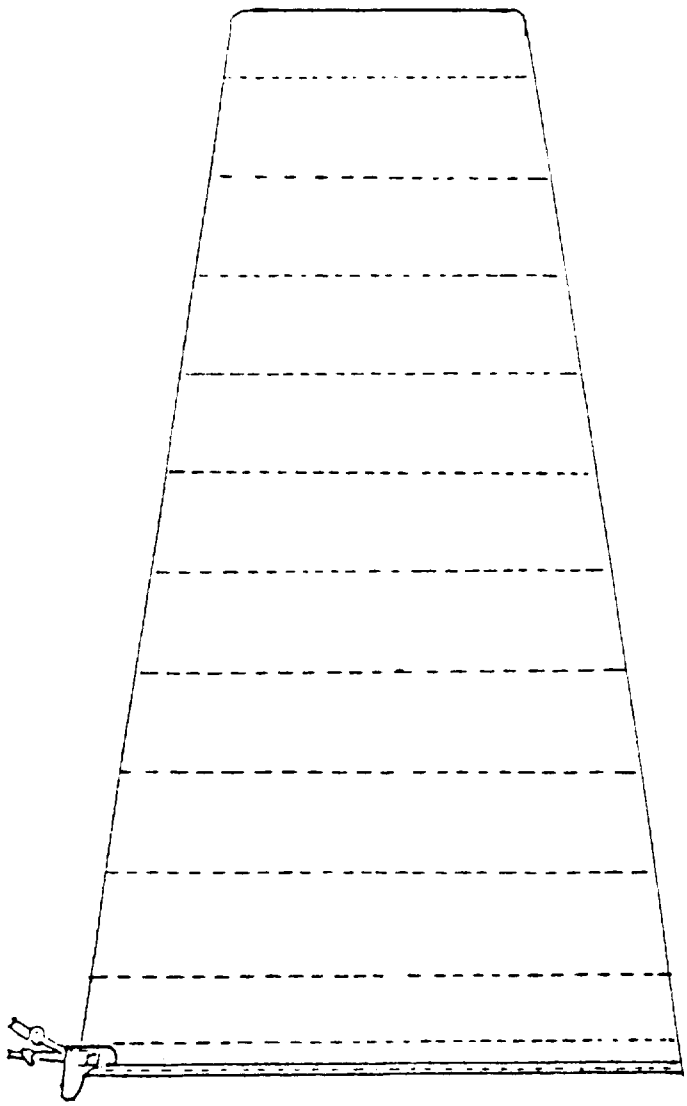


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS

SAN ANTONIO AIR MATERIEL AREA
SERVICE ENGINEERING DIVISION (MCEOP)
KELLY AFB, TEXAS 78241

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T12:17Z
Check the source to verify that this is the current version before use.